


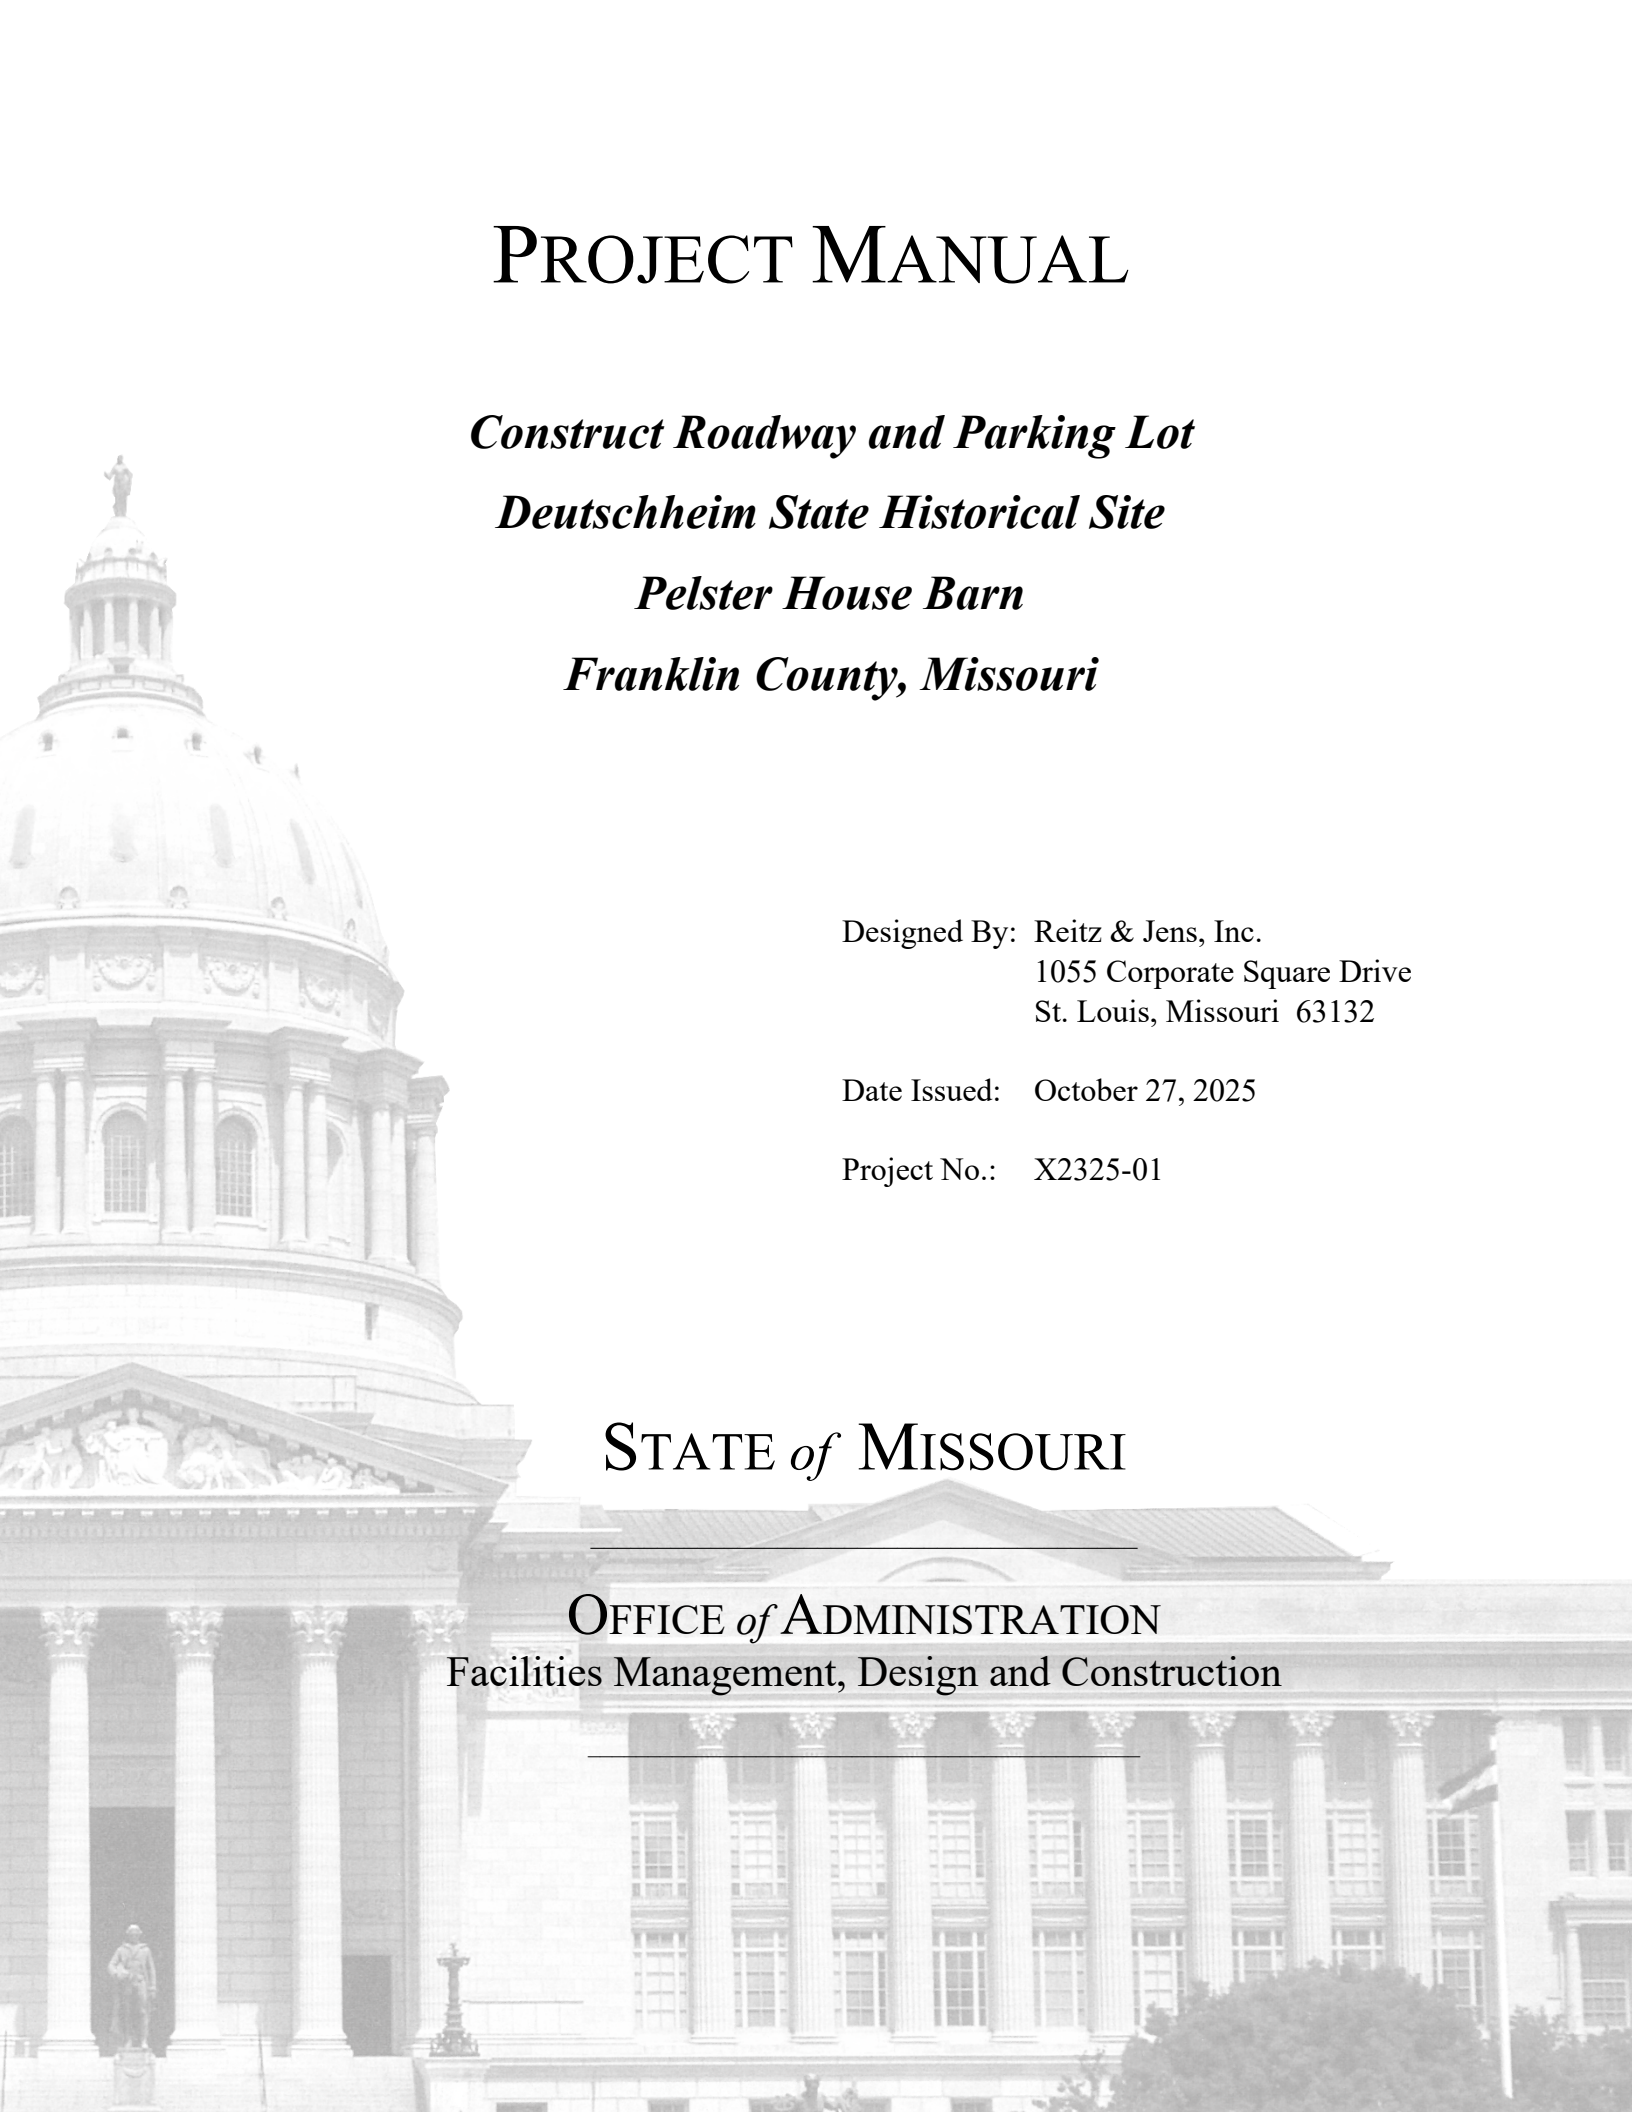

# PROJECT MANUAL

*Construct Roadway and Parking Lot*

*Deutschheim State Historical Site*

*Pelster House Barn*

*Franklin County, Missouri*

Designed By: Reitz & Jens, Inc.  
1055 Corporate Square Drive  
St. Louis, Missouri 63132

Date Issued: October 27, 2025

Project No.: X2325-01

STATE *of* MISSOURI

---

OFFICE *of* ADMINISTRATION  
Facilities Management, Design and Construction

---

## **SECTION 000107 - PROFESSIONAL SEALS AND CERTIFICATIONS**

**PROJECT NUMBER:** (X2325-01 " DESIGN & CONSTRUCT ROADWAY & PARKING LOT ")

**THE FOLLOWING DESIGN PROFESSIONALS HAVE SIGNED AND SEALED THE ORIGINAL PLANS AND SPECIFICATIONS FOR THIS PROJECT, WHICH ARE ON FILE WITH THE DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION:**

**Jeff Bertel, P.E. (2010025265)**

**Reitz & Jens, Inc.**

**1055 Corporate Square Drive**

**St. Louis, MO 63132**



**THE ENGINEER (DESIGNER) WHOSE SIGNATURE AND PERSONAL SEAL APPEAR HEREON ASSUMES RESPONSIBILITY ONLY FOR THE PLAN SHEETS AND SPECIFICATION SECTIONS INDICATED ABOVE AND DISCLAIMS (PURSUANT TO SECTION 327.411 RSMO) ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPORTS OR OTHER DOCUMENTS OR INSTRUMENTS NOT SEALED BY THE UNDERSIGNED ENGINEER RELATING TO OR INTENDED TO BE USED FOR ANY PART OR PARTS OF THE PROJECT TO WHICH THIS PAGE REFERS.**

# TABLE OF CONTENTS

| SECTION | TITLE | NUMBER OF PAGES |
|---------|-------|-----------------|
|---------|-------|-----------------|

## **DIVISION 00 – PROCUREMENT AND CONTRACTING INFORMATION**

### **000000 INTRODUCTORY INFORMATION**

|        |                                       |   |
|--------|---------------------------------------|---|
| 000101 | Project Manual Cover                  | 1 |
| 000107 | Professional Seals and Certifications | 1 |
| 000110 | Table of Contents                     | 2 |
| 000115 | List of Drawings                      | 1 |

|               |                                 |          |
|---------------|---------------------------------|----------|
| <b>001116</b> | <b>INVITATION FOR BID (IFB)</b> | <b>1</b> |
|---------------|---------------------------------|----------|

|               |                                |          |
|---------------|--------------------------------|----------|
| <b>002113</b> | <b>INSTRUCTIONS TO BIDDERS</b> | <b>7</b> |
|---------------|--------------------------------|----------|

### **NOTICE TO BIDDERS**

The following procurement forms can be found on our website at:  
<https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans>  
and shall be submitted with your bid to [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov)

### **004000 PROCUREMENT FORMS & SUPPLEMENTS**

|        |                                                                |   |
|--------|----------------------------------------------------------------|---|
| 004113 | Bid Form                                                       | * |
| 004322 | Unit Prices Form                                               | * |
| 004336 | Proposed Subcontractors Form                                   | * |
| 004337 | MBE/WBE/SDVE Compliance Evaluation Form                        | * |
| 004338 | MBE/WBE/SDVE Eligibility Determination Form for Joint Ventures | * |
| 004339 | MBE/WBE/SDVE Good Faith Effort (GFE) Determination Forms       | * |
| 004340 | SDVE Business Form                                             | * |
| 004541 | Affidavit of Work Authorization                                | * |
| 004545 | Anti-Discrimination Against Israel Act Certification form      | * |

### **005000 CONTRACTING FORMS AND SUPPLEMENTS**

|        |                       |   |
|--------|-----------------------|---|
| 005213 | Construction Contract | 3 |
|--------|-----------------------|---|

### **006000 PROJECT FORMS**

|           |                                                  |   |
|-----------|--------------------------------------------------|---|
| 006113    | Performance and Payment Bond                     | 2 |
| 006325    | Product Substitution Request                     | 2 |
| 006519.16 | Final Receipt of Payment and Release Form        | 1 |
| 006519.18 | MBE/WBE/SDVE Progress Report                     | 2 |
| 006519.21 | Affidavit of Compliance with Prevailing Wage Law | 1 |

### **007000 CONDITIONS OF THE CONTRACT**

|        |                          |    |
|--------|--------------------------|----|
| 007213 | General Conditions       | 20 |
| 007300 | Supplementary Conditions | 1  |
| 007346 | Wage Rate                | 4  |

## **DIVISION 1 - GENERAL REQUIREMENTS**

|           |                                                |   |
|-----------|------------------------------------------------|---|
| 011000    | Summary of Work                                | 2 |
| 012100    | Allowances                                     | 2 |
| 012200    | Unit Prices                                    | 2 |
| 012600    | Contract Modification Procedures               | 2 |
| 013100    | Coordination                                   | 4 |
| 013115    | Project Management Communications              | 4 |
| 013200    | Schedule-Bar Chart                             | 4 |
| 013300    | Submittals                                     | 7 |
| 013513.31 | Site Security and Health Requirements          | 5 |
| 015000    | Construction Facilities and Temporary Controls | 5 |
| 017400    | Cleaning                                       | 2 |

|                                                          |    |
|----------------------------------------------------------|----|
| <b>DIVISION 2 – EXISTING CONDITIONS</b>                  |    |
| 022100          Surveys                                  | 2  |
| <b>DIVISION 3 – CONCRETE</b>                             |    |
| 030000          Concrete Construction                    | 13 |
| <b>DIVISION 31 – EARTHWORK</b>                           |    |
| 311000          Site Clearing                            | 2  |
| 312200          Earthwork                                | 5  |
| 313700          Riprap                                   | 2  |
| <b>DIVISION 32 – EXTERIOR IMPROVEMENTS</b>               |    |
| 321123          Aggregate Base Courses                   | 3  |
| 322920          Lawns and Grasses                        | 5  |
| 323216          Mechanically Stabilized Earth (MSE) Wall | 6  |
| <b>DIVISION 33 – UTILITIES</b>                           |    |
| 333100          Sewage and Drainage Connection           | 4  |
| <b>APPENDIX A – LAND DISTURBANCE PERMIT</b>              | 34 |

## **SECTION 000115 – LIST OF DRAWINGS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section provides a comprehensive list of the drawings that comprise the Bid Documents for this project.

### **PART 2 - PRODUCTS (NOT APPLICABLE)**

### **PART 3 - EXECUTION**

#### **3.1 LIST OF DRAWINGS**

- A. The following list of drawings is a part of the Bid Documents:

|     | <b><u>TITLE</u></b>                       | <b><u>SHEET #</u></b> | <b><u>DATE</u></b> | <b><u>CAD #</u></b> |
|-----|-------------------------------------------|-----------------------|--------------------|---------------------|
| 1.  | Cover Sheet                               | G-001                 | 10/27/25           | G-001               |
| 2.  | Notes                                     | G-002                 | 10/27/25           | G-002               |
| 3.  | Plan and Profile: Sta. 0+00 to 2+56.13    | C-101                 | 10/27/25           | C-101               |
| 4.  | Plan and Profile: Sta. 2+56.13 to 8+72.91 | C-102                 | 10/27/25           | C-102               |
| 5.  | Plan and Profile: Sta 8+72.91 to 12+63.44 | C-103                 | 10/27/25           | C-103               |
| 6.  | Typical Cross Sections                    | C-301                 | 10/27/25           | C-301               |
| 7.  | Storm Profiles                            | C-302                 | 10/27/25           | C-302               |
| 8.  | Modular Block Wall Profile & Details      | C-303                 | 10/27/25           | C-303               |
| 9.  | Details                                   | C-501                 | 10/27/25           | C-501               |
| 10. | Details                                   | C-502                 | 10/27/25           | C-502               |

**END OF SECTION 000115**

## SECTION 001116 - INVITATION FOR BID

### 1.0 OWNER:

- A. The State of Missouri  
Office of Administration,  
Division of Facilities Management, Design and Construction  
Jefferson City, Missouri

### 2.0 PROJECT TITLE AND NUMBER:

- A. Construct Roadway and Parking Lot  
Deutschheim State Historic Site  
Pelster House Barn  
Franklin County, Missouri  
**Project No.: X2325-01**

### 3.0 BIDS WILL BE RECEIVED:

- A. Until: 1:30 PM, January 6, 2026
- B. **Only electronic bids sent to [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov) shall be accepted:** (See Instructions to Bidders for further detail)

### 4.0 DESCRIPTION:

- A. Scope: The project includes clearing, grading, modular block wall, gates, vault installation, stormwater culverts, guardrail, and crushed limestone and concrete paving. The Owner will procure the precast vault restroom, and the Contractor will install in the location shown on the plans in accordance with the Manufacturer's recommendations. The Contractor shall obtain a Franklin County Entrance Permit prior to starting construction.
- B. MBE/WBE/SDVE Goals: MBE 0%, WBE 0%, and SDVE 3%. **NOTE: Only MBE/WBE firms certified by the State of Missouri Office of Equal Opportunity as of the date of bid opening, or SDVE(s) meeting the requirements of Section 34.074, RSMo and 1 CSR 30-5.010, can be used to satisfy the MBE/WBE/SDVE participation goals for this project.**

### 5.0 PRE-BID MEETING:

- A. Place/Time: 10:00 AM, December 11, 2025, at Deutschheim State Historic Site - Pelster House Barn (Lat 38.492590, Lon -91.272857), Franklin County, MO. We will meet at the intersection of Schoeneberg Road and Cedar Fork Road (located on the north end of site).
- B. Access to State of Missouri property requires presentation of a photo ID by all persons

### 6.0 HOW TO GET PLANS & SPECIFICATIONS:

- A. View Only Electronic bid sets are available at no cost or paper bid sets for a **deposit of \$30.00** from American Document Solutions (ADS). MAKE CHECKS PAYABLE TO: American Document Solutions. Mail to: American Document Solutions, 1400 Forum Blvd., Suite 7A, Columbia, Missouri 65203. Phone 573-446-7768, Fax 573-355-5433, <https://www.adsplanroom.net>. NOTE: Prime contractors will be allowed a maximum of two bid sets at the deposit rate shown above. Other requesters will be allowed only one bid set at this rate. Additional bid sets or parts thereof may be obtained by any bidder at the cost of printing and shipping by request to American Document Solutions at the address shown above. Bidder must secure at least one bid set to become a planholder.
- B. **Refunds: Return plans and specifications in unmarked condition within 15 working days of bid opening to American Document Solutions, 1400 Forum Blvd., Suite 7A, Columbia, Missouri 65203. Phone 573-446-7768, Fax 573-355-5433. Deposits for plans not returned within 15 working days shall be forfeited.**
- C. Information for upcoming bids, including downloadable plans, specifications, Invitation for Bid, bid tabulation, award, addenda, and access to the ADS planholders list, is available on the Division of Facilities Management, Design and Construction's web site: <https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans>.

### 7.0 POINT OF CONTACT:

- A. Designer: Reitz & Jens, Inc., Jeff Bertel, P.E., (314) 993-4132, email: [JBertel@reitzjens.com](mailto:JBertel@reitzjens.com)
- B. Project Manager: Scott Zeller, (573) 680-8138, email: [Scott.Zeller@oa.mo.gov](mailto:Scott.Zeller@oa.mo.gov)

### 8.0 GENERAL INFORMATION:

- A. The State reserves the right to reject any and all bids and to waive all informalities in bids. No bid may be withdrawn for a period of 20 working days subsequent to the specified bid opening time. The contractor shall pay not less than the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed, as determined by the Missouri Department of Labor and Industrial Relations and as set out in the detailed plans and specifications.
- B. Bid results will be available at <https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans> after it is verified that at least one bid is awardable and affordable.

## **SECTION 002113 – INSTRUCTIONS TO BIDDERS**

### **1.0 - SPECIAL NOTICE TO BIDDERS**

- A. If awarded a contract, the Bidder's employees, and the employees of all subcontractors, who perform the work on the project must adhere to requirements in Section 013513 – Site Security and Health Requirements as applicable per Agency.
- B. The Bidder's prices shall include all city, state, and federal sales, excise, and similar taxes that may lawfully be assessed in connection with the performance of work, and the purchased of materials to be incorporated in the work. **THIS PROJECT IS NOT TAX EXEMPT.**

### **2.0 - BID DOCUMENTS**

- A. The number of sets obtainable by one (1) party may be limited in accordance with available supply.
- B. For the convenience of contractors, subcontractors and suppliers, bidding documents are available on the Owner's website at <https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans>.

### **3.0 - BIDDERS' OBLIGATIONS**

- A. Bidders must carefully examine the entire site of the work and shall make all reasonable and necessary investigations to inform themselves thoroughly as to the facilities available as well as to all the difficulties involved in the completion of all work in accordance with the specifications and the plans. Bidders are required to examine all maps, plans and data mentioned in the specifications. No plea of ignorance concerning observable existing conditions or difficulties that may be encountered in the execution of the work under this contract will be accepted as an excuse for any failure or omission on the part of the successful Bidder (contractor) to fulfill every detail of the requirements of the contract, nor accepted as a basis for any claims for extra compensation or time extension.
- B. Under no circumstances will Bidders give their plans and specifications to other Bidders. It is highly encouraged, but not required, that all Bidders be on the official planholders list to receive project updates including but not limited to any addenda that are issued during the bidding process.

### **4.0 - INTERPRETATIONS**

- A. No Bidder shall be entitled to rely on oral or written representations from any person as to the meaning of the plans and specifications or the acceptability of alternate products, materials, form or type of construction.
- B. Bidders shall make all requests for interpretations in writing and submit all requests to the Project Designer and Project Manager identified in Section 007300 – Supplementary Conditions with all necessary supporting documentation no less than five (5) working days before opening of bids. Responses to requests for interpretation will be issued via a written addendum and will be sent as promptly as is practicable to all official planholders and posted on the Owner's website. All such addenda shall become part of the bid and contract documents.
- C. Bidders shall make all requests for an "Acceptable Substitution" on the Section 006325 Substitution Request Form. The request shall be emailed to the Project Designer and Project Manager identified in Section 007300 – Supplementary Conditions no less than five (5) working days before opening of bids. Responses to requests for substitutions will be issued via a written addendum and will be sent as promptly as is practicable to all official planholders and posted on the Owner's website. All such addenda shall become part of the bid and contract documents.
- D. An "Acceptable Substitution" requested after the award of bid will only be approved if proven to the satisfaction of the Owner and the Designer that the product is acceptable in design, strength, durability, usefulness, and convenience for the purpose intended. Approval of the substitution after award is at the sole discretion of the Owner and all requests of this nature must be submitted in accordance with Article 3.1 of the General Conditions.

## **5.0 - BIDS AND BIDDING PROCEDURE**

- A. Bidders shall submit all submission forms and accompanying documents listed in Section 004113 – Bid Form, Article 5.0, Attachments to Bid by the stated time on the bid documents or the bid will be rejected for being non-responsive.
- B. Depending on the specific project requirements, **the following is a GENERIC list** of all possible bid forms that may be due with bid submittals. Bidders must verify each specific project's requirements in Section 004113 to ensure they have provided all the required documentation with their submission.

### **Bid Submittal – due before stated date and time of bid opening (see IFB):**

|        |                                                           |
|--------|-----------------------------------------------------------|
| 004113 | Bid Form (all pages are always required)                  |
| 004322 | Unit Prices Form                                          |
| 004336 | Proposed Subcontractors Form                              |
| 004337 | MBE/WBE/SDVE Compliance Evaluation Form                   |
| 004338 | MBE/WBE/SDVE Eligibility Determination for Joint Ventures |
| 004339 | MBE/WBE/SDVE GFE Determination                            |
| 004340 | SDVE Business Form                                        |
| 004541 | Affidavit of Work Authorization                           |
| 004545 | Anti-Discrimination Against Israel Act Certification form |

- C. The Bidder shall submit its bid on the forms provided by the Owner in the same file format (PDF) with each space fully and properly completed, typewritten or legibly printed, including all amounts required for alternate bids, unit prices, cost accounting data, etc. The Owner will reject bids that are not on the Owner's forms or that do not contain all requested information. All forms can be found on the Owner's website at <https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans> and shall be submitted with your bid to [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov).
- D. All bids shall be submitted without additional terms and conditions, modifications, or reservations. The completed forms should not include interlineations, alterations, or erasures. Bids not in compliance with the requirements of this paragraph will be rejected as non-responsive.
- E. All bids shall be accompanied by a bid bond executed by the bidder and a duly authorized surety company, certified check, cashier's check or bank draft made payable to the Division of Facilities Management, Design and Construction, State of Missouri, in the amount indicated in the bid documents in Section 004113. Failure of the Bidder to submit the duly authorized bid bond or the full amount required shall be sufficient cause to reject his bid. The Bidder agrees that the proceeds of the check, draft, or bond shall become the property of the State of Missouri, if for any reason the Bidder withdraws his bid after bid closing or if the Bidder, within ten (10) working days after notification of award, refuses or is unable to 1) execute the tendered contract, 2) provide an acceptable performance and payment bond, or 3) provide evidence of required insurance coverage.
- F. The bid bond check or draft submitted by the successful Bidder will be returned after the receipt of an acceptable performance and payment bond and execution of the formal contract. Checks or drafts of all other Bidders will be returned within a reasonable time after it is determined that the bid represented by same will receive no further consideration by the State of Missouri.

## **6.0 - SIGNING OF BIDS**

- A. A bid should contain the full and correct legal name of the Bidder. If the Bidder is an entity registered with the Missouri Secretary of State, the Bidder's name on the bid form should appear as shown in the Secretary of State's records. If the Bidder is an entity organized in a state other than Missouri, the Bidder must provide a Certificate of Authority to do business in the State of Missouri.
- B. If the successful Bidder is doing business in the State of Missouri under a fictitious name, the Bidder shall furnish to Owner, attached to the Bid Form, a properly certified copy of the certificate of Registration of Fictitious Name from the State of Missouri, and such certificate shall remain on file with the Owner.
- C. A bid from an individual shall be signed as noted on the Bid Form.
- D. A bid from a partnership or joint venture shall require only one signature of a partner, an officer of the joint venture authorized to bind the venture, or an attorney-in-fact. If the bid is signed by an officer of

a joint venture or an attorney-in-fact, a document evidencing the individual's authority to execute contracts should be included with the bid form.

- E. A bid from a limited liability company (LLC) shall be signed by a manager or a managing member of the LLC.
- F. A bid from a corporation shall have the correct corporate name thereon and the signature of an authorized officer of the corporation. Title of office held by the person signing for the corporation shall appear, along with typed name of said individual and the corporate license number shall be provided. In addition, for corporate proposals, the President or Vice-President listed per the current filing with the Missouri Secretary of State should sign as the Bidder. If the signatory is other than the corporate president or vice president, the bidder must provide satisfactory evidence that the signatory has the legal authority to bind the corporation.

#### **7.0 - RECEIVING BID SUBMITTALS**

- A. It is the Bidder's sole responsibility to ensure receipt of the bid submittals by Owner on or before the date and time specified in the Invitation for Bid or as modified via written addenda. Bids received after the date and time specified will not be considered by the Owner.
- B. All bids shall be received via email at [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov) and bids received by the Owner through any other means, including hard copies, will not be considered, and will be discarded by the Owner unopened.

#### **8.0 - MODIFICATION AND WITHDRAWAL OF BIDS**

- A. Bidder may withdraw a bid at any time prior to the scheduled closing time for receipt of bids, but no bidder may withdraw his bid for a period of twenty (20) working days after the scheduled closing time for receipt of bids.
- B. Bidder may modify a bid until the scheduled closing time by sending a revised bid to [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov) with a note in the subject line and body of the email that it is a revised bid. All revised bids must be submitted to [FMDCBids@oa.mo.gov](mailto:FMDCBids@oa.mo.gov), revised bids sent any other way will not be considered.

#### **9.0 - AWARD OF CONTRACT**

- A. The Owner reserves the right to reject any and/or all bids and further to waive all informalities in bidding when deemed in the best interest of the State of Missouri.
- B. The Owner reserves the right to let other contracts in connection with the work including, but not limited to, contracts for the furnishing and installation of furniture, equipment, machinery, appliances and other apparatuses.
- C. The Owner will award a contract to the lowest, responsive, and responsible Bidder in accordance with Section 8.250, RSMo. No contract will be awarded to any Bidder who has had a contract with the Owner terminated within the preceding twelve months for material breach of contract or who has been suspended or debarred by the Owner.
- D. Award of alternates, if any, will be made in numerical order unless all bids received are such that the order of acceptance of alternates does not affect the determination of the lowest, responsive, responsible bidder.
- E. No award shall be considered binding upon the Owner until the written contract has been properly executed and the following documentation has been provided: 1) performance and payment bond consistent with Article 6.1 of the General Conditions; 2) proof of the required insurance coverage; 3) an executed Section 004541 - Affidavit of Work Authorization form; and 4) documentation evidence enrollment and participation in a federal work authorization program.
- F. Failure to execute and return the contract and associated documents within the prescribed period shall be treated, at the option of the Owner, as a breach of Bidder's obligation and the Owner shall be under no further obligation to Bidder.
- G. Transient employers subject to Sections 285.230 and 285.234, RSMo, (out-of-state employers who temporarily transact any business in the State of Missouri) may be required to file a bond with the

Missouri Department of Revenue. No contract will be awarded by the Owner unless the successful Bidder certifies that he has complied with all applicable provisions of Section 285.230-234.

- H. Sections 285.525 and 285.530, RSMo, require business entities to enroll and participate in a federal work authorization program in order to be eligible to receive award of any state contract in excess of \$5,000. Bidders should submit with their bid an Affidavit of Work Authorization (Section 004541) along with appropriate documentation evidencing such enrollment and participation. Bidders must also submit an E-Verify Memorandum before the Owner may award a contract to the Bidder. Information regarding a E-Verify is located at <https://www.e-verify.gov/employers/enrolling-in-e-verify>. The contractor shall be responsible for ensuring that all subcontractors and suppliers associated with this contract enroll in E-Verify.
- I. The successful Bidder must be registered in MissouriBUYS powered by MOVERS at <https://missouribuyss.mo.gov/supplier-registration#> as an approved vendor prior to being issued a contract.

#### **10.0 - CONTRACT SECURITY**

- A. The successful Bidder shall furnish a performance/payment bond as set forth in General Conditions Article 6.1 prior to the State executing the contract and issuing a notice to proceed.

#### **11.0 - LIST OF SUBCONTRACTORS**

- A. If required by "Section 004113 – Bid Form," each Bidder must submit as part of their bid a list of subcontractors to be used in performing the work (Section 004336). The list must specify the name of the single designated subcontractor, manufacturer, or suppliers for each category of work listed in "Section 004336 - Proposed Subcontractors Form." If work within a category will be performed by more than one subcontractor, the bidder must provide the name of each subcontractor and specify the exact portion of the work to be done by each. If the Bidder intends to perform any of the designated subcontract work with the use of his own employees, the Bidder shall make that fact clear, by listing his own firm for the subject category. **If any category of work is left vacant or if more than one subcontractor is listed for any category without designating the portion of work to be performed by each, the bid shall be rejected.**

#### **12.0 - WORKING DAYS**

- A. Contract duration time is stated in working days and will use the following definition in determining the actual calendar date for contract completion:
  - 1. Working days are defined as all calendar days except Saturdays, Sundays and the following State of Missouri observed holidays: New Year's Day, Martin Luther King, Jr. Day, Lincoln Day, Washington's Birthday, Truman Day, Memorial Day, Juneteenth, Independence Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day and Christmas Day.

#### **13.0 - AMERICAN AND MISSOURI - MADE PRODUCTS AND FIRMS**

- A. By signing the bid form and submitting a bid on this project, the Bidder certifies that it will use American and Missouri products as set forth in Article 1.7 of the General Conditions. Bidders are advised to review those requirements carefully prior to bidding.
- B. A preference shall be given to Missouri firms, corporations or individuals, or firms, corporations or individuals that maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less.
- C. Pursuant to Section 34.076, RSMo, a contractor or Bidder domiciled outside the boundaries of the State of Missouri shall be required, in order to be successful, to submit a bid the same percent less than the lowest bid submitted by a responsible contractor or Bidder domiciled in Missouri as would be required for such a Missouri domiciled contractor or Bidder to succeed over the bidding contractor or Bidder domiciled outside Missouri on a like contract or bid being let in the Bidder's domiciliary state and, further, the contractor or Bidder domiciled outside the boundaries of Missouri shall be required to submit an audited financial statement as would be required of a Missouri domiciled contractor or Bidder on a like contract or bid being let in the domiciliary state of that contractor or Bidder.

#### **14.0 – ANTI-DISCRIMINATION AGAINST ISRAEL ACT CERTIFICATION:**

- A. If the Bidder meets the section 34.600, RSMo., definition of a “company” and the Bidder has ten or more employees, the Bidder must certify in writing that the Bidder is not currently engaged in a boycott of goods or services from the State of Israel and shall not engage in a boycott of goods or services from the State of Israel, if awarded a contract, for the duration of the contract. The Bidder is required to complete and submit the applicable portion of Section 004545 - Anti-Discrimination Against Israel Act Certification with its Bid Form. The applicable portion of the exhibit must be submitted prior to execution of a contract by the Owner and issuance of Notice to Proceed.

#### **15.0 – MBE/WBE/SDVE INSTRUCTIONS**

A. Definitions:

1. **“MBE”** means a Minority Business Enterprise.
2. **“MINORITY”** has the same meaning as set forth in 1 C.S.R. 10-17.010.
3. **“MINORITY BUSINESS ENTERPRISE”** has the same meaning as set forth in section 37.020, RSMo.
4. **“WBE”** means a Women’s Business Enterprise.
5. **“WOMEN’S BUSINESS ENTERPRISE”** has the same meaning as set forth in section 37.020, RSMo.
6. **“SDVE”** means a Service-Disabled Veterans Enterprise.
7. **“SERVICE-DISABLED VETERAN”** has the same meaning as set forth in section 34.074, RSMo.
8. **“SERVICE-DISABLED VETERAN ENTERPRISE”** has the same meaning as “Service-Disabled Veteran Business” set forth in section 34.074, RSMo.

B. MBE/WBE/SDVE General Requirements:

1. For all bids greater than \$100,000, the Bidder shall obtain MBE, WBE and SDVE participation in an amount equal to or greater than the percentage goals set forth in the Invitation for Bid and the Bid Form, unless the Bidder is granted a Good Faith Effort waiver by the Director of the Division, as set forth below. If the Bidder does not meet the MBE, WBE and SDVE goals, or make a good faith effort to do so, the Bidder shall be nonresponsive, and its bid shall be rejected.
2. The Bidder should submit with its bid all the information requested in the MBE/WBE/SDVE Compliance Evaluation Form for every MBE, WBE, or SDVE subcontractor or material supplier the Bidder intends to use for the contract work. The Bidder is required to submit all MBE/WBE/SDVE documentation before the stated time and date set forth in the Invitation for Bid. If the Bidder fails to provide such information by the specified date and time, the Owner shall reject the bid.
3. The Director reserves the right to request additional information from a Bidder to clarify the Bidder’s proposed MBE, WBE, and/or SDVE participation. The Bidder shall submit the clarifying information requested by the Owner within two (2) working days of receiving the request for clarification.
4. Pursuant to section 34.074, RSMo, a Prime Bidder that qualifies as an SDVE shall receive a three-percentage point bonus preference in the contract award evaluation process. The bonus preference will be calculated and applied by reducing the bid amount of the eligible SDVE by three percent of the apparent low responsive Bidder’s bid. Based on this calculation, if the eligible SDVE’s evaluation is less than the apparent low responsive Bidder’s bid, the eligible SDVE’s bid will become the apparent low responsive bid. This reduction is for evaluation purposes only and will have no impact on the actual amount(s) of the bid or the amount(s) of any contract awarded. In order to be eligible for the SDVE preference, the Bidder must complete and submit with its bid the Missouri Service-Disabled Veteran Business Form, and any information required by the form.

C. Computation of MBE/WBE/SDVE Goal Participation:

1. A Bidder who is a MBE, WBE, or SDVE may count 100% of the contract towards the MBE, WBE or SDVE goal, less any amounts awarded to another MBE, WBE or SDVE. (NOTE: a MBE firm that bids as general contractor must obtain WBE and SDVE participation; a WBE firm that bids as

a general contractor must obtain MBE and SDVE participation; and a SDVE firm that bids as general contractor must obtain MBE and WBE participation.) For the remaining contract amount to be counted towards the MBE, WBE or SDVE goal, the Bidder must complete the MBE/WBE/SDVE Compliance Evaluation Form (Section 004337) identifying itself as an MBE, WBE or SDVE.

2. The total dollar value of the work granted to a certified MBE, WBE or SDVE by the Bidder shall be counted towards the applicable goal.
3. Expenditures for materials and supplies obtained from a certified MBE, WBE, or SDVE supplier or manufacturer may be counted towards the MBE, WBE and SDVE goals, if the MBE, WBE, or SDVE assumes the actual and contractual responsibility for the provision of the materials and supplies.
4. The total dollar value of the work granted to a second or subsequent tier subcontractor or a supplier may be counted towards a Bidder's MBE, WBE and SDVE goals, if the MBE, WBE, or SDVE properly assumes the actual and contractual responsibility for the work.
5. The total dollar value of work granted to a certified joint venture equal to the percentage of the ownership and control of the MBE, WBE, or SDVE partner in the joint venture may be counted towards the MBE/WBE/SDVE goals.
6. Only expenditures to a MBE, WBE, or SDVE that performs a commercially useful function in the work may be counted towards the MBE, WBE and SDVE goals. A MBE, WBE, or SDVE performs a commercially useful function when it is responsible for executing a distinct element of the work and carrying out its responsibilities by performing, managing and supervising the work or providing supplies or manufactured materials.

D. Certification of MBE/WBE/SDVE Subcontractors:

1. In order to be counted towards the goals, an MBE or WBE must be certified by the State of Missouri Office of Equal Opportunity and an SDVE must be certified by the State of Missouri, Office of Equal Opportunity or by the Federal U.S. Small Business Administration directory.
2. The Bidder may determine the certification status of a proposed MBE or WBE subcontractor or supplier by referring to the Office of Equal Opportunity (OEO)'s online MBE/WBE directory <https://apps1.mo.gov/MWBCertifiedFirms/>. The Bidder may determine the eligibility of a SDVE subcontractor or supplier by referring to the Office of Equal Opportunity online SDVE directory at <https://oeo.mo.gov/sdve-certification-program/> or the Federal U.S. Small Business Administration directory <https://veterans.certify.sba.gov/#search>.
3. Additional information, clarifications, or other information regarding the MBE/WBE/SDVE listings in the directories may be obtained by contacting the Contract Specialist of record as shown in the Supplementary Conditions (Section 007300).

E. Waiver of MBE/WBE/SDVE Participation:

1. If a Bidder has made a good faith effort to secure the required MBE, WBE and/or SDVE participation and has failed, the Bidder shall submit with its bid the information requested in MBE/WBE/SDVE Good Faith Effort (GFE) Determination form. The Director will determine if the Bidder made a good faith effort to meet the applicable goals. If the Director determines that the Bidder did not make a good faith effort, the bid shall be rejected as being nonresponsive to the bid requirements. Bidders who demonstrate that they have made a good faith effort to include MBE, WBE, and/or SDVE participation will be granted a waiver and will be considered to be responsive to the applicable participation goals, regardless of the percent of actual participation obtained, if the bid is otherwise acceptable.
2. In determining whether a Bidder has made a good faith effort to obtain MBE, WBE and/or SDVE participation, the Director may evaluate the factors set forth in 1 CSR 30-5.010(6)(C) and the following:
  - a. The amount of actual participation obtained;

- b. How and when the Bidder contacted potential MBE, WBE, and SDVE subcontractors and suppliers;
- c. The documentation provided by the Bidder to support its contacts, including whether the Bidder provided the names, addresses, phone numbers, and dates of contact for MBE/WBE/SDVE firms contacted for specific categories of work;
- d. If project information, including plans and specifications, were provided to MBE/WBE/SDVE subcontractors;
- e. Whether the Bidder made any attempts to follow-up with MBE, WBE or SDVE firms prior to bid;
- f. Amount of bids received from any of the subcontractors and/or suppliers that the Bidder contacted;
- g. The Bidder's stated reasons for rejecting any bids;

F. Contractor MBE/WBE/SDVE Obligations

- 1. If awarded a contract, the Bidder will be contractually required to subcontract with or obtain materials from the MBE, WBE, and SDVE firms listed in its bid, in amounts equal to or greater than the dollar amount in the bid, unless the amount is modified in writing by the Owner.
- 2. If the Contractor fails to meet or maintain the participation requirements contained in the Contractor's bid, the Contractor must satisfactorily explain to the Director why it cannot comply with the requirement and why failing meeting the requirement was beyond the Contractor's control. If the Director finds the Contractor's explanation unsatisfactory, the Director may take any appropriate action including, but not limited to:
  - a. Declaring the Contractor ineligible to participate in any contracts with the Division for up to twelve (12) months (suspension); and/or
  - b. Declaring the Contractor be nonresponsive to the Invitation for Bid, or in breach of contract and rejecting the bid or terminating the contract.
- 3. If the Contractor replaces an MBE, WBE, or SDVE during the course of the contract, the Contractor shall replace it with another MBE, WBE, or SDVE or make a good faith effort to do so. All MBE, WBE and SDVE substitutions must be approved by the Director in writing.
- 4. The Contractor shall provide the Owner with regular reports on its progress in meeting its MBE/WBE/SDVE obligations. At a minimum, the Contractor shall report the dollar-value of work completed by each MBE, WBE, or SDVE during the preceding month and the cumulative total of work completed by each MBE, WBE or SDVE to date with each monthly application for payment. The Contractor shall also make a final report, which shall include the total dollar-value of work completed by each MBE, WBE, and SDVE during the entire contract.



# State of Missouri Construction Contract

THIS AGREEMENT is made (DATE) by and between:

## *Contractor Name and Address*

hereinafter called the "Contractor," and the **State of Missouri**, hereinafter called the "**Owner**", represented by the Office of Administration, Division of Facilities Management, Design and Construction.

WITNESSETH, that the Contractor and the Owner, for the consideration stated herein agree as follows:

## **ARTICLE 1. STATEMENT OF WORK**

The Contractor shall furnish all labor and materials and perform all work required for furnishing and installing all labor, materials, equipment and transportation and everything necessarily inferred from the general nature and tendency of the plans and specifications for the proper execution of the work for:

**Project Name:** Construct Roadway and Parking Lot  
Deutschheim State Historic Site  
Pelster House Barn  
Franklin County, Missouri

**Project Number:** X2325-01

in strict accordance with the Contract Documents as enumerated in Article 7, all of which are made a part hereof.

## **ARTICLE 2. TIME OF COMPLETION**

The contract performance time is **160 working days** from the transmittal date of this agreement. The contract completion date is **MONTH, DAY, YEAR**. This time includes ten (10) working days for the Contractor to receive, sign and return the contract form along with required bonding and insurance certificates. Failure of the Contractor to provide correct bonding and insurance within the ten (10) working days shall not be grounds for a time extension. Receipt of proper bonding and insurance is a condition precedent to the formation of the contract and if not timely received, may result in forfeiture of the Contractor's bid security. Work may not commence until the Owner issues a written Notice to Proceed and must commence within seven (7) working days thereafter.

## **ARTICLE 3. LIQUIDATED DAMAGES**

Whenever time is mentioned in this contract, time shall be and is of the essence of this contract. The Owner would suffer a loss should the Contractor fail to have the work embraced in this contract fully completed on or before the time above specified. THEREFORE, the parties hereto realize in order to adjust satisfactorily the damages on account of such failure that it might be impossible to compute accurately or estimate the amount of such loss or damages which the Owner would sustain by reason of failure to complete fully said work within the time required by this contract. The Contractor hereby covenants and agrees to pay the Owner, as and for **liquidated damages, the sum of \$700** per day for each and every day, Sunday and legal holidays excepted, during which the work remains incomplete and unfinished. Any sum which may be due the Owner for such damages shall be deducted and retained by the Owner from any balance which may be due the Contractor when said work shall have been finished and accepted. But such provisions shall not release the Bond of the Contractor from liability according to its terms. In case of failure to complete, the Owner will be under no obligation to show or prove any actual or specific loss or damage.

#### ARTICLE 4. CONTRACT SUM

The Owner shall pay the Contractor for the prompt, faithful and efficient performance of the conditions and undertakings of this contract, subject to additions, and deductions as provided herein, in current funds the sum of:

Base Bid: \$

Accepted Alternates, if applicable to the Project and accepted by the Owner.

**TOTAL CONTRACT AMOUNT:** (\$CONTRACT AMOUNT)

**UNIT PRICES:** The Owner accepts the following Unit Prices:

For changing specified quantities of work from those indicated by the contract drawings and specifications, upon written instructions of Owner, the following unit prices shall prevail. The unit prices include all labor, overhead and profit, materials, equipment, appliances, bailing, shoring, shoring removal, etc., to cover the finished work of the several kinds of work called for. Only a single unit price shall be given and it shall apply for either MORE or LESS work than that shown on the drawings and called for in the specifications or included in the Base Bid. In the event of more or less units than so indicated or included, change orders may be issued for the increased or decreased amount.

#### ARTICLE 5. PREVAILING WAGE RATE

**MISSOURI PREVAILING WAGE LAW (Sections 290.210 to 290.340, RSMo):** The Contractor shall pay not less than the specified hourly rate of wages, as set out in the wage order attached to and made part of the specifications for work under this contract, to all workers performing work under the contract, in accordance with sections 290.210 to 290.340, RSMo. The Contractor shall forfeit a penalty to the Owner of one hundred dollars per day (or portion of a day) for each worker that is paid less than the specified rates for any work done under the contract by the Contractor or by any subcontractor, in accordance with section 290.250, RSMo.

**DAVIS-BACON ACT:** If this Project is financed in whole or in part from Federal funds (as indicated in the Instructions to Bidders or other bid or contract documents for this Project), then this contract shall be subject to all applicable federal labor statutes, rules and regulations, including provisions of the Davis-Bacon Act, 40 U.S.C. §3141 et seq., and the "Federal Labor Standards Provisions," as further set forth in Section 007333 – Supplementary General Conditions for Federally Funded/Assisted Construction Projects, which is incorporated into the contract by reference. Where the Missouri Prevailing Wage Law and the Davis-Bacon Act require payment of different wages for work performed under this contract, the Contractor and all Subcontractors shall pay the greater of the wages required under either law, on a classification-by-classification basis.

#### ARTICLE 6. MINORITY/WOMEN/SERVICE DISABLED VETERAN BUSINESS ENTERPRISE PARTICIPATION

The Contractor has been granted a waiver of the 0% MBE and 0% WBE and 3% SDVE participation goals. The Contractor agrees to secure the MBE/WBE/SDVE participation amounts for this project as follows: (OR)

The Contractor has met the MBE/WBE/SDVE participation goals and agrees to secure the MBE/WBE/SDVE participation amounts for this project as follows:

|                    |                    |
|--------------------|--------------------|
| MBE/WBE/SDVE Firm: | Subcontract Amt:\$ |
| MBE/WBE/SDVE Firm: | Subcontract Amt:\$ |
| MBE/WBE/SDVE Firm: | Subcontract Amt:\$ |

Total \$

MBE/WBE/SDVE assignments identified above shall not be changed without a contract change signed by the Owner.

The Director of the Division of Facilities Management, Design and Construction or his Designee shall be the final authority to resolve disputes and disagreements between the Contractor and the MBE/WBE/SDVE firms listed above when such disputes impact the subcontract amounts shown above.

## ARTICLE 7. CONTRACT DOCUMENTS

The following documents are hereby incorporated into this contract by reference (all division/section numbers and titles are as utilized in the Project Manual published by the Owner for this Project):

1. Division 0 – Procurement and Contracting Information, including, but not limited to:
  - a. Invitation for Bid (Section 001116)
  - b. Instructions to Bidders (Section 002113)
  - c. Supplementary Instructions to Bidders (if applicable) (Section 002213)
  - d. The following documents as completed and executed by the Contractor and accepted by the Owner, if applicable:
    - i. Bid Form (Section 004113)
    - ii. Unit Prices (Section 004322)
    - iii. Proposed Contractors Form (Section 004336)
    - iv. MBE, WBE, SDVE Compliance Evaluation Form(s) (Section 004337)
    - v. MBE, WBE, SDVE Eligibility Determination Form for Joint Ventures (Section 004338)
    - vi. MBE, WBE, SDVE Good Faith Effort (GFE) Determination Form (Section 004339)
    - vii. Missouri Service Disabled Veteran Business Form (Section 004340)
    - viii. Affidavit of Work Authorization (Section 004541)
  - e. Performance and Payment Bond, completed and executed by the Contractor and surety (Section 006113)
  - f. General Conditions (Section 007213)
  - g. Supplementary Conditions (Section 007300)
  - h. Supplementary General Conditions for Federally Funded/Assisted Construction Projects (Section 007333), if applicable
  - i. Wage Rate(s) (Section 007346)
2. Division 1 – General Requirements
3. All Drawings identified in the Project Manual
4. All Technical Specifications included in the Project Manual
5. Addenda, if applicable

## ARTICLE 8 – CERTIFICATION

By signing this contract, the Contractor hereby re-certifies compliance with all legal requirements set forth in Section 6.0, Bidder's Certifications of the Bid Form.

By signature below, the parties hereby execute this contract document.

### APPROVED:

---

Brian Yansen, Director  
Division of Facilities Management,  
Design and Construction

---

Contractor's Authorized Signature

I, Corporate Secretary, certify that I am Secretary of the corporation named above and that (CONTRACTOR NAME), who signed said contract on behalf of the corporation, was then (TITLE) of said corporation and that said contract was duly signed for and in behalf of the corporation by authority of its governing body, and is within the scope of its corporate powers.

---

*Corporate Secretary*

**SECTION 006113 - PERFORMANCE AND PAYMENT BOND FORM**

KNOW ALL MEN BY THESE PRESENTS, THAT we \_\_\_\_\_

as principal, and \_\_\_\_\_

\_\_\_\_\_ as Surety, are held and firmly bound unto the

STATE OF MISSOURI. in the sum of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_ )

for payment whereof the Principal and Surety bind themselves, their heirs, executors, administrators and successors, jointly and severally, firmly by these presents.

WHEREAS, the Principal has, by means of a written agreement dated the \_\_\_\_\_

day of \_\_\_\_\_, 20\_\_\_\_\_, enter into a contract with the State of Missouri for

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

(Insert Project Title and Number)

NOW, THEREFORE, if the Principal shall faithfully perform and fulfill all the undertakings, covenants, terms, conditions and agreements of said contract during the original term of said contract and any extensions thereof that may be granted by the State of Missouri, with or without notice to the Surety and during the life of any guaranty required under the contract; and shall also faithfully perform and fulfill all undertakings, covenants, terms, conditions and agreements of any and all duly authorized modifications of said contract that may hereafter be made with or without notice to the Surety; and shall also promptly make payment for materials incorporated, consumed or used in connection with the work set forth in the contract referred to above, and all insurance premiums, both compensation and all other kinds of insurance, on said work, and for all labor performed on such work, whether by subcontractor or otherwise, at not less than the prevailing hourly rate of wages for work of a similar character (exclusive of maintenance work) in the locality in which the work is performed and not less than the prevailing hourly rate of wages for legal holiday and overtime work (exclusive of maintenance work) in the locality in which the work is performed both as determined by the Department of Labor and Industrial Relations or determined by the Court of Appeal, as provided for in said contract and in any and all duly authorized modifications of said contract that may be hereafter made, with or without notice to the Surety, then, this obligation shall be void and of no effect, but it is expressly understood that if the Principal should make default in or should fail to strictly, faithfully and efficiently do, perform and comply with any or more of the covenants, agreements, stipulations, conditions, requirements or undertakings, as specified in or by the terms of said contract, and with the time therein named, then this obligation shall be valid and binding upon each of the parties hereto and this bond shall remain in full force and effect; and the same may be sued on at the instance of any material man, laborer, mechanic, subcontractor, individual, or otherwise to whom such payment is due, in the name of the State of Missouri, to the use of any such person.

AND, IT IS FURTHER specifically provided that any modifications which may hereinafter be made in the terms of the contract or in the work to be done under it or the giving by the Owner of any extension of the time for the performance of the contract or any other forbearance on the part of either the Owner or the Principal to the other, shall not in any way release the Principal and the Surety, or either or any of them, their heirs, executors, administrators and successors, from their liability hereunder, notice to the Surety of any such extension, modifications or forbearance being hereby waived.

IN WITNESS WHEREOF, the above bounden parties have executed the within instrument this \_\_\_\_\_ day of \_\_\_\_\_, 20 \_\_\_\_.

**AS APPLICABLE:**

**AN INDIVIDUAL**

Name: \_\_\_\_\_

Signature: \_\_\_\_\_

**A PARTNERSHIP**

Name of Partner: \_\_\_\_\_

Signature of Partner: \_\_\_\_\_

Name of Partner: \_\_\_\_\_

Signature of Partner: \_\_\_\_\_

**CORPORATION**

Firm Name: \_\_\_\_\_

Signature of President: \_\_\_\_\_

**SURETY**

Surety Name: \_\_\_\_\_

Attorney-in-Fact: \_\_\_\_\_

Address of Attorney-in-Fact: \_\_\_\_\_

Telephone Number of Attorney-in-Fact: \_\_\_\_\_

Signature Attorney-in-Fact: \_\_\_\_\_

**NOTE:** Surety shall attach Power of Attorney



STATE OF MISSOURI  
OFFICE OF ADMINISTRATION  
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION  
**PRODUCT SUBSTITUTION REQUEST**

PROJECT NUMBER

PROJECT TITLE AND LOCATION

CHECK APPROPRIATE BOX

- ☐ **SUBSTITUTION PRIOR TO BID OPENING**  
(Minimum of (5) working days prior to receipt of Bids as per Article 4 – Instructions to Bidders)
- ☐ **SUBSTITUTION FOLLOWING AWARD**  
(Maximum of (20) working days from Notice to Proceed as per Article 3 – General Conditions)

FROM: BIDDER/CONTRACTOR (PRINT COMPANY NAME)

TO: ARCHITECT/ENGINEER (PRINT COMPANY NAME)

Bidder/Contractor hereby requests acceptance of the following product or systems as a substitution in accordance with provisions of Division One of the Bidding Documents:

SPECIFIED PRODUCT OR SYSTEM

SPECIFICATION SECTION NO.

SUPPORTING DATA

- ☐ Product data for proposed substitution is attached (include description of product, standards, performance, and test data)
- ☐ Sample ☐ Sample will be sent, if requested

**QUALITY COMPARISON**

|              | SPECIFIED PRODUCT | SUBSTITUTION REQUEST |
|--------------|-------------------|----------------------|
| NAME, BRAND  |                   |                      |
| CATALOG NO.  |                   |                      |
| MANUFACTURER |                   |                      |
| VENDOR       |                   |                      |

**PREVIOUS INSTALLATIONS**

|          |                    |
|----------|--------------------|
| PROJECT  | ARCHITECT/ENGINEER |
| LOCATION | DATE INSTALLED     |

**SIGNIFICANT VARIATIONS FROM SPECIFIED PRODUCT**

---

---

---

---

---

---

---

---

---

---

**REASON FOR SUBSTITUTION**

---

---

---

---

---

---

**DOES PROPOSED SUBSTITUTION AFFECT OTHER PARTS OF WORK?**☐ YES ☐ NO

IF YES, EXPLAIN

---

---

---

---

---

---

**SUBSTITUTION REQUIRES DIMENSIONAL REVISION OR REDESIGN OF STRUCTURE OR A/E WORK**☐ YES ☐ NO**BIDDER'S/CONTRACTOR'S STATEMENT OF CONFORMANCE OF PROPOSED SUBSTITUTION TO CONTRACT REQUIREMENT:**

We have investigated the proposed substitution. We believe that it is equal or superior in all respects to specified product, except as stated above; that it will provide the same Warranty as specified product; that we have included complete implications of the substitution; that we will pay redesign and other costs caused by the substitution which subsequently become apparent; and that we will pay costs to modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning as a result of the substitution.

BIDDER/CONTRACTOR

DATE

**REVIEW AND ACTION**☐ Resubmit Substitution Request with the following additional information:

---

☐ Substitution is accepted.☐ Substitution is accepted with the following comments:

---

☐ Substitution is not accepted.

ARCHITECT/ENGINEER

DATE



STATE OF MISSOURI  
OFFICE OF ADMINISTRATION  
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION  
**FINAL RECEIPT OF PAYMENT AND RELEASE**

PROJECT NUMBER

KNOW ALL MEN BY THESE PRESENT THAT:                    hereinafter called "Subcontractor" who heretofore entered into an agreement with                    hereinafter called "Contractor", for the performance of work and/or furnishing of material for the construction of the project entitled

(PROJECT TITLE, PROJECT LOCATION, AND PROJECT NUMBER)

at

(ADDRESS OF PROJECT)

for the State of Missouri (Owner) which said subcontract is by this reference incorporated herein, in consideration of such final payment by Contractor.

DOES HEREBY:

1. ACKNOWLEDGE that they have been **PAID IN FULL** all sums due for work and materials contracted or done by their Subcontractors, Material Vendors, Equipment and Fixture Suppliers, Agents and Employees, or otherwise in the performance of the Work called for by the aforesaid Contract and all modifications or extras or additions thereto, for the construction of said project or otherwise.
2. RELEASE and fully, finally, and forever discharge the Owner from any and all suits, actions, claims, and demands for payment for work performed or materials supplied by Subcontractor in accordance with the requirements of the above referenced Contract.
1. REPRESENT that all of their Employees, Subcontractors, Material Vendors, Equipment and Fixture Suppliers, and everyone else has been **paid in full** all sums due them, or any of them, in connection with performance of said Work, or anything done or omitted by them, or any of them in connection with the construction of said improvements, or otherwise.

DATED this                    day of                    , 20                    .

NAME OF SUBCONTRACTOR

BY (TYPED OR PRINTED NAME)

SIGNATURE

TITLE

ORIGINAL: FILE/Closeout Documents



STATE OF MISSOURI  
OFFICE OF ADMINISTRATION  
DIVISION OF FACILITIES MANAGEMENT,  
DESIGN AND CONSTRUCTION

**MBE/WBE/SDVE PROGRESS REPORT**

Remit with **ALL** Progress and Final Payments

(Please check appropriate box) ☐CONSULTANT ☐CONSTRUCTION

|                                                                    |                |
|--------------------------------------------------------------------|----------------|
| PAY APP NO.                                                        | PROJECT NUMBER |
| CHECK IF FINAL<br><input checked="" type="checkbox"/> <b>FINAL</b> | DATE           |

| PROJECT TITLE                                                                                                |                                                 |                                                                                              |                                                                                  |
|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| PROJECT LOCATION                                                                                             |                                                 |                                                                                              |                                                                                  |
| FIRM                                                                                                         |                                                 |                                                                                              |                                                                                  |
| ORIGINAL CONTRACT SUM (Same as Line Item 1. on Form A of Application for Payment)<br>\$                      |                                                 | TOTAL CONTRACT SUM TO DATE (Same as Line Item 3. on Form A of Application for Payment)<br>\$ |                                                                                  |
| THE TOTAL MBE/WBE/SDVE PARTICIPATION DOLLAR AMOUNT OF THIS PROJECT AS INDICATED IN THE ORIGINAL CONTRACT: \$ |                                                 |                                                                                              |                                                                                  |
| SELECT<br>MBE, WBE,<br>SDVE                                                                                  | ORIGINAL<br>CONTRACT<br>PARTICIPATION<br>AMOUNT | PARTICIPATION<br>AMOUNT<br>PAID-TO-DATE<br>(includes approved<br>contract changes)           | CONSULTANT/SUBCONSULTANT OR<br>CONTRACTOR/SUBCONTRACTOR/SUPPLIER<br>COMPANY NAME |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |
| <input type="checkbox"/> MBE<br><input type="checkbox"/> WBE<br><input type="checkbox"/> SDVE                | \$                                              | \$                                                                                           |                                                                                  |

Revised 06/2023

## **INSTRUCTIONS FOR MBE/WBE/SDVE PROGRESS REPORT**

### **CONTRACTOR OR CONSULTANT TO FILL OUT AND REMIT WITH EACH PAY APPLICATION:**

The MBE/WBE/SDVE Progress Report for the project is issued with the contract comprising values reported in the consultant's Proposal or on the successful contractor's Section 004337 Compliance Evaluation Forms.

At Initial Pay Application fill in the following:

1. Pay App No. Start with 1.
2. Fill in the Project Number and Date.
3. Enter Project Title, Project Location, and Firm.
4. Fill in the "Original Contract Sum" and "Total Contract Sum To Date" (Reference applicable Line Items on Form A of Application for Payment).
5. Indicate the Total Participation Dollar Amount from the Original Contract.
6. Select MBE, WBE, or SDVE for each Consultant/Subconsultant or Contractor/Subcontractor/Supplier.
7. Enter the "Total Amount of Subcontract", "\$ Amount (Paid-To-Date)", and Company Name.

For all subsequent Pay Applications fill in the following:

1. Pay App No.
2. If Final Pay App, check box.
3. Fill in the Project Number and Date.
4. Enter Project Title, Project Location, and Firm
5. At each Pay App fill in the "Original Contract Sum" and "Total Contract Sum To Date" (reference applicable Line Items on Form A of Application for Payment).
6. Indicate the Total Participation Dollar Amount from the Original Contract.
7. Select MBE, WBE, or SDVE for each Consultant/Subconsultant or Contractor/Subcontractor/Supplier
8. Enter the "Total Amount of Subcontract", "\$ Amount (Paid-To-Date)", and Company Name.



STATE OF MISSOURI  
OFFICE OF ADMINISTRATION  
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION  
**AFFIDAVIT – COMPLIANCE WITH PREVAILING WAGE LAW**

PROJECT NUMBER

Before me, the undersigned Notary Public, in and for the County of \_\_\_\_\_

State of \_\_\_\_\_ personally came and appeared \_\_\_\_\_

(NAME)

of the \_\_\_\_\_

(POSITION)

(NAME OF THE COMPANY)

(a corporation) (a partnership) (a proprietorship) and after being duly sworn did depose and say that all provisions and requirements set out in Chapter 290, Sections 290.210 through and including 290.340, Missouri Revised Statutes, pertaining to the payment of wages to workmen employed on public works project have been fully satisfied and there has been no exception to the full and completed compliance with said provisions and requirements

and with Wage Determination No: \_\_\_\_\_ issued by the

Department of Labor and Industrial Relations, State of Missouri on the \_\_\_\_\_ day of \_\_\_\_\_ 20 \_\_\_\_

in carrying out the contract and working in connection with \_\_\_\_\_

(NAME OF PROJECT)

Located at \_\_\_\_\_ in \_\_\_\_\_ County

(NAME OF THE INSTITUTION)

Missouri, and completed on the \_\_\_\_\_ day of \_\_\_\_\_ 20 \_\_\_\_

SIGNATURE

**NOTARY INFORMATION**

NOTARY PUBLIC EMBOSSER OR  
BLACK INK RUBBER STAMP SEAL

STATE

COUNTY (OR CITY OF ST. LOUIS)

SUBSCRIBED AND SWORN BEFORE ME, THIS

DAY OF

YEAR

**USE RUBBER STAMP IN CLEAR AREA BELOW**

NOTARY PUBLIC SIGNATURE

MY COMMISSION  
EXPIRES

NOTARY PUBLIC NAME (TYPED OR PRINTED)

FILE: Closeout Documents

# GENERAL CONDITIONS

## INDEX

### ARTICLE:

#### 1. General Provisions

- 1.1. Definitions
- 1.2. Drawings and Specifications
- 1.3. Compliance with Laws, Permits, Regulations and Inspections
- 1.4. Nondiscrimination in Employment
- 1.5. Anti-Kickback
- 1.6. Patents and Royalties
- 1.7. Preference for American and Missouri Products and Services
- 1.8. Communications
- 1.9. Separate Contracts and Cooperation
- 1.10. Assignment of Contract
- 1.11. Indemnification
- 1.12. Disputes and Disagreements

#### 2. Owner/Designer Responsibilities

#### 3. Contractor Responsibilities

- 3.1. Acceptable Substitutions
- 3.2. Submittals
- 3.3. As-Built Drawings
- 3.4. Guaranty and Warranties
- 3.5. Operation and Maintenance Manuals
- 3.6. Other Contractor Responsibilities
- 3.7. Subcontracts

#### 4. Changes in the Work

- 4.1. Changes in the Work
- 4.2. Changes in Completion Time

#### 5. Construction and Completion

- 5.1. Construction Commencement
- 5.2. Project Construction
- 5.3. Project Completion
- 5.4. Payments

#### 6. Bond and Insurance

#### 6.1. Bond

#### 6.2. Insurance

#### 7. Termination or Suspension of Contract

#### 7.1. For Site Conditions

#### 7.2. For Cause

#### 7.3. For Convenience

## SECTION 007213 - GENERAL CONDITIONS

- A. These General Conditions apply to each section of these specifications. The Contractor is subject to the provisions contained herein.
- B. The General Conditions are intended to define the relationship of the Owner, the Designer and the Contractor thereby establishing certain rules and provisions governing the operation and performance of the work so that the work may be performed in a safe, orderly, expeditious and workmanlike manner.

## ARTICLE 1 – GENERAL PROVISIONS

### ARTICLE 1.1 - DEFINITIONS

As used in these contract documents, the following terms shall have the meanings and refer to the parties designated in these definitions.

1. **"COMMISSIONER"**: The Commissioner of the Office of Administration.
2. **"CONSTRUCTION DOCUMENTS"**: The "Construction Documents" shall consist of the Project Manual, Drawings and Addenda.
3. **"CONSTRUCTION REPRESENTATIVE"**: Whenever the term "Construction Representative" is used, it shall mean the Owner's Representative at the work site.
4. **"CONTRACTOR"**: Party or parties who have entered into a contract with the Owner to furnish work under these specifications and drawings.
5. **"DESIGNER"**: When the term "Designer" is used herein, it shall refer to the Architect, Engineer, or Consultant of Record specified and defined in Paragraph 2.0 of the Supplemental Conditions, or his duly authorized representative. The Designer may be either a consultant or state employee.
6. **"DIRECTOR"**: Whenever the term "Director" is used, it shall mean the Director of the Division of Facilities Management, Design and Construction or his Designee, representing the Office of Administration, State of Missouri. The Director is the agent of the Owner.
7. **"DIVISION"**: Shall mean the Division of Facilities Management, Design and Construction, State of Missouri.
8. **"INCIDENTAL JOB BURDENS"**: Shall mean those expenses relating to the cost of work, incurred either in the home office or on the job-site, which are necessary in the course of doing business but are incidental to the job. Such costs include office supplies and equipment, postage, courier services, telephone expenses including long distance, water and ice and other similar expenses.
9. **"JOINT VENTURE"**: An association of two (2) or more businesses to carry out a single business enterprise for profit for which purpose they combine their property, capital, efforts, skills and knowledge.
10. **"OWNER"**: Whenever the term "Owner" is used, it shall mean the State of Missouri. Acting by and through the Office of Administration, Division of Facilities Management, Design and Construction.
11. **"PROJECT"**: Wherever the term "Project" is used, it shall mean the work required to be completed by the construction contract.
12. **"PROJECT MANUAL"**: The "Project Manual" shall consist of Introductory Information, Invitation for Bid, Instructions to Bidders, Bid Documents, Additional Information, Standard Forms, General Conditions, Supplemental General Conditions, General Requirements and Technical Specifications.
13. **"SUBCONTRACTOR"**: Party or parties who contract under, or for the performance of part or this entire Contract between the Owner and Contractor. The subcontract may or may not be direct with the Contractor.
14. **"WORK"**: All supervision, labor, materials, tools, supplies, equipment, and any incidental operations and/or activities required by or reasonably inferable from the Contract Documents necessary to construct the Project and to produce the results intended by the Contract Documents in a safe, expeditious, orderly, and workmanlike manner so that the project shall be complete and finished in the best manner known to each respective trade.
15. **"WORKING DAYS"**: are all calendar days except Saturdays, Sundays and the following holidays: New Year's Day, Martin Luther King, Jr. Day, Lincoln Day, Washington's Birthday (observed), Truman Day, Memorial Day, Juneteenth, Independence Day, Labor Day, Columbus Day, Veterans Day (observed), Thanksgiving Day, Christmas Day.

## ARTICLE 1.2 DRAWINGS AND SPECIFICATIONS

- A. In case of discrepancy between drawings and specifications, specifications shall govern. Should discrepancies in architectural drawings, structural drawings and mechanical drawings occur, architectural drawings shall govern and, in case of conflict between structural and mechanical drawings, structural drawings shall govern.
- B. Specifications are separated into titled divisions for convenience of reference only and to facilitate letting of contracts and subcontracts. The Contractor is responsible for establishing the scope of work for subcontractors, which may cross titled divisions. Neither the Owner nor Designer will establish limits and jurisdiction of subcontracts.
- C. Figured dimensions take precedence over scaled measurements and details over smaller scale general drawings. In the event of conflict between any of the documents contained within the contract, the documents shall take precedence and be controlling in the following sequence: addenda, supplementary general conditions, general conditions, division 1 specifications, technical division specifications, drawings, bid form and instructions to bidders.
- D. Anything shown on drawings and not mentioned in these specifications or vice versa, as well as any incidental work which is obviously necessary to complete the project within the limits established by the drawings and specifications, although not shown on or described therein, shall be performed by the Contractor at no additional cost as a part of his contract.
- E. Upon encountering conditions differing materially from those indicated in the contract documents, the Contractor shall promptly notify the Designer and Construction Representative in writing before such conditions are disturbed. The Designer shall promptly investigate said conditions and report to the Owner, with a recommended course of action. If conditions do materially differ and cause an increase or decrease in contract cost or time required for completion of any portion of the work, a contract change will be initiated as outlined in Article 4 of these General Conditions.
- E. Only work included in the contract documents is authorized, and the Contractor shall do no work other than that described therein or in accordance with appropriately authorized and approved contract changes.

## ARTICLE 1.3 - COMPLIANCE WITH LAWS, PERMITS, REGULATIONS AND INSPECTIONS

- A. Since the Owner is the State of Missouri, municipal or political subdivisions, zoning ordinances, construction codes (other than licensing of trades), and other like ordinances are not applicable to construction on Owner's property, and Contractor will not be required to submit drawings and specifications to any municipal or political subdivision, authority, obtain construction permits or any other licenses (other than licensing of trades) or permits from or submit to inspections by any municipality or political subdivision relating to the construction for this project. All permits or licenses required by municipality or political subdivision for operation on property not belonging to Owner shall be obtained by and paid for by Contractor. Each Contractor shall comply with all applicable laws, ordinances, rules and regulations that pertain to the work of this contract.
- B. Contractors, subcontractors and their employees engaged in the businesses of electrical, mechanical, plumbing, carpentry, sprinkler system work, and other construction related trades shall be licensed to perform such work by the municipal or political subdivision where the project is located, if such licensure is required by local code. Local codes shall dictate the level (master, journeyman, and apprentice) and the number, type and ratio of licensed tradesmen required for this project within the jurisdiction of such municipal or political subdivision.
- C. Equipment and controls manufacturers and their authorized service and installation technicians that do not maintain an office within the jurisdiction of the municipal or political subdivision but are a listed or specified contractor or subcontractor on this project are exempt from Paragraph 1.3 B above.
- D. The Contractor shall post a copy of the wage determination issued for the project and included as a part of the contract documents, in a prominent and easily accessible location at the site of construction for the duration of the project.
- E. Any contractor or subcontractor to such contractor at any tier signing a contract to work on this project shall provide a ten-hour Occupational Safety and Health Administration (OSHA) construction safety program for their on-site employees which includes a course in construction safety and health approved by OSHA or a similar program approved by the Department of Labor and Industrial Relations which is at least as stringent as an approved OSHA program. The contractor shall forfeit as a penalty to the public body on whose

behalf the contract is made or awarded, two thousand five hundred dollars plus one hundred dollars for each employee employed by the contractor or subcontractor, for each calendar day, or portion thereof, such employee is employed without the required training.

#### **ARTICLE 1.4 - NONDISCRIMINATION IN EMPLOYMENT**

A. The Contractor and his subcontractors will not discriminate against individuals based on race, color, religion, national origin, sex, disability, or age, but may use restrictions which relate to bona fide occupational qualifications. Specifically, the Contractor and his subcontractors shall not discriminate:

1. Against recipients of service on the basis of race, color, religion, national origin, sex, disability or age.
2. Against any employee or applicant, for employment on the basis of race, color, religion, national origin, sex or otherwise qualified disability status.
3. Against any applicant for employment or employee on the basis of age, where such applicant or employee is between ages 40 and 70 and where such Contractor employs at least 20 persons.
4. Against any applicant for employment or employee on the basis of that person's status as a disabled or Vietnam-era veteran.

The Contractor and his Subcontractors will ensure applicants for employment and employees are treated equally without regard to race, color, religion, national origin, sex, disability, or age. Such action shall include, but not be limited to, the following: employment, upgrading, demotion and transfer; recruitment or recruitment advertising; and selection for training, including apprenticeship. The Contractor and his Subcontractors will give written notice of their commitments under this clause to any labor union with which they have bargaining or other agreements under this clause to any labor union with which they have bargaining or other agreements.

B. In the event of the Contractor's or his subcontractor's noncompliance with any provisions of this Article of the Contract, the Owner may cancel this contract in whole or in part or require the Contractor to terminate his contract with the subcontractor.

#### **ARTICLE 1.5 - ANTI-KICKBACK**

No employee of the division, shall have or acquire any pecuniary interest, whether direct or indirect, in this contract or in any part hereof. No officer, employee, designer, attorney, or administrator of or for the Owner who is authorized in such capacity and on behalf of the Owner to exercise any legislative, executive, supervisory or other similar functions in connection with the construction of the project, shall have or acquire any pecuniary interest, whether direct or indirect, in this contract, any material supply contract, subcontract, insurance contract, or any other contract pertaining to the project.

#### **ARTICLE 1.6 - PATENTS AND ROYALTIES**

- A. The Contractor shall hold and save the Owner and its officers, agents, servants, and employees harmless from liabilities of any nature or kind, including cost and expenses, for, or on account of, any patented or unpatented invention, process, article or appliance manufactured or used in the performance of this contract, including its use by the Owner, unless otherwise specifically stipulated in the contract documents.
- B. If the Contractor uses any design, device or materials covered by letters, patent or copyright, the Contractor shall provide for such use by suitable agreement with the Owner of such patented or copyrighted design, device or material. It is mutually agreed and understood, without exception, that the contract prices shall include all royalties or costs arising from the use of such design, device or materials, in any way involved in the work. The Contractor and/or his sureties shall indemnify and save harmless the Owner of the project from any and all claims for infringement by reason of the use of such patented or copyrighted design, device or materials or any trademark or copyright in connection with work agreed to be performed under this contract and shall indemnify the Owner for any cost, expense or damage it may be obliged to pay by reason of such infringement at any time during the prosecution of the work or after completion of the work.

## **ARTICLE 1.7 - PREFERENCE FOR AMERICAN AND MISSOURI PRODUCTS AND SERVICES**

- A. By virtue of statutory authority a preference will be given to Missouri labor and to products of mines, forests and quarries of the state of Missouri when they are found in marketable quantities in the state, and all such materials shall be of the best quality and suitable character that can be obtained at reasonable market prices, all as provided for in Section 8.280, Missouri Revised Statutes and Cumulative Supplements.
- B. Furthermore, pursuant to Section 34.076 Missouri Revised Statutes and Cumulative Supplements, a preference shall be given to those persons doing business as Missouri firms, corporations, or individuals, or which maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less. In addition, in order for a non-domiciliary bidder to be successful, his bid must be that same percentage lower than a domiciliary Missouri bidder's bid, as would be required for a Missouri bidder to successfully bid in the non-domiciliary state.
- C. In accordance with the Missouri Domestic Products Procurement Act Section 34.350 RSMo and Cumulative Supplements any manufactured goods or commodities used or supplied in the performance of this contract or any subcontract thereto shall be manufactured, assembled or produced in the United States, unless the specified products are not manufactured, assembled or produced in the United States in sufficient quantities to meet the agency's requirements or cannot be manufactured, assembled or produced in the United States within the necessary time in sufficient quantities to meet the contract requirements, or if obtaining the specified products manufactured, assembled or produced in the United States would increase the cost of this contract for purchase of the product by more than ten percent.

## **ARTICLE 1.8 - COMMUNICATIONS**

- A. All notices, requests, instructions, approvals, and claims must be in writing and shall be delivered to the Designer and copied to the Construction Representative for the project except as required by Article 1.12 Disputes and Disagreements, or as otherwise specified by the Owner in writing as stated in Section 012600. Any such notice shall be deemed to have been given as of the time of actual receipt.
- B. The Contractor shall attend on-site progress and coordination meetings, as scheduled by the Construction Representative, no less than once a month.

- C. The Contractor shall ensure that major subcontractors and suppliers shall attend monthly progress meetings as necessary to coordinate the work, and as specifically requested by the Construction Representative.

## **ARTICLE 1.9 - SEPARATE CONTRACTS AND COOPERATION**

- A. The Owner reserves the right to let other contracts in connection with this work. The Contractor shall afford other contractors reasonable opportunity for the introduction and storage of their materials and the execution of their work and shall properly connect and coordinate his work with theirs.
- B. The Contractor shall consult the drawings for all other contractors in connection with this work. Any work conflicting with the above shall be brought to the attention of the Owner's Representative before the work is performed. If the Contractor fails to do this, and constructs any work which interferes with the work of another contractor, the Contractor shall remove any part so conflicting and rebuild same, as directed by the Owner's Representative at no additional cost to the Owner.
- C. Each contractor shall be required to coordinate his work with other contractors so as to afford others reasonable opportunity for execution of their work. No contractor shall delay any other contractor by neglecting to perform contract work at the proper time. If any contractor causes delay to another, they shall be liable directly to that contractor for such delay in addition to any liquidated damages which might be due the Owner.
- D. Should the Contractor or project associated subcontractors refuse to cooperate with the instructions and reasonable requests of other Contractors or other subcontractors in the overall coordinating of the work, the Owner may take such appropriate action and issue directions, as required, to avoid unnecessary and unwarranted delays.
- E. Each Contractor shall be responsible for damage done to Owner's or other Contractor's property by him/her or workers in his employ through their fault or negligence.
- F. Should a Contractor sustain any damage through any act or omission of any other Contractor having a contract with the Owner, the Contractor so damaged shall have no claim or cause of action against the Owner for such damage, but shall have a claim or cause of action against the other Contractor to recover any and all damages sustained by reason of the acts or omissions of such Contractor. The phrase "acts or omissions" as used in this section shall be defined to include, but

not be limited to, any unreasonable delay on the part of any such contractors.

#### **ARTICLE 1.10 - ASSIGNMENT OF CONTRACT**

- A. No assignment by Contractor of any amount or any part of this contract or of the funds to be received there under will be recognized unless such assignment has had the written approval of the Director and the surety has been given due notice of such assignment and has furnished written consent thereto. In addition to the usual recitals in assignment contracts, the following language must be set forth: "It is agreed that the funds to be paid to the assignee under this assignment are subject to performance by the Contractor of this contract and to claims or liens for services rendered or materials supplied for the performance of the work called for in said contract in favor of all persons, firms or corporations rendering such services or supplying such materials."

#### **ARTICLE 1.11 - INDEMNIFICATION**

- A. Contractor agrees to indemnify and save harmless Owner and its respective commissioners, officers, officials, agents, consultants and employees and Designer, their agents, servants and employees, from and against any and all liability for damage arising from injuries to persons or damage to property occasioned by any acts or omissions of Contractor, any subcontractors, agents, servants or employees, including any and all expense, legal or otherwise, which may be incurred by Owner or Designer, its agents, servants or employees, in defense of any claim, action or suit.
- B. The obligations of the Contractor under this paragraph shall not extend to the liability of the Designer, his agents or employees, arising out of (1) the preparation or approval of maps, drawings, opinions, reports, surveys, contract changes, design or specifications, or (2) giving of or the failure to give directions or instructions by the Designer, his agents or employees as required by this contract documents provided such giving or failure to give is the primary cause of the injury or damage.

#### **ARTICLE 1.12 - DISPUTES AND DISAGREEMENTS**

It is hereby expressly agreed and understood that in case any controversy or difference of opinion arises during construction, best efforts will be given to resolution at the field level. Should those efforts be unsuccessful, the Contractor has the right to appeal in writing, the decision of the Director's Designee to the Director at Room 730 Truman Building, P.O. Box 809, Jefferson City, Missouri 65102. The decision of the Director shall be final and binding on all parties.

#### **ARTICLE 2 -- OWNER/DESIGNER RESPONSIBILITIES**

- A. The Owner shall give all orders and directions contemplated under this contract relative to the execution of the work. During progress of work the Owner will be represented at the project site by the Construction Representative and/or Designer, whose responsibilities are to see that this contract is properly fulfilled.
- B. The Owner shall at all times have access to the work whenever it is in preparation or progress. The Contractors shall provide proper facilities for such access and for inspection and supervision.
- C. All materials and workmanship used in the work shall be subject to the inspection of the Designer and Construction Representative, and any work which is deemed defective shall be removed, rebuilt or made good immediately upon notice. The cost of such correction shall be borne by the Contractor. Contractor shall not be entitled to an extension of the contract completion date in order to remedy defective work. All rejected materials shall be immediately removed from the site of the work.
- D. If the Contractor fails to proceed at once with the correction of rejected defective materials or workmanship, the Owner may, by separate contract or otherwise, have the defects remedied or rejected. Materials removed from the site and charge the cost of the same against any monies which may be due the Contractor, without prejudice to any other rights or remedies of the Owner.
- E. Failure or neglect on the part of Owner to observe faulty work, or work done which is not in accordance with the drawings and specifications shall not relieve the Contractor from responsibility for correcting such work without additional compensation.
- F. The Owner shall have the right to direct the Contractor to uncover any completed work.
  - 1. If the Contractor fails to adequately notify the Construction Representative and/or Designer of an inspection as required by the Contract Documents, the Contractor shall, upon written request, uncover the work. The Contractor shall bear all costs associated with uncovering and again covering the work exposed.
  - 2. If the Contractor is directed to uncover work, which was not otherwise required by the Contract Documents to be inspected, and the work is found to be defective in any respect, no compensation shall be allowed for this work. If, however, such work is found to meet

the requirements of this contract, the actual cost of labor and material necessarily involved in the examination and replacement plus 10% shall be allowed the Contractor.

- G. The Designer shall give all orders and directions contemplated under this contract relative to the scope of the work and shall give the initial interpretation of the contract documents.
- H. The Owner may file a written notice to the Contractor to dismiss immediately any subcontractors, project managers, superintendents, foremen, workers, watchmen or other employees whom the Owner may deem incompetent, careless or a hindrance to proper or timely execution of the work. The Contractor shall comply with such notice as promptly as practicable without detriment to the work or its progress.
- I. If in the Owner's judgment it becomes necessary at any time to accelerate work, when ordered by the Owner in writing, the Contractor shall redirect resources to such work items and execute such portions of the work as may be required to complete the work within the current approved contract schedule.

### **ARTICLE 3 -- CONTRACTOR RESPONSIBILITIES**

The Contractor shall register and utilize the Owner's eBuilder digital project management system for submission of documents described in the following sections. This includes but is not limited to submittals as required by designer, payment applications, Request for Information (RFI), construction change orders, Request for Proposals (RFP), Designer Supplemental Instructions (DSI), etc.

#### **ARTICLE 3.1 -- ACCEPTABLE SUBSTITUTIONS**

- A. The Contractor may request use of any article, device, product, material, fixture, form or type of construction which in the judgment of the Owner and Designer is equal in all respects to that named. Standard products of manufacturers other than those specified will be accepted when, prior to the ordering or use thereof, it is proven to the satisfaction of the Owner and Designer that they are equal in design, strength, durability, usefulness and convenience for the purpose intended.
- B. Any changes required in the details and dimensions indicated on the drawings for the substitution of products other than those specified shall be properly made at the expense of the Contractor requesting the substitution or change.
- C. The Contractor shall submit a request for such substitutions in writing to the Owner and Designer within twenty (20) working days after the date of

the "Notice to Proceed." Thereafter no consideration will be given to alternate forms of accomplishing the work. This Article does not preclude the Owner from exercising the provisions of Article 4 hereof.

- D. Any request for substitution by the Contractor shall be submitted in accordance with SECTION 002113 - INSTRUCTIONS TO BIDDERS.
- E. When a material has been approved, no change in brand or make will be permitted unless:
  - 1. Written verification is received from the manufacturer stating they cannot make delivery on the date previously agreed, or
  - 2. Material delivered fails to comply with contract requirements.

#### **ARTICLE 3.2 -- SUBMITTALS**

- A. The Contractor's submittals must be submitted with such promptness as to allow for review and approval so as not to cause delay in the work. The Contractor shall coordinate preparation and processing of submittals with performance of construction activities.

Coordinate each submittal with fabrication, = purchasing, testing, delivery, other submittals, and related activities that require sequential activity.

Submit four (4) copies to the Designer and additional copies as required for the subcontractors and material suppliers. Also provide copies to meet the requirements for maintenance manuals.

- B. All subcontractors' shop drawings and schedules shall be submitted by the Contractor and shall bear evidence that Contractor has received, reviewed, and approved them. Any shop drawings and schedules submitted without this evidence will be returned to the Contractor for resubmission.
- C. The Contractor shall include with the shop drawing, a letter indicating any and all deviations from the drawings and/or specifications. Failure to notify the Designer of such deviations will be grounds for subsequent rejection of the related work or materials. If, in the opinion of the Designer, the deviations are not acceptable, the Contractor will be required to furnish the item as specified and indicated on the drawings.
- D. The Designer shall check shop drawings and schedules with reasonable promptness and approve them only if they conform to the design concept of the project and comply with the information given in the contract documents. The approval shall not relieve the Contractor from the responsibility to comply with the drawings and specifications, unless the Contractor has called the Designer's attention to the deviation, in writing, at the time of

submission and the Designer has knowingly approved thereof. An approval of any such modification will be given only under the following conditions:

1. It is in the best interest of the Owner
  2. It does not increase the contract sum and/or completion time
  3. It does not deviate from the design intent
  4. It is without prejudice to any and all rights under the surety bond.
- E. No extension of time will be granted because of the Contractor's failure to submit shop drawings and schedules in ample time to allow for review, possible resubmission, and approval. Fabrication of work shall not commence until the Contractor has received approval. The Contractor shall furnish prints of approved shop drawings and schedules to all subcontractors whose work is in any way related to the work under this contract. Only prints bearing this approval will be allowed on the site of construction
- F. The Contractor shall maintain a complete file on-site of approved shop drawings available for use by the Construction Representative.

#### **ARTICLE 3.3 – AS-BUILT DRAWINGS**

- A. The Contractor shall update a complete set of the construction drawings, shop drawings and schedules of all work monthly by marking changes, and at the completion of their work (prior to submission of request for final payment) note all changes and turn the set over to the Construction Representative. The updates shall show all addenda, all field changes that were made to adapt to field conditions, changes resulting from contract changes or supplemental instructions, and all locations of structures, buried installations of piping, conduit, and utility services. All buried and concealed items both inside and outside shall be accurately located as to depth and referenced to permanent features such as interior or exterior wall faces and dimensions shall be given in a neat and legible manner in a contrasting colored pencil or ink. If approved by the Designer, an electronic file format may be provided.

#### **ARTICLE 3.4 – GUARANTY AND WARRANTIES**

- A. General Guaranty
1. Neither the final certificate of payment nor any provision in the contract documents nor partial use or occupancy of the premises by the Owner shall constitute an acceptance of work not done in accordance with contract requirements.

2. The Contractor or surety shall remedy any defects in the work and pay for any damage to property resulting there from which shall appear within a period of one (1) year from the date of substantial completion unless a longer period is otherwise specified or a differing guaranty period has been established in the substantial completion certificate. The Owner will give notice of observed defects with reasonable promptness.
3. In case of default on the part of the Contractor in fulfilling this part of this contract, the Owner may correct the work or repair the damage and the cost and expense incurred in such event shall be paid by or recoverable from the Contractor or surety.
4. The work will be free from defects not inherent in the quality required or permitted, and that the Work will conform to the requirements of the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved and authorized, may be considered defective. The Contractor's guaranty excludes remedy for damage or defect caused by abuse, modifications not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear under normal usage. If required by the Owner, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment

#### **B. Extended Warranty**

Manufacturer's certificates of warranty shall be obtained for all major equipment. Warranty shall be obtained for at least one year. Where a longer period is offered at no additional cost or called for in the specific equipment specifications, the longer period shall govern.

#### **ARTICLE 3.5 -- OPERATION AND MAINTENANCE MANUALS**

- A. Immediately after equipment submittals are approved and no later than ten (10) working days prior to the substantial completion inspection, the Contractor shall provide to the Designer three (3) copies of operating instructions and service manuals, containing the following:
1. Start-up and Shut-down Procedures: Provide a step-by-step write up of all major equipment. When manufacturer's printed start-up, trouble shooting and shut-down procedures are available; they may be incorporated into the operating manual for reference.

2. Operating Instructions: Written operating instructions shall be included for the efficient and safe operation of all equipment.
  3. Equipment List: List of all major equipment as installed shall be prepared to include model number, capacities, flow rate, name plate data, shop drawings and air and water balance reports.
  4. Service Instructions: Provide the following information for all pieces of equipment.
    - a. Recommended spare parts including catalog number and name of local supplier or factory representative.
    - b. Belt sizes, types, and lengths.
    - c. Wiring diagrams.
  5. Manufacturer's Certificate of Warranty as described in Article 3.4.
  6. Prior to the final payment, furnish to the Designer three (4) copies of parts catalogs for each piece of equipment furnished by him/her on the project with the components identified by number for replacement ordering.
- B. Submission of operating instructions shall be done in the following manner.
1. Manuals shall be in quadruplicate, and all materials shall be bound into volumes of standard 8½" x 11" hard binders. Large drawings too bulky to be folded into 8½" x 11" shall be separately bound or folded and in envelopes, cross referenced and indexed with the manuals.
  2. The manuals shall identify project name, project number, and include the name and address of the Contractor, subcontractors and manufacturers who were involved with the activity described in that particular manual.
  3. Internally subdivide the binder contents with permanent page dividers, logically organized with tab titles clearly printed under reinforced laminated plastic tabs.
  4. Contents: Prepare a Table of Contents for each volume, with each product or system description identified.

#### **ARTICLE 3.6 – OTHER CONTRACTOR RESPONSIBILITIES**

- A. The Contractor shall keep on site, during progress of the work, a competent superintendent satisfactory to the Construction Representative. The superintendent shall represent the Contractor and all agreements made by the superintendent shall be binding. The superintendent shall

carefully study and compare all drawings, specifications and other instructions and shall promptly notify the Construction Representative and Designer, in writing, any error, inconsistency or omission which may be discovered. The superintendent shall coordinate all work on the project. Any change of the superintendent shall be approved by the Construction Representative.

- B. Contractor shall, at all times, enforce strict discipline and good order among his employees, and shall not employ on the work any unfit person or anyone not skilled in the work assigned to him/her.
- C. The Contractor shall supply sufficient labor, material, plant and equipment and pay when due any laborer, subcontractor or supplier for supplies furnished and otherwise prosecute the work with diligence to prevent work stoppage and ensure completion thereof within the time specified.
- D. The Contractor and each of his subcontractors shall submit to the Construction Representative, through the Designer such schedules of quantities and costs, progress schedules, payrolls, reports, estimates, records and other data as the Owner may request concerning work performed or to be performed under this contract.
- E. The Contractor, subcontractors, and material suppliers shall upon written request, give the Owner access to all time cards, material invoices, payrolls, estimates, profit and loss statements, and all other direct or indirect costs related to this work.
- F. The Contractor shall be responsible for laying out all contract work such as layout of architectural, structural, mechanical and electrical work, which shall be coordinated with layouts of subcontractors for general construction work. The Contractor is also responsible for unloading, uncrating and handling of all materials and equipment to be erected or placed by him/her, whether furnished by Contractor or others. No extra charges or compensation will be allowed as a result of failure to verify dimensions before ordering materials or fabricating items.
- G. The Contractor must notify the Construction Representative at least one working day before placing concrete or burying underground utilities, pipelines, etc.
- H. Contractors shall prearrange time with the Construction Representative for the interruption of any facility operation. Unless otherwise specified in these documents, all connections, alterations or relocations as well as all other portions of the work will be performed during normal working hours.

- I. The Contractor shall coordinate all work so there will not be prolonged interruptions of existing equipment operation. Any existing plumbing, heating, ventilating, air conditioning or electrical disconnections necessary for the project, which affect portions of this construction or building or any other building must be scheduled with the Construction Representative to minimize or avoid any disruption of facility operations. In no case, unless previously approved in writing by the Construction Representative, shall utilities be left disconnected at the end of a work day or over a weekend. Any interruption of utilities either intentionally or accidentally shall not relieve the Contractor responsible for the interruption from the responsibility to repair and restore the utility to normal service. Repairs and restoration shall be made before the workers responsible for the repair and restoration leave the job.
- J. Contractors shall limit operations and storage of materials to the area within the project, except as necessary to connect to existing utilities, and shall not encroach on neighboring property. The Contractor shall be responsible for repair of their damage to property on or off the project site occurring during construction of project. All such repairs shall be made to the satisfaction of the property owner.
- K. Unless otherwise permitted, all materials shall be new and both workmanship and materials shall be of the best quality.
- L. Unless otherwise provided and stipulated within these specifications, the Contractor shall furnish, construct, and/or install and pay for materials, devices, mechanisms, equipment, all necessary personnel, utilities including, but not limited to water, heat, light and electric power, transportation services, applicable taxes of every nature, and all other facilities necessary for the proper execution and completion of the work.
- M. Contractor shall carefully examine the plans and drawings and shall be responsible for the proper fitting of his material, equipment and apparatus into the building.
- N. The Contractor or subcontractors shall not overload, or permit others to overload, any part of any structure during the performance of this contract.
- O. All temporary shoring, bracing, etc., required for the removal of existing work and/or for the installation of new work shall be included in this contract. The Contractor shall make good, at no cost to the Owner, any damage caused by improper support or failure of shoring in any respect. Each Contractor shall be responsible for shoring required to protect his work or adjacent property and improvements of Owner and shall be responsible for shoring or for giving written notice to adjacent property owners. Shoring shall be removed only after completion of permanent supports.
- P. The Contractor shall provide at the proper time such material as is required for support of the work. If openings are required, whether shown on drawings or not, the Contractor shall see that they are properly constructed.
- Q. During the performance of work the Contractor shall be responsible for providing and maintaining warning signs, lights, signal devices, barricades, guard rails, fences and other devices appropriately located on site which will give proper and understandable warning to all persons of danger of entry onto land, structure or equipment.
- R. The Contractor shall be responsible for protection, including weather protection, and proper maintenance of all equipment and materials.
- S. The Contractor shall be responsible for care of the finished work and shall protect same from damage or defacement until substantial completion by the Owner. If the work is damaged by any cause, the Contractor shall immediately begin to make repairs in accordance with the drawings and specifications. Contractor shall be liable for all damage or loss unless attributable to the acts or omissions of the Owner or Designer. Any claim for reimbursement shall be submitted in accordance with Article 4. After substantial completion the Contractor will only be responsible for damage resulting from acts or omissions of the Contractor or subcontractors through final warranty.
- T. In the event the Contractor encounters an unforeseen hazardous material, the Contractor shall immediately stop work in the area affected and report the condition to the Owner and Designer in writing. The Contractor shall not be required, pursuant to Article 4, to perform, any work relating to hazardous materials.
- U. In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 4.
- V. Before commencing work, Contractors shall confer with the Construction Representative and facility representative and review any facility rules and regulations which may affect the conduct of the work.

- W. Project signs will only be erected on major projects and only as described in the specifications. If no sign is specified, none shall be erected.

#### **ARTICLE 3.7 -- SUBCONTRACTS**

- A. Subcontractor assignments as identified in the bid form shall not be changed without written approval of the Owner. The Owner will not approve changes of a listed subcontractor unless the Contractor documents, to the satisfaction of the Owner that the subcontractor cannot or will not perform the work as specified.
- B. The Contractor is fully responsible to the Owner for the acts and omissions of all subcontractors and of persons either directly or indirectly employed by them.
- C. Every subcontractor shall be bound by the applicable terms and provisions of these contract documents, but no contractual relationship shall exist between any subcontractor and the Owner unless the right of the Contractor to proceed with the work is suspended or this contract is terminated as herein provided, and the Owner in writing elects to assume the subcontract.
- D. The Contractor shall upon receipt of "Notice to Proceed" and prior to submission of the first payment request, notify the Designer and Construction Representative in writing of the names of any subcontractors to be used in addition to those identified in the bid form and all major material suppliers proposed for all parts of the work.

#### **ARTICLE 4 -- CHANGES IN THE WORK**

##### **4.1 CHANGES IN THE WORK**

- A. The Construction Representative, without giving notice to the surety and without invalidating this contract, may order extra work or make changes by altering, adding to or deducting from the work, this contract sum being adjusted accordingly. All such work shall be executed under the conditions of the original contract. A claim for extension of time caused by any change must be adjusted at the time of ordering such change. No future request for time will be considered.
- B. Each Contract Change shall include all costs required to perform the work including all labor, material, equipment, overheads and profit, delay, disruptions, or other miscellaneous expenses. No subsequent requests for additional compensation including claims for delay, disruption, or reduced efficiency as a result of each change will be considered. Values from the Schedule of Values will not be binding as a basis for additions to or deductions from the contract price.

- C. The amount of any adjustment in this contract price for authorized changes shall be agreed upon before such changes become effective and shall be determined, through submission of a request for proposal, as follows:

1. By an acceptable fixed price proposal from the Contractor. Breakdowns shall include all takeoff sheets of each Contractor and subcontractor. Breakdown shall include a listing of each item of material with unit prices and number of hours of labor for each task. Labor costs per hour shall be included with labor burden identified, which shall be not less than the prevailing wage rate, etc. Overhead and profit shall be shown separately for each subcontractor and the Contractor.
2. By a cost-plus-fixed-fee (time and material) basis with maximum price, total cost not to exceed said maximum. Breakdown shall include a listing of each item of material with unit prices and number of hours of labor for each task. Labor costs per hour shall be included with labor burden identified, which shall be not less than the prevailing wage rate, etc. Overhead and profit shall be shown separately for each subcontractor and the Contractor.
3. By unit prices contained in Contractor's original bid form and incorporated in the construction contract.

- D. Overhead and Profit on Contract Changes shall be applied as follows:

1. The overhead and profit charge by the Contractor and all subcontractors shall be considered to include, but is not limited to: incidental job burdens, small truck (under 1 ton) expense, mileage, small hand tools, warranty costs, company benefits and general office overhead. Project supervision including field supervision and job site office expense shall be considered a part of overhead and profit unless a compensable time extension is granted.
2. The percentages for overhead and profit charged on Contract Changes shall be subject to the following limits: (a) the percentage mark-up for the Contractor shall be limited to the Contractor's fee; (b) fifteen percent (15%) maximum for Work directly performed by employees of a subcontractor, or sub-subcontractor; (c) five percent (5%) maximum for the Work performed or passed through to the Owner by the Contractor; (d) five percent (5%) maximum subcontractor's mark-up for

Work performed by a sub-subcontractor and passed through to the Owner by the subcontractor and Contractor; and (e) in no case shall the total overhead and profit paid by the Owner on any Contract Changes exceed twenty-five percent (25%) of the cost of materials, labor and equipment (exclusive of Contractor or any Subcontractor overhead and profit) necessary to put the contract change work in place.

3. The Contractor will be allowed to add the cost of Contractor's payment and performance bonding, builder's risk insurance, and general liability insurance to their cost of work. The above listed bonding and insurance cost shall not exceed two percent (2%) and shall be allowed on the total cost of the added work, including overhead and profit.
  4. On proposals covering both increases and decreases in the amount of this contract, the application of overhead and profit shall be on the net change in the cost of the work.
  5. The percentage(s) for overhead and profit to be credited to the Owner on Contract Changes that are solely decreases in the quantity of work or materials shall be the same as those for additive Contract Changes provided above.
- E. No claim for an addition to this contract sum shall be valid unless authorized as aforesaid in writing by the Owner. In the event that none of the foregoing methods are agreed upon, the Owner may order the Contractor to perform work on a time and material basis. The cost of such work shall be determined by the Contractor's actual labor and material cost to perform the work plus overhead and profit as outlined herein. The Designer and Construction Representative shall approve the Contractor's daily time and material invoices for the work involved.
- F. If the Contractor claims that any instructions involve extra cost under this contract, the Contractor shall give the Owner's Representative written notice thereof within a reasonable time after the receipt of such instructions, and in any event before proceeding to execute the work. No such claim shall be valid unless so made and authorized by the Owner, in writing.
- G. In an emergency affecting the safety of life or of the structure or of adjoining property, the Contractor, without special instruction or authorization from the Construction Representative, is hereby permitted to act at their discretion to prevent such threatened loss or injury. The Contractor shall submit a claim for compensation for such emergency work in writing to the Owner's Representative.

## ARTICLE 4.2 – CHANGES IN COMPLETION TIME

- A. Extension of the number of work days stipulated in the Contract for completion of the work with compensation may be made when:
1. The contractor documents that proposed Changes in the work, as provided in Article 4.1, extends construction activities critical to contract completion date, OR
  2. The Owner suspends all work for convenience of the Owner as provided in Article 7.3, OR
  3. An Owner caused delay extends construction activities critical to contract completion (except as provided elsewhere in these General Conditions). The Contractor is to review the work activities yet to begin and evaluate the possibility of rescheduling the work to minimize the overall project delay.
- B. Extension of the number of work days stipulated in the Contract for completion of the work without compensation may be made when:
1. Weather-related delays occur, subject to provisions for the inclusion of a specified number of "bad weather" days when provided for in Section 012100-Allowances, OR
  2. Labor strikes or acts of God occur, OR
  3. The work of the Contractor is delayed on account of conditions which were beyond the control of the Contractor, subcontractors or suppliers, and were not the result of their fault or negligence.
- C. No time extension or compensation will be provided for delays caused by or within the control of the Contractor, subcontractors or suppliers and for concurrent delays caused by the Owner.
- D. The Contractor shall notify the Owner promptly of any occurrence or conditions which in the Contractor's opinion results in a need for an extension of time. The notice shall be in writing and shall include all necessary supporting materials with details of any resultant costs and be submitted in time to permit full investigation and evaluation of the Contractor's claim. The Owner shall promptly acknowledge the Contractor's notice and, after recommendation from the Owner's Representative and/or Designer, shall provide a decision to the Contractor. Failure on the part of the Contractor to provide such notice and to detail the costs shall constitute a waiver by the Contractor of any claim. Requests for extensions of time shall be for working days only.

## **ARTICLE 5 - CONSTRUCTION AND COMPLETION**

### **ARTICLE 5.1 – CONSTRUCTION COMMENCEMENT**

A. Upon receipt of the "Intent to Award" letter, the Contractor must submit the following properly executed instruments to the Owner:

1. Contract;
2. Performance/payment bond as described in Article 6.1;
3. Certificates of Insurance, or the actual policies themselves, showing that the Contractor has obtained the insurance coverage required by Article 6.2.

Above referenced items must be received by the Owner within ten (10) working days after the effective date of the contract. If not received, the Owner may treat the failure to timely submit them as a refusal by the Contractor to accept a contract for this work and may retain as liquidated damages the Contractor's bid bond, cashier's check or certified check as provided in the Instructions to Bidders. Upon receipt the Owner will issue a "Notice to Proceed" with the work to the Contractor.

B. Within the time frame noted in Section 013200 - Schedules, following receipt of the "Notice to Proceed", the Contractor shall submit to the Owner a progress schedule and schedule of values, showing activities through the end of the contract period. Should the Contractor not receive written notification from the Owner of the disapproval of the schedule of values within fifteen (15) working days, the Contractor may consider it approved for purpose of determining when the first monthly Application and Certification for Payment may be submitted.

C. The Contractor may commence work upon receipt of the Division of Facilities Management, Design and Construction's "Notice to Proceed" letter. Contractor shall prosecute the work with faithfulness and energy, and shall complete the entire work on or before the completion time stated in the contract documents or pay to the Owner the damages resulting from the failure to timely complete the work as set out within Article 5.4.

### **ARTICLE 5.2 -- PROJECT CONSTRUCTION**

A. Each Contractor shall submit for the Owner's approval, in reproducible form, a progress schedule showing the rate of progress and the order of the work proposed to carry on various phases of the project. The schedule shall be in conformance

with the requirements outlined in Section 013200 – Schedules.

B. Contractor shall employ and supply a sufficient force of workers, material, and equipment and shall pay when due, any worker, subcontractor or supplier and otherwise prosecute the work with such diligence so as to maintain the rate of progress indicated on the progress schedule, prevent work stoppage, and insure completion of the project within the time specified.

### **ARTICLE 5.3 -- PROJECT COMPLETION**

A. Substantial Completion. A Project is substantially complete when construction is essentially complete and work items remaining to be completed can be done without interfering with the Owner's ability to use the Project for its intended purpose.

1. Once the Contractor has reached what they believe is Substantial Completion, the Contractor shall notify the Designer and the Construction Representative of the following:
  - a. That work is essentially complete with the exception of certain listed work items. The list shall be referred to as the "Contractor's Punch."
  - b. That all Operation and Maintenance Manuals have been assembled and submitted in accordance with Article 3.5A.
  - c. That the Work is ready for inspection by the Designer and Construction Representative. The Owner shall be entitled to a minimum of ten working days notice before the inspection shall be performed.
2. If the work is acceptable, the Owner shall issue a Certificate of Substantial Completion, which shall set forth the responsibilities of the Owner and the Contractor for utilities, security, maintenance, damage to the work and risk of loss. The Certificate shall also identify those remaining items of work to be performed by the Contractor. All such work items shall be complete within 30 working days of the date of the Certificate, unless the Certificate specifies a different time. If the Contractor shall be required to perform tests that must be delayed due to climatic conditions, it is understood that such tests and affected equipment will be identified on the Certificate and shall be accomplished by the Contractor at the earliest possible date. Performance of the tests may not be required before Substantial Completion can be issued. The date of the issuance of the Certificate of

Substantial Completion shall determine whether or not the work was completed within the contract time and whether or not Liquidated Damages are due.

3. If the work is not acceptable, and the Owner does not issue a Certificate of Substantial Completion, the Owner shall be entitled to charge the Contractor with the Designer's and Owner's costs of re-inspection, including time and travel.
- B. Partial Occupancy. Contractor agrees that the Owner shall be permitted to occupy and use any completed or partially completed portions of the Project, when such occupancy and use is in the Owner's best interest. Owner shall notify Contractor of its desire and intention to take Partial Occupancy as soon as possible but at least ten (10) working days before the Owner intends to occupy. If the Contractor believes that the portion of the work the Owner intends to occupy is not ready for occupancy, the Contractor shall notify the Owner immediately. The Designer shall inspect the work in accordance with the procedures above. If the Contractor claims increased cost of the project or delay in completion as a result of the occupancy, he shall notify the Owner immediately but in all cases before occupancy occurs.
- C. Final Completion. The Project is finally complete when the Certificate of Substantial Completion has been issued and all work items identified therein as incomplete have been completed, and when all administrative items required by the contract have been completed. Final Completion entitles the Contractor to payment of the outstanding balance of the contract amount including all change orders and retainage. Within five (5) working days of the date of the Certificate of Substantial Completion, the Contractor shall identify the cost to complete any outstanding items of work. The Designer shall review the Contractor's estimate and either approve it or provide an independent estimate for all such items. If the Contractor fails to complete the remaining items within the time specified in the Certificate, the Owner may terminate the contract and go to the surety for project completion in accordance with Article 7.2 or release the contract balance to the Contractor less 150% of the approved estimate to complete the outstanding items. Upon completion of the outstanding items, when a final cost has been established, any monies remaining shall be paid to the Contractor. Failure to complete items of work does not relieve the Contractor from the obligation to complete the administrative requirements of the contract, such as the provisions of Article 5.3 FAILURE TO COMPLETE ALL ITEMS OF WORK UNDER THE CONTRACT SHALL BE CONSIDERED A

#### DEFAULT AND BE GROUNDS FOR CONTRACT TERMINATION AND DEBARMENT.

- D. Liquidated Damages. Contractor agrees that the Owner may deduct from the contract price and retain as liquidated damages, and not as penalty or forfeiture, the sum stipulated in this contract for each work day after the Contract Completion Day on which work is not Substantially Complete. Assessment of Liquidated Damages shall not relieve the Contractor or the surety of any responsibility or obligation under the Contract. In addition, the Owner may, without prejudice to any other rights, claims, or remedies the Owner may have including the right to Liquidated Damages, charge the Contractor for all additional expenses incurred by the Owner and/or Designer as the result of the extended contract period through Final Completion. Additional Expenses shall include but not be limited to the costs of additional inspections.
- E. Early Completion. The Contractor has the right to finish the work before the contract completion date; however, the Owner assumes no liability for any hindrances to the Contractor unless Owner caused delays result in a time extension to the contract completion date. The Contractor shall not be entitled to any claims for lost efficiencies or for delay if a Certificate of Substantial Completion is given on or before the Contract Completion Date.

#### ARTICLE 5.4 -- PAYMENT TO CONTRACTOR

- A. Payments on account of this contract will be made monthly in proportion to the work which has been completed. Request for payment must be submitted on the Owner's forms. No other pay request will be processed. Supporting breakdowns must be in the same format as Owner's forms and must provide the same level of detail. The Designer will, within 5 working days from receipt of the contractor's request for payment either issue a Certificate for Payment to the Owner, for such amount as the Designer determines is properly due, or notify the Contractor in writing of reasons for withholding a Certificate. The Owner shall make payment within 30 calendar days after the "Application and Certification for Payment" has been received and certified by the Designer. The following items are to be attached to the contractor's pay request:
  1. Updated construction schedule
  2. Certified payrolls consisting of name, occupation and craft, number of hours worked and actual wages paid for each individual employee, of the Contractor and all subcontractors working on the project

- B. The Owner shall retain 5 percent of the amount of each such payment application, except as allowed by Article 5.4, until final completion and acceptance of all work covered by this contract.
- C. Each payment made to Contractor shall be on account of the total amount payable to Contractor and all material and work covered by paid partial payment shall thereupon become the sole property of Owner. This provision shall not be construed as relieving Contractor from sole responsibility for care and protection of materials and work upon which payments have been made or restoration of any damaged work or as a waiver of the right of Owner to require fulfillment of all terms of this contract.
- D. Materials delivered to the work site and not incorporated in the work will be allowed in the Application and Certification for Payment on the basis of one hundred (100%) percent of value, subject to the 5% retainage providing that they are suitably stored on the site or in an approved warehouse in accordance with the following requirements:
  - 1. Material has previously been approved through submittal and acceptance of shop drawings conforming to requirements of Article 3.2 of General Conditions.
  - 2. Delivery is made in accordance with the time frame on the approved schedule.
  - 3. Materials, equipment, etc., are properly stored and protected from damage and deterioration and remain so - if not, previously approved amounts will be deleted from subsequent pay applications.
  - 4. The payment request is accompanied by a breakdown identifying the material equipment, etc. in sufficient detail to establish quantity and value.
- E. The Contractor shall be allowed to include in the Application and Certification for Payment, one hundred (100%) of the value, subject to retainage, of major equipment and material stored off the site if all of the following conditions are met:
  - 1. The request for consideration of payment for materials stored off site is made at least 15 working days prior to submittal of the Application for Payment including such material. Only materials inspected will be considered for inclusion on Application for Payment requests.
  - 2. Materials stored in one location off site are valued in excess of \$25,000.
  - 3. That a Certificate of Insurance is provided indicating adequate protection from loss, theft

conversion or damage for materials stored off site. This Certificate shall show the State of Missouri as an additional insured for this loss.

- 4. The materials are stored in a facility approved and inspected, by the Construction Representative.
- 5. Contractor shall be responsible for, Owner costs to inspect out of state facilities, and any delays in the completion of the work caused by damage to the material or for any other failure of the Contractor to have access to this material for the execution of the work.
- F. The Owner shall determine the amount, quality and acceptability of the work and materials which are to be paid for under this contract. In the event any questions shall arise between the parties, relative to this contract or specifications, determination or decision of the Owner or the Construction Representative and the Designer shall be a condition precedent to the right of the Contractor to receive any money or payment for work under this contract affected in any manner or to any extent by such question.
- G. Payments Withheld: The Owner may withhold or nullify in whole or part any certificate to such extent as may be necessary to protect the Owner from loss on account of:
  - 1. Defective work not remedied. When a notice of noncompliance is issued on an item or items, corrective action shall be undertaken immediately. Until corrective action is completed, no monies will be paid and no additional time will be allowed for the item or items. The cost of corrective action(s) shall be borne by the Contractor.
  - 2. A reasonable doubt that this contract can be completed for the unpaid balance.
  - 3. Failure of the Contractor to update as-built drawings monthly for review by the Construction Representative.
  - 4. Failure of the Contractor to update the construction schedule.When the Construction Representative is satisfied the Contractor has remedied above deficiencies, payment shall be released.
- H. Final Payment: Upon receipt of written notice from the Contractor to the Designer and Project Representative that the work is ready for final inspection and acceptance, the Designer and Project Representative, with the Contractor, shall promptly make such inspection. If the work is acceptable and the contract fully performed, the Construction Representative shall complete a final acceptance report and the Contractor will be

directed to submit a final Application and Certification for Payment. If the Owner approves the same, the entire balance shall be due and payable, with the exception of deductions as provided for under Article 5.4.

1. Where the specifications provide for the performance by the Contractor of (certain tests for the purpose of balancing and checking the air conditioning and heating equipment and the Contractor shall have furnished and installed all such equipment in accordance with the specifications, but said test cannot then be made because of climatic conditions, such test shall may be considered as required under the provisions of the specifications, Section 013300 and this contract may be substantial Full payment will not be made until the tests have been made and the equipment and system is finally accepted. If the tests are not completed when scheduled, the Owner may deduct 150% of the value of the tests from the final payment.
2. The final payment shall not become due until the Contractor delivers to the Construction Representative:
  - a) A complete file of releases, on the standard form included in the contract documents as "Final Receipt of Payment and Release Form", from subcontractors and material suppliers evidencing payment in full for services, equipment and materials, as the case may require, if the Owner approves, or a consent from the Surety to final payment accepting liability for any unpaid amounts.
  - b) An Affidavit of Compliance with Prevailing Wage Law, in the form as included in this contract specifications, properly executed by each subcontractor, and the Contractor
  - c) Certified copies of all payrolls
  - d) As-built drawings
3. If any claim remains unsatisfied after all payments are made, the Contractor shall refund to the Owner all monies that the latter may be compelled to pay in discharging such a claim including all costs and a reasonable attorney's fee.
4. Missouri statute requires prompt payment from the Owner to the Contractor within thirty calendar days and from the Contractor to his subcontractors within fifteen calendar days. Failure to make payments within the required

time frame entitles the receiving party to charge interest at the rate of one and one half percent per month calculated from the expiration of the statutory time period until paid.

5. The value of all unused unit price allowances and/or 150% of the value of the outstanding work items, and/or liquidated damages may be deducted from the final pay request without executing a Contract Change. Any unit price items which exceed the number of units in the contract may be added by Contract Change.

## **ARTICLE 6 -- INSURANCE AND BONDS**

### **ARTICLE 6.1 -- BOND**

- A. Contractor shall furnish a performance/payment bond in an amount equal to 100% of the contract price to guarantee faithful performance of the contract and 100% of the contract price to guarantee the payment of all persons performing labor on the project and furnishing materials in connection therewith under this contract as set forth in the standard form of performance and payment bond included in the contract documents. The surety on such bond shall be issued by a surety company authorized by the Missouri Department of Insurance to do business in the state of Missouri.
- B. All Performance/Payment Bonds furnished in response to this provision shall be provided by a bonding company with a rating of B+ or higher as established by A.M. Best Company, Inc. in their most recent publication.

## ARTICLE 6.2 – INSURANCE

A. The successful Contractor shall procure and maintain for the duration of the contract issued a policy or policies of insurance for the protection of both the Contractor and the Owner and their respective officers, officials, agents, consultants and employees. The Owner requires certification of insurance coverage from the Contractor prior to commencing work.

### B. Minimum Scope and Extent of Coverage

#### 1. General Liability

Commercial General Liability, ISO coverage form number or equivalent CG 00 01 ("occurrence" basis), or I-SO coverage form number CG 00 02, or ISO equivalent.

If ISO equivalent or manuscript general liability coverage forms are used, minimum coverage will be as follows: Premises/Operations; Independent Contractors; Products/Completed Operations; personal Injury; Broad Form Property Damage including Completed Operations; Broad Form Contractual Liability Coverage to include Contractor's obligations under Article 1.11 Indemnification and any other Special Hazards required by the work of the contract.

#### 2. Automobile Liability

Business Automobile Liability Insurance, ISO Coverage form number or equivalent CA 00 01 covering automobile liability, code 1 "ANY AUTO".

#### 3. Workers' Compensation and Employer's Liability

Statutory Workers' Compensation Insurance for Missouri and standard Employer's Liability Insurance, or the authorization to self-insure for such liability from the Missouri Division of Workers' Compensation.

#### 4. Builder's Risk or Installation Floater Insurance

Insurance upon the work and all materials, equipment, supplies, temporary structures and similar items which may be incident to the performance of the work and located at or adjacent to the site, against loss or damage from fire and such other casualties as are included in extended coverage in broad "All Risk" form, including coverage for Flood and Earthquake, in an amount not less than the replacement cost of the work or this contract price, whichever is greater, with loss payable to Contractor and Owner as their respective interests may appear.

Contractor shall maintain sufficient insurance to cover the full value of the work and materials as the work progresses, and shall furnish Owner copies of all endorsements. If Builder's Risk Reporting- Form of Endorsement is used, Contractor shall make all reports as required therein so as to keep in force an amount of insurance which will equal the replacement cost of the work, materials, equipment, supplies, temporary structures, and other property covered thereby; and if, as a result of Contractor's failure to make any such report, the amount of insurance so recoverable shall be less than such replacement cost, Contractor's interest in the proceeds of such insurance, if any, shall be subordinated to Owner's interest to the end that Owner may receive full reimbursement for its loss.

### C. Minimum Limits of Insurance

#### 1. General Liability

Contractor

|             |                                                                                              |
|-------------|----------------------------------------------------------------------------------------------|
| \$2,000,000 | combined single limit per occurrence for bodily injury, personal injury, and property damage |
|-------------|----------------------------------------------------------------------------------------------|

|             |                  |
|-------------|------------------|
| \$2,000,000 | annual aggregate |
|-------------|------------------|

#### 2. Automobile Liability

|             |                                                                            |
|-------------|----------------------------------------------------------------------------|
| \$2,000,000 | combined single limit per occurrence for bodily injury and property damage |
|-------------|----------------------------------------------------------------------------|

#### 3. Workers' Compensation and Employers Liability

Workers' Compensation limits as required by applicable State Statutes (generally unlimited) and minimum of \$1,000,000 limit per accident for Employer's Liability.

General Liability and Automobile Liability insurance may be arranged under individual policies for the full limits required or by a combination of underlying policies with the balance provided by a form-following Excess or Umbrella Liability policy.

### D. Deductibles and Self-Insured Retentions

All deductibles, co-payment clauses, and self-insured retentions must be declared to and approved by the Owner. The Owner reserves the right to request the reduction or elimination of unacceptable deductibles or self-insured retentions, as they would apply to the Owner, and their respective officers, officials, agents, consultants and employees. Alternatively, the Owner may request Contractor to procure a bond guaranteeing

payment of losses and related investigations, claims administration, and defense expenses.

E. Other Insurance Provisions and Requirements

The respective insurance policies and coverage, as specified below, must contain, or be endorsed to contain the following conditions or provisions:

1. General Liability

The Owner, and its respective commissioners, officers, officials, agents, consultants and employees shall be endorsed as additional insured's by ISO form CG 20 26 Additional Insured - Designated Person or Organization. As additional insured's, they shall be covered as to work performed by or on behalf of the Contractor or as to liability which arises out of Contractor's activities or resulting from the performance of services or the delivery of goods called for by the Contract.

Contractor's insurance coverage shall be primary with respect to all additional insured's. Insurance of self-insurance programs maintained by the designated additional -insured's shall be excess of the Contractor's insurance and shall not contribute with it.

Additionally, the Contractor and Contractor's general liability insurer shall agree to waive all rights of subrogation against the Owner and any of their respective officers, officials, agents, consultants or employees for claims, losses, or expenses which arise out of Contractor's activities or result from the performance of services or the delivery of goods called for by the Contract.

Contractor's failure to comply with the terms and conditions of these insurance policies shall not affect or abridge coverage for the Owner, or for any of their officers, officials, agents, consultants or employees.

2. Automobile Insurance

The Owner, and their respective officers, officials, agents, consultants and employees shall be endorsed as additional insured's by ISO form CG 20 26 - Additional Insured Designated Person or Organization. As additional insured's, they shall be covered as to work performed by or on behalf of the Contractor or as to liability which arises out of Contractor's activities or resulting from the performance of services or the delivery of goods called for by the Contract.

Contractor's insurance coverage shall be primary with respect to all additional insured's. Insurance or self-insurance

programs maintained by the designated additional insured's shall be in excess of the Contractor's insurance and shall not contribute with it.

Additionally, the Contractor and Contractor's automobile insurer shall agree to waive all rights of subrogation against the Owner and any of their respective officers, officials, agents, consultants or employees for claims, losses, or expenses which arise out of Contractor's activities or result from the performance of services or the delivery of goods called for by the Contract.

Contractor's failure to comply with the terms and conditions of these insurance policies shall not affect or abridge coverage for the Owner or for any of its officers, officials, agents, consultants or employees.

3. Workers' Compensation/Employer's Liability

Contractor's workers' compensation insurance shall be endorsed with NCCI form WC 00 03 01 A - Alternative Employer Endorsement. The Alternative Employer Endorsement shall designate the Owner as "alternate employers."

4. All Coverages

Each insurance policy required by this section of the Contract shall contain a stipulation, endorsed if necessary, that the Owner will receive a minimum of a thirty (30) calendar day advance notice of any policy cancellation. Ten (10) calendar days advance notice is required for policy cancellation due to non-payment of premium.

F. Insurer Qualifications and Acceptability

Insurance required hereunder shall be issued by an A.M. Best, "B+" rated, Class IX insurance company approved to conduct insurance business in the state of Missouri.

G. Verification of Insurance Coverage

Prior to Owner issuing a Notice to Proceed, the Contractor shall furnish the Owner with Certificate(s) of Insurance and with any applicable original endorsements evidencing the required insurance coverage. The insurance certificates and endorsements are to be signed by a person authorized by that insurer to bind coverage on its behalf. All certificates and endorsements received by the Owner are subject to review and approval by the Owner. The Owner reserves the right to require certified copies of all required policies at any time. If the scope of this contract will exceed one (1) year - or, if any of Contractor's applicable insurance coverage expires prior to completion of the work or services required under this contract -

the Contractor will provide a renewal or replacement certificate before continuing work or services hereunder. If the Contractor fails to provide documentation of required insurance coverage, the Owner may issue a stop work order and no additional contract completion time and/or compensation shall be granted as a result thereof.

## **ARTICLE 7 – SUSPENSION OR TERMINATION OF CONTRACT**

### **ARTICLE 7.1 - FOR SITE CONDITIONS**

When conditions at the site of the proposed work are considered by the Owner to be unsatisfactory for prosecution of the work, the Contractor may be ordered in writing to suspend the work or any part thereof until reasonable conditions exist. When such suspension is not due to fault or negligence of the Contractor, time allowed for completion of such suspended work will be extended by a period of time equal to that lost due to delay occasioned by ordered suspension. This will be a no cost time extension.

### **ARTICLE 7.2 - FOR CAUSE**

#### **A. Termination or Suspension for Cause:**

1. If the Contractor shall file for bankruptcy, or should make a general assignment for the benefit of the creditors, or if a receiver should be appointed on account of insolvency, or if the contractor should persistently or repeatedly refuse or fail to supply enough properly skilled workers or proper materials, or if the contractor should fail to make prompt payment to subcontractors or for material or labor, or persistently disregard laws, ordinances or the instructions of the Owner, or otherwise be guilty of a substantial violation of any provision of this contract, then the Owner may serve notice on the Contractor and the surety setting forth the violations and demanding compliance with this contract. Unless within ten (10) consecutive calendar days after serving such notice, such violations shall cease and satisfactory arrangements for correction be made, the Owner may suspend the Contractor's right to proceed with the work or terminate this contract.
2. In the event the Owner suspends Contractor's right to proceed with the work or terminates the contract, the Owner may demand that the Contractor's surety take over and complete the work on this contract, after the surety submits a written proposal to the Owner and receives written approval and upon the surety's failure or refusal to do so within ten (10) consecutive

calendar days after demand therefore, the Owner may take over the work and prosecute the same to completion by bid or negotiated contract, or the Owner may elect to take possession of and utilize in completing the work such materials, supplies, appliances and plant as may be on the site of the work, and all subcontractors, if the Owner elects, shall be bound to perform their contracts.

- B. The Contractor and its surety shall be and remain liable to the Owner for any excess cost or damages occasioned to the Owner as a result of the actions above set forth.
- C. The Contractor in the event of such suspension or termination shall not be entitled to receive any further payments under this contract until the work is wholly finished. Then if the unpaid balance under this contract shall exceed all expenses of the Owner as certified by the Director, such excess shall be paid to the Contractor; but, if such expenses shall exceed the unpaid balance as certified by the Director, the Contractor and their surety shall be liable for and shall pay the difference and any damages to the Owner.
- D. In exercising Owner's right to secure completion of the work under any of the provisions hereof, the Director shall have the right to exercise Owner's sole discretion as to the manner, methods and reasonableness of costs of completing the work.
- E. The rights of the Owner to suspend or terminate as herein provided shall be cumulative and not exclusive and shall be in addition to any other remedy provided by law.
- F. The Contractor in the event of such suspension or termination may be declared ineligible for Owner contracts for a minimal period of twelve (12) months. Further, no contract will be awarded to any Contractor who lists in their bid form any subcontractor whose prior performance has contributed, as determined by the Owner, to a breach of a contract. In order to be considered for state-awarded contracts after this period, the Contractor/subcontractor will be required to forward acceptance reports to the Owner regarding successful completion of non-state projects during the intervening twelve (12) months from the date of default. No contracts will be awarded to a subcontractor/Contractor until the ability to perform responsibly in the private sector has been proven to the Owner.

### **ARTICLE 7.3 -- FOR CONVENIENCE**

- A. The Owner may terminate or suspend the Contract or any portion of the Work without cause at any time, and at the Owner's convenience. Notification of a termination or suspension shall be in writing

and shall be given to the Contractor and their surety. If the Contract is suspended, the notice will contain the anticipated duration of the suspension or the conditions under which work will be permitted to resume. If appropriate, the Contractor will be requested to demobilize and re-mobilize and will be reimbursed time and costs associated with the suspension.

B. Upon receipt of notification, the Contractor shall:

1. Cease operations when directed.
2. Take actions to protect the work and any stored materials.
3. Place no further subcontracts or orders for material, supplies, services or facilities except as may be necessary to complete the portion of the Contract that has not been terminated. No claim for payment of materials or supplies ordered after the termination date shall be considered.
4. Terminate all existing subcontracts, rentals, material, and equipment orders.

5. Settle all outstanding liabilities arising from termination with subcontractors and suppliers.

6. Transfer title and deliver to the Owner, work in progress, completed work, supplies and other material produced or acquire for the work terminated, and completed or partially completed plans, drawings information and other property that, if the Contract had been completed, would be required to be furnished to the Owner.

C. For termination without cause and at the Owner's convenience, in addition to payment for work completed prior to date of termination, the Contractor may be entitled to payment of other documented costs directly associated with the early termination of the contract. Payment for anticipated profit and unapplied overhead will not be allowed.

## **SECTION 007300 - SUPPLEMENTARY CONDITIONS**

### **1.0 GENERAL:**

- A. These Supplementary General Conditions clarify, add, delete, or otherwise modify standard terms and conditions of DIVISION 0, BIDDING AND CONTRACTING REQUIREMENTS.

### **2.0 CONTACTS:**

Designer: Jeff Bertel, P.E.  
Reitz & Jens, Inc.  
1055 Corporate Square Drive  
St. Louis, Missouri 63132  
Telephone: (314) 993-4132  
Email: [JBertel@reitzjens.com](mailto:JBertel@reitzjens.com)

Construction Representative: Carl Haley  
Division of Facilities Management, Design and Construction  
301 W High Street, Room 730  
Jefferson City, Missouri 65101  
Telephone: (573) 645-7834  
Email: [Carl.Haley@oa.mo.gov](mailto:Carl.Haley@oa.mo.gov)

Project Manager: Scott Zeller  
Division of Facilities Management, Design and Construction  
301 West High Street, Room 730  
Jefferson City, Missouri 65101  
Telephone: (573) 680-8138  
Email: [Scott.Zeller@oa.mo.gov](mailto:Scott.Zeller@oa.mo.gov)

Contract Specialist: Paul Girouard  
Division of Facilities Management, Design and Construction  
301 West High Street, Room 730  
Jefferson City, Missouri 65101  
Telephone: (573) 751-4797  
Email: [Paul.Girouard@oa.mo.gov](mailto:Paul.Girouard@oa.mo.gov)

### **3.0 NOTICE: ALL BID MATERIALS ARE DUE AT THE TIME OF BID SUBMITTAL. THERE IS NO SECOND SUBMITTAL FOR THIS PROJECT.**

### **4.0 FURNISHING CONSTRUCTION DOCUMENTS:**

- A. The Owner will furnish the Contractor with approximately 5 complete sets of drawings and specifications at no charge.
- B. The Owner will furnish the Contractor with approximately 5 sets of explanatory or change drawings at no charge.
- C. The Contractor may make copies of the documents as needed with no additional cost to the Owner.


### **5.0 SAFETY REQUIREMENTS**

Contractor and subcontractors at any tier shall comply with RSMo 292.675 and Article 1.3, E, of Section 007213, General Conditions.

# Missouri

## Division of Labor Standards

### WAGE AND HOUR SECTION

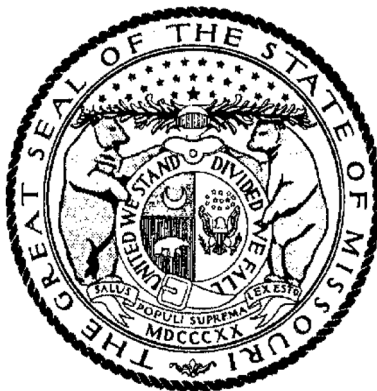

MIKE KEHOE, Governor

## Annual Wage Order No. 32

Section 036  
**FRANKLIN COUNTY**

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by

Logan Hobbs, Director  
Division of Labor Standards

Filed With Secretary of State: March 10, 2025

Last Date Objections May Be Filed: April 9, 2025

Prepared by Missouri Department of Labor and Industrial Relations

| OCCUPATIONAL TITLE           | **Prevailing<br>Hourly<br>Rate |
|------------------------------|--------------------------------|
| Asbestos Worker              | \$47.80                        |
| Boilermaker                  | \$81.61                        |
| Bricklayer-Stone Mason       | \$65.80                        |
| Carpenter                    | \$67.06                        |
| Lather                       |                                |
| Linoleum Layer               |                                |
| Millwright                   |                                |
| Pile Driver                  |                                |
| Cement Mason                 | \$60.05                        |
| Plasterer                    |                                |
| Communication Technician     | \$29.87*                       |
| Electrician (Inside Wireman) | \$79.10                        |
| Electrician Outside Lineman  | \$72.01                        |
| Lineman Operator             |                                |
| Lineman - Tree Trimmer       |                                |
| Groundman                    |                                |
| Groundman - Tree Trimmer     |                                |
| Elevator Constructor         | \$29.87*                       |
| Glazier                      | \$69.00                        |
| Ironworker                   | \$72.39                        |
| Laborer                      | \$52.37                        |
| General Laborer              |                                |
| First Semi-Skilled           |                                |
| Second Semi-Skilled          |                                |
| Mason                        | \$29.87*                       |
| Marble Mason                 |                                |
| Marble Finisher              |                                |
| Terrazzo Worker              |                                |
| Terrazzo Finisher            |                                |
| Tile Setter                  |                                |
| Tile Finisher                |                                |
| <b>Operating Engineer</b>    | <b>\$73.95</b>                 |
| Group I                      |                                |
| Group II                     |                                |
| Group III                    |                                |
| Group III-A                  |                                |
| Group IV                     |                                |
| Group V                      |                                |
| Painter                      | \$55.36                        |
| Plumber                      | \$80.82                        |
| Pipe Fitter                  |                                |
| Roofer                       | \$60.36                        |
| Sheet Metal Worker           | \$76.65                        |
| Sprinkler Fitter             | \$70.74                        |
| Truck Driver                 | \$29.87*                       |
| Truck Control Service Driver |                                |
| Group I                      |                                |
| Group II                     |                                |
| Group III                    |                                |
| Group IV                     |                                |

\*The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. The public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

\*\*The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title as defined in RSMo Section 290.210.

| OCCUPATIONAL TITLE            | **Prevailing<br>Hourly<br>Rate |
|-------------------------------|--------------------------------|
| Carpenter                     | \$67.22                        |
| Millwright                    |                                |
| Pile Driver                   |                                |
| Electrician (Outside Lineman) | \$72.01                        |
| Lineman Operator              |                                |
| Lineman - Tree Trimmer        |                                |
| Groundman                     |                                |
| Groundman - Tree Trimmer      |                                |
| Laborer                       | \$54.40                        |
| General Laborer               |                                |
| Skilled Laborer               |                                |
| <b>Operating Engineer</b>     | <b>\$72.92</b>                 |
| Group I                       |                                |
| Group II                      |                                |
| Group III                     |                                |
| Group IV                      |                                |
| Truck Driver                  | \$45.86                        |
| Truck Control Service Driver  |                                |
| Group I                       |                                |
| Group II                      |                                |
| Group III                     |                                |
| Group IV                      |                                |

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title as shown on the Building Construction Rate Sheet.

\*The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. Public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

\*\*The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title.

# OVERTIME and HOLIDAYS

## OVERTIME

For all work performed on a Sunday or a holiday, not less than twice (2x) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work.

For all overtime work performed, not less than one and one-half (1½) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work or contractual obligation. For purposes of this subdivision, "**overtime work**" shall include work that exceeds ten hours in one day and work in excess of forty hours in one calendar week; and

A thirty-minute lunch period on each calendar day shall be allowed for each worker on a public works project, provided that such time shall not be considered as time worked.

## HOLIDAYS

January first;  
The last Monday in May;  
July fourth;  
The first Monday in September;  
November eleventh;  
The fourth Thursday in November; and  
December twenty-fifth;

If any holiday falls on a Sunday, the following Monday shall be considered a holiday.

## **SECTION 011000 – SUMMARY OF WORK**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions and Division 1 Specification Sections apply to this Section.

#### **1.2 WORK COVERED BY CONTRACT DOCUMENTS**

- A. The Project consists of a roadway and parking lot.
  - 1. Project Location: 38.492590, -91.272857, Herman, Missouri.
  - 2. Owner: State of Missouri, Office of Administration, Division of Facilities Management, Design and Construction, Harry S Truman State Office Building, Post Office Box 809, 301 West High Street, Jefferson City, Missouri 65102.
- B. Contract Documents, dated **October 27, 2025** were prepared for the Project by Reitz & Jens, Inc., 1055 Corporate Square Drive, St. Louis, MO 63132.
- C. The Work consists of clearing, grading, modular block wall, gates, vault installation, stormwater culverts, guardrail, and crushed limestone and concrete paving.
- D. The Owner will procure the precast vault restroom and the Contractor will install in the location shown on the plans in accordance with the Manufacturer's recommendations.
- E. The Contractor shall obtain a Franklin County Entrance Permit prior to starting construction.
- F. The Work will be constructed under a single prime contract.

#### **1.3 CONTRACTOR USE OF PREMISES**

- A. General: During the construction period the Contractor shall have full use of the premises for construction operations, including use of the site. The Contractor's use of the premises limited only by the Owner's right to perform work or to retain other contractors on portions of the Project.
- B. Use of the Site: Limit use of the premises to work in areas indicated. Confine operations to areas within contract limits indicated. Do not disturb portions of the site beyond the areas in which the Work is indicated.
  - 1. Driveways and Entrances: Keep driveways and entrances serving the premises clear and available to the Owner, the Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.
- C. Use of the Existing Building: Maintain the existing building in a weathertight condition throughout the construction period. Repair damage cause by construction operations. Take all precautions necessary to protect the building and its occupants during the construction period..

## **1.4 MISCELLANEOUS PROVISIONS**

**PART 2 - PRODUCTS (Not Applicable)**

**PART 3 - EXECUTION (Not Applicable)**

**END OF SECTION 011000**

## **SECTION 012100 – ALLOWANCES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements governing allowances.
  - 1. Certain items are specified in the Contract Documents by allowances. Allowances have been established in lieu of additional requirements and to defer selection of actual materials and equipment to a later date when additional information is available for evaluation. If necessary, additional requirements will be issued by Change Order.
- B. Types of allowances include the following:
  - 1. Weather allowances.
- C. Related Sections include the following:
  - 1. Division 1 Section "Contract Modification Procedures" for procedures for submitting and handling Change Orders for allowances.
  - 2. Division 1 Section "Unit Prices" for procedures for using unit prices.

#### **1.3 WEATHER ALLOWANCE**

- A. Included within the completion period for this project are a specified number of “bad weather” days (see Schedule of Allowances).
- B. In the event weather conditions preclude performance of critical work activities for 50% or more of the Contractor’s scheduled workday, that day shall be declared unavailable for work due to weather (a “bad weather” day) and charged against the above allowance. Critical work activities will be determined by review of the Contractor’s current progress schedule.
- C. The Contractor’s Representative and the Construction Representative shall agree monthly on the number of “bad weather” days to be charged against the allowance. This determination will be documented in writing and be signed by the Contractor and the Construction Representatives. If there is a failure to agree on all or part of the “bad weather” days for a particular month, that disagreement shall be noted on this written document and signed by each party’s representative. Failure of the Contractor’s representative to sign the “bad weather” day documentation after it is presented, with or without the notes of disagreement, shall constitute agreement with the “bad weather” day determination contained in that document.
- D. There will be no modification to the time of contract performance due solely to the failure to deplete the “bad weather” day allowance.

**PART 2 - PRODUCTS (Not Used)**

**PART 3 - EXECUTION**

**3.1 SCHEDULE OF ALLOWANCES**

- A. Weather Allowance: Included within the completion period for this Project are twenty (20) “bad weather” days.

**END OF SECTION 012100**

## **SECTION 012200 – UNIT PRICES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.
- B. Quantities of Units to be included in the Base Bid are indicated in Section 004322 – Unit Prices.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for Unit Prices.
- B. Related Sections include the following:
  - 1. Division 1 Section "Allowances" for procedures for using Unit Prices to adjust quantity allowances.
  - 2. Division 1 Section "Contract Modification Procedures" for procedures for submitting and handling Change Orders.
  - 3. Division 31 Section "Section 312200 - Earthwork" for procedures for measurement and payment for Class A and Class B Excavation, and Granular Fill.

#### **1.3 DEFINITIONS**

- A. Unit Price is a price per unit of measurement for materials or services added to or deducted from the Contract Sum by appropriate modification, if estimated quantities of Work required by the Contract Documents are increased or decreased.

#### **1.4 PROCEDURES**

- A. Unit Prices include all necessary material plus cost for delivery, installation, insurance, applicable taxes, overhead, and profit.
- B. Measurement and Payment: Refer to individual Specification Sections for work that requires establishment of Unit Prices. Methods of measurement and payment for Unit Prices are specified in those Sections.
- C. Owner reserves the right to reject Contractor's measurement of Work in-place that involves use of established Unit Prices and to have this work measured, at Owner's expense, by an independent surveyor acceptable to Contractor.
- D. List of Unit Prices: A list of Unit Prices is included in Part 3. Specification Sections referenced in the schedule contain requirements for materials described under each Unit Price.

**PART 2 - PRODUCTS (Not Used)**

**PART 3 - EXECUTION**

**3.1 LIST OF UNIT PRICES**

A. Unit Price No. 01 – Class A Excavation:

1. Description: Class A Excavation according to Division 31 Section "Section 312200 - Earthwork."
2. Unit of Measurement: Cubic Yard (CY)
3. Base Bid Quantity: 50 CY

B. Unit Price No. 02 – Class B Excavation:

1. Description: Class B Excavation according to Division 31 Section "Section 312200 - Earthwork."
2. Unit of Measurement: Cubic Yard (CY)
3. Base Bid Quantity: 100 CY

C. Unit Price No. 03 – Granular Fill:

1. Description: Granular Fill according to Division 31 Section "Section 312200 - Earthwork."
2. Unit of Measurement: Cubic Yard (CY)
3. Base Bid Quantity: 100 CY

**END OF SECTION 012200**

## **SECTION 012600 – CONTRACT MODIFICATION PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section specifies administrative and procedural requirements for handling and processing Contract Modifications.
- B. Related Sections include the following:
  - 1. Division 1, Section 012100 "Allowances" for procedural requirements for handling and processing Allowances.
  - 2. Division 1, Section 012200 "Unit Prices" for administrative requirements for using Unit Prices.
  - 3. Division 1, Section 013115 "Project Management Communications" for administrative requirements for communications.
  - 4. Division 0, Section 007213, Article 3.1 "Acceptable Substitutions" for administrative procedures for handling Requests for Substitutions made after Contract award.
  - 5. Division 0, Section 007213, Article 4.0 "Changes in the Work" for Change Order requirements.

#### **1.3 REQUESTS FOR INFORMATION**

- A. In the event that the Contractor or Subcontractor, at any tier, determines that some portion of the Drawings, Specifications, or other Contract Documents requires clarification or interpretation, the Contractor shall submit a "Request for Information" (RFI) in writing to the Designer. A RFI may only be submitted by the Contractor and shall only be submitted on the RFI forms provided by the Owner. The Contractor shall clearly and concisely set forth the issue for which clarification or interpretation is sought and why a response is needed. In the RFI, the Contractor shall set forth an interpretation or understanding of the requirement along with reasons why such an understanding was reached.
- B. Responses to RFI shall be issued within ten (10) working days of receipt of the Request from the Contractor unless the Designer determines that a longer time is necessary to provide an adequate response. If a longer time is determined necessary by the Designer, the Designer will, within five (5) working days of receipt of the request, notify the Contractor of the anticipated response time. If the Contractor submits a RFI on a time sensitive activity on the current project schedule, the Contractor shall not be entitled to any time extension due to the time it takes the Designer to respond to the request provided that the Designer responds within the ten (10) working days set forth above.
- C. Responses from the Designer will not change any requirement of the Contract Documents. In the event the Contractor believes that a response to a RFI will cause a change to the requirements of the Contract Document, the Contractor shall give written

notice to the Designer requesting a Change Order for the work. Failure to give such written notice within ten (10) working days, shall waive the Contractor's right to seek additional time or cost under Article 4, "Changes in the Work" of the General Conditions.

#### **1.4 MINOR CHANGES IN THE WORK**

- A. Designer will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Amount or the Contract Time, on "Designer's Supplemental Instructions" (DSI).

#### **1.5 PROPOSAL REQUESTS**

- A. The Designer or Owner Representative will issue a detailed description of proposed Changes in the Work that may require adjustment to the Contract Amount or the Contract Time. The proposed Change Description will be issued using the "Request for Proposal" (RFP) form. If necessary, the description will include supplemental or revised Drawings and Specifications.
  - 1. Proposal Requests issued by the Designer or Owner Representative are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
  - 2. Within ten (10) working days after receipt of Proposal Request, submit a proposal for the cost adjustments to the Contract Amount and the Contract Time necessary to execute the Change. The Contractor shall submit his proposal on the appropriate Change Order Detailed Breakdown form. Subcontractors may use the appropriate Change Order Detailed Breakdown form or submit their proposal on their letterhead provided the same level of detail is included. All proposals shall include:
    - a. A detailed breakdown of costs per Article 4.1 of the General Conditions.
    - b. If requesting additional time per Article 4.2 of the General Conditions, include an updated Contractor's Construction Schedule that indicates the effect of the Change including, but not limited to, changes in activity duration, start and finish times, and activity relationship.

#### **1.6 CHANGE ORDER PROCEDURES**

- A. On Owner's approval of a Proposal Request, the Designer or Owner Representative will issue a Change Order for signatures of Owner and Contractor on the "Change Order" form.

#### **PART 2 - PRODUCTS (Not Used)**

#### **PART 3 - EXECUTION (Not Used)**

#### **END OF SECTION 012600**

## **SECTION 013100 – COORDINATION**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes administrative provisions for coordinating construction operations on Projects including, but not limited to, the following:
  - 1. Coordination Drawings.
  - 2. Administrative and supervisory personnel.
  - 3. Project meetings.
- B. Each Contractor shall participate in coordination requirements. Certain areas of responsibility will be assigned to a specific Contractor.
- C. Related Sections include the following:
  - 1. Division 1, Section 013200 "Schedules – Bar Chart" for preparing and submitting Contractor's Construction Schedule.
  - 2. Articles 1.8.B and 1.8.C of Section 007213 "General Conditions" for coordinating meetings onsite.
  - 3. Article 5.4.H of Section 007213 "General Conditions" for coordinating Closeout of the Contract.

#### **1.3 COORDINATION**

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections, which depend on each other for proper installation, connection, and operation.
- B. Coordination: Each Contractor shall coordinate its construction operations with those of other contractors and entities to ensure efficient and orderly installation of each part of the Work. Each Contractor shall coordinate its operations with operations included in different Sections that depend on each other for proper installation, connection, and operation.
  - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
  - 2. Coordinate installation of different components with other Contractors to ensure maximum accessibility for required maintenance, service, and repair.
  - 3. Make adequate provisions to accommodate items scheduled for later installation.
  - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required

maintenance, service, and repair of all components including mechanical and electrical.

- C. Prepare memoranda for distribution to each party involved outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
  - 1. Prepare similar memoranda for Owner and separate Contractors if coordination of their Work is required.
- D. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other Contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
  - 1. Preparation of Contractor's Construction Schedule.
  - 2. Preparation of the Schedule of Values.
  - 3. Installation and removal of temporary facilities and controls.
  - 4. Delivery and processing of submittals.
  - 5. Progress meetings.
  - 6. Preinstallation conferences.
  - 7. Startup and adjustment of systems.
  - 8. Project Closeout activities.
- E. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
  - 1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. Refer to other Sections for disposition of salvaged materials that are designated as Owner's property.

#### **1.4 SUBMITTALS**

- A. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.
- B. Key Personnel Names: Within fifteen (15) work days of starting construction operations, submit a list of key personnel assignments including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project.
  - 1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.

#### **1.5 PROJECT MEETINGS**

- A. The Owner's Construction Representative will schedule a Pre-Construction Meeting prior to beginning of construction. The date, time, and exact place of this meeting will be determined after Contract Award and notification of all interested parties. The

Contractor shall arrange to have the Job Superintendent and all prime Subcontractors present at the meeting. During the Pre-Construction Meeting, the construction procedures and information necessary for submitting payment requests will be discussed and materials distributed along with any other pertinent information.

1. Minutes: Designer will record and distribute meeting minutes.
- B. Progress Meetings: The Owner's Construction Representative will conduct Monthly Progress Meetings as stated in Articles 1.8.B and 1.8.C of Section 007213 "General Conditions".
1. Minutes: Designer will record and distribute to Contractor the meeting minutes.
- C. Preinstallation Conferences: Contractor shall conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
1. Attendees: Installer and representatives of Manufacturers and Fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Designer and Construction Representative of scheduled meeting dates.
  2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration including requirements for the following:
    - a. Contract Documents
    - b. Options
    - c. Related RFIs
    - d. Related Change Orders
    - e. Purchases
    - f. Deliveries
    - g. Submittals
    - h. Review of mockups
    - i. Possible conflicts
    - j. Compatibility problems
    - k. Time schedules
    - l. Weather limitations
    - m. Manufacturer's written recommendations
    - n. Warranty requirements
    - o. Compatibility of materials
    - p. Acceptability of substrates
    - q. Temporary facilities and controls
    - r. Space and access limitations
    - s. Regulations of authorities having jurisdiction
    - t. Testing and inspecting requirements

- u. Installation procedures
  - v. Coordination with other Work
  - w. Required performance results
  - x. Protection of adjacent Work
  - y. Protection of construction and personnel
3. Contractor shall record significant conference discussions, agreements, and disagreements including required corrective measures and actions.
  4. Reporting: Distribute minutes of the meeting to each party present and to parties who should have been present.
  5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
  6. Revise paragraph below if Project requires holding progress meetings at different intervals. Insert special intervals such as "every third Tuesday" to suit special circumstances.
  7. Project name
  8. Name and address of Contractor
  9. Name and address of Designer
  10. RFI number including RFIs that were dropped and not submitted
  11. RFI description
  12. Date the RFI was submitted
  13. Date Designer's response was received
  14. Identification of related DSI or Proposal Request, as appropriate

**PART 2 - PRODUCTS (Not Used)**

**PART 3 - EXECUTION (Not Used)**

**END OF SECTION 013100**

## **SECTION 013115 - PROJECT MANAGEMENT COMMUNICATIONS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.
- B. Division 1, Section 013300 - Submittals
- C. Division 1, Section 012600 – Contract Modification Procedures

#### **1.2 SUMMARY**

- A. Project Management Communications: The Contractor shall use the Internet web-based project management communications tool, Trimble Unity Construct® (Formerly eBuilder) ASP software, and protocols included in that software during this project. The use of project management communications as herein described does not replace or change any contractual responsibilities of the participants.
  - 1. Project management communications is available through Trimble Unity Construct® (Formerly eBuilder) as provided by "Trimble Unity Construct®" in the form and manner required by the Owner.
  - 2. The project communications database is on-line and fully functional. User registration, electronic and computer equipment, and Internet connections are the responsibility of each project participant. The sharing of user accounts is prohibited
- B. Support: Trimble Unity Construct® (Formerly eBuilder) will provide on-going support through on-line help files.
- C. Copyrights and Ownership: Nothing in this specification or the subsequent communications supersedes the parties' obligations and rights for copyright or document ownership as established by the Contract Documents. The use of CAD/BIM files, processes or design information distributed in this system is intended only for the project specified herein.
- D. Purpose: The intent of using Trimble Unity Construct®(Formerly eBuilder) is to improve project work efforts by promoting timely initial communications and responses. Secondly, to reduce the number of paper documents while providing improved record keeping by creation of electronic document files
- E. Authorized Users: Access to the web site will be by individuals who are authorized users.

1. Individuals shall complete the Trimble Unity Construct (Formerly eBuilder) New Company/User Request Form located at the following web site: <https://oa.mo.gov/facilities/vendor-links/contractor-forms>. Completed forms shall be emailed to the following email address: [OA.FMDCE-BuilderSupport@oa.mo.gov](mailto:OA.FMDCE-BuilderSupport@oa.mo.gov).
  2. Authorized users will be contacted directly and assigned a temporary user password.
  3. Individuals shall be responsible for the proper use of their passwords and access to data as agents of the company in which they are employed.
- F. Administrative Users: Administrative users have access and control of user licenses and all posted items. DO NOT POST PRIVATE OR YOUR COMPANY CONFIDENTIAL ITEMS IN THE DATABASE! Improper or abusive language toward any party or repeated posting of items intended to deceive or disrupt the work of the project will not be tolerated and will result in deletion of the offensive items and revocation of user license at the sole discretion of the Administrative User(s).
- G. Communications: The use of fax, email and courier communication for this project is discouraged in favor of using Trimble Unity Construct® (Formerly eBuilder) to send messages. Communication functions are as follows:
1. Document Integrity and Revisions:
    - a. Documents, comments, drawings and other records posted to the system shall remain for the project record. The authorship time and date shall be recorded for each document submitted to the system. Submitting a new document or record with a unique ID, authorship, and time stamp shall be the method used to make modifications or corrections.
    - b. The system shall make it easy to identify revised or superseded documents and their predecessors.
    - c. Server or Client-side software enhancements during the life of the project shall not alter or restrict the content of data published by the system. System upgrades shall not affect access to older documents or software.
  2. Document Security:
    - a. The system shall provide a method for communication of documents. Documents shall allow security group assignment to respect the contractual parties communication except for Administrative Users. DO NOT POST PRIVATE OR YOUR COMPANY CONFIDENTIAL ITEMS IN THE DATABASE!
  3. Document Integration:
    - a. Documents of various types shall be logically related to one another and discoverable. For example, requests for information, daily field reports, supplemental sketches and photographs shall be capable of reference as related records.
  4. Reporting:
    - a. The system shall be capable of generating reports for work in progress, and logs for each document type. Summary reports generated by the system shall be available for team members.
  5. Notifications and Distribution:

- a. Document distribution to project members shall be accomplished both within the extranet system and via email as appropriate. Project document distribution to parties outside of the project communication system shall be accomplished by secure email of outgoing documents and attachments, readable by a standard email client.
- 6. Required Document Types:
  - a. RFI, Request for Information.
  - b. Submittals, including record numbering by drawing and specification section.
  - c. Transmittals, including record of documents and materials delivered in hard copy.
  - d. Meeting Minutes.
  - e. Application for Payments (Draft or Pencil).
  - f. Review Comments.
  - g. Field Reports.
  - h. Construction Photographs.
  - i. Drawings.
  - j. Supplemental Sketches.
  - k. Schedules.
  - l. Specifications.
  - m. Request for Proposals
  - n. Designer's Supplemental Instructions
  - o. Punch Lists
- H. Record Keeping: Except for paper documents, which require original signatures and large format documents (greater than 8½ x 11 inches), all other 8½ x 11 inches documents shall be submitted by transmission in electronic form to the Trimble Unity Construct® (Formerly eBuilder) web site by licensed users.
  - a. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier shall respond to documents received in electronic form on the web site and consider them as if received in paper document form.
  - b. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier reserves the right to and shall reply or respond by transmissions in electronic form on the web site to documents actually received in paper document form.
  - c. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier reserves the right to and shall copy any paper document into electronic form and make same available on the web site.
- I. Minimum Equipment and Internet Connection: In addition to other requirements specified in this Section, the Owner and his representatives, the Construction Manager and his representatives, the Architect and his consultants, and the Contractor and his sub-contractors and suppliers at every tier required to have a user license(s) shall be responsible for the following:

1. Providing suitable computer systems for each licensed user at the users normal work location<sup>1</sup> with high-speed Internet access, i.e. DSL, local cable company's Internet connection, or T1 connection.
2. Each of the above referenced computer systems shall have the following minimum system<sup>2</sup> and software requirements:
  - a. Desktop configuration (Laptop configurations are similar and should be equal to or exceed desktop system.)
    - 1) Operating System: Windows XP or newer
    - 2) Internet Browser: Internet Explorer 6.01SP2+ (Recommend IE7.0+)
    - 3) Minimum Recommend Connection Speed: 256K or above
    - 4) Processor Speed: 1 Gigahertz and above
    - 5) RAM: 512 mb
    - 6) Operating system and software shall be properly licensed.
    - 7) Internet Explorer version 7 (current version is a free distribution for download). This specification is not intended to restrict the host server or client computers provided that industry standard HTTP clients may access the published content.
    - 8) Adobe Acrobat Reader (current version is a free distribution for download).
    - 9) Users should have the standard Microsoft Office Suite (current version must be purchased) or the equivalent.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable.)

END OF SECTION 013115

---

<sup>1</sup> The normal work location is the place where the user is assigned for more than one-half of his time working on this project.

<sup>2</sup> The minimum system herein will not be sufficient for many tasks and may not be able to process all documents and files stored in the Trimble Unity Construct® (Formerly eBuilder) Documents area.

## **SECTION 013200 – SCHEDULE – BAR CHART**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes requirements for a Bar Chart Schedule for the project construction activities, schedule of submittals, and schedule for testing.

### **PART 2 - PRODUCTS – (Not Applicable)**

### **PART 3 - EXECUTION**

#### **3.1 SUBMITTAL PROCEDURES**

- A. The Contractor shall submit to the Designer, within ten (10) working days following the Notice to Proceed, a Progress Schedule including Schedule of Values showing the rate of progress the Contractor agrees to maintain and the order in which he proposed to carry out the various phases of Work. No payments shall be made to the Contractor until the Progress Schedule has been approved by the Owner.
  - 1. The Schedule of Values must have the following line items included with the value of the item as indicated below:
    - a. O&M's (Owner's Manual)
      - 1) \$1,000,000.00 (One million) and under – 2% of the total contract amount
      - 2) Over \$1,000,000.00 (One million) – 1% of the total contract amount
    - b. Close Out Documents
      - 1) \$1,000,000.00 (One million) and under – 2% of the total contract amount
      - 2) Over \$1,000,000.00 (One million) – 1% of the total contract amount
    - c. General Conditions
      - 1) No more than 10%
- B. The Contractor shall submit an updated Schedule for presentation at each Monthly Progress Meeting. The Schedule shall be updated by the Contractor as necessary to reflect the current Schedule and its relationship to the original Schedule. The updated Schedule shall reflect any changes in the logic, sequence, durations, or completion date. Payments to the Contractor shall be suspended if the Progress Schedule is not adequately updated to reflect actual conditions.

- C. The Contractor shall submit Progress Schedules to Subcontractors to permit coordinating their Progress Schedules to the general construction Work. The Contractor shall coordinate preparation and processing of Schedules and reports with performance of other construction activities.

### 3.2 CONSTRUCTION PROGRESS SCHEDULE – BAR CHART SCHEDULE

- A. Bar-Chart Schedule: The Contractor shall prepare a comprehensive, fully developed, horizontal bar chart-type Contractor's Construction Schedule. The Contractor for general construction shall prepare the Construction Schedule for the entire Project. The Schedule shall show the percentage of work to be completed at any time, anticipated monthly payments by Owner, as well as significant dates (such as completion of excavation, concrete foundation work, underground lines, superstructure, rough-ins, enclosure, hanging of fixtures, etc.) which shall serve as check points to determine compliance with the approved Schedule. The Schedule shall also include an activity for the number of "bad" weather days specified in Section 012100 – Allowances.
1. The Contractor shall provide a separate time bar for each significant construction activity. Provide a continuous vertical line to identify the first working day of each week.
    - a. If practical, use the same Schedule of Values breakdown for schedule time bars.
  2. The Contractor shall provide a base activity time bar showing duration for each construction activity. Each bar is to indicate start and completion dates for the activity. The Contractor is to place a contrasting bar below each original schedule activity time for indicating actual progress and planned remaining duration for the activity.
  3. The Contractor shall prepare the Schedule on a minimal number of separate sheets to readily show the data for the entire construction period.
  4. Secure time commitments for performing critical elements of the Work from parties involved. Coordinate each element on schedule with other construction activities. Include minor elements involved in the overall sequence of the Work. Show each activity in proper sequence. Indicate graphically the sequences necessary for completion of related portions of the Work.
  5. Coordinate the Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittal Schedule, progress reports, payment requests, and other required schedules and reports.
  6. Indicate the Intent to Award and the Contract Substantial Completion dates on the schedule.
- B. Phasing: Provide notations on the schedule to show how the sequence of the Work is affected by the following:
1. Requirement for Phased completion
  2. Work by separate Contractors
  3. Work by the Owner
  4. Pre-purchased materials
  5. Coordination with existing construction
  6. Limitations of continued occupancies

7. Un-interruptible services
  8. Partial Occupancy prior to Substantial Completion
  9. Site restrictions
  10. Provisions for future construction
  11. Seasonal variations
  12. Environmental control
- C. Work Stages: Use crosshatched bars to indicate important stages of construction for each major portion of the Work. Such stages include, but are not necessarily limited to, the following:
1. Subcontract awards
  2. Submittals
  3. Purchases
  4. Mockups
  5. Fabrication
  6. Sample testing
  7. Deliveries
  8. Installation
  9. Testing
  10. Adjusting
  11. Curing
  12. Startup and placement into final use and operation
- D. Area Separations: Provide a separate time bar to identify each major area of construction for each major portion of the Work. For the purposes of this Article, a “major area” is a story of construction, a separate building, or a similar significant construction element.
1. Indicate where each construction activity within a major area must be sequenced or integrated with other construction activities to provide for the following:
    - a. Structural completion.
    - b. Permanent space enclosure
    - c. Completion of mechanical installation
    - d. Completion of the electrical portion of the Work
    - e. Substantial Completion

### **3.3 SCHEDULE OF SUBMITTALS**

- A. Upon acceptance of the Construction Progress Schedule, prepare and submit a complete schedule of submittals. Coordinate the submittal schedule with Section 013300 SUBMITTALS, the approved Construction Progress Schedule, list of subcontracts, Schedule of Values and the list of products.
- B. Prepare the schedule in chronological order. Provide the following information

1. Scheduled date for the first submittal
  2. Related Section number
  3. Submittal category
  4. Name of the Subcontractor
  5. Description of the part of the Work covered
  6. Scheduled date for resubmittal
  7. Scheduled date for the Designer's final release or approval
- C. Distribution: Following the Designer's response to the initial submittal schedule, print and distribute copies to the Designer, Owner, subcontractors, and other parties required to comply with submittal dates indicated.
1. Post copies in the Project meeting room and temporary field office.
  2. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned part of the Work and are no longer involved in construction activities.
- D. Schedule Updating: Revise the schedule after each meeting or other activity where revisions have been recognized or made. Issue the updated schedule concurrently with the report of each meeting.

### **3.4 SCHEDULE OF INSPECTIONS AND TESTS**

- A. Prepare a schedule of inspections, tests, and similar services required by the Contract Documents. Submit the schedule with (15) days of the date established for commencement of the Contract Work. The Contractor is to notify the testing agency at least (5) working days in advance of the required tests unless otherwise specified.
- B. Form: This schedule shall be in tabular form and shall include, but not be limited to, the following:
1. Specification Section number
  2. Description of the test
  3. Identification of applicable standards
  4. Identification of test methods
  5. Number of tests required
  6. Time schedule or time span for tests
  7. Entity responsible for performing tests
  8. Requirements for taking samples
  9. Unique characteristics of each service
- C. Distribution: Distribute the schedule to the Owner, Architect, and each party involved in performance of portions of the Work where inspections and tests are required.

**END OF SECTION 013200**

## **SECTION 013300 – SUBMITTALS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.
- B. Division 1, Section 013115 “Project Management Communications” for administrative requirements for communications.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for submittals required for performance of the Work including the following:
  - 1. Shop Drawings
  - 2. Product Data
  - 3. Samples
  - 4. Quality Assurance Submittals
  - 5. Construction Photographs
  - 6. Operating and Maintenance Manuals
  - 7. Warranties
- B. Administrative Submittals: Refer to General and Supplementary Conditions other applicable Division 1 Sections and other Contract Documents for requirements for administrative submittals. Such submittals include, but are not limited to, the following:
  - 1. Construction Progress Schedule including Schedule of Values
  - 2. Performance and Payment Bonds
  - 3. Insurance Certificates
  - 4. Applications for Payment
  - 5. Certified Payroll Reports
  - 6. Partial and Final Receipt of Payment and Release Forms
  - 7. Affidavit – Compliance with Prevailing Wage Law
  - 8. Record Drawings
  - 9. Notifications, Permits, etc.
- C. The Contractor is obliged and responsible to check all shop drawings and schedules to assure compliance with contract plans and specifications. The Contractor is responsible for the content of the shop drawings and coordination with other contract work. Shop drawings and schedules shall indicate, in detail, all parts of an Item or Work including erection and setting instructions and integration with the Work of other trades.
- D. The Contractor shall at all times make a copy, of all approved submittals, available on site to the Construction Representative.

### **1.3 SUBMITTAL PROCEDURES**

- A. The Contractor shall comply with the General and Supplementary Conditions and other applicable sections of the Contract Documents. The Contractor shall submit, with such promptness as to cause no delay in his work or in that of any other contractors, all required submittals indicated in Part 3.1 of this section and elsewhere in the Contract Documents. Coordinate preparation and processing of submittals with performance of construction activities. Transmit each submittal sufficiently in advance of performance of related construction activities to avoid delay.
  - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
  - 2. Coordinate transmittal of different types of submittals for related elements of the Work so processing will not be delayed by the need to review submittals concurrently for coordination.
    - a. The Designer reserves the right to withhold action on a submittal requiring coordination with other submittals until all related submittals are received.
- B. Each drawing and/or series of drawings submitted must be accompanied by a letter of transmittal giving a list of the titles and numbers of the drawings. Each series shall be numbered consecutively for ready reference and each drawing shall be marked with the following information:
  - 1. Date of Submission
  - 2. Name of Project
  - 3. Location
  - 4. Section Number of Specification
  - 5. State Project Number
  - 6. Name of Submitting Contractor
  - 7. Name of Subcontractor
  - 8. Indicate if Item is submitted as specified or as a substitution

### **1.4 SHOP DRAWINGS**

- A. Comply with the General Conditions, Article 3.2.
- B. The Contractor shall submit newly prepared information drawn accurately to scale. Highlight, encircle, or otherwise indicate deviations from the Contract Documents. Do not reproduce Contract Documents or copy standard information as the basis of Shop Drawings. Standard information prepared without specific reference to the Project is not a Shop Drawing.
- C. Shop Drawings include fabrication and installation drawings, setting diagrams, schedules, patterns, templates, and similar drawings including the following information:
  - 1. Dimensions
  - 2. Identification of products and materials included by sheet and detail number
  - 3. Compliance with specified standards
  - 4. Notation of coordination requirements

5. Notation of dimensions established by field measurement
6. Sheet Size: Except for templates, patterns and similar full-size Drawings, submit Shop Drawings on sheets at least 8½"x11" but no larger than 36"x48".

## **1.5 PRODUCT DATA**

- A. The Contractor shall comply with the General Conditions, Article 3.2.
- B. The Contractor shall collect Product Data into a single submittal for each element of construction or system. Product Data includes printed information, such as manufacturer's installation instructions, catalog cuts, standard color charts, roughing-in diagrams and templates, standard wiring diagrams, and performance curves.
  1. Mark each copy to show applicable choices and options. Where printed Product Data includes information on several products that are not required, mark copies to indicate the applicable information including the following information:
    - a. Manufacturer's printed recommendations
    - b. Compliance with Trade Association standards
    - c. Compliance with recognized Testing Agency standards
    - d. Application of Testing Agency labels and seals
    - e. Notation of dimensions verified by field measurement
    - f. Notation of coordination requirements
  2. Do not submit Product Data until compliance with requirements of the Contract Documents has been confirmed.

## **1.6 SAMPLES**

- A. The Contractor shall comply with the General Conditions, Article 3.2.
- B. The Contractor shall submit full-size, fully fabricated samples, cured and finished as specified, and physically identical with the material or product proposed. Samples include partial sections of manufactured or fabricated components, cuts or containers of materials, color range sets, and swatches showing color, texture, and pattern.
  1. The Contractor shall mount or display samples in the manner to facilitate review of qualities indicated. Prepare samples to match the Designer's sample including the following:
    - a. Specification Section number and reference
    - b. Generic description of the Sample
    - c. Sample source
    - d. Product name or name of the Manufacturer
    - e. Compliance with recognized standards
    - f. Availability and delivery time
  2. The Contractor shall submit samples for review of size, kind, color, pattern, and texture. Submit samples for a final check of these characteristics with other elements and a comparison of these characteristics between the final submittal and the actual component as delivered and installed.

- a. Where variation in color, pattern, texture, or other characteristic is inherent in the material or product represented, submit at least three (3) multiple units that show approximate limits of the variations.
  - b. Refer to other Specification Sections for requirements for samples that illustrate workmanship, fabrication techniques, details of assembly, connections, operation, and similar construction characteristics.
  - c. Refer to other Sections for samples to be returned to the Contractor for incorporation in the Work. Such samples must be undamaged at time of use. On the transmittal, indicate special requests regarding disposition of sample submittals.
  - d. Samples not incorporated into the Work, or otherwise designated as the Owner's property, are the property of the Contractor and shall be removed from the site prior to Substantial Completion.
3. Field samples are full-size examples erected onsite to illustrate finishes, coatings, or finish materials and to establish the Project standard.
    - a. The Contractor shall comply with submittal requirements to the fullest extent possible. The Contractor shall process transmittal forms to provide a record of activity.

## **1.7 QUALITY ASSURANCE DOCUMENTS**

- A. The Contractor shall comply with the General Conditions, Article 3.2
- B. The Contractor shall submit quality control submittals including design data, certifications, manufacturer's instructions, manufacturer's field reports, and other quality-control submittals as required under other Sections of the Specifications.
- C. Certifications: Where other Sections of the Specifications require certification that a product, material, or installation complies with specified requirements, submit a notarized certification from the Manufacturer certifying compliance with specified requirements.
  1. Signature: Certification shall be signed by an officer of the Manufacturer or other individual authorized to contractually bind the Company.
- D. Inspection and Test Reports: The Contractor shall submit the required inspection and test reports from independent testing agencies as specified in this Section and in other Sections of the Contract Documents.
- E. Construction Photographs: The Contractor shall submit record construction photographs as specified in this Section and in other Sections of the Contract Documents.
  1. The Contractor shall submit digital photographs. The Construction Administrator shall determine the quantity and naming convention at the preconstruction meeting.
  2. The Contractor shall identify each photograph with project name, location, number, date, time, and orientation.
  3. The Contractor shall submit progress photographs monthly unless specified otherwise. Photographs shall be taken one (1) week prior to submitting.
  4. The Contractor shall take four (4) site photographs from differing directions and a minimum of five (5) interior photographs indicating the relative progress of the Work.

## 1.8 OPERATING AND MAINTENANCE MANUALS AND WARRANTIES

- A. The Contractor shall submit all required manufacturer's operating instructions, maintenance/service manuals, and warranties in accordance with the General Conditions, Article 3.5, and Supplementary Conditions along with this and other Sections of the Contract Documents.

## PART 2 - PRODUCTS (Not Applicable)

## PART 3 - EXECUTION

### 3.1 REQUIRED SUBMITTALS

- A. Contractor shall submit the following information for materials and equipment to be provided under this contract.

| SPEC SECTION | TITLE                                                       | CATEGORY                        |
|--------------|-------------------------------------------------------------|---------------------------------|
| 011000       | Summary of Work                                             | Franklin County Entrance Permit |
| 012600       | Request for Information                                     | Product Data                    |
| 012600       | Proposal for Cost Adjustment                                | Schedule of Values              |
| 012600       | Contract Change Detailed Breakdown Form                     | Schedule of Values              |
| 013100       | Coordination Drawings                                       | Shop Drawings                   |
| 013100       | List of Key Personnel Names                                 | Schedule of Values              |
| 013100       | Preparation of Contractor's Construction Schedule           | Construction Schedule           |
| 013100       | Preparation of the Schedule of Values                       | Schedule of Values              |
| 013200       | Construction Progress Schedule                              | Construction Schedule           |
| 013200       | Schedule of Values (O&M's)                                  | Schedule of Values              |
| 013200       | Schedule of Values (Close Out Documents)                    | Schedule of Values              |
| 013200       | Schedule of Values (General Conditions)                     | Schedule of Values              |
| 013200       | List of Subcontractors                                      | List of Subcontractors          |
| 013200       | Progress Report                                             | Construction Schedule           |
| 013200       | Schedule of Submittals                                      | Construction Schedule           |
| 013200       | Schedule of Inspections, Tests, and Similar Services        | Construction Schedule           |
| 013300       | Construction Progress Schedule including Schedule of Values | Schedule of Values              |
| 013300       | Record Drawings                                             | As-Built                        |
| 013300       | Notification                                                | Construction Schedule           |
| 013300       | Permit                                                      | Certification                   |
| 013300       | Shop Drawings                                               | Shop Drawings                   |
| 013300       | List of Products                                            | Major Material Suppliers        |
| 013300       | Product Data                                                | Product Data                    |
| 013300       | Product Samples                                             | Sample                          |

| SPEC SECTION | TITLE                                                                      | CATEGORY                       |
|--------------|----------------------------------------------------------------------------|--------------------------------|
| 013300       | Field Test Reports                                                         | Test Report                    |
| 013300       | Materials and Quality Assurance                                            | Certification                  |
| 013300       | Certifications (signed) for Products, Materials, and Installation          | Certification                  |
| 013300       | Construction Photographs                                                   | Test Report                    |
| 013300       | Manufacturer's Instructions                                                | Operation / Maintenance Manual |
| 013300       | Manufacturer's Maintenance/Service Manuals and Warranties                  | Operation / Maintenance Manual |
| 013300       | Manufacturer's Maintenance/Service Manuals and Warranties                  | Warranty                       |
| 013300       | Certifications (signed) for Products, Materials, and Installation          | Certification                  |
| 013513.51    | MSDS Sheets for Hazardous Materials                                        | Product Data                   |
| 013513.51    | Schedule of Proposed Shutdowns                                             | Construction Schedule          |
| 013513.51    | List of Employees who will Submit Fingerprint Background Checks            | Schedule of Values             |
| 013513.51    | Missouri Applicant Fingerprint Privacy Notice (Signed)                     | Certification                  |
| 013513.51    | Applicant Privacy Rights (Signed)                                          | Certification                  |
| 013513.51    | Privacy Act Statement (Signed)                                             | Certification                  |
| 015000       | Test, Inspection, Meter Reading, or Similar Procedure of Temporary Utility | Test Report                    |
| 015000       | Implementation and Termination Schedule                                    | Construction Schedule          |
| 022100       | Surveys: As-Built Drawings                                                 | As-Builts                      |
| 030000       | Product Data                                                               | Product Data                   |
| 030000       | Design Mixtures                                                            | Certification                  |
| 030000       | Steel Reinforcement Shop Drawings                                          | Shop Drawings                  |
| 030000       | Formwork Shop Drawings                                                     | Shop Drawings                  |
| 030000       | Test Reports                                                               | Test Report                    |
| 030000       | Cast-In-Place Concrete Compressive Strength Test                           | Test Report                    |
| 030000       | Cast-In-Place Concrete Slump Test                                          | Test Report                    |
| 030000       | Cast-In-Place Concrete Air Content Test                                    | Test Report                    |
| 030000       | Cast-In-Place Concrete Unit Weight and Yield Test                          | Test Report                    |
| 030000       | Construction Joint Layout                                                  | Shop Drawings                  |
| 030000       | Material Certificates                                                      | Product Data                   |
| 030000       | QC Test & Inspection Reports                                               | Test Report                    |
| 030000       | Proposed Sequence of Concrete Placement                                    | Construction Schedule          |
| 030000       | Hot Weather Concreting Procedures                                          | Construction Schedule          |
| 030000       | Cold Weather Concreting Procedures                                         | Construction Schedule          |

| SPEC SECTION                 | TITLE                                                                      | CATEGORY                 |
|------------------------------|----------------------------------------------------------------------------|--------------------------|
| 030000                       | Certification that Portland Cement used complies with ASTM C150            | Certification            |
| 030000                       | Certification that aggregates comply with ASTM C33                         | Certification            |
| 030000                       | Availability of Concrete                                                   | Major Material Suppliers |
| 030000                       | Delivery tickets for ready-mix concrete or weighmasters certificate        | Certification            |
| 312200                       | Material Certificates                                                      | Product Data             |
| 312200                       | Quarry Gradations                                                          | Product Data             |
| 312200                       | Laboratory Test Reports                                                    | Test Report              |
| 312200                       | Daily Field Quality Control Test Reports                                   | Test Report              |
| 313700                       | Geotextile Fabric Product Data                                             | Product Data             |
| 313700                       | Geotextile Sample for Verification                                         | Sample                   |
| 313700                       | Geotextile Qualification Data                                              | Product Data             |
| 321123                       | Product Samples                                                            | Sample                   |
| 321123                       | Material Sources                                                           | Product Data             |
| 321123                       | Aggregate Composition Test Reports                                         | Test Report              |
| 321123                       | Aggregate Base Course Density Test                                         | Test Report              |
| 321123                       | Aggregate Base Course Thickness Test                                       | Test Report              |
| 321123                       | Aggregate Base Course Gradation and Deleterious Material Inspection Report | Test Report              |
| 322920                       | Product Data                                                               | Product Data             |
| 322920                       | Quantities Verification                                                    | Test Report              |
| 323216                       | MSE Walls Designs                                                          | Shop Drawings            |
| Plan Sheet C-502<br>Detail 4 | 16-foot Gate Design                                                        | Shop Drawings            |
| Plan Sheet C-502<br>Detail 5 | 24-foot Gate Design                                                        | Shop Drawings            |

**END OF SECTION 013300**

## **SECTION 013513.31 - SITE SECURITY AND HEALTH REQUIREMENTS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes general Institution rules.
- B. This Section includes requirements for environments that employees are domiciled in, or public participation in program activities in or adjacent to the Scope of Work area:
  - 1. The Contractor shall have the applicable measures specified below in-place any time demolition or construction activities occur in occupied or non-occupied project work areas.
  - 2. The Contractor shall complete all specified cleaning procedures and receive clearance from the Construction Representative prior to removing any barriers and other precautionary measures – even for areas that the employees or public do not occupy during construction.

#### **1.3 SUBMITTALS**

- A. List of required submittals:
  - 1. Materials Safety Data Sheets for all hazardous materials to be brought onsite.
  - 2. Schedule of proposed shutdowns, if applicable.
  - 3. A list of the names of all employees who will submit fingerprints for a background check, and the signed privacy documents identified below for each employee.

### **PART 2 - PRODUCTS (Not Applicable)**

### **PART 3 - EXECUTION**

#### **3.1 ACCESS TO THE SITE**

- A. The Contractor shall arrange with Facility Representatives to establish procedures for the controlled entry of workers and materials into the work areas at the Facility.
- B. The Contractor shall establish regular working hours with Facility Representatives. The Contractor must report changes in working hours or overtime to Facility Representatives and obtain approval twenty-four (24) hours ahead of time. The Contractor shall report emergency overtime to Facility Representatives as soon as it is evident that overtime is needed. The Contractor must obtain approval from Facility Representatives for all work performed after dark.

- C. The Contractor shall provide the name and phone number of the Contractor's employee or agent who is in charge onsite; this individual must be able to be contacted in case of emergency. The Contractor must be able to furnish names and address of all employees upon request.
- D. All construction personnel shall visibly display issued identification badges.

### **3.2 FIRE PROTECTION, SAFETY, AND HEALTH CONTROLS**

- A. The Contractor shall take all necessary precautions to guard against and eliminate possible fire hazards.
  - 1. Onsite burning is prohibited.
  - 2. The Contractor shall store all flammable or hazardous materials in proper containers located outside the buildings or offsite, if possible.
  - 3. The Contractor shall provide and maintain, in good order, during construction fire extinguishers as required by the National Fire Protection Association. In areas of flammable liquids, asphalt, or electrical hazards, 15-pound carbon dioxide or 20-pound dry chemical extinguishers shall be provided.
- B. The Contractor shall not obstruct streets or walks without permission from the Owner's Construction Representative and Facility Representatives.
- C. The Contractor's personnel shall not exceed the speed limit of 15 mph while at the Facility unless otherwise posted.
- D. The Contractor shall take all necessary, reasonable measures to reduce air and water pollution by any material or equipment used during construction. The Contractor shall keep volatile wastes in covered containers and shall not dispose of volatile wastes or oils in storm or sanitary drains.
- E. The Contractor shall keep the project site neat, orderly, and in a safe condition at all times. The Contractor shall immediately remove all hazardous waste and shall not allow rubbish to accumulate. The Contractor shall provide onsite containers for collection of rubbish and shall dispose of it at frequent intervals during the progress of the Work.
- F. Fire exits, alarm systems, and sprinkler systems shall remain fully operational at all times, unless written approval is received from the Owner's Construction Representative and the appropriate Facility Representative at least twenty-four (24) hours in advance. The Contractor shall submit a written time schedule for any proposed shutdowns.
- G. For all hazardous materials brought onsite, Material Safety Data Sheets shall be on site and readily available upon request at least a day before delivery.
- H. Alcoholic beverages or illegal substances shall not be brought upon the Facility premises. The Contractor's workers shall not be under the influence of any intoxicating substances while on the Facility premises.

### **3.3 DISRUPTION OF UTILITIES**

- A. The Contractor shall give a minimum of seventy-two (72) hours written notice to the Construction Representative and the Facility Representative before disconnecting electric, gas, water, fire protection, or sewer service to any building.
- B. The Contractor shall give a minimum of seventy-two (72) hours written notice to the Construction Representative and Facility Representative before closing any access drives, and shall make temporary access available, if possible. The Contractor shall not obstruct streets, walks, or parking.

### **3.4 PROTECTION OF PERSONS AND PROPERTY**

#### **A. SAFETY PRECAUTIONS AND PROGRAMS**

- 1. The Contractor shall at all times conduct operations under this Contract in a manner to avoid the risk of bodily harm to persons or risk of damage to any property. The Contractor shall promptly take precautions which are necessary and adequate against conditions created during the progress of the Contractor's activities hereunder which involve a risk of bodily harm to persons or a risk of damage to property. The Contractor shall continuously inspect Work, materials, and equipment to discover and determine any such conditions and shall be solely responsible for discovery, determination, and correction of any such conditions. The Contractor shall comply with applicable safety laws, standards, codes, and regulations in the jurisdiction where the Work is being performed, specifically, but without limiting the generality of the foregoing, with rules regulations, and standards adopted pursuant to the Williams-Steiger Occupational Safety and Health Act of 1970 and applicable amendments.
- 2. All contractors, subcontractors and workers on this project are subject to the Construction Safety Training provisions 292.675 RSMo.
- 3. In the event the Contractor encounters on the site, material reasonably believed to be asbestos, polychlorinated biphenyl (PCB), lead, mercury, or other material known to be hazardous, which has not been rendered harmless, the Contractor shall immediately stop Work in the area affected and report the condition to the Owner's Representative and the Architect in writing. The Work in the affected area shall not thereafter be resumed except by written agreement of the Owner's Representative and Contractor if in fact the material is asbestos or polychlorinated biphenyl (PCB) and has not been rendered harmless. The Work in the affected area shall be resumed in the absence of asbestos or polychlorinated biphenyl (PCB), or when it has been rendered harmless by written agreement of the Owner's Representative and the Contractor. "Rendered Harmless" shall mean that levels of such materials are less than any applicable exposure standards, including but limited to OSHA regulations.

#### **B. SAFETY OF PERSONS AND PROPERTY**

- 1. The Contractor shall take reasonable precautions for safety of, and shall provide protection to prevent damage, injury, or loss to:
  - a. clients, staff, the public, construction personnel, and other persons who may be affected thereby;
  - b. the Work and materials and equipment to be incorporated therein, whether in

- storage on or off the site, under care, custody, or control of the Contractor or the Contractor's Subcontractors of any tier; and
- c. other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.
2. The Contractor shall give notices and comply with applicable laws, standards, codes, ordinances, rules, regulations, and lawful orders of public authorities bearing on safety of persons or property or their protection from damage, injury, or loss.
  3. The Contractor shall erect and maintain, as required by existing conditions and performance of the Contract, safeguards for safety and protection, including, but not limited to, posting danger signs and other warnings against hazards, promulgating safety regulations, and notifying owners and users of adjacent sites and utilities.
  4. When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise the highest degree of care and carry on such activities under supervision of properly qualified personnel.
  5. The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in this Section caused in whole or in part by the Contractor, a Subcontractor of any tier, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable, and for which the Contractor is responsible under this Section, except damage or loss attributable solely to acts or omissions of Owner or the Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's other obligations stated elsewhere in the Contract.
  6. The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents, and the maintaining, enforcing and supervising of safety precautions and programs. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner's Representative and Architect. The Contractor shall hold regularly scheduled safety meetings to instruct Contractor personnel on safety practices, accident avoidance and prevention, and the Project Safety Program. The Contractor shall furnish safety equipment and enforce the use of such equipment by its employees and its subcontractors of any tier.
  7. The Contractor shall not load or permit any part of the construction or site to be loaded so as to endanger its safety.
  8. The Contractor shall promptly report in writing to the Owner all accidents arising out of or in connection with the Work which cause death, lost time injury, personal injury, or property damage, giving full details and statements of any witnesses. In addition, if death, serious personal injuries, or serious property damages are caused, the accident shall be reported immediately.
  9. The Contractor shall promptly notify in writing to the Owner of any claims for injury or damage to personal property related to the work, either by or against the Contractor.
  10. The Owner assumes no responsibility or liability for the physical condition or safety of the Work site, or any improvements located on the Work site. The Contractor shall be solely responsible for providing a safe place for the performance of the Work. The Owner shall not be required to make any adjustment in either the Contract Sum or Contract Time concerning any failure by the Contractor or any Subcontractor to comply with the requirements of this Paragraph.

11. In no event shall the Owner have control over, charge of, or any responsibility for construction means, methods, techniques, sequences or procedures or for safety precautions and programs in connection with the Work, notwithstanding any of the rights and authority granted the Owner in the Contract Documents.
12. The Contractor shall maintain at his own cost and expense, adequate, safe and sufficient walkways, platforms, scaffolds, ladders, hoists and all necessary, proper, and adequate equipment, apparatus, and appliances useful in carrying on the Work and which are necessary to make the place of Work safe and free from avoidable danger for clients, staff, the public and construction personnel, and as may be required by safety provisions of applicable laws, ordinances, rules regulations and building and construction codes.

**END OF SECTION 013513.31**

## **SECTION 015000 – CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes requirements for construction facilities and temporary controls including temporary utilities, support facilities, security, and protection.
- B. Temporary utilities include, but are not limited to, the following:
  - 1. Water service and distribution
  - 2. Temporary electric power and light
  - 3. Sanitary facilities, including drinking water
  - 4. Storm and sanitary sewer
- C. Support facilities include, but are not limited to, the following:
  - 1. Field offices and storage sheds
  - 2. Temporary roads and paving
  - 3. Dewatering facilities and drains
  - 4. Temporary enclosures
  - 5. Temporary project identification signs and bulletin boards
  - 6. Waste disposal services
  - 7. Construction aids and miscellaneous services and facilities
- D. Security and protection facilities include, but are not limited to, the following:
  - 1. Barricades, warning signs, and lights
  - 2. Environmental protection

#### **1.3 SUBMITTALS**

- A. Temporary Utilities: Submit reports of tests, inspections, meter readings, and similar procedures performed on temporary utilities.
- B. Implementation and Termination Schedule: Within (15) days of the date established for commencement of the Work, submit a schedule indicating implementation and termination of each temporary utility.

#### **1.4 QUALITY ASSURANCE**

- A. Regulations: Comply with industry standards and applicable laws and regulations including, but not limited to, the following:
  - 1. Building code requirements

2. Health and safety regulations
  3. Utility company regulations
  4. Police, fire department, and rescue squad rules
  5. Environmental protection regulations
- B. Standards: Comply with NFPA 241 “Standard for Safeguarding Construction, Alterations, and Demolition Operations”. ANSI A10 Series standards for “Safety Requirements for Construction and Demolition”, and NECA Electrical Design Library “Temporary Electrical Facilities”.
1. Electrical Service: Comply with NEMA, NECA, and UL standards and regulations for temporary electric service. Install service in compliance with NFPA 70 “National Electric Code”.
- C. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

## **1.5 PROJECT CONDITIONS**

- A. Temporary Utilities: Prepare a schedule indicating dates for implementation and termination of each temporary utility.
- B. Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Relocate temporary services and facilities as the Work progresses. Do not overload facilities or permit them to interfere with progress. Take necessary fire-prevention measures. Do not allow hazardous, dangerous, or unsanitary conditions, or public nuisances to develop or persist onsite.

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. General: Provide new materials. If acceptable to the Designer, the Contractor may use undamaged, previously used materials in serviceable condition. Provide materials suitable for use intended.

### **2.2 EQUIPMENT**

- A. General: Provide new equipment. If acceptable to the Designer, the Contractor may use undamaged, previously used equipment in serviceable condition. Provide equipment suitable for use intended.
- B. Temporary Toilet Units: Provide self-contained, single-occupant toilet units of the chemical, aerated re-circulation, or combustion type. Provide units properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material.
- C. Fire Extinguishers: Provide hand-carried, portable, UL-rated, Class A fire extinguishers for temporary offices and similar spaces. In other locations, provide hand-carried, portable, UL-rated, Class ABC, dry-chemical extinguishers, or a combination of extinguishers of NFPA-recommended classes for the exposures.

1. Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.

### **3.2 TEMPORARY UTILITY INSTALLATION**

- A. General: Engage the appropriate local utility company to install temporary service or connect to existing service. Where company provides only part of the service, provide the remainder with matching, compatible materials and equipment. Comply with company recommendations.
- B. Temporary Lighting
  1. Install and operate temporary lighting that will fulfill security and protection requirements. Provide temporary lighting that will provide adequate illumination for construction operations and traffic conditions.
- C. Temporary Telephones: Provide temporary telephone service throughout the construction period for all personnel engaged in construction activities.
- D. Temporary Toilets: Install self-contained toilet units. Use of pit-type privies will not be permitted. Comply with regulations and health codes for the type, number, location, operation, and maintenance of fixtures and facilities. Install where facilities will best serve the Project's needs.
  1. Shield toilets to ensure privacy.
  2. Provide separate facilities for male and female personnel.
  3. Provide toilet tissue materials for each facility.
- E. Wash Facilities: Install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a health and sanitary condition. Dispose of drainage properly. Supply cleaning compounds appropriate for each condition.
  1. Provide paper towels or similar disposable materials for each facility.
  2. Provide covered waste containers for used material.
  3. Provide safety showers, eyewash fountains, and similar facilities for convenience, safety, and sanitation of personnel.
- F. Provide earthen embankments and similar barriers in and around excavations and subgrade construction, sufficient to prevent flooding by runoff of storm water from heavy rains.

### **3.3 SUPPORT FACILITIES INSTALLATION**

- A. General: Locate field offices, storage sheds, and other temporary construction and support facilities for easy access.
- B. Construction Parking: Parking at the site will be provided in the areas designated at the Pre-Construction Meeting.
- C. Dewatering Facilities and Drains: For temporary drainage and dewatering facilities and operations not directly associated with construction activities included under individual Sections, comply with dewatering requirements of applicable Division 2 Sections. Where feasible, utilize the same facilities. Maintain the site, excavations, and construction free of water.
- D. Collection and Disposal of Waste: Collect waste from construction areas and elsewhere daily. Comply with requirements of NFPA 241 for removal of combustible waste material and debris. Enforce requirements strictly. Do not hold materials more than seven (7) days during normal weather or three (3) days when the temperature is expected to rise above 80°F (27°C). Handle hazardous, dangerous, or unsanitary waste materials separately from other waste by containerizing properly. Dispose of material lawfully.

### **3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION**

- A. Barricades, Warning Signs, and Lights: Comply with standards and code requirements for erection of structurally adequate barricades. Paint with appropriate colors, graphics, and warning signs to inform personnel and the public of the hazard being protected against. Where appropriate and needed, provide lighting including flashing red or amber lights.
  - 1. Storage: Where materials and equipment must be stored and are of value or attractive for theft, provide a secure lockup. Enforce discipline in connection with the installation and release of material to minimize the opportunity for theft and vandalism.
- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and minimize the possibility that air, waterways, and subsoil might be contaminated or polluted or that other undesirable effects might result. Avoid use of tools and equipment that produce harmful noise. Restrict use of noisemaking tools and equipment to hours that will minimize complaints from persons or firms near the site.

### **3.5 OPERATION, TERMINATION AND REMOVAL**

- A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.
- B. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage by freezing temperatures and similar elements.
- C. Termination and Removal: Unless the Designer requests that it be maintained longer, remove each temporary facility when the need has ended, when replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of

interference with the temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are the Contractor's property. The Owner reserves the right to take possession of project identification signs.
2. Remove temporary paving not intended for or acceptable for integration into permanent paving. Where the area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil in the area. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at the temporary entrances as required by the governing authority.

**END OF SECTION 015000**

## **SECTION 017400 – CLEANING**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for cleaning during the Project.
- B. Environmental Requirements: Conduct cleaning and waste-disposal operations in compliance with local laws and ordinances. Comply fully with federal and local environmental and anti-pollution regulations.
  - 1. Do not dispose of volatile wastes such as mineral spirits, oil, or paint thinner in storm or sanitary drains.
  - 2. Burning or burying of debris, rubbish, or other waste material on the premises is not permitted.

### **PART 2 - PRODUCTS**

#### **2.1 MATERIALS**

- A. Cleaning Agents: Use cleaning materials and agents recommended by the manufacturer or fabricator for the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

### **PART 3 - EXECUTION**

#### **3.1 PROGRESS CLEANING**

- A. General
  - 1. Retain all stored items in an orderly arrangement allowing maximum access, not impeding drainage or traffic, and providing the required protection of materials.
  - 2. Do not allow the accumulation of scrap, debris, waste material, and other items not required for construction of this Work.
  - 3. At least twice each month, and more often if necessary, completely remove all scrap, debris, and waste material from the jobsite.
  - 4. Provide adequate storage for all items awaiting removal from the jobsite, observing all requirements for fire protection and protection of the ecology.
- B. Site
  - 1. Daily, inspect the site and pick up all scrap, debris, and waste material. Remove all such items to the place designated for their storage.
  - 2. Weekly, inspect all arrangements of materials stored onsite. Re-stack, tidy, or otherwise service all material arrangements.

3. Maintain the site in a neat and orderly condition at all times.

### **3.2 FINAL CLEANING**

- A. General: Provide final cleaning operations when indicated.
- B. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for the entire Project or a portion of the Project.
  1. Clean the Project Site, yard and grounds, in areas disturbed by construction activities including landscape development areas, of rubbish, waste material, litter, and foreign substances.
  2. Sweep paved areas broom clean. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
  3. Remove petrochemical spills, stains, and other foreign deposits.
  4. Remove tools, construction equipment, machinery, and surplus material from the site.
- C. Removal of Protection: Remove temporary protection and facilities installed during construction to protect previously completed installations during the remainder of the construction period.
- D. Compliances: Comply with governing regulations and safety standards for cleaning operations. Remove waste materials from the site and dispose of lawfully.
  1. Where extra materials of value remain after Final Acceptance by the Owner, they become the Owner's property.

**END OF SECTION 017400**

## **SECTION 022100 – SURVEYS**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Surveying for laying out the work.

#### **1.02 RELATED REQUIREMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section
- B. Section 011000 - Summary: Limitations on working in existing building; continued occupancy; work sequence; identification of salvaged and relocated materials.
- C. Section 013300 - Submittals: Procedures for submittals
- D. Section 013100 - Coordination: Procedures for administration and meetings
- E. Section 312200 - Earthwork
- F. Section 322920 – Lawns and Grasses
- G. Section 333100 – Sewer and Drainage Construction

#### **1.03 SUBMITTALS**

- A. See Section 013300 - Submittals, for submittal procedures
- B. Contractor shall provide As-Built Drawing

#### **1.04 QUALIFICATIONS**

- A. For surveying work, employ a land surveyor registered in Missouri and acceptable to Designer. Submit evidence of surveyor's Errors and Omissions insurance coverage in the form of an Insurance Certificate. Employ only individual(s) trained and experienced in collecting and recording accurate data relevant to ongoing construction activities.

### **PART 2 PRODUCTS (NOT USED)**

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Contractor shall examine and verify specific conditions described in individual specification sections.
- B. Contractor shall take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or mis-fabrication.

- C. Contractor shall verify that utility services are available, of the correct characteristics, and in the correct locations.

### **3.02 SURVEYING FOR LAYING OUT THE WORK**

- A. Verify locations of survey control points prior to starting work.
- B. Promptly notify Designer of any discrepancies discovered.
- C. Control datum for survey is that indicated on drawings.
- D. Protect survey control points prior to starting site work; preserve permanent reference points during construction.
- E. Promptly report to Designer the loss or destruction of any reference point or relocation required because of changes in grades or other reasons.
- F. Replace dislocated survey control points based on original survey control. Make no changes without prior written notice to Designer.
- G. Utilize recognized engineering survey practices.
- H. Establish elevations, lines and levels. Locate and lay out by instrumentation and similar appropriate means.
- I. Periodically verify layouts by same means.
- J. Maintain a complete and accurate log of control and survey work as it progresses.
- K. As-built drawing: Prepare an as-built drawing of the following items to confirm they were installed in accordance with the drawings:
  - 1. Roadway, parking lot, gates, kiosk, restrooms, modular block wall and stormwater culverts

**END OF SECTION 022100**

## **SECTION 030000 – CONCRETE CONSTRUCTION**

### **PART 1 GENERAL**

#### **1.01 GENERAL**

- A. Concrete shall consist of a mixture of cement, fine aggregate, coarse aggregate and water, combined in the proportions specified for the various classes. Admixtures may be added as specifically required or permitted.

#### **1.02 SUMMARY**

- A. This section specifies cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finished, for the disabled parking spaces, kiosk slab, sidewalks, pipe collar and cutoff wall.

#### **1.03 REFERENCE STANDARDS**

- A. ACI 117 - Standard Specifications for Tolerances for Concrete Construction and Materials; 2010 (Reapproved 2015).
- B. ACI 301 - Specifications for Structural Concrete; 2016.
- C. ACI SP-66 - ACI Detailing Manual; 2004.
- D. ACI 304R - Guide for Measuring, Mixing, Transporting, and Placing Concrete; 2000 (Reapproved 2009).
- E. ACI 305R - Guide to Hot Weather Concreting; 2010.
- F. ACI 306R - Guide to Cold Weather Concreting; 2016.
- G. ACI 308R - Guide to External Curing of Concrete; 2016.
- H. ACI 318 - Building Code Requirements for Structural Concrete and Commentary; 2014 (Errata 2017).
- I. ACI 347R - Guide to Formwork for Concrete; 2014.
- J. ASTM A615/A615M - Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement; 2016.
- K. ASTM A1064/A1064M - Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete; 2017.
- L. ASTM C33/C33M - Standard Specification for Concrete Aggregates; 2016, with Editorial Revision (2016).
- M. ASTM C39/C39M - Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens; 2018.
- N. ASTM C94/C94M - Standard Specification for Ready-Mixed Concrete; 2017a.
- O. ASTM C109/C109M - Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or (50-mm) Cube Specimens); 2016a.
- P. ASTM C143/C143M - Standard Test Method for Slump of Hydraulic-Cement Concrete; 2015a.
- Q. ASTM C150/C150M - Standard Specification for Portland Cement; 2018.
- R. ASTM C171 - Standard Specification for Sheet Materials for Curing Concrete; 2016.

- S. ASTM C173/C173M - Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method; 2016.
- T. ASTM C260/C260M - Standard Specification for Air-Entraining Admixtures for Concrete; 2010a (Reapproved 2016).
- U. ASTM C330/C330M - Standard Specification for Lightweight Aggregates for Structural Concrete; 2017a.
- V. ASTM C494/C494M - Standard Specification for Chemical Admixtures for Concrete; 2017.
- W. ASTM C618 - Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete; 2015.
- X. ASTM C827/C827M - Standard Test Method for Change in Height at Early Ages of Cylindrical Specimens of Cementitious Mixtures; 2016.
- Y. ASTM C1059/C1059M - Standard Specification for Latex Agents for Bonding Fresh to Hardened Concrete; 2013.
- Z. ASTM C1107/C1107M - Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink); 2014a.
- AA. ASTM C1116/C1116M - Standard Specification for Fiber-Reinforced Concrete; 2010a (Reapproved 2015).
- AB. ASTM C1240 - Standard Specification for Silica Fume Used in Cementitious Mixtures; 2015.
- AC. ASTM D1751 - Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types); 2004, with Editorial Revision (2013).
- AD. ASTM E1745 - Standard Specification for Plastic Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs; 2017.
- AE. Missouri Highways and Transportation Commission (MHTC) Missouri Standard Specifications for Highway Construction

#### **1.04 SUBMITTALS**

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
- C. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.
- D. Formwork Shop Drawings: Prepared by or under the supervision of a qualified professional engineer detailing fabrication, assembly, and support of formwork.
- E. Test Reports: Submit report for each test or series of tests specified.
- F. Construction Joint Layout: Indicate proposed construction joints required to construct the structure.

G. Material Certificates: For each of the following, signed by manufacturers:

1. Cementitious materials
2. Admixtures
3. Form materials and form-release agents
4. Steel reinforcement and accessories
5. Waterstops
6. Curing compounds
7. Floor and slab treatments
8. Bonding agents
9. Adhesives
10. Adhesive Anchors
11. Vapor retarders
12. Semirigid joint filler
13. Joint-filler strips
14. Repair materials

H. Quality-control test and inspection reports

## **PART 2 PRODUCTS**

### **2.01 GENERAL**

- A. All material shall be in accordance with Missouri Highways and Transportation Commission (MHTC) Missouri Standard Specifications for Highway Construction, Division 1000, Material Details.

### **2.02 MIX DESIGN**

- A. The proportions of cement, fine aggregate and coarse aggregate for concrete shall be approved by the engineer within the applicable limits of the specifications for the class of concrete specified in the contract. The contractor shall submit a mixture designed by absolute volume methods or an optimized mix design method such as Shilstone method or other recognized optimization method. Optimized will refer to aggregate gradations that produce lower water demands, as well as improved workability and finishing characteristics. The target and allowable gradation range of each fraction shall be included. The contractor may be required to submit representative samples of each ingredient to the Owner for laboratory testing.
- B. The concrete mix design shall contain the following information:
1. Source, type and specific gravity of Type IL or Portland cement
  2. Source, type (class, grade, etc.) and specific gravity of supplementary materials, if used
  3. Source, name, type and amount of admixtures
  4. Source, type (formation, etc.), ledge number if applicable, and gradation of the aggregate

5. Specific gravity and absorption of each fraction in accordance with AASHTO T 85 for coarse aggregate and AASHTO T 84 for fine aggregate, including raw data
6. Unit Weight of each fraction in accordance with AASHTO T 19
7. The percent of each aggregate component used for optimized concrete mixes
8. The design air content and slump
9. Batch weights of Type IL or Portland Cement and supplemental cementitious materials
10. Batch weights of coarse, intermediate and fine aggregates
11. Batch weight of water

### **2.03 AIR-ENTRAINING ADMIXTURES FOR CONCRETE**

- A. They shall conform to the requirements of the Specifications for Air-Entraining Admixtures for Concrete, ASTM C260.

### **2.04 WATER**

- A. When used with cement in mortar or concrete or for curing of concrete or for testing of structures for water-tightness, the water shall be potable.

### **2.05 CLASSES OF CONCRETE**

- A. General.
  1. Concrete for the disabled parking spaces, kiosk slab, and sidewalks shall meet the MHTC requirements for concrete class Pavement Concrete. The minimum design compressive strength shall be 4,000 pounds per square inch.
  2. Concrete for the pipe collar and cutoff wall shall meet the MHTC requirements for concrete class B. The minimum design compressive strength shall be 3,000 pounds per square inch.
- B. Air Content
  1. The allowable air content for the mix design submittal shall be 6.0% +/- 1%.
- C. Sampling. Sampling of fresh concrete shall be in accordance with AASHTO R 60, except that for central or truck mixed concrete, the entire sample for slump and air tests and for molding compressive strength specimens may be taken at one time after approximately one cubic yard of concrete has been discharged, instead of at three or more regular intervals during the discharge of the entire batch. Acceptability of the concrete for slump and air content and, if applicable, for strength requirements, will be determined by tests on these samples.
- D. Consistency. The slump of the concrete when placed in the work shall be 4 inches +/- 1 inch. The concrete shall be uniform in consistency and shall contain the minimum quantity of water required to produce the designated slump. The slump of concrete mixes will be determined in accordance with AASHTO T 119. The quantity of mixing water in the concrete shall be considered the net quantity after proper allowance has been made for absorption by the aggregate.

- E. Measurement of Material. The cement and aggregate for concrete shall be measured by weight. The weights of coarse and fine aggregates to be used will be calculated from the proportions approved by the engineer. The slump and mixing water content of the concrete, when placed in the work, shall not exceed a water/cementitious ratio of 0.50. Batches that do not contain the proper quantities of material shall be wasted at the contractor's expense.

## **2.06 FORMS**

- A. Forms General:
  - 1. Prefabricated or job built.
  - 2. Wood forms:
    - a. 5/8 or 3/4 inch 5-ply structural plywood of concrete form grade.
    - b. Built-in-place or prefabricated type panel.
  - 3. Metal forms:
    - a. Metal forms may be used except for aluminum in contact with concrete.
    - b. Forms to be tight to prevent leakage, free of rust and straight without dents to provide members of uniform thickness.
  - 4. Place struts and walers as necessary to avoid form skin deviation and excessive deviation in flatness.
- B. Chamfer Strips: Wood, metal, PVC, or rubber strips, 3/4 by 3/4 inch (19 by 19 mm), minimum.
- C. Form-Release Agent: Commercially formulated form-release agent that does not bond with, stain, or adversely affect concrete surfaces and does not impair subsequent treatments of concrete surfaces.
  - 1. Formulate form-release agent with rust inhibitor for steel form-facing materials.
- D. Form Ties: Factory-fabricated, removable or snap-off glass-fiber-reinforced plastic or metal form ties designed to resist lateral pressure of fresh concrete on forms and to prevent spalling of concrete on removal.
  - 1. Furnish units that leave no corrodible metal closer than 1 inch (25 mm) to the plane of exposed concrete surface.
  - 2. Furnish ties that, when removed, leave holes no larger than 1 inch (25 mm) in diameter in concrete surface.
  - 3. Furnish ties with integral water-barrier plates to walls indicated to receive damp proofing or waterproofing.

## **2.07 REINFORCEMENT MATERIALS**

- A. Reinforcing Steel: ASTM A615/A615M, Grade 60 (60,000 psi)
  - 1. Type: Deformed billet-steel bars
- B. Steel Welded Wire Reinforcement (WWR): Plain type, ASTM A1064/A1064M
  - 1. WWR Style: As indicated on drawings
- C. Reinforcement Accessories:
  - 1. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded-wire reinforcement in place. Manufacture bar

supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:

- a. For concrete surfaces exposed to view, where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.

## **2.8 JOINT SEALANT**

- A. Construction joints shall be sealed with a gunnable or caulkable material meeting the following requirements:
  1. ASTM C 920, Type S (Single Component) or Type M (Multi Component); Grade NS; Class 50; NT.
- B. Expansion joints shall be sealed with a gunnable or caulkable material meeting the following requirements:
  1. ASTM C 920, Type S (Single Component) or Type M (Multi Component); Grade NS; Class 50; T.

## **2.9 CURING MATERIALS**

- A. Evaporation Reducer: Liquid thin-film-forming compound that reduces rapid moisture loss caused by high temperature, low humidity, and high winds; intended for application immediately after concrete placement.
  1. Manufacturers:
    - a. Dayton Superior Corporation; AquaFilm Concentrate J74: [www.daytonsuperior.com/#sle](http://www.daytonsuperior.com/#sle)
    - b. Euclid Chemical Company ; EUCOBAR: [www.euclidchemical.com/#sle](http://www.euclidchemical.com/#sle)
    - c. Kaufman Products Inc; VaporAid: [www.kaufmanproducts.net/#sle](http://www.kaufmanproducts.net/#sle)
    - d. Sika Corporation, Inc.; SikaFilm
- B. Moisture-Retaining Sheet: ASTM C171
  1. White-burlap-polyethylene sheet, weighing not less than 3.8 ounces per square yard
- C. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. (305 g/sq. m) when dry
- D. Water: Potable, not detrimental to concrete

# **PART 3 EXECUTION**

## **3.01 BATCHING AND MIXING**

- A. Plant-mixed or Ready-mixed Concrete
  1. The mixer shall produce concrete uniform in color, appearance and distribution of the material throughout the mixture. The cement, aggregate and no less than 60 percent of the water shall be mixed a minimum of one minute. The remaining water shall be added within 15 seconds after all other material for the batch is in the mixer. If mixers having multiple compartment drums are used, the time required to transfer material between compartments will be considered mixing time. The speed at which the drum rotates shall

be as designated by the manufacturer. If such mixing does not result in uniform and smooth texture concrete, a sufficient number of additional revolutions at the same speed shall be performed until a thorough mixing of each batch of concrete is secured. The mixing time shall be measured from the time all cement, aggregate and 60 percent of the water are in the drum. The volume of concrete mixed in each batch shall not exceed the manufacturer's rated capacity. The mixer shall be equipped to automatically time the mixing of each batch of concrete. If the automatic timing device becomes inoperable, a manual timing device shall be provided to complete the day's operation.

2. **Truck Mixed Concrete.** Truck mixed concrete shall be mixed at the proportioning plant and the mixer shall operate at agitating speed while in transit. Truck mixed concrete may be mixed at the point of delivery, provided the cement or cement and mixing water, are added at that point. Mixing of truck mixed concrete shall begin immediately after the introduction of the mixing water and cement to the aggregate or the introduction of the cement to the aggregate.
3. **Truck Mixing Requirements.** Truck mixers and agitators shall be operated at the speed of rotation designated by the manufacturer of the equipment. Truck mixed concrete shall initially be mixed no less than 70 or more than 100 revolutions of the drum at mixing speed after all ingredients, including water, are in the mixer, except that when the batch volume does not exceed 57.5 percent of the gross volume of the drum or 91 percent of the rated maximum capacity, the number of revolutions required for mixing shall be no less than 50 or more than 100. When a truck mixer or truck agitator is used for transporting concrete that has been completely mixed, agitation of the concrete shall continue during transportation at the speed designated by the manufacturer of the equipment as agitating speed. Water may be added to the mixture no more than two times after initial mixing is completed. Each time water is added, the drum shall be turned an additional 30 revolutions, or more if necessary, at mixing speed, until uniform mixing is accomplished. All water added will be included in determining the effective water in the mixture.
4. **Adding Water:** If concrete arrives on-site with slump less than suitable for placement, do not add water unless the concrete load ticket lists the maximum allowable water to be added on site.

### **3.02 CONVEYING AND PLACING**

#### **A. Standard Practice**

1. The standard practice for conveying and placing concrete as outlined by the American Concrete Institute shall be followed. Concrete shall be conveyed from the mixer to the place of final deposit by methods which will prevent separation or loss of materials and contamination due to debris, dirt, or any foreign material. The maximum height of an unconfined drop of concrete shall be six feet. Equipment used shall be suitable and in good clean mechanical condition. Approved equipment for placing concrete by pumping shall be used when gravity methods become impractical or difficult. Before placing concrete in the forms or in the place of deposit, all debris and foreign materials, soft earth, mud, and water shall be removed. No concrete shall be placed in water unless entirely unavoidable, and then only with permission and approval of such method of placing that will prevent washing and dilution of the concrete. Steel or wood forms shall be oiled and treated to prevent adhesion of concrete and damage to the concrete surface upon removal of the forms. Concrete shall be placed as nearly as practicable in its final position to avoid segregation due to rehandling or flowing. Concreting shall be carried on at such a rate that the concrete is at all times plastic and flows readily into the forms and around reinforcing.

No concrete shall be used that has partially hardened or has been contaminated by foreign material or that has been retempered.

2. When concreting has once started, it shall be carried on as a continuous operation until the section or structural unit is completed. The top surface shall be leveled or screeded or finished to the shape, level, and type of finish required by the drawings and specifications. When construction joints are required, they shall be made in conformance with these specifications. Care must be used to avoid displacing or disturbing the reinforcing steel.
3. All concrete shall be thoroughly compacted by vibrators, spading, or other suitable means during the operation of placing to insure that concrete will flow around all reinforcement, embedded fixtures and into the corners and against the surfaces of the forms to give a dense finished product with true surfaces free from honeycombing and other imperfections.
4. Concrete, when delivered to the project, shall be subjected to reinspection and acceptance or rejection after its arrival.
5. No more concrete shall be delivered to the project than can be readily placed. All delivery tickets from the concrete shall be machine stamped with time of batch. All concrete not in place 90 minutes from batch time shall be subject to rejection.

### **3.03 MORTAR AND GROUT**

#### **A. Mortar Mixture For Sewer Construction**

1. Mortar for sewer construction shall consist of a uniform mixture of Portland cement and sand with the minimum amount of water to produce the required consistency for the particular required use. No admixtures shall be used without the permission of the Owner. All materials shall conform to the requirements specified in Part 2.
2. Mortar shall be prepared in suitable mixing equipment or, for small amounts, on a hard impervious surface. It shall be kept free from contamination, debris, or other deleterious substances until incorporated in the construction. Retempered mortar or partially set mortar shall not be used.

#### **B. Grout**

1. Grout will be described in the specifications or on the drawings with the item for which it is used. Retempered grout shall not be used. Grout shall be kept in a uniformly mixed condition during placing.
2. Grout for filling the voids in grouted rip-rap, revetment, or rock surfacing shall consist of an eight sack mix of Portland cement per cubic yard with the minimum amount of water required to permit the grout to flow into the spaces. An approved air-entrainment agent shall be added to the grout. No separate payment will be made for mortar or for grout. Its costs are included in the various bid items requiring its use.
3. Special grout mixes will be considered for use by the Owner at the time of construction.

### **3.04 CONSTRUCTION AND EXPANSION JOINTS**

- A. Control Joints in Slabs-on-Grade and Pavement: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:

1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch (3.2 mm). Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
  2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- (3.2-mm-) wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
  3. Slab-on-Grade shall have control joints in both directions spaced at not more than 15 feet - 0 inches on centers and located in such a manner that each floor slab section is rectangular in shape. See typical details for control joint requirements.
- B. Expansion Joints in Slabs-on-Grade and Pavement: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated.
  2. Terminate full-width joint-filler strips not less than 1/2 inch (13 mm) or more than 1 inch (25 mm) below finished concrete surface where joint sealants are specified.
  3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
  4. Apply sealant to expansion joint in accordance with manufacturer's recommendations.

### **3.05 FINISHING**

#### **A. General**

1. Immediately after removing the forms, all fins or irregular projections shall be removed from all surfaces except those in contact with backfill and which are not to be exposed. All construction or special joints in the completed work shall be carefully tooled and be free of all mortar and concrete. Expansion joint fillers shall be left exposed for their full length with clean true edges. On all surfaces, cavities produced by form ties, holes, honeycomb areas, broken edges or corners, and other surface defects shall be cleaned, and carefully filled, pointed and troweled to a true uniform smooth surface with sand-cement mortar mixed in the proportions used in the grade of concrete being finished. Such repaired surfaces shall be kept moist for a period of twenty-four hours.

#### **B. Rubbed Surface Finish**

1. Rubbed surface finish will not be required unless specifically required by the drawings and Specifications, except in the case of repaired surfaces where the uniform finished appearance of the exposed surface is important. Rubbing will not be permitted until the repaired surface has set for at least twenty-four hours. The final finish shall be attained by rubbing the repaired area and adjacent surface with a carborundum stone and water until the entire surface is of smooth uniform texture and color matching the adjoining surface. After rubbing is completed, any remaining paste, powder, or objectionable evidence of repair shall be completely removed.

### **3.06 CURING AND PROTECTION**

#### **A. General**

1. Provisions shall be made for protecting concrete, brick masonry, and cement plastering against damage from freezing or from lack of moisture. All concrete placed into the forms shall have a temperature between 50 and 90 degrees F. The Contractor will be responsible for all damage to the concrete surface due to the flow of water over uncured concrete, vandalism, etc. Unless otherwise provided in the Project Specifications, the cost of curing and protection are included in the payments made for the bid items of construction requiring the use of curing and protection for cement and concrete work.

**B. Cold Weather**

1. All job-stored materials shall be covered and protected from ice and snow. The temperature of mixing water shall not be less than 55 degrees F nor more than 165 degrees F. All reinforcement, forms, fill material and ground which the concrete will contact shall be free of frost or ice and snow. Whenever the temperature of the surrounding air is 40 degrees F and falling, no concrete shall be placed unless the Contractor has on hand sufficient, suitable, and approved means of protecting the concrete. The subgrade of any structures on which concrete is to be placed shall be adequately protected, if necessary, to prevent freezing prior to placing. Whenever the temperature of the surrounding air is below 40 degrees F, adequate means shall be provided for maintaining a temperature in the surrounding air of not less than 70 degrees F for as much time as necessary to insure proper curing of the concrete. The housing, covering, or other protection used shall remain intact and in place at least twenty-four hours. If the structure is backfilled the next day, the backfill will be considered adequate protection in lieu of the housing or covering that is initially required. Salt or chemicals shall not be used to prevent freezing. Whenever the temperature of the surrounding air reaches 32 degrees F and lower, concrete shall not be placed except with approval of the Owner, who shall state the time in addition to that specified herein that artificial heat and protection must be supplied. Whenever the temperature of the surrounding air reaches 20 degrees F or lower, no concrete shall be placed except for emergencies and only with permission of the Owner.

**C. Hot Dry Weather**

1. Provision must be made to protect concrete, brick masonry, and cement plastering from drying, and to maintain a moist condition for curing for at least five days after placing of concrete and at least two days after laying and plastering brick masonry. For high-early-strength concrete, moist curing shall be provided for at least two days after placing. Plastering on the outside of manholes and the top and side surfaces of monolithic sewers may be cured by use of approved curing compounds uniformly sprayed as recommended by the manufacturer.

**3.07 STEEL REINFORCEMENT INSTALLATION**

- A. Conform to ACI 117 for placement tolerances and fabrication of reinforcement.
- B. Provide bar spacers and support in accordance with the latest edition of ACI SP-66 Detailing Manual.
- C. Position, support and secure reinforcement against displacement.
- D. Locate and support with chairs, runners, bolsters, spacers and hangers, as required.
- E. Set wire ties so ends do not touch forms and are directed into concrete, not toward exposed concrete surfaces.
- F. Lap splice lengths: ACI 318 Class B tension splices unless indicated otherwise on the Drawings.

- G. Extend reinforcement to within 3 inches of concrete perimeter edges:
  - 1. If perimeter edge is earth formed, extend reinforcement to within 4 inches of the edge.
- H. Minimum concrete protective covering for reinforcement: As shown on Drawings.
- I. Do not weld reinforcing bars, unless as indicated on Drawings.
- J. Welded reinforcing bars shall conform to ASTM A706, Grade 60, weldable steel.
- K. Development length: ACI 318 basic development length for the specified yield strength.
- L. Install welded-wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.
- M. Provide minimum of 24-hour notice prior to closing forms to allow for special inspection requirements.

### **3.08 CONCRETE FORMS**

#### **A. Forms**

- 1. Forms shall conform to the shape, lines, dimensions, and elevations of the structures shown on the drawings. They shall be substantial and tight to prevent the leakage of mortar. Be of adequate strength and properly braced to rigidly maintain their shape, position, and elevation under all loading conditions. Forms for exposed surfaces such as the interior of sewers, faces of headwalls and architectural concrete shall produce a smooth regular true surface without offset, joint marks or surface blemishes. Joints shall be butt joints. Forms and centering shall be designed to allow their removal without damage to the structures. Forms for walls of rectangular section sewers on curves shall be laid to a true curve using a maximum of two feet form sections and they shall be plumbed and constructed in a manner so that they are uniform and in proper alignment. Inside exposed edges of walls, and edges next to expansion joints in walls shall be chamfered  $\frac{3}{4}$  inch. Other exposed corners and edges next to expansion joints shall be properly tooled.
- 2. Wood spreaders shall not be used. Only metal form ties and spreaders with removable heads shall be used, so that, upon removal of forms, exposed metal ends can be covered with at least one inch cement mortar.
- 3. Concrete in walls to be placed against rock excavation may be placed against the rock without back forms, provided care and precautions are taken to prevent the contamination of the placed concrete due to falling earth and other debris. Back forms must be provided for walls to be placed against earth excavation. Loose earth likely to fall into the forms must be stripped back, and precautions taken to prevent contamination of the placed concrete. In cases where circumstances require placing of concrete against vertical earth excavation for walls, similar precautions must be taken, and the earth surface stabilized with sprayed asphalt emulsion.
- 4. Forms and supporting forms or shoring shall not be removed until the concrete has attained sufficient strength to permit removal without injury to the concrete or to the strength of the construction, and able to support safely its own weight and the load upon the construction. Supporting forms for all beams, arches or slabs shall remain in place a minimum of 7 days. Supporting shores may be required after removal of forms. The Contractor shall be responsible for all damage due to premature removal of forms. Forms shall be cleaned and oiled upon removal. Defects in the exposed surfaces of the concrete shall be repaired.

### 3.09 FIELD QUALITY CONTROL

- A. Contractor will engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Inspections
  - 1. Steel reinforcement placement.
  - 2. Verification of use of required design mixture.
  - 3. Concrete placement, including conveying and depositing.
  - 4. Curing procedures and maintenance of curing temperature.
  - 5. Verification of concrete strength before removal of shores and forms.
- D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172/C 172M shall be performed according to the following requirements:
  - 1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture, plus one set for each additional 50 cu. yd. (38 cu. m) or fraction thereof.
  - 2. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
  - 3. Air Content: ASTM C 231/C 231M, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
  - 4. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F (4.4 deg C) and below or 80 deg F (27 deg C) and above, and one test for each composite sample.
  - 5. Unit Weight: ASTM C 567/C 567M, fresh unit weight of structural concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
  - 6. Compression Test Specimens: ASTM C 31/C 31M.
    - a. Cast and laboratory cure three sets of two standard cylinder specimens for each composite sample.
    - b. Cast and field cure three sets of two standard cylinder specimens for each composite sample.
  - 7. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.
    - a. Test one set of two field-cured specimens at 7 days and one set of two specimens at 28 days.
    - b. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
  - 8. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
  - 9. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength

and no compressive-strength test value falls below specified compressive strength by more than 500 psi (3.4 MPa).

10. Test results shall be reported in writing to Owner, Engineer, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
11. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Engineer. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Engineer.
12. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
13. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

**END OF SECTION 030000**

## **SECTION 311000 – SITE CLEARING**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Clearing and protection of vegetation.
- B. Removal of existing debris.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 011000 - Summary of Work: Limitations on Contractor's use of site and premises.
- B. Section 011000 - Summary of Work: Sequencing and staging requirements.
- C. Section 015000 - Construction Facilities and Temporary Controls.

#### **1.03 REFERENCE STANDARDS**

- A. ANSI A300 Part 1 - American National Standard for Tree Care Operations -- Tree, Shrub and Other Woody Plant Maintenance -- Standard Practices (latest edition).

### **PART 2 PRODUCTS**

#### **2.01 MATERIALS**

- A. Tree protection and vegetation clearing limits fencing - shall be constructed of plastic mesh and shall stand at least four feet tall. Mesh shall be brightly colored or otherwise highly visible. Standard orange construction fencing is acceptable

### **PART 3 EXECUTION**

#### **3.01 SITE CLEARING**

- A. Note that tree clearing available dates are restricted by the 404 Nationwide Permits as follows:
  - 1. The project site contains suitable summer roosting habitat for the endangered Indiana Bat (*Myotis sodalis*) and threatened Northern Long-eared Bat (*Myotis septentrionalis*). Tree clearing must not occur between April 1 and October 31 in order to prevent any incidental take of these species during the summer roosting period.

#### **3.02 EXISTING UTILITIES AND BUILT ELEMENTS**

- A. Existing utilities located within the limits of work are private utilities owned by Owner.
- B. Protect existing utilities to remain from damage.
- C. Protect existing structures and other elements that are not to be removed.

#### **3.03 VEGETATION**

- A. Scope: Remove trees, shrubs, brush, and stumps in project areas.
- B. Limits of disturbance and clearing are shown on the Drawings.

- C. Do not remove or damage vegetation beyond the limits of disturbance indicated on drawings.
- D. Unless method of demarcation for vegetation clearing areas are otherwise approved by the owner, install substantial and highly visible temporary fences at least 4 feet high to prevent inadvertent damage to vegetation to remain:
  - 1. At vegetation removal limits.
- E. Pruning shall consist of pruning limbs of trees adjacent to clearing limits as needed to perform required clearing while not damaging adjacent trees to remain.
  - 1. Prune trees as recommended in ANSI A300 Part 1.
- F. Clearing shall consist of the felling, trimming, and cutting of trees into sections and the satisfactory disposal of the trees and other vegetation designated for removal, including downed timber, snags, brush, and rubbish occurring within the areas to be cleared.
  - 1. Trees, stumps, roots, brush, and other vegetation in areas to be cleared shall be cut flush with or below the ground surface, except such trees and vegetation as may be directed to be left standing. Grubbing shall be used to remove existing stumps within the limits of disturbance.
- G. Grubbing shall consist of the removal and disposal of stumps, roots larger than 3 inches in diameter, and matted roots from the grubbing areas. Material to be grubbed, together with logs and other organic or metallic debris not suitable for foundation purposes, shall be removed to a depth of not less than 18 inches below the original surface level of the ground in areas indicated to be grubbed and in areas indicated as construction areas under this contract, such as areas for buildings, and areas to be paved. Depressions made by grubbing shall be filled with suitable material and compacted to make the surface conform with the original adjacent surface of the ground.
- H. Vegetation Removed: Do not burn, bury, landfill, or leave on site, except as indicated.
  - 1. All vegetation debris from clearing and grubbing shall be removed off site by the Contractor.
- I. Restoration: If vegetation outside removal limits or within specified protective fences is damaged or destroyed due to subsequent construction operations, replace at no cost to Owner.

### **3.04 DEBRIS**

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.
- D. Keep roads, walks, trails and parking lots free of dirt and debris at all times

### **END OF SECTION 311000**

## **SECTION 312200 – EARTHWORK**

### **PART 1 GENERAL**

#### **1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.
- B. Section 022100 - Surveys

#### **1.02 SUMMARY**

- A. This section includes the excavation and placement of fill for the roadway and parking lot.

#### **1.03 REFERENCES**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.
- B. ASTM International (ASTM)

| ASTM<br>Reference # | Description                                                                                                                         |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| C136- 01            | Sieve Analysis of Fine and Coarse Aggregates                                                                                        |
| D698                | Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/cu. ft. (600 kN-m/cu.m.))                        |
| D2487-00            | Standard Classification of Soils for Engineering Purposes (Unified Soil Classification System)                                      |
| D2922-01            | Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)                                                      |
| D3017-01            | Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth)                                                          |
| D422-02             | Particle-Size Analysis of Soils                                                                                                     |
| D4253-00            | Maximum Index Density and Unit Weight of Soils Using a Vibratory Table                                                              |
| D4254-00            | Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density                                                  |
| D4318-00            | Liquid Limit, Plastic Limit, and Plasticity Index of Soils                                                                          |
| D5084-16a           | Standard Test Methods for Measurement of Hydraulic Conductivity of Saturated Porous Materials Using a Flexible Wall Permeameter     |
| D5856-15            | Standard Test Methods for Measurement of Hydraulic Conductivity of Porous Material Using a Rigid-Wall, Compaction-Mold Permeameter  |
| D7928               | Standard Test Method for Particle-Size Distribution (Gradation) of Fine Grained Soils using the Sedimentation (Hydrometer Analysis) |

#### **1.04 SUBMITTALS**

- A. See Section 013300 - Submittals, for submittal procedures.
- B. Material Certificates: signed by the manufacturer and Contractor, certifying that each material complies with or exceeds requirements, may be submitted in lieu of material laboratory testing when acceptable to Construction Administrator.

- C. Quarry gradations for granular material.
- D. Laboratory Test Reports including soil classifications, grain size analysis, and proctor curves for each type of material used.
- E. Daily Field Quality Control Test Reports including all test results.

#### **1.05 QUALITY ASSURANCE**

- A. Codes and Standards: Perform earthwork complying with the requirements of the Drawings and specifications.
- B. Testing and Inspection Service: Contractor shall employ a qualified Independent Testing Agency at the Contractor's cost to perform all required field and laboratory testing.

#### **1.06 PROJECT CONDITIONS**

- A. Existing utility lines that are shown on the Contract Drawings or the locations of which are made known to the Contractor prior to excavation and that are to be retained shall be protected from damage during excavation.
- B. Contractor shall continuously maintain all roadways free of mud or tracked materials during site operations. Contractor shall use equipment specifically designed for street cleaning and approved by the Owner.

### **PART 2 PRODUCTS**

#### **2.01 SOIL AND ROCK MATERIALS**

- A. Material excavated onsite in planned cut areas shall be used as fill.
- B. Imported fill shall be ASTM D 2487 soil classification groups GM, GC, SW, SP, SM, CL and ML, free of rock or gravel larger than 1 inch in any dimension, debris, waste, frozen materials, vegetation, or other deleterious matter. All materials used will have a plasticity index less than 25 (ASTM 4318) and liquid limit less than 50 (ASTM D 2487).
- C. Fill shall not contain roots or other similar organic matter, trash, frozen material, chemical contamination, or rock or concrete fragments larger than 6 inches in the maximum dimension.
- D. Larger particles sizes may be used if they can be placed in a manner in which they are not nested (i.e. individual particles are encapsulated in fine-grain soil) and do not interfere with construction of utilities, foundations and other appurtenances, with approval of Owner.
- E. Granular Fill for the roadway and parking lot shall be MoDOT Type 5 Aggregate as described in Section 32 1123, Aggregate Base Courses.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Verify that survey bench marks and intended elevations for the Work are as indicated.
- B. Identify required lines, levels, contours, and datum locations.

### **3.02 PROTECTION**

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by earthwork operations.
- B. Call Missouri 811 not less than three working days before performing work.
- C. Protect and maintain benchmarks, monuments or other established reference points and property corners. If disturbed or destroyed, replace at own expense to full satisfaction of Owner and controlling agency.

### **3.03 CONTROL OF WATER**

- A. While sewers, tanks, and appurtenances are under construction, the Contractor shall keep all excavations free of water at his/her own expense. The Contractor shall provide all dams, flumes, channels, sumps, or other works necessary to keep the excavation entirely clear of water and shall provide and operate pumps or other suitable equipment of adequate capacity for dewatering the excavations. The water shall be disposed of in a manner approved by the Owner.
- B. Protect subgrades and foundation soils from softening and damage by rain or water accumulation and from freezing temperatures or frost.

### **3.04 SUBGRADES**

- A. Excavate or backfill as required to construct subgrades to elevations and grades indicated.
- B. Remove all unsuitable material and replace with acceptable fill material and perform all wetting, drying, shaping, and compacting required to prepare subgrade.
- C. Contractor shall proof roll subgrades with a fully-load tandem dump truck or scraper as directed by the Engineer. If the Engineer identifies unsuitable material, then the Contractor shall excavate unsatisfactory soil material and replace with suitable compacted backfill or fill material as determined by the Engineer.
- D. Reconstruct subgrades damaged by freezing temperatures, frost, rain, accumulated water, or construction activities as directed by the Engineer and at no cost to the Owner.
- E. Roughen subgrade for backfill or fills by discing or scarifying and wet or dry top 6 inches as required to bond with fill.

### **3.05 EXCAVATION**

- A. Explosives: Do not use explosives.
- B. Class A Excavation: Any material in original beds, or well-defined ledges such as solid limestone, hard sandstone, or hard shales. Also, any material where each piece is more than one cubic yard in volume such as large boulders, detached pieces of limestone, hard sandstone, or mass concrete.
- C. Class B Excavation: Densely packed materials such as most shales, soft sandstone, highly weathered limestone or rubble. Also, detached pieces of material each being more than one cubic foot in volume such as broken concrete or rock.
- D. Unclassified Excavation: Unclassified Excavation will consist of the excavation of all materials of whatever character encountered in the work.
- C. Shoring: The Contractor is responsible for the design and installation of any and all shoring required.

- D. Excavate for structures, pavements, and walks to indicated elevations and dimensions. Widen excavations to permit placing and removing concrete formwork, installing services and other construction, and for inspections. Trim subgrades to required lines and grades to leave solid base to receive other work.
- E. Trench Excavation Requirements
  - 1. Excavate utility trenches to indicated slopes, lines, depths, and invert elevations of uniform widths to provide working clearance on each side of pipe, and in accordance with the Drawings. Excavate and shape trench to provide uniform bearing and continuous support for pipe and conduit and to comply with OSHA requirements. Where encountering rock or other unyielding bearing surface, carry trench excavation 6 inches below invert elevation to receive bedding course.
  - 2. The bottoms of trenches shall be accurately graded to provide uniform bearing and support for the bottom quadrant of each section of the pipe. Stones shall be removed to avoid point bearing.
- F. Remove from site and excavated subsoil that is not re-used, the cost of which is considered incidental to excavation.

### **3.06 GENERAL REQUIREMENTS FOR FILLING, BACKFILLING, GRADING, AND TRENCHING**

- A. Fill to contours and elevations indicated using unfrozen suitable materials.
- B. Employ a placement method that does not disturb or damage other work.
- C. Systematically fill to allow maximum time for natural settlement. Do not fill over porous, wet, frozen or spongy subgrade surfaces.
- D. Fill Preparation: Slopes that are steeper than five horizontal to one vertical shall be continuously benched in not less than 12-inch rises as the fill is brought up in layers. Benching shall be of sufficient width to permit placing and compacting operations. Each horizontal cut shall begin at the intersection of the ground line and the vertical side of the previous bench.
- E. Place backfill and fill materials in layers not more than 12 inches in loose depth for material compacted by heavy compaction equipment, and not more than 6 inches in loose depth for material compacted by hand-operated tampers. Place evenly alongside structures and utilities to required elevations.
- F. Uniformly moisten or aerate subgrade and each subsequent fill or backfill layer to achieve the minimum percent of maximum density specified.
- G. Remove and replace, or scarify and air dry, satisfactory soil material that is too wet to compact to specified density.
- H. Reshape and re-compact fills subjected to vehicular traffic.

### **3.07 COMPACTION**

- A. Fill shall be compacted to a minimum of 95% of maximum dry unit weight as determined by the Standard Proctor Moisture Density Test (ASTM D698). The top 2 feet immediately beneath pavement or footings shall be compacted to a minimum dry unit weight equal to 98% of the same maximum dry unit weight. The moisture content of the fill at the time of compaction shall not be less than optimum moisture content nor exceed 4% above optimum.

### **3.08 FIELD QUALITY CONTROL**

- A. Contractor shall retain and pay for a qualified Independent Testing Agency to perform all quality control testing. The testing Agency shall submit daily reports to the Construction Administrator and Designer of the results of any tests, and any other observations regarding the quality of the work. Allow the Testing Agency to inspect and test each subgrade and each fill or backfill layer. Do not proceed until test results for previously completed work verify compliance with requirements.
  - 1. Provide a soil classification (ASTM D-2487), Atterberg limit (ASTM D-4318), and modified Proctor compaction curve (ASTM D-698) for each type of soil material used. Provide a gradation (ASTM D-1140) for each type of crushed rock backfill to be used.
  - 2. Perform field in-place density tests according to ASTM D 1556 (sand cone method), ASTM D 2167 (rubber balloon method), ASTM D 2922 (nuclear method), or ASTM D 2937 (drive cylinder method), as applicable.
  - 3. In each compacted fill layer, perform one test per every 2500 sq. ft. of fill but in no case fewer than two tests per layer.
- B. When test results indicate that fills or backfills are below specified density, scarify and moisten or aerate, or remove and replace soil to the depth required, recompact, and retest until obtaining required density at no cost to the Owner.

### **3.09 STOCKPILING AND DISPOSAL**

- A. Stockpiling: Satisfactory soil materials are to be temporarily stored in designated stockpiles for reuse as directed by the Owner.
- B. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, vegetative debris, trash, and debris, and legally dispose of it in accordance with the following paragraphs.
  - 1. Burning waste materials on site is not permitted.
  - 2. All disposal of materials shall be done in accordance with all Federal, State, County and local regulations.
  - 3. All debris shall be removed off site.

**END OF SECTION 312200**

## **SECTION 313700 – RIPRAP**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. This Section includes furnishing and installing the following Light Stone Revetment to the lines and grades shown on the drawings.

#### **1.02 RELATED REQUIREMENTS**

#### **1.03 REFERENCES**

- A. Metropolitan St. Louis Sewer District: “Standard Construction Specifications for Sewers and Drainage Facilities”, 2009”, hereinafter referred to as the MSD Standard Specifications. Should a conflict arise between the Contract Documents and the MSD Standard Specifications arise, these Contract Documents shall govern.
- B. ASTM D4992 - Evaluation of Stone to Be Used for Erosion Control; 2014.
- C. ASTM C127 - Standard Test Method for Relative Density (Specific Gravity) and Absorption of Coarse Aggregate; 2015.
- D. ASTM D5312 - Standard Test Method for Evaluation of Durability of Rock for Erosion Control Under Freezing and Thawing Conditions, 2013.
- E. ASTM D4884 - Standard Test Method for Strength of Sewn or Bonded Seams of Geotextiles; 2014.

### **PART 2 PRODUCTS**

#### **2.01 MATERIALS**

- A. Light Stone Revetment: Rock shall be hard, angular in shape and resist weathering. The rock shall have a minimum specific gravity of 2.5. Not more than 30 percent of the stone shall have a ratio of maximum length (a) to maximum width perpendicular to the long axis (c) greater than 2.5. No stone shall have a ratio of (a/c) greater than 3.5. Rock shall be well graded. Rock may be shot rock as long as it generally conforms to the gradation presented in the Project Plans. The rock shall contain fines in sufficient quantities to fill voids while allowing point-to-point contact between rocks. Rock suspended in a matrix of fines shall not be allowed. THERE SHALL BE NO VISIBLE VOIDS IN ROCK STRUCTURES. Light Stone Revetment shall consist of material with a predominant size of 8 inches, a maximum rock size of 12 inches and a gradation such that no more than 15 percent will be less than 3 inches.
- B. Geotextile Fabric material shall meet the requirements for MSD Type 1 - Geotextile Fabric.

### **PART 3 EXECUTION**

#### **3.01 EXAMINATION**

- A. Do not place riprap over frozen or spongy subgrade surfaces.

The Engineer shall verify that all debris, including plant materials such as trees, stumps, and roots, and rocks of size large enough to interfere with proper placement/compaction are

removed prior to subgrade construction and preparation. The Contractor shall remove all material designated by the Engineer

### **3.02 PLACEMENT**

#### **A. Place Geotextile Fabric**

1. After the subgrade is prepared and before the Light Stone Revetment is placed, a layer of Geotextile Fabric shall be installed.
  - a. The filter fabric shall be placed loosely upon or against the surface to receive the fabric, and secured as necessary, so that the fabric conforms to the surface without damage when the Light Stone Revetment material is placed.
  - b. The filter fabric shall be placed such that it overlaps the adjacent section of fabric a minimum of 24-inches at all joints. Vertical overlaps shall be made so that the higher section overlaps the lower section. Horizontal overlaps shall be made with the upstream matting overlapping the downstream matting.
  - c. Equipment or vehicles shall not be operated or driven directly on the filter fabric.
  - d. Filter fabric damaged during placement shall be replaced or repaired, as directed by the Owner's Representative, by the Contractor at the Contractor's expense.
  - e. Repairing damaged fabric shall consist of placing new fabric over the damaged area with a minimum overlap of 3-feet from the edge of the damaged area.

#### **B. Place Light Stone Revetment**

1. Place to full course thickness in one operation in a manner to avoid displacing underlying materials.
2. Place Light Stone Revetment in such a manner as to produce a reasonable well-graded, stable mass of rock with a minimum practicable percentage of voids. Hand place only if necessary to achieve a finished product free from objectionable pockets of small stones and clusters of larger stones.
3. Limit drop height of riprap placed on geotextile to three feet or less. Geotextile shall be free of tears, holes, and sags prior to placement of riprap.
4. Provide laborers during placement and rearrangement of loose rock fragments, "chinking" of void spaces, and hand placement as needed to comply with the requirement for a stable layer of riprap.
5. Place Light Stone Revetment from the bottom of slopes to the top of slopes.
6. Place within a tolerance of  $\pm 0.25$  feet from the design slope lines and grades.
7. Maintain Light Stone Revetment protection until accepted; replace any material displaced during construction of the same.

**END OF SECTION 313700**

## **SECTION 321123 – AGGREGATE BASE COURSES**

### **PART 1 GENERAL**

#### **1.01 SECTION INCLUDES**

- A. Aggregate base course
- B. Paving aggregates

#### **1.02 RELATED REQUIREMENTS**

#### **1.03 REFERENCE STANDARDS**

- A. Standard Specifications for Road and Bridge Construction, State of Missouri.
- B. AASHTO M 147 - Standard Specification for Materials for Aggregate and Soil-Aggregate Subbase, Base and Surface Courses; 2017.
- C. ASTM C136/C136M - Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates; 2014.
- D. ASTM D698 - Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft<sup>3</sup> (600 kN-m/m<sup>3</sup>)); 2012, with Editorial Revision (2015).
- E. ASTM D4318 - Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils; 2017.

#### **1.04 SUBMITTALS**

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Samples: 25 lb sample of each type of aggregate; submit in air-tight containers to Engineer.
- C. Materials Sources: Submit name of imported materials source.
- D. Aggregate Composition Test Reports: Results of laboratory tests on proposed and actual materials used.

### **PART 2 PRODUCTS**

#### **2.01 MATERIALS**

- A. Geotextile Fabric material shall meet the requirements of MSD Type 1 - Geotextile Fabric.
- B. Crushed Limestone Base Course

1. Crushed Limestone Base Course shall comply with MHTC Section 1007.3 - Type 5 Aggregate with the following gradation:

| <u>Sieve</u>         | <u>Percent by Weight</u> |
|----------------------|--------------------------|
| Passing 1-inch sieve | 100                      |
| Passing 1/2-inch     | 60-90                    |
| Passing No. 4        | 35-60                    |
| Passing No. 30       | 10-35                    |
| Passing No. 200      | 0-15                     |

### **PART 3 EXECUTION**

#### **3.01 SUBGRADE**

- A. Subgrade shall be proof-rolled and compacted in conformance with Section 312200 - Earthwork.

#### **3.02 PLACE GEOTEXTILE FABRIC**

- A. After the subgrade is prepared and before the Crushed Limestone Aggregate is placed, a layer of Geotextile Fabric shall be installed.
- B. The filter fabric shall be placed loosely upon or against the surface to receive the fabric, and secured as necessary, so that the fabric conforms to the surface.
- C. The filter fabric shall be placed such that it overlaps the adjacent section of fabric a minimum of 24-inches at all joints. Vertical overlaps shall be made so that the higher section overlaps the lower section. Horizontal overlaps shall be made with the upstream matting overlapping the downstream matting.
- D. Equipment or vehicles shall not be operated or driven directly on the filter fabric.
- E. Filter fabric damaged during placement shall be replaced or repaired, as directed by the Owner's Representative, by the Contractor at the Contractor's expense.
- F. Repairing damaged fabric shall consist of placing new fabric over the damaged area with a minimum overlap of 3-feet from the edge of the damaged area.

#### **3.03 CRUSHED LIMESTONE AGGREGATE**

- A. The base course shall be compacted base crushed aggregate with a minimum thickness indicated on the plans. The base course shall only be applied to approved subgrade.
- B. The crushed limestone aggregate shall be placed and compacted in conformance with Section 31 2300 – Earthwork.
- C. Aggregate base courses shall be compacted to a minimum of 95% of maximum dry unit weight as determined by the Standard Proctor Moisture Density Test (ASTM D698).

### **3.04 TOLERANCES**

- A. The surface of each layer shall not show any deviations in excess of  $\frac{3}{4}$ - inch when tested with a 10 foot straightedge applied both parallel with and at right angles to the centerline of the flow of traffic. Deviations exceeding this amount shall be corrected by the Contractor by removing material, replacing with new material, or reworking existing material and compacting, as directed.
- B. The completed thickness of each course shall be within  $\frac{1}{2}$  inch of the thickness indicated.
  - 1. When the measured thickness of the aggregate surface course is more than  $\frac{1}{2}$  inch deficient in thickness, the Contractor, at no additional expense to the Company shall correct such areas by scarifying, adding mixture of proper gradation, re-blading, and re-compacting, as directed by the Company. Where the measured thickness of the aggregate surface course is more than  $\frac{1}{2}$  inch thicker than that indicated, it shall be considered as conforming with the specified thickness requirements.

### **3.05 PROTECTION OF COMPLETED WORK**

- A. The Contractor shall maintain the completed work throughout construction and shall replace and re-grade any portions that become damaged by construction traffic as directed by the Engineer.

**END OF SECTION 321123**

## **SECTION 322920 – LAWNS AND GRASSES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions, Division Specification sections, and the Approved DNR Land Disturbance Permit, apply to the Work specified in this Section.

#### **1.2 DESCRIPTION OF WORK**

- A. Furnish all materials, labor, equipment and services necessary to perform all Work.
- B. Work included in this Section includes clearing of weeds, seed bed preparation, installation of erosion control fabric and seeding operations required for seeding of the areas shown on Drawings.

#### **1.3 SPECIFICATIONS AND STANDARDS**

- A. U.S. Department of Agriculture: SRA 156 U.S. Department of Agriculture, Rules and Regulations under the Federal Seed Act.
- B. American Joint Committee on Horticultural Nomenclature Standard: 1942 Edition Standardized Plant Names.

### **PART 2 - PRODUCTS**

#### **2.1 SEED**

- A. All seed shall be furnished in sealed, standard containers, unless otherwise approved. Seed which has become wet, moldy, or otherwise damaged will not be acceptable.
- B. Each container of seed shall be fully labeled in accordance with the Federal Seed Act and seed certifications shall be signed and made part of seed invoices.
- C. All seed must comply with the requirements of the Missouri Seed Law, contain no seed of any plant of the Federal noxious weed list, and contain not seed of any weed not known to exist in Missouri.
- D. Provide fresh, clean new-crop seed complying with rate of application as stated herein. Seed mixtures are to be applied to those areas so designated on the Plans or as otherwise directed by the Owner's Representative. Acceptable seed mixtures and rates of application are shown in Table 1. Seed Mixture #1 shall be planted between March 1 and June 15, and/or between August 1 and October 15 unless otherwise directed by Owner's Representative. Seed Mixture #2 shall be planted between January 1 and April 15 unless otherwise directed by the Owner's Representative.

**Table 1: Acceptable Seed Mixtures and Rates**

| <b>Seed Mixture #1 – Lawn Area Only</b> |                                                | <b>Seed Mixture #2 – All Areas Excluding Lawn Area</b> |                                                |                |
|-----------------------------------------|------------------------------------------------|--------------------------------------------------------|------------------------------------------------|----------------|
| <b>Cool Season Grass Mix</b>            | <b>Pounds of Pure Live Seed (PLS) Per Acre</b> | <b>Warm Season Grass Mix</b>                           | <b>Pounds of Pure Live Seed (PLS) Per Acre</b> | <b>Variety</b> |
| Redtop                                  | 3.0                                            | Big Bluestem                                           | 12.0                                           | Aldous         |
| Timothy                                 | 6.0                                            | Switch Grass                                           | 10.0                                           |                |
| Ladino Clover                           | 3.0                                            | Alfalfa<br>(Medicago sativa)                           | 3.0                                            |                |
| Smooth Brome                            | 5.0                                            | Little Bluestem                                        | 7.0                                            | KAW            |
| Orchard Grass                           | 10.0                                           | Eastern Gamagrass                                      | 6.0                                            |                |
| Tall Fescue                             | 20.0                                           | Partridge Pea                                          | 4.0                                            |                |
| Red Clover                              | 3.0                                            | Red Clover                                             | 3.0                                            |                |
| Perennial Ryegrass                      | 10.0                                           | Perennial Ryegrass                                     | 10.0                                           |                |
| Alfalfa                                 | 4.0                                            | Oats<br>(March 1 to June 15)                           | 30 (Not PLS)                                   |                |
| Wheat                                   | 30 (Not PLS)                                   | Wheat<br>(August 1 to October 15)                      | 30 (Not PLS)                                   |                |
|                                         |                                                | Ladina Clover                                          | 2.0                                            |                |
|                                         |                                                | Indiangrass                                            | 7.0                                            | Osage          |
|                                         |                                                | Illinois Bundleflower                                  | 4.0                                            |                |
|                                         |                                                | Sideoats Grama                                         | 4.0                                            |                |

- E. Invoices and tags for seed shall show type furnished. Upon acceptance of the seeded areas, a final check of total quantities of seed used will be made against total area seeded and if minimum rates of application or specified quantities have not been met, the Architect will require distribution of additional quantities of these materials to make up minimum application specified.

## 2.2 FERTILIZER

- A. Fertilizer shall be uniform in composition, free-flowing, suitable for application with approved equipment and delivered to the site unopened in original containers each bearing the manufacturer's guaranteed analysis and in conformity with state fertilizer laws. Fertilizer shall contain the following minimum percentage of plant food by weight.
1. 12 percent available nitrogen
  2. 12 percent available phosphoric acid
  3. 12 percent available potash
- B. Fertilizer application rates shall be 600 pounds per acre with a minimum of 300 lbs applied.
- C. Invoices for fertilizer shall show grade furnished. Upon acceptance of the seeded areas, a final check of total quantities of fertilizer used will be made against total area seeded and if minimum

rates of application or specified quantities have not been met, the Architect will require distribution of additional quantities of these materials to make up minimum application specified.

## **2.3 INOCULANTS**

- A. All leguminous seed shall be inoculated or treated with the proper cultures for the particular legume to be sown.
- B. The inoculant for treating leguminous seed shall be a pure culture of nitrogen-fixing bacteria. The containers of inoculant shall be plainly marked with the expiration date for use and the manufacturer's directions for inoculating seed.
- C. The process of inoculation shall be in accordance with the manufacturer's direction for the particular species of legume. The time lapse for sowing the seed following inoculations shall not exceed 24 hours.
- D. Legumes shall be inoculated separately with sufficient inoculant to cover all seed before mixing with other seeds. A commercial sticker shall be used to ensure the inoculant adheres to the seed.
- E. Inoculants shall be applied at double the manufacturer's recommendation.

## **2.4 EROSION CONTROL BLANKET**

- A. Fabric shall be "Soil Saver" as is distributed by Jim Walls Company in Dallas, Texas (214) 239-8577; or "Curlex Blankets" as is distributed by Americal Excelsior Company in North Kansas City, Missouri (816) 842-3034; or "RollMax" as is distributed by North American Green in Evansville, Indiana (800) 772-2040.

## **2.5 MULCH**

- A. Mulch shall consist of straw of wheat or oats.
- B. The mulch shall be free of prohibited weed seed and all other noxious and undesirable seed and shall not be in an advanced stage of decomposition.

## **2.6 STAPLES**

- A. Staples shall be a No. 11 gauge steel wire formed into a "U" shape, 6 inches long.

# **PART 3 - EXECUTION**

## **3.1 GROUND PREPARATION**

- A. General: the ground areas are to be seeded and fertilized as indicated on the Drawings and/or as specified herein. Equipment necessary for the proper preparation of the ground surface and for handling and placing all required materials shall be on hand, in good condition and shall be approved before the Work is started.
- B. Clearing: Prior to tillage, seeding or other specified operations, all vegetation which might interfere with the indicated treatment of the areas shall be mowed, grubbed, raked and the debris removed from the site. Prior to or during grading and tillage operations, the ground surface shall be cleared of materials which might hinder final operations. Areas which have been disturbed shall be finish graded and/or developed as indicated on the Drawings or as specified.

- C. Tillage: After the areas required to be seeded have been brought to the finish grades as specified, they shall be thoroughly tilled to a depth of at least 6 inches by plowing, disking, harrowing or other approved methods until the condition of the soil is acceptable to the Architect. Work shall be performed only during period when beneficial results are likely to be obtained. When conditions are such by reason of drought, excessive moisture, or other factors that satisfactory results are not likely to be obtained, Work shall be stopped. Work shall be resumed only when desired results are likely to be obtained.
- D. Leveling: Any undulations or irregularities in the surface resulting from tillage, fertilizing or other operations shall be leveled with a float drag before seeding operations are begun.
- E. Fertilizing: Fertilizer shall be distributed uniformly at the rate previously specified per 1,000 square feet over the areas to be seeded and shall be incorporated into the soil to a depth of at least 3 to 4 inches by disking, harrowing or other approved methods. The incorporation of fertilizer may be a part of the tillage operation hereinbefore specified. Distribution by means of an approved seed drill equipped to sow seed and distribute fertilizer at the same time will not be accepted. Fertilizer shall be incorporated into the soil a minimum of 10 days before seed is planted.
- F. Inspection: A minimum of 48 hours prior notice must be given to the Construction Administrator before fertilizing may commence.
- G. Planting Time: All seeding Work shall be done between the dates of April 1 to May 15 for spring planting and from August 15 to October 15 for fall planting except as otherwise directed in writing by the Construction Administrator.

### **3.2 SEEDING**

- A. General: Prior to seeding, any previously prepared seedbed areas compacted or damaged by interim rains, traffic, or other cause shall be reworked to restore the ground condition previously specified.
- B. Rolling: Immediately after seeding, except for slopes 3 horizontal to 1 vertical and greater, the entire area shall be firmed with a roller not exceeding 90 pounds for each foot of roller width. Do not roll areas seeded with seed drills equipped with rollers.
- C. Inspection: A minimum of 48 hours prior notice must be given to the Construction Administrator before seeding may commence.

### **3.3 INSTALLATION OF EROSION CONTROL BLANKET**

- A. Blanket shall be rolled out in place blanket shall be applied without stretching and shall lie smoothly but loosely on the soil surface. The Contractor shall refer to the Drawings for details of fabric fastening.
- B. Application of the erosion control blanket shall occur the same day that the seeding of an area has taken place.
- C. Blanket shall completely cover all areas which are shown on the Drawings to be protected from erosion. After fabric installation, the entire area shall be rolled with a smooth roller weighing between 200 to 250 pounds. After rolling, the blanket shall be in intimate contact with the soil surface at all points. Any clods, etc., which hold the fabric off the ground should be removed. The fabric shall be forced down into any depressions and held there with a staple.

### **3.4 MAINTENANCE**

- A. General: The project areas shall be kept clean at all times and care shall be taken that use of the premises shall not be unduly hampered by Work herein specified. The intent of this Section is to ensure a healthy, well-established turf, and prevent soil erosion in compliance with the Land Disturbance Permit issued by the Missouri Department of Natural Resources.
- B. Responsibility: The Owner shall be responsible for maintenance of all seeded areas upon completion of seeding and general acceptance by the Construction Administrator.
- C. Damage: Damage to seeded areas during the project shall be repaired by the persons responsible for causing such damage.

### **3.5 GENERAL ACCEPTANCE**

- A. The Construction Administrator shall make an inspection of the seeded areas upon completion of seeding. Seeded areas shall be considered acceptable if the specified quantities of fertilizer & seed have been properly applied.

### **3.6 GUARANTEE**

- A. The Contractor is responsible for the proper application of the fertilizer & seeding. Watering, weeding, re-seeding, and mowing will be the responsibility of the Owner after proper application of the seed.

**END OF SECTION 322920**

## **SECTION 323216 – MECHANICALLY STABILIZED EARTH (MSE) WALL**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions, Division Specification sections, and the Approved DNR Land Disturbance Permit, apply to the Work specified in this Section.
- B. Section 312200 Earthwork

#### **1.2 REFERENCES**

- A. Precast Modular Stabilized Earth (MSE) Wall Units:
  - 1. ASTM C-33 Specification for Concrete Aggregates
  - 2. ASTM C-39 Test Method for Compressive Strength of Cylindrical Concrete Specimens
  - 3. ASTM C-94 Specification for Ready-Mixed Concrete
  - 4. ASTM C-138 Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete
  - 5. ASTM C-143 Test Method for Slump of Hydraulic-Cement Concrete
  - 6. ASTM C-260 Specification for Air-Entraining Admixtures for Concrete
  - 7. ASTM C-494 Specification for Chemical Admixtures for Concrete
  - 8. ASTM C1611 Test Method for Slump Flow of Self-Consolidating Concrete
  - 9. ASTM C-1776 Standard Specification for Wet-Cast Precast Modular Block Retaining Wall Units
- B. Drain Pipe
  - 1. ASTM D-3034 Standard Specification for Type PSM (Vinyl Chloride) (PVC) Sewer Pipe and Fittings
  - 2. ASTM F-2648 Standard Specification for 2- to 60-inch [50 to 1500 mm] Annular Corrugated Profile Wall Polyethylene (PE) Pipe and Fittings for Land Drainage Applications
- C. Geosynthetics
  - 1. ASTM D-4595 Tensile Properties of Geotextiles - Wide Width Strip
  - 2. ASTM D-4873 Standard Guide for Identification, Storage and Handling of Geosynthetics
  - 3. ASTM D-5262 Unconfined Tension Creep Behavior of Geosynthetics
  - 4. ASTM D-5321 Standard Test Method for Determining the Coefficient of Soil and Geosynthetic or Geosynthetic and Geosynthetic Friction by the Direct Shear Method
  - 5. ASTM D-5818 Standard Practice for Obtaining Samples of Geosynthetics from a Test Section for Assessment of Installation Damage
  - 6. ASTM D-5970 Standard Test Method for Deterioration of Geotextiles from Outdoor Exposure
  - 7. ASTM D-6637 Standard Test Method for Determining Tensile Properties of Geogrids by the Single- or Multi-Rib Tensile Method
  - 8. ASTM D-6638 Standard Test Method for Determining Connection Strength Between Geosynthetic Reinforcement and Segmental Concrete Units

9. ASTM D-6706 Standard Test Method for Measuring Geosynthetic Pullout Resistance in Soil

D. Engineering Design:

1. NCMA Design Manual for Segmental Retaining Walls, Current Edition
2. AASHTO LRFD Bridge Design Specifications, Current Edition
3. International Building Code (IBC), Current Edition
4. Minimum Design Loads for Buildings and Structures, ASCE 7, Current Edition

E. Soils:

1. ASTM D-422 Standard Test Method for Particle-Size Analysis of Soils
2. ASTM D-448 Standard Classification for Sizes of Aggregates for Road and Bridge Construction
3. ASTM D-698 Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/f<sup>3</sup>) (600 kN-m/m<sup>3</sup>)
4. ASTM D-1241 Standard Specification for Materials for Soil-Aggregate Subbase, Base and Surface Courses
5. ASTM D-1556 Standard Test Method for Density and Unit Weight of Soil in Place by the Sand Cone Method
6. ASTM D-1557 Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/f<sup>3</sup>) (2700 kN-m/m<sup>3</sup>)
7. ASTM D-2487 Standard Classification of Soils for Engineering Purposes (Unified Soil Classification System)
8. ASTM D-3080 Standard Test Method for Direct Shear Test of Soils Under Consolidated Drained Conditions
9. ASTM D-4318 Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils
10. ASTM D-4767 Test Method for Consolidated-Undrained Triaxial Compression Test for Cohesive Soils
11. ASTM D-6938 Standard Test Methods for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)
12. ASTM D-G51 Standard Test Method for Measuring pH of Soil for Use in Corrosion Testing

### 1.3 DESCRIPTION OF WORK

- A. Mechanically stabilized earth (MSE) wall work shall consist of furnishing materials, labor, equipment, and supervision to install a MSE wall system in accordance with the plans and specifications and in reasonably close conformity with the lines, grades, design, and dimensions shown on the plans or established by the Owner.
- B. MSE wall systems shall be built in accordance with Section 720 of the St. Louis County Standard Specifications for Road and Bridge Construction and these plans. In the case of a discrepancy between these documents, the issue shall be immediately brought to the attention of the Owner for resolution.
- C. Measurement of mechanically stabilized earth wall systems will be made to the nearest square foot. The quantity to be paid will be measured from the wall outline as shown on the plans as

listed with each wall elevation. No adjustments in the measured quantity will be permitted for additional wall area required to meet the minimum wall elevations shown on the plans. Final measurement will not be made except for authorized changes during construction or where appreciable errors are found in the contract quantity. The revision or correction will be computed and added to or deducted from the contract quantity.

- D. Payment for MSE walls shall include all materials, labor, equipment, supervision, and Delegated Design necessary to install the MSE walls complete. The following shall be considered incidental to the MSE wall construction and no direct payment shall be made: excavation behind the face of the wall including for the leveling pad and ground improvement, ground improvement, leveling pad, wall units, cap units or capstones, drainage system (to discharge), drainage aggregate, select granular backfill, better aggregate material, MoDOT Type 5 aggregate backfill (where specified), soil reinforcement, separation geotextile, pipe collars, grade beams, etc.

## **1.4 SUBMITTALS**

- A. The Contractor shall provide MSE wall designs (Delegated Design) and shop drawings for each wall, signed and sealed by a Registered Professional Engineer in the State of Missouri.
- B. Submit gradation reports for aggregates used for the wall leveling pad, unit / drainage fill and for select reinforced fill if required in the final approved engineered wall design.

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. MSE walls are to be VERSA-LOK Square Foot wall system, Tensar Mesa Retaining wall system, or Rockwood Retaining wall Classic 8 system, 8"x18"x12", spilt-face block, natural color, as approved by the Owner.
- B. Select granular backfill shall meet the requirements of Section 1010 with an angle of internal friction of no less than 34 degrees. Laboratory shear testing of material will not be required whenever 80 percent of the particle sizes are greater than 3/4 inch or whenever backfill material consists entirely of crushed limestone. Rapidly draining backfill shall meet the requirements for Aggregate for Drainage per Section 1009.
- C. Material for leveling pad shall consist of compacted sand, gravel, or combination thereof (USCS soil types GP, GW, SP, & SW) and shall be a minimum of 6 inches in depth. Lean concrete with a strength of 200-300 psi and 3 inches thick maximum may also be used as a leveling pad material if approved by the Owner. The leveling pad should extend laterally at least a distance of 6 inches from the toe and heel of the lowermost SRW unit.
- D. Soil reinforcement shall be part of the MSE wall structural system developed and tested by the manufacturer. The soil reinforcement length shall be calculated based on external and internal stability considerations accounting for all special load conditions and all design criteria. Soil reinforcement length shall be as a minimum approximately 70% of the wall height (as measured from the top of the leveling pad to the top of the wall). The soil reinforcement length shall be uniform throughout the entire height of the wall. The upper two layers of soil reinforcement shall be extended 3-ft beyond the lower layers.
- E. Separation geotextile, meeting the requirements of Section 1011, shall be placed between the select granular backfill and the backfill being retained by the MSE system.

- F. Topmost layer of soil reinforcement shall be fully covered with a minimum of 3-inches of select granular backfill, as approved by the wall manufacturer, before placement of the Separation Geotextile.

## **2.2 DRAINAGE SYSTEMS**

- A. Drainage system shall include perforated pipes located at the base of the wall and at the basal interface between the reinforced backfill and the retained backfill as detailed on the approved shop drawings. Drainage system shall include non-perforated lateral drain pipe outlets spaced at 40-ft maximum along the length of the wall. Drainage system shall include non-perforated pipe outlets at the low points of the system.
- B. Drainage system pipe minimum 4" diameter perforated PVC or PE pipe. All pipe shall be sloped to drain, 1% minimum slope unless shown otherwise on approved shop drawings.
- C. All pipe outlets shall have rodent screens installed.
- D. Drainage system shall be discharged to daylight. Discharge shall be to the face of the curb, a minimum of 12-inches from the exposed front of the MSE wall with no curb, or beyond the sloped embedment, unless approved otherwise by the Owner.
- E. Contractor shall modify the drain details as shown if it will improve flow as may be the case for stepped leveling pad and for an uneven ground line, if approved by the Owner.
- F. Where drainage system cannot drain to the bottom of the wall and reinforced backfill due to adjacent grades, Delegated Design shall provide for maximum positive drainage of backfill and shall account for induced hydrostatic loads and affects on bearing capacity. Low permeability granular material may be used as backfill below elevated drainage system pipes, if approved by the Owner and include in the Delegated Design.
- G. Storm pipe systems shall be kept separate from MSE wall drainage system.

## **2.3 MSE WALL DESIGNS (DELEGATED DESIGN)**

- A. The Contractor shall provide MSE wall designs (Delegated Design) and shop drawings for each wall, signed and sealed by a Registered Professional Engineer in the State of Missouri.
  - 1. Delegated Design of MSE walls shall coordinate with abutting improvements including walls, buildings, and stairwells. Construction efforts shall ensure loss of soil or backfill is prevented. Shop drawings shall include sufficient details to show proper coordination.
  - 2. The intersection of numbered MSE walls shall be made by interlocking courses in accordance with the manufacturer's recommendations. Course elevations shall be coordinated between intersecting MSE walls.
  - 3. Delegated Design of MSE walls shall coordinate with all embedded improvements within the reinforced backfill and additional zone of influence behind the wall. These improvements include rail/fence, guardrail, barriers, foundations, light standards, utility boxes, etc.
  - 4. No construction work shall commence prior to written approval of Delegated Designs and shop drawings by the Owner.
  - 5. No separate payment will be made for Delegated Designs and shop drawings but shall be considered incidental to the MSE wall costs.

- B. The Contractor shall show the following items on the design drawings and/or on the shop drawings.
1. The leveling pad shall be horizontal. Leveling pad length and step elevations shall be based on the wall manufacturer's recommendation. Top of leveling pad elevations shall not be higher than theoretical top of leveling pad elevations shown on these plans.
  2. Soil reinforcement material, length, and elevation.
  3. Range of acceptable slope excavation line angles.
  4. Drainage system details including pipe elevation, discharge locations, and discharge details.
  5. Details for railing/fence foundations at MSE walls.
- C. Design Specifications: 2002 AASHTO LFD (17th Ed.) Standard Specifications (Section 5, ASD Design)
- D. The factors of safety for external stability shall be 2.0 for overturning and 1.5 for sliding. For seismic design the factors of safety shall be 1.5 for overturning and 1.1 for sliding.
- E. Select Granular Backfill:
1. Actual  $\phi_r \geq 34^\circ$  for the select granular backfill (reinforced backfill and wedge area backfill).
  2. Design  $\phi_r = 34^\circ$  for the select granular backfill (reinforced backfill).
- F. Special Load Considerations:
1. Delegated Design of the walls shall account for traffic loads. Traffic loads shall be treated as uniform surcharge loads. The live load surcharge pressure shall be equal to not less than 2 feet of earth.
  2. Guardrails located within the reinforced backfill of a MSE wall shall be placed a minimum distance of 3.3 feet from the wall face and embedded a minimum of 5 feet below grade. Delegated Design of the wall shall account for partially or fully severed reinforcement layers by designing the surrounding reinforcement layers to carry the additional load which would have been carried by the severed reinforcements. The upper two rows of reinforcement shall be designed for an additional horizontal load of 300 pounds per linear foot of wall. Two rows of reinforcement (minimum) are required in the upper four feet of the wall.
  3. Delegated Design of the walls shall account for rail/fence height, embedment, and location. Rail loads shall be per building code. Fence loads shall account for fence material and wind loads. If directly mounted to the wall the upper 24-inches of the wall, at minimum, shall be engaged and additional mass may be required to satisfy structural design requirements. Offset installations shall be 3-ft minimum behind the face of the wall and shall engage at least one soil reinforcement within the upper 2-ft of the wall. Engineered post anchoring systems may be submitted for approval.
  4. Delegated Design of walls at the bioretention basin shall account for hydrostatic pressures. A minimum differential hydrostatic pressure equal to 3.3 feet of water shall be considered for design. This load shall be applied at the high-water level using the 100-year low flow blocked maximum computed water surface elevation. If rapidly draining backfill is not provided, Delegated Design shall account for possible rapid drawdown conditions.

## **PART 3 - EXECUTION**

### **3.1 EXCAVATION**

- A. Contractor shall excavate to the lines and grades shown on the construction drawings. The contractor shall be careful not to disturb the base beyond the lines indicated.
- B. Foundation soils shall be excavated as required for footing base / leveling pad dimensions shown on the construction drawings, or as required by the Delegated Design.
- C. Over-excavated areas shall be filled with additional concrete or mechanically compacted granular base.

### **3.2 GROUND IMPROVEMENT**

- A. This work shall consist of replacing the in situ soil below the MSE Walls as required by the Delegated Design of the MSE Walls or these plans. The soil shall be removed and replaced with well graded, MoDOT Type 5 Aggregate (See Specification Section 32 1123).
- B. The Ground Improvement shall extend laterally in all directions beyond the footing and reinforced backfill a distance equal to the depth of the Improvement as required by the Delegated Design of the MSE Walls or these plans. The completed Ground Improvement shall provide a net allowable bearing pressure or factored net bearing resistance as required by the Delegated Design of the MSE Walls.

### **3.3 GENERAL**

- A. Contractor shall construct the MSE Wall per the manufacturer's recommendations.
- B. Contractor shall construct the MSE Wall per the Delegated Design.
- C. Control water during construction to divert it away from wall excavation and away from the face of the wall.
- D. Final grade above and below the retaining wall shall provide for positive drainage and prevent ponding.
- E. Protect completed wall from other construction. Do not operate large equipment or store materials above the wall that exceed the design surcharge loads.

### **3.4 MANUFACTURER'S REPRESENTATION**

- A. A representative from the MSE Wall manufacturer shall be made available for consultation. Any additional work provisions made by the Contractor, relating to consultation with the manufacturer, will be included in payment under the provided pay items and no additional payment will be made

**END OF SECTION 323216**

## **SECTION 333100 – SEWER AND DRAINAGE CONSTRUCTION**

### **PART 1 GENERAL**

#### **1.01 SUMMARY**

- A. This Section includes all storm sewer pipe, flared end sections and precast area inlet, including materials of construction, excavation, sewer construction and backfill, concrete construction, protection and restoration of site, and miscellaneous requirements.

#### **1.02 RELATED REQUIREMENTS**

- A. Section 312200 - Earthwork

#### **1.03 REFERENCE STANDARDS**

- A. Metropolitan St. Louis Sewer District (MSD) Standard Construction Specifications for Sewers and Drainage Facilities, 2009, and the most recent Amendments hereinafter referred to as the “MSD Standard Specifications”. Should a conflict between the Contract Documents and the MSD Standard Specifications arise, these Contract Documents shall govern.
- B. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- C. Missouri Highway and Transportation Commission (MHTC) Missouri Standard Specifications for Highway Construction, 2025.

#### **1.04 SUBMITTALS**

- A. Submit as specified in Division 01.
- B. Submit the following for acceptance prior to fabrication:
  - 1. Pipe and joint details.
  - 2. Flared end section details.
  - 3. Precast area inlet details.
  - 4. Special, fitting and coupling details.
  - 5. Laying and installation schedule.
  - 6. Certificates and Affidavits:
    - a. Submit as specified in Division 01.
    - b. Furnish the following prior to shipment:
      - 1) Affidavit of compliance with applicable standard.
- C. Sheet Manufacturer's Certified Analysis. The manufacturer of each brand shall file with Construction and Materials a certificate setting forth the name or brand of metal to be furnished, the specified chemical composition and a typical or average analysis showing the percent of carbon, phosphorus, manganese, sulfur and silicon. The certificate shall be sworn to, for the manufacturer, by a person having legal authority to bind the company.
- D. Sheet Manufacturer's Guarantee. The manufacturer of the steel sheet shall submit with the certified analysis a guarantee providing that all metal furnished is in accordance with the specification requirements, shall bear a suitable identification brand or mark and shall be

replaced without cost to the Commission when not in accordance with the specified analysis, sheet thickness or coating. The guarantee shall be so worded as to remain in effect as long as the manufacturer continues to furnish material. The manufacturer shall conduct such tests and measurements as necessary to ensure the material produced is in accordance with all specification requirements. These tests and measurements shall be identified by the identification symbols or code used on the sheet in a manner that will permit the manufacturer to produce specific reports showing test results representative of specific lots of steel sheet. Copies of reports of these tests shall be kept on file and shall be submitted to the engineer upon request. The brand shall be removed or obliterated by the manufacturer on all material where control tests, as outlined herein, do not show conformance to this specification.

### **1.05 QUALITY ASSURANCE**

- A. Perform sewer construction work in accordance with MSD Standard Specifications.
- B. Manufacturer:
  - 1. Experienced in the design, manufacture and commercial supplying of the specific material.
  - 2. Experienced in the design, manufacture, and commercial supplying of the specific size of pipe.
  - 3. Experienced in the design, manufacture, and commercial supplying of the specific size of flared end section.
- C. Certify to above experience requirements.

### **1.06 FIELD MEASUREMENTS**

- A. Verify field measurements and elevations are as indicated on the Drawings.

### **1.07 PROJECT CONDITIONS**

- A. Site Information: Perform site survey, research public utility records, and verify existing utility locations.
- B. Verify location and elevation of existing sewers and structures when connecting new work with existing. Notify Owner immediately when existing conditions differ from those shown on plans, and to what extent work may be affected.

## **PART 2 PRODUCTS**

### **2.01 PIPE CULVERTS**

- A. The galvanized steel coils shall conform to the applicable requirements of AASHTO M 218 or ASTM A929.
- B. The CMP shall be manufactured in accordance with the applicable requirements of AASHTO M 36 or ASTM A760. The pipe sizes, gauges and corrugations shall be as shown on the project plans.
- C. Coupling bands for the CMP shall be made of the same base metal and coatings as the CMP to a minimum of 18 gauge.
- D. Ends of the CMP are rerolled with annular corrugations for proper indexing.
- E. Connection fasteners will be provided.

- F. Resistance Spot Welded Seams. A longitudinal seam will not be permitted on the corner radius or invert of pipe arch.

## **2.02 FLARED END SECTIONS**

- A. Steel sheet shall be certifiable in accordance with AASHTO M 218 or AASHTO M 274. Finished steel sheet shall be free from injurious defects such as blisters, flux and uncoated spots.
- B. Metal end sections shall be in accordance with the requirements for base metal, coating, fabrication, sampling, accepted brands of metal, sheet manufacturer's certified analysis, sheet manufacturer's guarantee, sheet thickness, workmanship and repair of coating. The sections shall conform to the shape, dimensions and sheet thicknesses shown on the plans, and shall be manufactured as integral units or so the sections may be readily assembled in place.
- C. Bands. Formed bands may be used on pipe with annular corrugations and helically corrugated pipe with reformed ends. Bands shall be formed with a minimum of two corrugations matching the profile of the pipes being joined together. The corrugations shall be spaced to provide seating in the second corrugation of each pipe and without creating more than 1/2-inch annular space between the pipe ends when joined together.

## **2.03 PRECAST AREA INLET**

- A. Precast manhole with cast-in-place concrete base or precast concrete base shall conform to ASTM C478 and conform to the drawings.
- B. Frames and covers shall be per MSD requirements. Set frame level to proper grade on full bed of mortar.
- C. All pipe connections to manholes and structures shall be via MSD approved A-Lok watertight seals or Z-Lok depending on angle.
- D. Form invert channel with 4,000 psi Type II Portland cement concrete.
- E. Make changes in direction of flow with smooth curves of as large a radius as size of manhole permits.
- F. Make changes in size and grade smoothly and uniformly.
- G. Slope floor of manhole adjacent to channels as indicated.
- H. Finish channel bottom smoothly without roughness, irregularity, or pockets.
- I. Apply coal-tar coating to exterior walls on all manholes from base to finish grade.
- J. Apply coating in two coats to minimum 12-mil dry-film thickness per coat.
- K. Mac Wrap all manhole structures per ASTM C877 (Type II) requirements.

## **PART 3 EXECUTION**

### **3.01 EXCAVATION AND BACKFILLING**

- A. EXCAVATION Sections A through G and Standard Details of Sewer Construction Sheets 1 through 72 in the MSD Standard Specifications apply.
- B. Perform all excavation, trenching and backfilling in accordance with Section 311000 – Site Clearing and Section 312200 - Earthwork.

### **3.02 PIPE SEWER CONSTRUCTION**

- A. Install pipe, fittings, and accessories in accordance with the requirements of the MSD Standard Specifications; Part 4 - PIPE SEWER CONSTRUCTION Sections A through H and Standard Details of Sewer Construction Sheets 1 through 72.

**END OF SECTION 333100**

## **APPENDIX A**

### **Land Disturbance Permit**

August 1, 2022

Leanne Mattern  
Office of Administration, Facilities Management Design & Construction  
Harry S. Truman SOB,  
301 West High Street, Room 730  
Jefferson City, MO 65102

Dear Permittee:

Pursuant to the Federal Water Pollution Control Act, under the authority granted to the State of Missouri and in compliance with the Missouri Clean Water Law, we have issued and are enclosing your Missouri State Operating Permit for Office of Administration, MOR-100038.

Please read and review your permit and attached Standard Conditions. They contain important information on site management and reporting requirements. Quarterly reports required by this report must be submitted through our eDMR system.

This permit may include requirements with which you may not be familiar. If you would like The Department of Natural Resources to meet with you to discuss how to satisfy the permit requirements, an appointment can be set up by contacting the permit writer at 573-526-1139. These visits are called Compliance Assistance Visits and focus on explaining the requirements to the permit holder.

This permit is both your Federal NPDES Permit and your new Missouri State Operating Permit and replaces all previous State Operating Permits issued for this facility under this permit number. In all future correspondence regarding this facility, please refer to your State Operating Permit number and facility name as shown on page one of the permit.


If you were adversely affected by this decision, you may be entitled to an appeal before the Administrative Hearing Commission (AHC) pursuant to 10 CSR 20-1.020 and 10 CSR 20-6.020; RSMo Section 621.250, 640.013, and 644.051.6. To appeal, you must file a petition with the AHC within thirty days after the date this decision was mailed or the date it was delivered, whichever date was earlier. If any such petition is sent by registered mail or certified mail, it will be deemed filed on the date it is mailed; if it is sent by any method other than registered mail or certified mail, it will be deemed filed on the date it is received by the AHC. Contact information for the AHC is: Administrative Hearing Commission, Truman State Office Building, Room 640, 301 W. High Street, P.O. Box 1557, Jefferson City, Missouri 65102, phone: (573) 751-2422, fax: (573) 751-5018; website: <http://ahc.mo.gov/>.

Office of Administration  
Page Two

Please be aware that this facility may also be subject to any applicable county or other local ordinances or restrictions. If you have any questions concerning this permit, please do not hesitate to contact the Water Protection Program at P.O. Box 176, Jefferson City, MO 65102, 573-522-4502.

Sincerely,

WATER PROTECTION PROGRAM

A handwritten signature in black ink that reads "Chris Wieberg". The signature is written in a cursive, flowing style.

Chris Wieberg  
Director

CW/qs

Enclosure

STATE OF MISSOURI  
DEPARTMENT OF NATURAL RESOURCES  
MISSOURI CLEAN WATER COMMISSION



## MISSOURI STATE OPERATING PERMIT

### General Operating Permit

In compliance with the Missouri Clean Water Law, (Chapter 644 R.S. Mo as amended, hereinafter, the Law), and the Federal Water Pollution Control Act (Public Law 92-500, 92nd Congress) as amended,

|                                |                                                                                                           |
|--------------------------------|-----------------------------------------------------------------------------------------------------------|
| Permit No                      | MOR100038                                                                                                 |
| Owner:                         | OA-Facilities Mgmt, Design, and Construc                                                                  |
| Address:                       | 301 West High Street, Hst Rm 370<br>Jefferson City, MO 65101                                              |
| Continuing Authority:          | OA Facilities Mgmt Design Construction<br>301 West High St.<br>HST SOB Rm 730<br>Jefferson City, MO 65102 |
| Facility Name:                 | Office of Administration                                                                                  |
| Facility Address:              | OA-FMDC, PO Box 809 301 W High street<br>JEFFERSON CITY, MO 65102                                         |
| Legal Description:             | Land Grant 02681, Cole County                                                                             |
| UTM Coordinates:               | 571840.000/4270368.000                                                                                    |
| Receiving Stream:              | Tributary to Wears Creek (U)                                                                              |
| First Classified Stream - ID#: | 100K Extent-Remaining Streams (C) 3960.00                                                                 |
| USGS# and Sub Watershed#:      | 10300102 - 1304                                                                                           |

is authorized to discharge from the facility described herein, in accordance with the effluent limitations and monitoring requirements as set forth herein.

### **FACILITY DESCRIPTION** All Outfalls SIC #1629

All Outfalls - Construction or land disturbance activity (e.g., clearing, grubbing, excavating, grading, filling and other activity that results in the destruction of the root zone and/or land disturbance activity that is reasonably certain to cause pollution of waters of the state)

Issued to a city, county, state or federal agency, other governmental jurisdiction, or other private area-wide projects as determined by the Department on a case-by-case basis

This permit authorizes only wastewater, including storm water, discharges under the Missouri Clean Water Law and the National Pollutant Discharge Elimination System, it does not apply to other regulated areas. This permit may be appealed in accordance with RSMo Section 644.051.6 and 621.250, 10 CSR 20-6.020, and 10 CSR 20-1.020.

August 01, 2022

Issue Date

Chris Wieberg, Director  
Water Protection Program

July 04, 2027

Expiration Date

## **I. APPLICABILITY**

### **A. Permit Coverage and Authorized Discharges**

1. This Missouri State Operating Permit (permit) authorizes the discharge of stormwater and certain non-stormwater discharges from land disturbance sites that disturb one or more acres, or disturb less than one acre when part of a larger common plan of development or sale that will disturb a cumulative total of one or more acres over the life of the project.

A Missouri State Operating Permit must be issued before any site vegetation is removed or the site disturbed. Any site owner/operator subject to these requirements for stormwater discharges and who disturbs land prior to permit issuance from the Missouri Department of Natural Resources (Department) is in violation of both State regulations per 10 CSR 20-6.200(1)(A) and Federal regulations per 40 CFR 122.26. The owner/operator of this permit is responsible for compliance with this permit [10 CSR 20-6.200 (3)(B)].

2. This general permit is issued to a city, county, state or federal agency, other governmental jurisdiction, or other private area-wide projects as determined by the Department on a case-by-case basis, for land disturbance projects performed by or under contract to the permittee.
3. This permit authorizes stormwater discharges from land disturbance support activities (e.g., equipment staging yards, material storage areas, excavated material disposal areas, borrow areas, concrete, or asphalt batch plants) provided appropriate stormwater controls are designed, installed, and maintained and the following conditions are met and addressed in the Stormwater Pollution Prevention Plan (SWPPP). The permittee is responsible for compliance with this permit for any stormwater discharges from construction support activity.
  - (a) The support activity is directly related to the construction site required to have permit coverage for stormwater discharges;
  - (b) The support activity is not a commercial operation or serve multiple unrelated construction sites;
  - (c) The support activity does not continue to operate beyond the completion of the construction activity at the project it supports;
  - (d) Sediment and erosion controls are implemented in accordance with the conditions of this permit; and
  - (e) The support activity is strictly stormwater discharges or non-stormwater discharges listed in PART I, APPLICABILITY, Condition A.4. Support activities which discharge process water shall apply for separate coverage (e.g., a concrete batch plant discharging process water shall be covered under a MOG49).
4. This permit authorizes non-stormwater discharges associated with your construction activity from the following activities provided that these discharges are treated by appropriate Best Management Practices (BMPs) where applicable and addressed in the permittee's site specific SWPPP required by this general permit:
  - (a) Discharges from emergency fire-fighting activities;
  - (b) Hydrant flushing and water line flushing, provided the discharged water is managed to avoid instream water quality impacts;
  - (c) Landscape watering, including to establish vegetation;
  - (d) Water used to control dust;
  - (e) Waters used to rinse vehicles and equipment, provided there is no discharge of soaps, solvents, or detergents used for such purposes;
  - (f) External building washdown, provided soaps, solvents, and detergents are not used, and external surfaces do not contain hazardous substances (e.g., paint or caulk containing polychlorinated biphenyls (PCBs))
  - (g) Pavement wash waters, provided spills or leaks of toxic or hazardous substances have not occurred (unless all spill material has been removed) and where soaps, solvents, and detergents are not used. Directing pavement wash waters directly into any water of the state, storm drain inlet, or stormwater conveyance (constructed or natural site drainage features), unless the conveyance is connected to an effective control, is prohibited;
  - (h) Uncontaminated air conditioning or compressor condensate;
  - (i) Uncontaminated, non-turbid discharges of ground water or spring water;
  - (j) Foundation or footing drains where flows are not contaminated with process materials; and
  - (k) Uncontaminated construction dewatering water discharged in accordance with requirements found in this permit for specific dewatering activities.

## **B. Permit Restrictions and Limitations**

1. This permit does not authorize the discharge of process wastewaters, treated or otherwise.
2. For sites operating within the watershed of any Outstanding National Resource Water (which includes the Ozark National Riverways and the National Wild and Scenic Rivers System), sites that discharge to an Outstanding State Resource Water, or facilities located within the watershed of an impaired water as designated in the Clean Water Act (CWA) Section 303(d) list with an impairment for sedimentation/siltation:
  - (a) This permit authorizes stormwater discharge provided no degradation of water quality occurs due to discharges from the permitted facility per 10 CSR 20-7.031(3)(C).
  - (b) A site with a discharge found to be causing degradation or contributing to an impairment by discharging a pollutant of concern, during an inspection or through complaint investigations, may be required to become a no discharge facility or obtain a site-specific permit with more stringent monitoring and SWPPP requirements.
3. This permit does not allow placement of fill material into any stream or wetland, alteration of a stream channel, or obstruction of stream flow unless the appropriate CWA Section 404 permitting authority provides approval for such actions or determines such actions are exempt from Section 404 jurisdiction. Additionally, this permit does not authorize placement of fill in floodplains unless approved or determined exempt by appropriate federal and/or state floodplain development authorities.
4. This operating permit does not affect, remove, or replace any requirement of the National Environmental Policy Act; the Endangered Species Act; the National Historic Preservation Act; the Comprehensive Environmental Response, Compensation and Liability Act; the Resource Conservation and Recovery Act; or any other relevant acts. Determination of applicability to the above mentioned acts is the responsibility of the permittee. Additionally, this permit does not establish terms and conditions for runoff resulting from silvicultural activities listed in Section 402(l)(3)(a) of the Clean Water Act.
5. Compliance with all requirements in this permit does not supersede any requirement for obtaining project approval from an established local authority nor remove liability for compliance with county and other local ordinances.
6. The Department may require any facility or site authorized by a general permit to apply for a site-specific permit [10 CSR 20-6.010(13)(C)].
7. If a facility or site covered under a current general permit desires to apply for a site-specific permit, the facility or site may do so by contacting the Department for application requirements and procedures.
8. Any discharges not expressly authorized in this permit and not clearly disclosed in the permit application cannot become authorized or shielded from liability under CWA section 402(k) or Section 644.051.16, RSMo, by disclosure to EPA, state, or local authorities after issuance of this permit via any means, including any other permit applications, funding applications, the SWPPP, discharge monitoring reporting, or during an inspection. Discharges at the facility not expressly authorized by this permit must be covered by another permit, be exempt from permitting, or be authorized through some other method.

## **II. EXEMPTIONS FROM PERMIT REQUIREMENTS**

1. Sites that discharge all stormwater runoff directly to a combined sewer system (as defined in 40 CFR 122.26 and 40 CFR 35.2005) connecting to a publicly owned treatment works which has consented to receive such a discharge are exempt from Department stormwater permit requirements.
2. Land disturbance activities that disturb less than one (1) acre of total land area which are not part of a common plan or sale where water quality standards are not exceeded are exempt from Department stormwater permit requirements.

3. Oil and gas related activities as listed in 40 CFR 122.26(a)(2)(ii) where water quality standards are not exceeded are exempt from Department stormwater permit requirements.
4. Linear, strip, or ribbon construction or maintenance operations meeting one (1) of the following criteria are exempt from Department stormwater permit requirements:
  - (a) Grading of existing dirt or gravel roads which does not increase the runoff coefficient and the addition of an impermeable surface over an existing dirt or gravel road;
  - (b) Cleaning or routine maintenance of roadside ditches, sewers, waterlines, pipelines, utility lines, or similar facilities;
  - (c) Trenches two (2) feet in width or less; or
  - (d) Emergency repair or replacement of existing facilities as long as BMPs are employed during the emergency repair.

### **III. REQUIREMENTS**

1. The permittee shall post a public notification sign at the main entrance to the site, or a publically visible location, with the specific MOR100 permit number. The public notification sign must be visible from the public road that provides access to the site's main entrance. An alternate location is acceptable provided the public can see it and it is noted in the SWPPP. The public notification sign must remain posted at the site until the site is finalized.
2. The permittee shall be responsible for notifying the land owner and each contractor or entity (including utility crews and city employees or their agents) who will perform work at the site of the existence of the SWPPP and what actions or precautions shall be taken while on site to minimize the potential for erosion and the potential for damaging any BMP. The permittee is responsible for any damage a subcontractor may do to established BMPs and any subsequent water quality violation resulting from the damage.
3. Ensure the design, installation, and maintenance of effective erosion and sediment controls to minimize the discharge of pollutants. At a minimum, such controls must be designed, installed, and maintained to:
  - (a) Control stormwater volume, velocity, and peak flow rates to minimize soil erosion;
  - (b) Control stormwater discharges, including both peak flow rates and total stormwater volume, to minimize erosion at outlets and to minimize downstream channel and stream bank erosion and scour;
  - (c) Minimize the amount of exposed soil during construction activity;
  - (d) Minimize the disturbance of steep slopes;
  - (e) Minimize sediment discharges from the site. Address factors such as:
    - 1) The amount, frequency, intensity, and duration of precipitation;
    - 2) The nature of resulting stormwater runoff;
    - 3) Expected flow from impervious surfaces, slopes, and drainage features; and
    - 4) Soil characteristics, including the range of soil particle size expected to be present on the site.
  - (f) Provide and maintain natural buffers around surface waters as detailed in Part V. BMP REQUIREMENTS Condition 7, direct stormwater to vegetated areas to increase sediment removal and maximize stormwater infiltration and filtering, unless infeasible; and
  - (g) Minimize soil compaction and preserve topsoil where practicable.

A 2-year, 24-hour storm event can be determined for the project location using the National Oceanic and Atmospheric Administration's National Weather Service Atlas 14 which can be located at [https://hdsc.nws.noaa.gov/hdsc/pfds/pfds\\_map\\_cont.html](https://hdsc.nws.noaa.gov/hdsc/pfds/pfds_map_cont.html), or the permittee can determine local rainfall distribution for a 2-year, 24 hours storm event using multi-decade local high density rain gauge data, as approved by the Department.

4. BMPs for land disturbance [10 CSR 20-6.200(1)(D)2] are a schedule of activities, practices, or procedures that reduces the amount of soil available for transport or a device that reduces the amount of suspended solids in runoff before discharge to waters of the state. The term BMPs are also used to describe the sediment and erosion controls and other activities used to prevent stormwater pollution. BMPs are divided into two main categories: structural or non-structural; and they are also classified as temporary or permanent. Temporary BMPs may be added and removed as necessary with updates to the SWPPP as specified in the requirements below.

5. Installation of BMPs necessary to prevent soil erosion and sedimentation at the downgradient project boundary (e.g. buffers, perimeter controls, exit point controls, storm drain inlet protection) must be complete prior to the start of all phases of construction. By the time construction activity in any given portion of the site begins, downgradient BMPs must be installed and operational to control discharges from the initial site clearing, grading, excavating, and other earth-disturbing activities. Additional BMPs shall be installed as necessary throughout the life of the project.
6. All BMPs shall be maintained and remain in effective operating condition during the entire duration of the project, with repairs made within the timeframes specified elsewhere in this permit, until final stabilization has been achieved.
  - (a) Ensure BMPs are protected from activities that would reduce their effectiveness.
  - (b) Remove any sediment per the BMP manufacturer's instructions or before it has accumulated to one-half of the above-ground height of any BMP that collects sediment (i.e., silt fences, sediment traps, etc.)
  - (c) The project is considered to achieve final stabilization when Part V. BMP REQUIREMENTS, Condition 13 is met.
7. Minimize sediment trackout from the site and sediment transport onto roadways.
  - (a) Restrict vehicle traffic to designated exit points.
  - (b) Use appropriate stabilization techniques or BMPs at all points that exit onto paved roads or areas outside of the site.
  - (c) Use additional controls or BMPs to remove sediment from vehicle and equipment tires prior to exit from facility where necessary.
  - (d) Any sediment or debris that is tracked out past the exit pad or is deposited on a roadway after a precipitation event shall be removed by the shorter of either the same business day (for business days only), or by the end of the next business day if track-out occurs on a non-business day, and before predicted rain events. Remove the track-out sediment by sweeping, shoveling, or vacuuming these surfaces, or by using other similarly effective means of sediment removal. Sediment or debris tracked out on pavement or other impervious surfaces shall not be disposed of into any stormwater conveyance, storm drain inlet, or water of the state.
  - (e) Stormwater inlets susceptible to receiving sediment or other pollutants from the permitted land disturbance site shall have curb inlet protection. This may include inlets off the active area where track out from vehicles and equipment could impact the stormwater runoff to those inlets.
8. Concrete washout facilities shall be used to contain concrete waste from the activities onsite, unless the washout of trucks and equipment is managed properly at an off-site location.

The washout facility shall be managed to prevent solid and/or liquid waste from entering waters of the state by the following:

  - (a) Direct the wash water into leak-proof containers or pits designed so that no overflows can occur due to inadequate sizing or precipitation;
  - (b) Locate washout activities away from waters of the state, stormwater inlets, and/or stormwater conveyances where practicable. If not practicable, use BMPs to reduce risk of waste leaving the washout facility;
  - (c) Washout facilities shall be cleaned, or new facilities must be constructed and ready for use, once the washout is 75% full;
  - (d) Designate the washout area(s) and conduct such activities only in these areas.
  - (e) Ensure contractors are aware of the location, such as by marking the area(s) on the map or signage visible to the truck and/or equipment operators.
9. Good housekeeping practices shall be maintained at all times to keep waste from entering waters of the state.
  - (a) Provide solid and hazardous waste management practices, including providing trash containers, regular site cleanup for proper disposal of solid waste such as scrap building material, product/material shipping waste, food/beverage containers, spent structural BMPs;
  - (b) Provide containers and methods for proper disposal of waste paints, solvents, and cleaning compounds.
  - (c) Manage sanitary waste. Portable toilets shall be positioned so that they are secure and will not be tipped or knocked over and so that they are located away from waters of the state and stormwater inlets and stormwater conveyances.
  - (d) Ensure the storage of construction materials be kept away from drainage courses, stormwater conveyances, storm drain inlets, and low areas.

10. All fueling facilities present shall at all times adhere to applicable federal and state regulations concerning underground storage, above ground storage, and dispensers.
11. Any hazardous wastes that are generated onsite shall be managed, stored, and transported according to the provisions of the Missouri Hazardous Waste Laws and Regulations.
12. Store all paints, solvents, petroleum products, petroleum waste products, and storage containers (such as drums, cans, or cartons) so they are not exposed to stormwater or provide other prescribed BMPs (such as plastic lids and/or portable spill pans) to prevent the commingling of stormwater with container contents. Commingled water may not be discharged under this permit. Provide spill prevention, control, and countermeasures to contain the spill. Any containment system used to implement this requirement shall be constructed of materials compatible with the substances contained and shall prevent the contamination of groundwater.
13. Implement measures intended to prevent the spillage or loss of fluids, oil, grease, fuel, etc. from vehicles and equipment to thereby prevent the contamination of stormwater from these substances. This may include prevention measures such as, but not limited to, utilizing drip pans under vehicles and equipment stored outdoors, covering fueling areas, using dry clean-up methods, use of absorbents, and cleaning pavement surfaces to remove oil and grease.
14. Spills, Overflows, and Other Unauthorized Discharges.
  - (a) Any spill, overflow, or other discharge not specifically authorized in the permit above are unauthorized.
  - (b) Should an unauthorized discharge cause or permit any contaminants, other than sediment, or hazardous substance to discharge or enter waters of the state, the unauthorized discharge must be reported to the regional office as soon as practicable but no more than 24 hours after the discovery of the discharge. If the spill or overflow needs to be reported after normal business hours or on the weekend, the facility must call the Department's Environmental Emergency Response hotline at (573) 634-2436. Leaving a message on a Department staff member voice-mail does not satisfy this reporting requirement.
  - (c) A record of all spills shall be retained with the SWPPP and made available to the Department upon request.
  - (d) Other spills not reaching waters of the state must be cleaned up as soon as possible to prevent entrainment in stormwater but are not required to be reported to the Department.
15. The full implementation of this operating permit shall constitute compliance with all applicable federal and state statutes and regulations in accordance with RSMo 644.051.16 and the CWA §402(k); however, this permit may be reopened and modified or alternatively revoked and reissued to comply with any applicable effluent standard or limitation issued or approved under Clean Water Act §§ 301(b)(2)(C) and (D), 304(b)(2), and 307(a)(2) if the effluent standard or limitation so issued or approved contains different conditions or is otherwise more stringent than any effluent limitation in the permit or controls any pollutant not limited in the permit. This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, termination, notice of planned changes, or anticipated non-compliance does not stay any permit condition.

#### **IV. STORMWATER POLLUTION PREVENTION PLAN (SWPPP) MANAGEMENT REQUIREMENTS**

1. The primary requirement of this permit is the development and implementation of a SWPPP which incorporates site specific practices to best minimize the soil exposure, soil erosion, and the discharge of pollutants, including solids for each site covered under this permit.

The purpose of the SWPPP is to ensure the design, implementation, management, and maintenance of BMPs in order to prevent sediment and other pollutants in stormwater discharges associated with the land disturbance activities [40 CFR 122.44 (k)(4)] from entering waters of the state above established general and narrative criteria; compliance with Missouri Water Quality Standards; and compliance with the terms and conditions of this general permit.

- (a) **The SWPPP must be developed and implemented prior to conducting any land disturbance activities and must be specific to the land disturbance activities at the site.**
- (b) The permittee shall fully implement the provisions of the SWPPP required under this permit as a condition of this general permit throughout the term of the land disturbance project. Failure to develop, implement, and maintain a SWPPP may lead to immediate enforcement action.

- (c) The SWPPP shall be updated any time site conditions warrant adjustments to the project or BMPs.
  - (d) Either an electronic copy or a paper copy of the SWPPP, and any required reports, must be accessible to anyone on site at all times when land disturbance operations are in process or other operational activities that may affect the maintenance or integrity of the BMP structures and made available as specified under Part VIII. STANDARD PERMIT CONDITIONS, Condition 1 of this permit. The SWPPP shall be readily available upon request and should not be sent to the Department unless specifically requested
2. Failure to implement and maintain the BMPs chosen, which can be revised and updated, is a permit violation. The chosen BMPs will be the most reasonable and cost effective while also ensuring the highest quality water discharged attainable for the facility. Facilities with established SWPPPs and BMPs shall evaluate BMPs on a regular basis and change the BMPs as needed if there are BMP deficiencies.
3. The SWPPP must:
- (a) List and describe the location of all outfalls;
  - (b) List any allowable non-stormwater discharges occurring on site and where these discharges occur;
  - (c) Incorporate required practices identified below;
  - (d) Incorporate sediment and erosion control practices specific to site conditions;
  - (e) Discuss whether or not a 404 Permit is required for the project; and
  - (f) Name the person(s) responsible for inspection, operation, and maintenance of BMPs. The SWPPP shall list the names and describe the role of all owners/primary operators (such as general contractor, project manager) responsible for environmental or sediment and erosion control at the land disturbance site.
4. The SWPPP briefly must describe the nature of the land disturbance activity, including:
- (a) The function of the project (e.g., low density residential, shopping mall, highway, etc.);
  - (b) The intended sequence and timing of activities that disturb the soils at the site; and
  - (c) Estimates of the total area expected to be disturbed by excavation, grading, or other land disturbance support activities including off-site borrow and fill areas;
5. In order to identify the site, the SWPPP shall include site information including size in acres. The SWPPP shall have sufficient information to be of practical use to contractors and site construction workers to guide the installation and maintenance of BMPs.
6. The function of the SWPPP and the BMPs listed therein is to prevent or minimize pollution to waters of the state. A deficiency of a BMP means it was not effective in preventing or minimizing pollution of waters of the state.

The permittee shall select, install, use, operate and maintain appropriate BMPs for the permitted site. The following manuals are acceptable resources for the selection of appropriate BMPs.

*Developing Your Stormwater Pollution Prevention Plan: A Guide for Construction Sites*, (Document number EPA 833-R-06-004) published by the United States Environmental Protection Agency (USEPA) in May 2007. This manual as well as other information, including examples of construction SWPPPs, is available at the USEPA internet site at [https://www.epa.gov/sites/production/files/2015-10/documents/sw\\_swppp\\_guide.pdf](https://www.epa.gov/sites/production/files/2015-10/documents/sw_swppp_guide.pdf); and <https://www.epa.gov/npdes/developing-stormwater-pollution-prevention-plan-swppp>.

The latest version of *Protecting Water Quality: A field guide to erosion, sediment and stormwater best management practices for development sites in Missouri*, published by the Department. This manual is available at: <https://dnr.mo.gov/document-search/protecting-water-quality-field-guide>.

The permittee is not limited to the use of these guidance manuals. Other guidance publications may be used to select appropriate BMPs. However, all BMPs must be described and justified in the SWPPP. Although the use of these manuals or other resources is recommended and may be used for BMP selection, they do not supersede the conditions of this permit. They may be used to inform in the decision making process for BMP selection but they are not themselves part of the permit conditions.

The permittee may retain the SWPPP, inspection reports, and all other associated documents (including a copy of this permit) electronically pursuant to RSMo 432.255. The documents must be made available to all interested persons in either paper or electronic format as required by this permit and the permittee must remit a copy (electronic or otherwise) of the SWPPP and inspection reports to the Department upon request.

7. The SWPPP must contain a legible site map, multiple maps if necessary, identifying:
  - (a) Site boundaries of the property;
  - (b) Locations of all waters of the state (including wetlands) within the site and half a mile downstream of the site's outfalls;
  - (c) Location of all outfalls;
  - (d) Direction(s) of stormwater flow (use arrows) and approximate slopes before and after grading activities;
  - (e) Areas of soil disturbance and areas that will not be disturbed (or a statement that all areas of the site will be disturbed unless otherwise noted);
  - (f) Location of structural and non-structural BMPs, including natural buffer areas, identified in the SWPPP;
  - (g) Locations where stabilization practices are expected to occur;
  - (h) Locations of on-site and off-site material, waste, borrow, or equipment storage areas and stockpiles;
  - (i) Designated points where vehicles will exit the site;
  - (j) Location of stormwater inlets and conveyances including ditches, pipes, man-made conduits, and swales; and
  - (k) Areas where final stabilization has been achieved.
8. An individual shall be designated by the permittee as the environmental lead. This environmental lead shall have knowledge in erosion, sediment, and stormwater control principles, knowledge of the permit, and the site's SWPPP. The environmental lead shall ensure all personnel and contractors understand any requirements of this permit may be affected by the work they are doing. The environmental lead or designated inspector(s) knowledgeable in erosion, sediment, and stormwater control principles shall inspect all structures that function to prevent or minimize pollution of waters of the state.
9. Throughout coverage under this permit, the permittee shall amend and update the SWPPP as appropriate during the term of the land disturbance activity. All SWPPP modifications shall be signed and dated. The permittee shall amend the SWPPP to incorporate any significant site condition changes which impact the nature and condition of stormwater discharges. At a minimum, these changes include whenever the:
  - (a) Location, design, operation, or maintenance of BMPs is changed;
  - (b) Design of the construction project is changed that could significantly affect the quality of the stormwater discharges;
  - (c) The permittee's inspections indicate deficiencies in the SWPPP or any BMP;
  - (d) Department notifies the permittee in writing of deficiencies in the SWPPP;
  - (e) SWPPP is determined to be ineffective in minimizing or controlling erosion and sedimentation (e.g., there is visual evidence of excessive site erosion or sediment deposits in streams, lakes, or downstream waterways, sediment or other wastes off site); and/or
  - (f) Department determines violations of water quality standards may occur or have occurred.
10. Site Inspections: The environmental lead, or a designated inspector, shall conduct regularly scheduled inspections. These inspections shall be conducted by a qualified person, one who is responsible for environmental matters at the site, or a person trained by and directly supervised by the person responsible for environmental matters at the site. Site inspections shall include, at a minimum, the following:
  - (a) For disturbed areas that have not achieved final stabilization, all installed BMPs and other pollution control measures shall be inspected to ensure they are properly installed, appear to be operational, and are working as intended to minimize the discharge of pollutants.
  - (b) For areas on site that have achieved either temporary or final stabilization, while at the same time active construction continues on other areas, ensure that all stabilization measures are properly installed, appear to be operational, and are working as intended to minimize the discharge of pollutants.
  - (c) Inspect all material, waste, borrow, and equipment storage and maintenance areas that are covered by this permit. Inspect for conditions that could lead to spills, leaks, or other accumulations of pollutants on the site.
  - (d) Inspect all areas where stormwater typically flows within the site, including drainage ways designed to divert, convey, and/or treat stormwater.

- (e) All stormwater outfalls shall be inspected for evidence of erosion, sediment deposition, or impacts to the receiving stream. If a discharge is occurring during an inspection, the inspector must observe and document the visual quality of the discharge and take note of the characteristics of the stormwater discharge, including turbidity, color; odor; floating, settled, or suspended solids; foam; oil sheen; and other indicators of stormwater pollutants.
  - (f) When practicable the receiving stream shall also be inspected for a minimum of 50 feet downstream of the outfall.
  - (g) The perimeter of the site shall be inspected for evidence of BMP failure to ensure concentrated flow does not develop a new outfall.
  - (h) The SWPPP must explain how the environmental lead will be notified when stormwater runoff occurs.
11. Inspection Frequency: All BMPs must be inspected in accordance to one of the schedules listed below. The inspection frequency shall be documented in the SWPPP, and any changes to the frequency of inspections, including switching between the options listed below, must be documented on the inspection form:
- (a) At least once every seven (7) calendar days and within 48 hours after any storm event equal to or greater than a 2-year, 24-hour storm has ceased during a normal work day or within 72 hours if the rain event ceases during a non-work day such as a weekend or holiday; or
  - (b) Once every 14 calendar days and within 24 hours of the occurrence of a storm event of 0.25 inches of precipitation or greater, or the occurrence of runoff from snowmelt. To determine if a storm event of 0.25 inches or greater has occurred on the site, the permittee shall either keep a properly maintained rain gauge on site, or obtain the storm event information from a weather station near the site location.
    - 1) Inspections are only required during the project's normal working hours.
    - 2) An inspection must be conducted within 24 hours of a storm event which has produced 0.25 inches. The inspection shall be conducted within 24 hours of the event end, or within 72 hours if the rain event ceases during a non-work day such as a weekend or holiday.
    - 3) If it is elected to inspect every 14 calendar days and there is a storm event at the site that continues for multiple days, and each day of the storm produces 0.25 inches or more of rain, the permittee shall conduct an inspection within 24 hours of the end of the storm or within 72 hours if the rain event ceases during a non-work day such as a weekend or holiday.
  - (c) Areas on site that have achieved stabilization, while at the same time active construction continues on other areas, may reduce inspection frequency to monthly, for those stabilized areas, if the following conditions exist:
    - 1) For areas where disturbed portions have undergone temporary stabilization, inspections shall occur at least once a month while stabilized and when re-disturbed shall follow either frequency outlined in (a),(b), or (c) above.
    - 2) Areas on site that have achieved final stabilization must be inspected at least once per month until the permit is terminated.
  - (d) If construction activities are suspended due to frozen conditions, the permittee may temporarily reduce site inspections to monthly until thawing conditions begin to occur if all of the following are met:
    - 1) Land disturbances have been suspended; and
    - 2) All disturbed areas of the site have been stabilized in accordance with Part V. BMP REQUIREMENTS, Condition 13.
    - 3) The change shall be noted in the SWPPP.
  - (e) Any basin dewatering shall be inspected daily when discharge is occurring. The discharge shall be observed and dewatering activities shall be ceased immediately if the receiving stream is being impacted. These inspections shall be noted on a log or on the inspection report.
- If weather conditions or other issues prevent correction of BMPs within seven calendar days, the reasons for the delay must be documented (including pictures), and there must be a narrative explaining why the work cannot be accomplished within the seven day time period. The documentation must be filed with the regular inspection reports. The corrections shall be made as soon as weather conditions or other issues allow.
12. Site Inspection Reports: A log of each inspection and/or copy of the inspection report shall be kept readily accessible and must be made available upon request by the Department. Electronic logs are acceptable as long as reports can be provided within 24 hours. If inspection reports are kept off site, the SWPPP must indicate where they are stored. The inspection report shall be signed by the environmental lead or designated inspector (electronically or otherwise).
- (a) The inspection report is to include the following minimum information:
    - 1) Inspector's name and title.
    - 2) Date and time of inspection.
    - 3) Observations relative to the effectiveness of the BMPs and stabilization measures. The following must be

documented:

- a. Whether BMPs are installed, operational, and working as intended;
- b. Whether any new or modified stormwater controls are needed;
- c. Facilities examined for conditions that could lead to spill or leak;
- d. Outfalls examined for visual signs of erosion or sedimentation at outfalls. Excessive erosion or sedimentation may be due to BMP failure or insufficiency. Response to observations should be addressed in the inspection report.

4) Corrective actions taken or necessary to correct the observed problem.

5) Listing of areas where land disturbance operations have permanently or temporarily stopped.

13. Any structural or maintenance deficiencies for BMPs or stabilization measures shall be documented and corrected as soon as possible but no more than seven (7) calendar days after the inspection.

(a) Corrective action documentation shall be stored with the associated site inspection report.

(b) Immediately take all reasonable steps to address the condition, including cleaning up any contaminated surfaces so the material will not discharge in subsequent storm events.

(c) If weather conditions or other issues prevent correction of BMPs within seven calendar days, the reasons for the delay must be documented (this may include pictures) and there must be a narrative explaining why the work cannot be accomplished within the seven day time period. The permittee shall correct the problem as soon as weather conditions or issues allow.

(d) Corrective actions may be required by the Department. The permittee must comply with any corrective actions required by the Department as a result of permit violations found during an inspection.

## **V. BMP REQUIREMENTS**

1. The information, practices, and BMP requirements in this section shall be implemented on site and, where noted, provided for in the SWPPP.

2. Existing vegetation and trees shall be preserved where practicable. The permittee is encouraged to preserve topsoil where practicable.

3. The permittee shall select appropriate BMPs for use at the site and list them in the SWPPP. When selecting effective BMPs, the permittee shall consider stormwater volume and velocity. A BMP that has demonstrated ineffectiveness in preventing or minimizing sediment or other pollutants from leaving a given site shall be replaced with a more effective BMP, or additional and sequential BMPs and treatment devices may be incorporated as site conditions allow. The permittee should consider a schedule for performing erosion control measures when selecting BMPs.

4. The SWPPP shall include a description of both structural and non-structural BMPs that will be used at the site.

(a) The SWPPP shall provide the following general information for each BMP which will be used one or more times at the site:

- 1) Physical description of the BMP;
- 2) Site conditions that must be met for effective use of the BMP;
- 3) BMP installation/construction procedures, including typical drawings; and
- 4) Operation and maintenance procedures and schedules for the BMP.

(b) The SWPPP shall provide the following information for each specific instance where a BMP is to be installed:

- 1) Whether the BMP is temporary or permanent;
- 2) When the BMP will be installed in relation to each phase of the land disturbance procedures to complete the project; and
- 3) Site conditions that must be met before removal of the BMP if the BMP is not a permanent BMP.

5. Structural BMP Installation: The permittee shall ensure all BMPs are properly installed and operational at the locations and relative times specified in the SWPPP.

(a) Perimeter control BMPs for runoff from disturbed areas shall be installed before general site clearing is started. Note this requirement does not apply to earth disturbances related to initial site clearing and establishing entry, exit, or access of the site, which may require that stormwater controls be installed immediately after the earth

disturbance.

- (b) For phased projects, BMPs shall be properly installed as necessary prior to construction activities.
  - (c) Stormwater discharges which leave the site from disturbed areas shall pass through an appropriate impediment to sediment movement such as a sedimentation basin, sediment traps (including vegetative buffers), or silt fences prior to leaving the land disturbance site.
  - (d) A drainage course change shall be clearly marked on a site map and described in the SWPPP.
  - (e) If vegetative stabilization measures are being implemented, stabilization efforts are considered “installed” when all activities necessary to seed or plant the area are completed. Vegetative stabilization is not considered “operational” until the vegetation is established.
6. Install sediment controls along any perimeter areas of the site that are downgradient from any exposed soil or other disturbed areas. Prevent stormwater from circumventing the edge of the perimeter control. For sites where perimeter controls are infeasible, other practices shall be implemented to minimize discharges to perimeter areas of the site.
7. For surface waters of the state, defined in Section 644.016.1(27) RSMo, located on or adjacent to the site, the permittee must maintain a riparian buffer or structural equivalent in accordance with at least one of the following options. The selection and location must be described in the SWPPP.
- (a) Provide and maintain a 50-foot undisturbed natural buffer; or
  - (b) Provide and maintain an undisturbed natural buffer that is less than 50 feet and is supplemented by erosion and sediment controls that achieve the sediment load reduction equivalent to a 50-foot undisturbed natural buffer; or
  - (c) If infeasible to provide and maintain an undisturbed natural buffer of any size, implement erosion and sediment controls to achieve the sediment load reduction equivalent to a 50-foot undisturbed natural buffer.
  - (d) The permittee is not required to comply with (a), (b), or (c) above if one or more of the following exceptions apply and documentation is provided in the SWPPP:
    - 1) As authorized per CWA Section 404 Department of the Army permit and its associated Section 401 Water Quality Certification from the Department.
    - 2) If there is no discharge of stormwater to waters of the state through the area between the disturbed portions of the site and waters of the state located within 50 feet of the site. This includes situations where the permittee has implemented permanent control measures that will prevent such discharges, such as a berm or other barrier.
    - 3) Where no natural buffer exists due to preexisting development disturbances that occurred prior to the initiation of planning for the current development of the site.
      - a. Where some natural buffer exists but portions of the area within 50 feet of the waters of the state are occupied by preexisting development disturbances the permittee is required to comply with (a), (b), or (c) above.
    - 4) For linear projects where site constraints make it infeasible to implement a buffer or equivalent provided the permittee limit disturbances within 50 feet of any waters of the state and/or the permittee provides supplemental erosion and sediment controls to treat stormwater discharges from earth disturbances within 50 feet of the water of the state. The permittee must also document in the SWPPP the rationale for why it is infeasible for the permittee to implement (a), (b), or (c) and describe any buffer width retained and supplemental BMPs installed.
  - (e) Where the permittee is retaining a buffer of any size, the buffer should be measured perpendicularly from any of the following points, whichever is further landward from the water:
    - 1) The ordinary high water mark of the water body, defined as the line on the shore established by fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, and/or the presence of litter and debris; or
    - 2) The edge of the stream or river bank, bluff, or cliff, whichever is applicable.
8. Slopes for disturbed areas must be identified in the SWPPP. A site map or maps defining the sloped areas for all phases of the project must be included in the SWPPP. The disturbance of steep slopes shall be minimized.
9. Manage stockpiles or land clearing debris piles composed, in whole or in part, of sediment and/or soil.
- (a) Locate the piles outside of any natural buffers zones, established under the condition above, and away from any stormwater conveyances, drain inlets, and areas where stormwater flow is concentrated;
  - (b) Install a sediment barrier along all downgradient perimeter areas;
  - (c) Divert surface flows around stockpiles to reduce and minimize erosion of the stockpile.

- (d) For piles that will be unused for 14 or more days, provide cover with appropriate temporary stabilization in accordance with Part V. BMP REQUIREMENTS, Condition 13.
  - (e) Rinsing, sweeping, or otherwise placing any soil, sediment, debris, or stockpiled product which has accumulated on pavement or other impervious surfaces into any stormwater conveyance, storm drain inlet, or water of the state is prohibited.
10. The site shall include BMPs for pollution prevention measures and shall be noted in the SWPPP. At minimum such measures must be designed, installed, implemented, and maintained to:
- (a) Minimize the discharge of pollutants from equipment and vehicle rinsing; no detergents, additives, or soaps of any kind shall be discharged. Rinse waters must be treated in a sediment basin or alternative control that provides equivalent or better treatment prior to discharge;
  - (b) Minimize the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste, and other materials present on the site to precipitation and to stormwater;
  - (c) Minimize the discharge of pollutants from spills and leaks and implement chemical spill and leak prevention and response procedures, including, but not limited to, the installation of containment berms and use of drip pans at petroleum product and liquid storage tanks and containers; and
  - (d) Prevent discharges from causing or contributing to an exceedance of water quality standards including general criteria.
11. Sedimentation Basins: The SWPPP shall include a sedimentation basin for each drainage area with ten or more acres disturbed at one time.
- (a) The sedimentation basin shall be sized, at a minimum, to treat a local 2-year, 24-hour storm.
  - (b) Sediment basins shall not be constructed in any waters of the state or natural buffer zones.
  - (c) Discharges from dewatering activities shall be managed by appropriate controls. The SWPPP shall include a description of any anticipated dewatering methods and specific BMPs designed to treat dewatering water.
    - 1) Appropriate controls include, but are not limited to, sediment socks, dewatering tanks, tube settlers, weir tanks, filtration systems (e.g. bag or sand filters), and passive treatment systems that are designed to remove or retain sediment.
    - 2) Erosion controls and velocity dissipation devices (e.g., check dams, riprap, and vegetated buffers) to minimize erosion at inlets, outlets, and discharge points from shall be utilized.
    - 3) Water with an oil sheen shall not be discharged and shall be marked in SWPPP.
    - 4) Visible floating solids and foam shall not be discharged.
  - (d) Until final stabilization has been achieved, sediment basins and impoundments shall utilize outlet structures or floating skimmers that withdraw water from the surface when discharging.
    - 1) Under frozen conditions, it may be considered infeasible to withdraw water from the surface and an exception can be made for that specific period as long as discharges that may contain sediment and other pollutants are managed by appropriate controls. If determined infeasible due to frozen conditions, documentation must be provided in the SWPPP to support the determination, including the specific conditions or time period when this exception applies.
  - (e) Accumulated sediment shall not exceed 50% of total volume or as prescribed in the design, whichever is less. Note in the SWPPP the locations for disposal of the material removed from sediment basins.
  - (f) Prevent discharges to the receiving stream causing excessive visual turbidity. For the purposes of this permit, visual turbidity refers to a sediment plume or other cloudiness in the water caused by sediment that can be identified by an observer.
  - (g) The SWPPP shall require the basin be maintained until final stabilization of the disturbed area served by the basin.

Where use of a sediment basin is infeasible, the SWPPP shall evaluate and specify other similarly effective BMPs to be employed to control erosion and sediment. These similarly effective BMPs shall be selected from appropriate BMP guidance documents authorized by this permit. The BMPs must provide equivalent water quality protection to achieve compliance with this permit. The SWPPP shall require both temporary and permanent sedimentation basins to have a stabilized spillway to minimize the potential for erosion of the spillway or basin embankment.

12. Soil disturbing activities on site that have ceased either temporarily or permanently shall initiate stabilization immediately in accordance with the options below. For soil disturbing activities that have been temporarily ceased on any portion of the site and will not resume for a period exceeding 14 calendar days:
  - (a) The permittee shall construct BMPs to establish interim stabilization; and
  - (b) Stabilization must be initiated immediately and completed within 14 calendar days.
  - (c) For soil disturbing activities that have been permanently ceased on any portion of the site, final stabilization of disturbed areas must be initiated immediately and completed within 14 calendar days.
    - 1) Allowances to the 14-day completion period for temporary and final stabilization may be made due to weather and equipment malfunctions. The use of allowances shall be documented in the SWPPP. Allowances may be determined unnecessary after review by the Department.
  - (d) Until stabilization is complete, interim sediment control shall consist of well-established and maintained BMPs that are reasonably certain to protect waters of the state from sediment pollution over an extended period of time. This may require adding more BMPs to an area than is normally used during daily operations. The types of BMPs used must be suited to the area disturbed, taking into account the number of acres exposed and the steepness of the slopes. If the slope of the area is greater than 3:1 (three feet horizontal to one foot vertical), then the permittee shall establish interim stabilization within seven days of ceasing operations on that part of the site. The following activities would constitute the immediate initiation of stabilization:
    - 1) Prepping the soil for vegetative or non-vegetative stabilization as long as seeding, planting, and/or installation of non-vegetative stabilization products takes place as soon as practicable;
    - 2) Applying mulch or other non-vegetative product to the exposed areas;
    - 3) Seeding or planting the exposed areas;
    - 4) Finalizing arrangements to have stabilization product fully installed in compliance with the deadlines for completing stabilization.
  - (e) If vegetative stabilization measures are being implemented, stabilization is considered “installed” when all activities necessary to seed or plant the area are completed. Installed does not mean established.
  - (f) If non-vegetative stabilization measures are being implemented, stabilization is considered “installed” when all such measures are implemented or applied.
    - 1) Non-vegetative stabilization shall prevent erosion and shall be chosen for site conditions, such as slope and flow of stormwater.
  - (g) Final stabilization is not considered achieved until vegetation has grown and established to meet the requirements below.
13. Prior to removal of BMPs, ceasing site inspections, and removing from the quarterly report, final stabilization must be achieved. Final stabilization shall be achieved as soon as possible once land disturbance activities have ceased. Document in the SWPPP the type of stabilization and the date final stabilization is achieved.
  - (a) The project is considered to have achieved final stabilization when perennial vegetation (excluding volunteer vegetation), pavement, buildings, or structures using permanent materials (e.g., riprap, gravel, etc.) cover all areas that have been disturbed. With respect to areas that have been vegetated, vegetation must be at least 70% coverage of 100% of the vegetated areas on site. Vegetation must be evenly distributed.
  - (b) Disturbed areas on agricultural land are considered to have achieved final stabilization when they are restored to their preconstruction agricultural use. If former agricultural land is changing to non-agricultural use, this is no longer considered agricultural land and shall follow condition (a).
  - (c) If the intended function of a specific area of the site necessitates that it remain disturbed, final stabilization is considered achieved if all of the following are met:
    - 1) Only the minimum area needed remains disturbed (i.e., dirt access roads, motocross tracks, utility pole pads, areas being used for storage of vehicles, equipment, materials). Other areas must meet the criteria above.

- 2) Permanent structural BMPs (e.g., rock checks, berms, grading, etc.) or non-vegetative stabilization measures are implemented and designed to prevent sediment and other pollutants from entering waters of the state.
- 3) Inspection requirements in Part IV. SWPPP MANAGEMENT REQUIREMENT, Condition 11 are met and documented in the SWPPP.
- (d) Winter weather and frozen conditions do not excuse any of the above final stabilization requirements. If vegetation is required for stabilization the permittee must maintain BMPs throughout winter weather and frozen conditions until thawing and vegetation meets final stabilization criteria above. Document stabilization attempts during frozen conditions in the SWPPP. Consider future freezing when removing vegetation and plan with temporary stabilization techniques before the ground becomes frozen.

## **VI. SITE FINALIZATION & PERMIT TERMINATION**

1. Until a site is finalized, the permittee must comply with all conditions in the permit, including continuation of site inspections and reporting quarterly to the Department. To finalize the site and remove from this permit coverage, the site shall meet the following requirements:
  - (a) For any areas that (1) were disturbed during construction, (2) are not covered over by permanent structures, and (3) over which the permittee had control during the construction activities, the requirements for final vegetative or non-vegetative stabilization in Part V. BMP REQUIREMENTS, Condition 13;
  - (b) The permittee has removed and properly disposed of all construction materials, waste, and waste handling devices and has removed all equipment and vehicles that were used during construction, unless intended for long-term beyond construction phase;
  - (c) The permittee has removed all temporary BMPs that were installed and maintained during construction, except those that are intended for long-term use or those that are biodegradable; and
  - (d) The permittee has removed all potential pollutants and pollutant-generating activities associated with construction, unless needed for long-term use following the construction activities.
2. The permit may be terminated if;
  - (a) There has been a transfer of control of all areas of the site for which the current permittee is responsible under this permit to another operator, and that operator has obtained coverage under this permit;
  - (b) Active sites obtain coverage under an individual or alternative general NPDES permit, with land disturbance conditions; or
  - (c) This permit may be terminated when all projects covered under this permit are finalized. In order to terminate the permit, the permittee shall notify the Department by submitting a Request for Termination along with the final quarterly report for the current calendar quarter.

## **VII. REPORTING AND SAMPLING REQUIREMENTS**

1. The permittee is not required to sample stormwater under this permit. The Department may require sampling and reporting as a result of illegal discharges, compliance issues related to water quality concerns, or evidence of off-site impacts from activities at a site. If such an action is needed, the Department will specify in writing the sampling requirements, including such information as location and extent. If the permittee refuses to perform sampling when required, the Department may terminate the general permit and require the facility to obtain a site-specific permit with sampling requirements.
2. Electronic Discharge Monitoring Report (eDMR) Submission System. The NPDES Electronic Reporting Rule, 40 CFR Part 127, reporting of any report required by the permit shall be submitted via an electronic system to ensure timely, complete, accurate, and nationally consistent set of data for the NPDES program. The eDMR system is currently the only Department-approved reporting method for this permit unless specified elsewhere in this permit, or a waiver is granted by the Department. The facility must register in the Department's eDMR system through the Missouri Gateway for Environmental Management (MoGEM) before the first report is due.
3. Permittees shall prepare a quarterly report with a list of active land disturbance sites including any off-site borrow or depositional areas associated with the construction project and submit the following information electronically as an

attachment to the eDMR system until such a time when the current or a new system is available to allow direct input of the data:

- (a) The name of the project;
- (b) The location of the project (including the county);
- (c) The name of the primary receiving water(s) for each project;
- (d) A description of the project;
- (e) The number of acres disturbed;
- (f) The percent of completion of the project; and
- (g) The projected date of completion.

The quarterly report(s) shall be maintained by the permittee and readily available for review by the Department at the address provided on the application as well as submitted quarterly via the Department's eDMR system. The permittee shall submit quarterly reports according to Table A.

| <b>Table A</b>                            | <b>Schedule for Quarterly Reporting</b> |
|-------------------------------------------|-----------------------------------------|
| Activity for the months of:               | Report is due:                          |
| January, February, March (1st Quarter)    | April 28                                |
| April, May, June (2nd Quarter)            | July 28                                 |
| July, August, September (3rd Quarter)     | October 28                              |
| October, November, December (4th Quarter) | January 28                              |

## **VIII. STANDARD PERMIT CONDITIONS**

1. Records: The permittee shall retain copies of this general permit, the SWPPP and all amendments for the site named in the State Operating Permit, results of any monitoring and analysis, and all site inspection records required by this general permit.
  - (a) The records shall be accessible during normal business hours and retained for a period of at least three (3) years from the date of termination.
  - (b) The permittee shall provide a copy (electronic or otherwise) of the SWPPP to the Department, USEPA, or any local agency or government representative if they request a copy in the performance of their official duties within 24 hours of the request (or next working day), unless given more time by the representative.
  - (c) The permittee shall provide a copy of the SWPPP to those who are responsible for installation, operation, or maintenance of any BMP. The permittee, their representative, and/or the contractor(s) responsible for installation, operation and maintenance of the BMPs shall have a current copy of the SWPPP with them when on the project site.
2. Land Ownership and Change of Ownership: Federal and Missouri stormwater regulations [10 CSR 20-6.200(1) (B)] require a stormwater permit and erosion control measures for all land disturbances of one or more acres. These regulations also require a permit for less than one acre lots if the lot is part of a larger common plan of development or sale where that plan is at least one acre in size.
  - (a) If the permittee sells any portion of a permitted site to a developer for commercial, industrial, or residential use, this land remains a part of the common sale and the new owner must obtain a permit prior to conducting any land disturbance activity. Therefore, the original permittee must amend the SWPPP to show that the property has been sold and, therefore, no longer under the original permit coverage.
  - (b) Property of any size which is part of a larger common plan of development where the property has achieved final stabilization and the original permit terminated will require application of a new land disturbance permit for any future land disturbance activity unless the activity is by an individual residential building lot owner on a site less than one acre.
  - (c) If a portion of a larger common plan of development is sold to an individual for the purpose of building his or her own private residence, a permit is required if the portion of land sold is equal to or greater than one acre. No permit is required, however, for less than one acre of land sold.
3. Permit Transfer: This permit may not be transferred to a new owner.

4. Termination: This permit may be terminated when the project has achieved final stabilization, defined in Part VI. SITE FINALIZATION & PERMIT TERMINATION.
  - (a) In order to terminate the permit, the permittee shall notify the Department by submitting the form Request for Termination of Operating Permit Form MO 780-2814. The form should be submitted to the appropriate regional office or through an approved electronic system if it should become available.
  - (b) The Cover Page (Certificate Page) of the Master General Permit for Land Disturbance specifies the “effective date” and the “expiration date” of the Master General Permit. The “issued date” along with the “expiration date” will appear on the State Operating Permit issued to the applicant. **This permit does not continue administratively beyond the expiration date.**
5. Duty to Reapply: If the project or development completion date will be after the expiration date of this general permit, then the permittee must reapply to the Department for a new permit. This permit may be applied for and issued electronically in accordance with Section 644.051.10, RSMo.
  - (a) Due to the nature of the electronic permitting system, a period of time may be granted at the discretion of the Department in order to apply for a new permit after the new version is effective. Applicants must maintain appropriate best management practices and inspections during the discretionary period.
6. Duty to Comply: The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Missouri Clean Water Law and Federal Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.
7. Modification, Revocation, and Reopening:
  - (a) If at any time the Department determines that the quality of waters of the state may be better protected by reopening this permit, or revoking this permit and requiring the owner/operator of the permitted site to apply for a site-specific permit, the Department may revoke a general permit and require any person to obtain such an operating permit as authorized by 10 CSR20-6.010(13) and 10 CSR 20-6.200(1)(B).
  - (b) If this permit is reopened, modified, or revoked pursuant to this Section, the permittee retains all rights under Chapter 536 and 644 Revised Statutes of Missouri upon the Department’s reissuance of the permit as well as all other forms of administrative, judicial, and equitable relief available under law.
8. Other Information: Where the permittee becomes aware that it failed to submit any relevant facts in a permit application or submitted incorrect information in a permit application or in any report to the Department, it shall promptly submit such facts or information.
9. Duty to Provide Information: The permittee shall furnish to the Department, within 24 hours unless explicitly granted more time in writing, any information which the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The permittee shall also furnish to the Department upon request, copies of records required to be kept by this permit.
10. Inspection and Entry: The permittee shall allow the Department, or an authorized representative (including an authorized contractor acting as a representative of the Department), upon presentation of credentials and other documents as may be required by law, to:
  - (a) Enter upon the permittee's premises where a regulated facility or activity is located or conducted or where records must be kept under the conditions of the permit;
  - (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
  - (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
  - (d) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Federal Clean Water Act or Missouri Clean Water Law, any substances or parameters at any location.

11. Signatory Requirement:

- (a) All permit applications, reports required by the permit, or information requested by the Department shall be signed and certified. (See 40 CFR 122.22 and 10 CSR 20-6.010)
- (b) The Federal Clean Water Act provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit (including monitoring reports or reports of compliance or non-compliance) shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six (6) months per violation, or by both.
- (c) The Missouri Clean Water Law provides that any person who knowingly makes any false statement, representation or certification in any application, record, report, plan, or other document filed or required to be maintained pursuant to sections 644.006 to 644.141 shall, upon conviction, be punished by a fine of not more than ten thousand dollars, or by imprisonment for not more than six months, or by both.

12. Property Rights: This permit does not convey any property rights of any sort or any exclusive privilege.

13. Notice of Right to Appeal: If you were adversely affected by this decision, you may be entitled to pursue an appeal before the administrative hearing commission (AHC) pursuant to Sections 621.250 and 644.051.6 RSMo. To appeal, you must file a petition with the AHC within thirty days after the date this decision was mailed or the date it was delivered, whichever date was earlier. If any such petition is sent by registered mail or certified mail, it will be deemed filed on the date it is mailed; if it is sent by any method other than registered mail or certified mail, it will be deemed filed on the date it is received by the AHC. Any appeal should be directed to:

Administrative Hearing Commission  
U.S. Post Office Building, Third Floor  
131 West High Street, P.O. Box 1557  
Jefferson City, MO 65102-1557  
Phone: 573-751-2422  
Fax: 573-751-5018  
Website: <https://ahc.mo.gov>



**MISSOURI**  
DEPARTMENT OF  
NATURAL RESOURCES

STORMWATER DISCHARGES FROM  
THIS LAND DISTURBANCE SITE ARE  
AUTHORIZED BY THE MISSOURI  
STATE OPERATING PERMIT NUMBER:

---

ANYONE WITH QUESTIONS OR  
CONCERNS ABOUT STORMWATER  
DISCHARGES FROM THIS SITE,  
PLEASE CONTACT THE MISSOURI  
DEPARTMENT OF NATURAL  
RESOURCES AT

**1-800-361-4827**

**MISSOURI DEPARTMENT OF NATURAL RESOURCES**  
**FACT SHEET FOR MASTER GENERAL PERMIT**  
**MO-R100xxx**

The Federal Water Pollution Control Act [Clean Water Act (CWA)] Section 402 of Public Law 92-500 (as amended) established the National Pollution Discharge Elimination System (NPDES) permit program. This program regulates the discharge of pollutants from point sources into the waters of the United States and the release of stormwater from certain point sources. All such discharges are unlawful without a permit (Section 301 of the CWA). After a permit is obtained, a discharge not in compliance with all permit terms and conditions is unlawful. Missouri State Operating Permits (MSOPs) are issued by the Missouri Department of Natural Resources (Department) under an approved program operated in accordance with federal and state laws (Federal CWA and Missouri Clean Water Law Section 644 as amended). Permits are issued for a period of five (5) years unless otherwise specified.

Per 40 CFR 124.56, 40 CFR 124.8, and 10 CSR 20-6.020(1)(A)2, a Fact Sheet shall be prepared to give pertinent information regarding the applicable regulations, rationale for the development of effluent limitations and conditions, and the public participation process for the permit. A Fact Sheet is not an enforceable part of an MSOP.

**DEFINITIONS FOR THE PURPOSES OF THIS PERMIT:**

Common Promotional Plan: A plan undertaken by one (1) or more persons to offer lots for sale or lease; where land is offered for sale by a person or group of persons acting in concert, and the land is contiguous or is known, designated, or advertised as a common unit or by a common name or similar names, the land is presumed, without regard to the number of lots covered by each individual offering, as being offered for sale or lease as part of a common promotional plan.

Dewatering: The act of draining rainwater and/or groundwater from basins, building foundations, vaults, and trenches.

Effective Operating Condition: For the purposes of this permit, a stormwater control is kept in effective operating condition if it has been implemented and maintained in such a manner that it is working as designed to minimize pollutant discharges.

Emergency-Related Project: A project initiated in response to a public emergency (e.g. earthquakes, extreme flooding conditions, tornado, disruptions in essential public services, pandemic) for which the related work requires immediate authorization to avoid imminent endangerment to human health/safety or the environment or to reestablish essential public services.

Exposed Soils: For the purposes of this permit, soils that as a result of earth-disturbing activities are left open to the elements.

Immediately: For the purposes of this permit, immediately should be defined as within 24 hours.

Impervious Surface: For the purpose of this permit, any land surface with a low or no capacity for soil infiltration including, but not limited to, pavement, sidewalks, parking areas and driveways, packed gravel or soil, or rooftops.

Infeasible: Infeasible means not technologically possible or not economically practicable and achievable in light of best industry practices.

Install or Installation: When used in connection with stormwater controls, to connect or set in position stormwater controls to make them operational.

Land Disturbance Site or Site: The land or water area where land disturbance activities will occur and where stormwater controls will be installed and maintained. The land disturbance site includes construction support activities, which may be located at a different part of the property from where the primary land disturbance activity will take place or on a different piece of property altogether. Off-site borrow areas directly and exclusively related to the land disturbance activity are part of the site and must be permitted.

Larger Common Plan of Development or Sale: A continuous area where multiple separate and distinct construction activities are occurring under one plan, including any off-site borrow areas that are directly and exclusively related to the land disturbance activity. Off-site borrow areas utilized for multiple different land disturbance projects are considered their own entity and are not part of the larger common plan of development or sale. See definition of Common Promotional Plan to understand what a 'common plan' is.

Minimize: To reduce and/or eliminate to the extent achievable using stormwater controls that are technologically available and economically practicable and achievable in light of best industry practices.

Non-structural Best Management Practices (BMPs): Institutional, educational, or pollution prevention practices designed to limit the amount of stormwater runoff or pollutants that are generated in the landscape. Examples of non-structural BMPs include picking up trash and debris, sweeping up nearby sidewalks and streets, maintaining equipment, and training site staff on stormwater control practices.

Operational: for the purposes of this permit, stormwater controls are made "operational" when they have been installed and implemented, are functioning as designed, and are properly maintained.

Ordinary High Water Mark: The line on the shore established by fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, and/or the presence of litter and debris.

Peripheral: For the purposes of this permit, peripheral should be defined as the outermost boundary of the area that will be disturbed.

Permanently: For the purposes of this permit, permanently is defined as any activity that has been ceased without any intentions of future disturbance.

Pollution Prevention Controls (or Measures): Stormwater controls designed to reduce or eliminate the addition of pollutants to construction site discharges through analysis of pollutant sources, implementation of proper handling/disposal practices, employee education, and other actions.

Qualified Person (inspections): A person knowledgeable in the principles and practice of erosion and sediment controls and pollution prevention who possesses the appropriate skills and training to assess conditions at the construction site that could impact stormwater quality and the appropriate skills and training to assess the effectiveness of any stormwater controls selected and installed to meet the requirements of this permit.

Stormwater Control (also referred to as sediment/erosion controls): refers to any temporary or permanent BMP or other method used to prevent or reduce the discharge of pollutants to waters of the state.

Structural BMP: Physical sediment/erosion controls working individually or as a group (treatment train) appropriate to the source, location, and area climate for the pollutant to be controlled. Examples of structural BMPs include silt fences, sedimentation ponds, erosion control blankets, and seeding.

Temporary Stabilization: A condition where exposed soils or disturbed areas are provided temporary vegetation and/or non-vegetative protective cover to prevent erosion and sediment loss. Temporary stabilization may include temporary seeding, geotextiles, mulches, and other techniques to reduce or eliminate erosion until either final stabilization can be achieved or until further construction activities take place to re-disturb this area.

Treatment Train: A multi-BMP approach to managing the stormwater volume and velocity and often includes erosion prevention and sediment control practices often applied when the use of a single BMP is inadequate in preventing the erosion and transport of sediment. A good option to utilize as a corrective action.

Volunteer Vegetation: A volunteer plant is a plant that grows on its own, rather than being deliberately planted for stabilization purposes. Volunteers often grow from seeds that float in on the wind, are dropped by birds, or are inadvertently mixed into soils. Commonly, volunteer vegetation is referred to as 'weeds'. This does not meet the requirements for final stabilization.

Waters of the State: Section 644.016.1(27) RSMo. defines waters of the state as, "All waters within the jurisdiction of this state, including all rivers, streams, lakes and other bodies of surface and subsurface water lying within or forming a part of the boundaries of the state which are not entirely confined and located completely upon lands owned, leased or otherwise controlled by a single person or by two or more persons jointly or as tenants in common."

## **PART I – BASIC PERMIT INFORMATION**

|                       |                                                                                                                                                                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Facility Type:        | Industrial Stormwater; Land Disturbance                                                                                                                                                                                                                                         |
| Facility SIC Code(s): | 1629                                                                                                                                                                                                                                                                            |
| Facility Description: | Construction or land disturbance activity (e.g., clearing, grubbing, excavating, grading, filling, and other activities that result in the destruction of the root zone and/or land disturbance activity that is reasonably certain to cause pollution to waters of the state). |

This permit establishes a Stormwater Pollution Prevention Plan (SWPPP) requirement for pollutants of concern from this type of facility or for all facilities and sites covered under this permit. 10 CSR 20-6.200(7) specifies "general permits shall contain BMP requirements and/or monitoring and reporting requirements to keep the stormwater from becoming contaminated".

Land disturbance activities include clearing, grubbing, excavating, grading, filling and other activities that result in the destruction of the root zone and/or other activities that are reasonably certain to cause pollution to waters of the state. A Missouri State Operating Permit for land disturbance permit is required for construction disturbance activities of one or more acres or for construction activities that disturb less than one acre when they are part of a larger common plan of development or sale that will disturb a cumulative total of one or more acres over the life of the project.

The primary requirement of a land disturbance permit is the development of a SWPPP which incorporates site-specific BMPs to minimize soil exposure, soil erosion, and the discharge of pollutants. The SWPPP ensures the design, implementation, management, and maintenance of BMPs in order to prevent sediment and other pollutants from leaving the site.

When it precipitates, stormwater washes over the loose soil on a construction site and various other materials and products being stored outside. As stormwater flows over the site, it can pick up pollutants like sediment, debris, and chemicals from the loose soil and transport them to nearby storm sewer systems or directly into rivers, lakes, or coastal waters.

The Missouri Department of Natural Resources is responsible for ensuring that construction site operators have the proper stormwater controls in place so that construction can proceed in a way that protects your community's clean water and the surrounding environment. One way the department helps protect water quality is by issuing land disturbance permits.

Local conditions are not considered when developing conditions for a general permit. A facility may apply for a site-specific permit if they desire a review of site-specific conditions.

## **PART II – RECEIVING STREAM INFORMATION**

### **APPLICABLE DESIGNATIONS OF WATERS OF THE STATE:**

Per Missouri Effluent Regulations (10 CSR 20-7.015), the waters of the state are divided into seven (7) categories. This permit applies to facilities discharging to the following water body categories:

- ✓ Missouri or Mississippi River [10 CSR 20-7.015(2)]
- ✓ Lakes or Reservoirs [10 CSR 20-7.015(3)]
- ✓ Losing Streams [10 CSR 20-7.015(4)]
- ✓ Metropolitan No-Discharge Streams [10 CSR 20-7.015(5)]
- ✓ Special Streams [10 CSR 20-7.015(6)]
- ✓ Subsurface Waters [10 CSR 20-7.015(7)]
- ✓ All Other Waters [10 CSR 20-7.015(8)]

Missouri Water Quality Standards (10 CSR 20-7.031) defines the Clean Water Commission water quality objectives in terms of "water uses to be maintained and the criteria to protect those uses." The receiving stream and/or 1<sup>st</sup> classified receiving stream's designated water uses shall be maintained in accordance with 10 CSR 20-7.031(24). A general permit does not take into consideration site-specific conditions.

### **MIXING CONSIDERATIONS:**

This permit applies to receiving streams of varying low flow conditions. Therefore, the effluent limitations must be based on the smallest low flow streams considered, which includes waters without designated uses. As such, no mixing is allowed [10 CSR 20-7.031(5)(A)4.B.(I)(a)]. No Zone of Initial Dilution is allowed. [10 CSR 20-7.031(5)(A)4.B.(I)(b)].

### **RECEIVING STREAM MONITORING REQUIREMENTS:**

There are no receiving water monitoring requirements recommended at this time.

## **PART III – RATIONALE AND DERIVATION OF EFFLUENT LIMITATIONS & PERMIT CONDITIONS**

### **305(B) REPORT, 303(d) LIST, & TOTAL MAXIMUM DAILY LOAD (TMDL):**

Section 305(b) of the Federal CWA requires each state identify waters not meeting Water Quality Standards and for which adequate water pollution controls have not been required. Water Quality Standards protect such beneficial uses of water as whole body contact, maintaining fish and other aquatic life, and providing drinking water for people, livestock, and wildlife. The 303(d) list helps state and federal agencies keep track of waters which are impaired but not addressed by normal water pollution control programs.

A TMDL is a calculation of the maximum amount of a given pollutant a body of water can absorb before its water quality is affected. If a water body is determined to be impaired as listed on the 303(d) list, then a watershed management plan will be developed which shall include the TMDL calculation. For facilities with an existing general permit before a TMDL is written on their receiving stream, the Department will evaluate the permit and may require any facility authorized by this general permit to apply for and obtain a site-specific operating permit.

**ANTI-BACKSLIDING:**

A provision in the Federal Regulations [CWA Section 303(d)(4); CWA Section 402(c); 40 CFR Part 122.44(I)] requires a reissued permit to be as stringent as the previous permit with some exceptions.

- ✓ Not Applicable: All effluent limitations in this permit are at least as protective as those previously established.

**ANTIDEGRADATION:**

Antidegradation policies ensure protection of water quality for a particular water body on a pollutant by pollutant basis to ensure Water Quality Standards are maintained to support beneficial uses such as fish and wildlife propagation and recreation on and in the water. This also includes special protection of waters designated as an Outstanding National Resource Water or Outstanding State Resource Water [10 CSR 20-7.031(3)(C)]. Antidegradation policies are adopted to minimize adverse effects on water.

The Department has determined the best avenue forward for implementing the Antidegradation requirements into general stormwater permits is by requiring the appropriate development and maintenance of a SWPPP. The SWPPP must identify all reasonable and effective BMPs, taking into account environmental impacts and costs. This analysis must document why no discharge or no exposure options are not feasible at the facility. This selection and documentation of appropriate control measures will then serve as the analysis of alternatives and fulfill the requirements of the Antidegradation Rule and Implementation Procedure 10 CSR 20-7.031(3) and 10 CSR 20-7.015(9)(A)5.

Any facility seeking coverage under this permit which undergoes expansion or discharges a new pollutant of concern must update their SWPPP and select reasonable and cost effective new BMPs. New facilities seeking coverage under this permit are required to develop a SWPPP including this analysis and documentation of appropriate BMPs. Renewal of coverage for a facility requires a review of the SWPPP to ensure the selected BMPs continue to be appropriate.

- ✓ Applicable; the facility must review and maintain stormwater BMPs as appropriate.

**BENCHMARKS:**

When a permitted feature or outfall consists of only stormwater, a benchmark may be implemented at the discretion of the permit writer. Benchmarks require the facility to monitor and, if necessary, replace and update stormwater control measures. Benchmark concentrations are not effluent limitations. A benchmark exceedance, therefore, is not a permit violation; however, failure to take corrective action is a violation of the permit. Benchmark monitoring data is used to determine the overall effectiveness of control measures and to assist the permittee in knowing when additional corrective actions may be necessary to comply with the limitations of the permit.

- ✓ Not applicable; this permit does not contain numeric benchmarks.

**BEST MANAGEMENT PRACTICES (BMPs):**

Minimum site-wide BMPs are established in this permit to ensure all permittees are managing their sites equally to protect waters of the state from certain activities which could cause negative effects in receiving water bodies. While not all sites require a SWPPP because the SIC codes are specifically exempted in 40 CFR 122.26(b)(14), these BMPs are not specifically included for stormwater purposes. These practices are minimum requirements for all industrial sites to protect waters of the state. If the minimum BMPs are not followed, the facility may violate general criteria [10 CSR 20-7.031(4)]. Statutes are applicable to all permitted facilities in the state; therefore, pollutants cannot be released unless in accordance with RSMo 644.011 and 644.016 (17).

**CHANGES IN DISCHARGES OF TOXIC POLLUTANT:**

This special condition reiterates the federal rules found in 40 CFR 122.44(f) and 122.42(a)(1). In these rules, the facility is required to report changes in amounts of toxic substances discharged. Toxic substances are defined in 40 CFR 122.2 as "...any pollutant listed as toxic under section 307(a)(1) or, in the case of "sludge use or disposal practices," any pollutant identified in regulations implementing section 405(d) of the CWA." Section 307 of the CWA then refers to those parameters found in 40 CFR 401.15.

The permittee should also consider any other toxic pollutant in the discharge as reportable under this condition.

**EFFLUENT LIMITATION GUIDELINE:**

Effluent Limitation Guidelines, or ELGs, are found at 40 CFR 400-499. These are limitations established by the EPA based on the SIC code and the type of work a facility is conducting. Most ELGs are for process wastewater and some address stormwater. All are technology based limitations which must be met by the applicable facility at all times.

- ✓ The industries covered under this permit have an associated Effluent Limit Guideline (ELG) which is applicable to the stormwater discharges in this permit and is applied under 40 CFR 125.3(a).

**ELECTRONIC DISCHARGE MONITORING REPORT (EDMR) SUBMISSION SYSTEM:**

The U.S. Environmental Protection Agency (EPA) promulgated a final rule on October 22, 2015, to modernize CWA reporting for municipalities, industries, and other facilities by converting to an electronic data reporting system. The final rule requires regulated entities and state and federal regulators to use information technology to electronically report data required by the National Pollutant Discharge Elimination System (NPDES) permit program instead of filing paper reports. To comply with the federal rule, the Department is requiring all permittees to begin submitting discharge monitoring data and reports online.

- ✓ Applicable; this permit requires quarterly reports.

**GENERAL CRITERIA CONSIDERATIONS:**

In accordance with 40 CFR 122.44(d)(1), effluent limitations shall be placed into permits for pollutants determined to cause, have reasonable potential to cause, or to contribute to, an excursion above any water quality standard, including narrative water quality criteria. In order to comply with this regulation, the permit writer has completed a reasonable potential determination on whether discharges have reasonable potential to cause or contribute to an excursion of the general criteria listed in 10 CSR 20-7.031(4). In instances where reasonable potential exists, the permit includes limitations within the permit to address the reasonable potential. In discharges where reasonable potential does not exist, the permit may include monitoring to later determine the discharge's potential to impact the narrative criteria. Additionally, RSMo 644.076.1, as well as Standard Permit Conditions Part VIII of this permit state it shall be unlawful for any person to cause or allow any discharge of water contaminants from any water contaminant or point source located in Missouri in violation of sections 644.006 to 644.141 of the Missouri Clean Water Law or any standard, rule, or regulation promulgated by the commission.

**LAND APPLICATION:**

Land application, or surficial dispersion of wastewater and/or sludge, is performed by facilities to maintain a basin as no-discharge. Requirements for these types of operations are found in 10 CSR 20-6.015; authority to regulate these activities is from RSMo 644.026.

- ✓ Not applicable; this permit does not authorize operation of a surficial land application system to disperse wastewater or sludge.

**LAND DISTURBANCE:**

Land disturbance, sometimes called construction activities, are actions which cause disturbance of the root layer or soil; these include clearing, grading, and excavating of the land. 40 CFR 122.26(b)(14) and 10 CSR 20-6.200(3) requires permit coverage for these activities. Coverage is not required for facilities when only providing maintenance of original line and grade, hydraulic capacity, or to continue the original purpose of the facility.

- ✓ Applicable; this permit provides coverage for land disturbance activities. These activities have SWPPP requirements and may be combined with the standard site SWPPP. Land disturbance BMPs should be designed to control the expected peak discharges. The University of Missouri has design storm events for the 25 year 24 hour storm; these can be found at: [http://ag3.agebb.missouri.edu/design\\_storm/comparison\\_reports/20191117\\_25yr\\_24hr\\_comparison\\_table.htm](http://ag3.agebb.missouri.edu/design_storm/comparison_reports/20191117_25yr_24hr_comparison_table.htm); to calculate peak discharges, the website <https://www.lmnoeng.com/Hydrology/rational.php> has the rational equation to calculate expected discharge volume from the peak storm events.

**NUTRIENT MONITORING:**

Nutrient monitoring is required for facilities characteristically or expected to discharge nutrients (nitrogenous compounds and/or phosphorus) when the design flow is equal to or greater than 0.1 MGD per 10 CSR 20-7.015(9)(D)8.

- ✓ This is a stormwater only permit; therefore, it is not subject to provisions found in 10 CSR 20-7.015 per 10 CSR 20-7.015(1)(C).

**OIL/WATER SEPARATORS:**

Oil water separator (OWS) tank systems are frequently found at industrial sites where process water and stormwater may contain oils and greases, oily wastewaters, or other immiscible liquids requiring separation. Food industry discharges typically require pretreatment prior to discharge to municipally owned treatment works. Per 10 CSR 26-2.010(2)(B), all oil water separator tanks must be operated according to manufacturer's specifications and authorized in NPDES permits per 10 CSR 26-2.010(2) or may be regulated as a petroleum tank.

- ✓ Not applicable; this permit does not authorize the operation of OWS. The facility must obtain a separate permit to cover operation of and discharge from these devices.

**PERMIT SHIELD:**

The permit shield provision of the CWA (Section 402(k)) and Missouri Clean Water Law (644.051.16 RSMo) provides that when a permit holder is in compliance with its NPDES permit or MSOP, they are effectively in compliance with certain sections of the CWA and equivalent sections of the Missouri Clean Water Law. In general, the permit shield is a legal defense against certain enforcement actions but is only available when the facility is in compliance with its permit and satisfies other specific conditions, including having completely disclosed all discharges and all facility processes and activities to the Department at time of application. It is the facility's responsibility to ensure that all potential pollutants, waste streams, discharges, and activities, as well as wastewater land application, storage, and treatment areas, are all fully disclosed to the Department at the time of application or during the draft permit review process. Subsequent requests for authorization to discharge additional pollutants or expanded or newly disclosed flows, or for authorization for previously unpermitted and undisclosed activities or discharges, will likely require permit modification or may require the facility be covered under a site specific permit.

**PRETREATMENT PROGRAM:**

This permit does not regulate pretreatment requirements for facilities discharging to an accepting permitted wastewater treatment facility. If applicable, the receiving entity (the publicly owned treatment works - POTW) must ensure compliance with any effluent limitation guidelines for pretreatment listed in 40 CFR Subchapter N per 10 CSR 20-6.100. Pretreatment regulations per RSMo 644.016 are limitations on the introduction of pollutants or water contaminants into publicly owned treatment works or facilities.

- ✓ Not Applicable; the facilities covered under this permit are not required to meet pretreatment requirements under an ELG.

**PUBLIC NOTICE OF COVERAGE FOR AN INDIVIDUAL FACILITY:**

Public Notice of reissuance of coverage is not required unless the facility is a specific type of facility as defined in 10 CSR 20-6.200(1). The need for an individual public notification process shall be determined and identified in the permit [10 CSR 20-6.020(1)(C)5].

- ✓ Not applicable; public notice is not required for coverage under this permit to individual facilities. The MGP is public noticed in lieu of individual permit PN requirements.

**REASONABLE POTENTIAL ANALYSIS (RPA):**

Federal regulation 40 CFR Part 122.44(d)(1)(i) requires effluent limitations for all pollutants which are or may be discharged at a level which will cause or have the reasonable potential to cause or contribute to an in-stream excursion above narrative or numeric water quality standard. In accordance with 40 CFR Part 122.44(d)(iii) if the permit writer determines any given pollutant has the reasonable potential to cause or contribute to an in-stream excursion above the water quality standard, the permit must contain effluent limits for the pollutant.

- ✓ The permit writer reviewed industry materials, available past inspections, and other documents and research to evaluate general and narrative water quality reasonable potential for this permit. Permit writers also use the Department's permit writer's manual, the EPA's permit writer's manual (<https://www.epa.gov/npdes/npdes-permit-writers-manual>), program policies, and best professional judgment. For each parameter in each permit, the permit writer carefully considers all applicable information regarding technology based effluent limitations, effluent limitation guidelines, and water quality standards. Best professional judgment is based on the experience of the permit writer, cohorts in the Department and resources at the EPA, research, and maintaining continuity of permits if necessary. For stormwater permits, the permit writer is required per 10 CSR 6.200(6)(B)2 to consider: A. application and other information supplied by the permittee; B. effluent guidelines; C. best professional judgment of the permit writer; D. water quality; and E. BMPs.

#### **SCHEDULE OF COMPLIANCE (SOC):**

Per § 644.051, RSMo, a permit may be issued with a Schedule of Compliance (SOC) to provide time for a facility to come into compliance with new state or federal effluent regulations, water quality standards, or other requirements. Such a schedule is not allowed if the facility is already in compliance with the new requirement or if prohibited by other statute or regulation. An SOC includes an enforceable sequence of interim requirements (e.g. actions, operations, or milestone events) leading to compliance with the Missouri Clean Water Law, its implementing regulations, and/or the terms and conditions of an operating permit. *See also* Section 502(17) of the CWA, and 40 CFR 122.2. For new effluent limitations, the permit may include interim monitoring for the specific parameter to demonstrate the facility is not already in compliance with the new requirement. Per 40 CFR 122.47(a)(1) and 10 CSR 20-7.031(11), compliance must occur as soon as possible. If the permit provides a schedule for meeting new water quality based effluent limits, an SOC must include an enforceable, final effluent limitation in the permit even if the SOC extends beyond the life of the permit.

- ✓ Not Applicable: This permit does not contain a SOC.

#### **SETBACKS:**

Setbacks, sometimes called separation distances, are common elements of permits and are established to provide a margin of safety in order to protect the receiving water and other features from accidents, spills, unusual events, etc. Specific separation distances are included in 10 CSR 20-8 for minimum design standards of wastewater structures. While wastewater is considered separately from stormwater under this permit, the guides and Chapter 8 distances may remain relevant to requirements under this permit if deemed appropriate by the permittee.

- ✓ Discharge to the watersheds of a Metropolitan No-Discharge Stream (10 CSR 20-7.031 Table F) is authorized by this permit if the discharges are in compliance with 10 CSR 20-7.015(5) and 10 CSR 20-7.031(7). Discharges to these watersheds are authorized for uncontaminated stormwater discharges only.
- ✓ This permit authorizes stormwater discharges which are located in a way to allow water to be released into sinkholes, caves, fissures, or other openings in the ground which could drain into aquifers (except losing streams) per 10 CSR 20-7.015(7). It is the best professional judgment of the permit writer to allow discharges to losing streams as the effluent is stormwater only.
- ✓ This permit authorizes stormwater discharge in the watersheds of Outstanding state Resource Waters (OSRW); Outstanding National Resources Waters (ONRW), which includes the Ozark National Riverways and the National Wild and Scenic Rivers System; and impaired waters as designated in the 305(b) Report provided no degradation of water quality occurs in the OSRW and ONRW due to discharges from the permitted facility per 10 CSR 20-7.015(6)(B) and 10 CSR 20-7.031(3)(C). Additionally, if the facility is found to be causing degradation or contributing to an impairment by discharging a pollutant of concern during an inspection or through complaint investigations, they will be required to become a no discharge facility or obtain a site specific permit with more stringent monitoring and SWPPP requirements. Missouri's impaired waters can be found at <https://dnr.mo.gov/water/what-were-doing/water-planning/quality-standards-impaired-waters-total-maximum-daily-loads/impaired-waters>. Sites within 1000 feet of a OSRW, ONRW, or water impaired for sediment must operate as a no-discharge facility. These additional protections are borrowed from the USEPA 2021 draft Construction General Permit.

**SLUDGE – DOMESTIC BIOSOLIDS:**

Biosolids are solid materials resulting from domestic wastewater treatment meeting federal and state criteria for beneficial use (i.e. fertilizer). Sewage sludge is solid, semi-solid, or liquid residue generated during the treatment of domestic sewage in a treatment works; including, but not limited to, domestic septage; scum or solids removed in primary, secondary, or advanced wastewater treatment process; and material derived from sewage sludge. Sewage sludge does not include ash generated during the firing of sewage sludge in a sewage sludge incinerator or grit and screening generated during preliminary treatment of domestic sewage in a treatment works.

- ✓ This permit does not authorize discharge or land application of biosolids. Sludge/biosolids is not generated by this industry.

**SLUDGE – INDUSTRIAL:**

Industrial sludge is solid, semi-solid, or liquid residue generated during the treatment of industrial process wastewater in a treatment works; including, but not limited to, scum or solids removed in primary, secondary, or advanced wastewater treatment process; scum and solids filtered from water supplies and backwashed; and a material derived from industrial sludge.

- ✓ Not applicable; sludge is not generated by this industry.

**SPILL REPORTING:**

Any emergency involving a hazardous substance must be reported to the Department's 24 hour Environmental Emergency Response hotline at (573) 634-2436 at the earliest practicable moment after discovery. The Department may require the submittal of a written report detailing measures taken to clean up a spill. These reporting requirements apply when the spill results in chemicals or materials leaving the permitted property or reaching waters of the state. This requirement is in addition to the noncompliance reporting requirement found in Standard Conditions Part I. <https://dnr.mo.gov/waste-recycling/investigations-cleanups/environmental-emergency-response>.

Underground and above ground storage devices for petroleum products, vegetable oils, and animal fats may be subject to control under federal Spill Prevention, Control, and Countermeasure Regulation and are expected to be managed under those provisions, if applicable. Substances regulated by federal law under the Resource Conservation and Recovery Act (RCRA) or the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) which are transported, stored, or used for maintenance, cleaning or repair shall be managed according to the provisions of RCRA and CERCLA.

**STORMWATER POLLUTION PREVENTION PLAN (SWPPP):**

In accordance with 40 CFR 122.44(k), BMPs must be used to control or abate the discharge of pollutants when: 1) Authorized under section 304(e) of the CWA for the control of toxic pollutants and hazardous substances from ancillary industrial activities; 2) Authorized under section 402(p) of the CWA for the control of stormwater discharges; 3) Numeric effluent limitations are infeasible; or 4) the practices are reasonably necessary to achieve effluent limitations and standards or to carry out the purposes and intent of the CWA. In accordance with the EPA's *Developing Your Stormwater Pollution Prevention Plan: A Guide for Construction Sites*, (Document number EPA 833-R-06-004) published by the EPA in 2007 [https://www.epa.gov/sites/production/files/2015-10/documents/sw\\_swppp\\_guide.pdf](https://www.epa.gov/sites/production/files/2015-10/documents/sw_swppp_guide.pdf), BMPs are measures or practices used to reduce the amount of pollution entering waters of the state from a permitted facility. BMPs may take the form of a process, activity, or physical structure. Additionally, in accordance with the Stormwater Management, a SWPPP is a series of steps and activities to 1) identify sources of pollution or contamination, and 2) select and carry out actions which prevent or control the pollution of storm water discharges. Additional information can be found in *Stormwater Management for Industrial Activities: Developing Pollution Prevention Plans and Best Management Practices* (EPA 832-R-92-006; September 1992).

A SWPPP must be prepared if the SIC code for the facility is found in 40 CFR 122.26(b)(14) and/or 10 CSR 20-6.200(2). A SWPPP may be required of other facilities where stormwater has been identified as necessitating better management.

The purpose of a SWPPP is to comply with all applicable stormwater regulations by creating an adaptive management plan to control and mitigate stream pollution from stormwater runoff. Developing a SWPPP provides opportunities to employ appropriate BMPs to minimize the risk of pollutants being discharged during storm events. The following paragraph outlines the general steps the permittee should take to determine which BMPs will work to achieve the benchmark values or limits in the permit. This section is not intended to be all encompassing or restrict the use of any physical BMP or operational and maintenance procedure assisting in pollution control. Additional steps or revisions to the SWPPP may be required to meet the requirements of the permit.

Areas which should be included in the SWPPP are identified in 40 CFR 122.26(b)(14). Once the potential sources of stormwater pollution have been identified, a plan should be formulated to best control the amount of pollutant being released and discharged by each activity or source. This should include, but is not limited to, minimizing exposure to stormwater, good housekeeping measures, proper facility and equipment maintenance, spill prevention and response, vehicle traffic control, and proper materials handling. Once a plan has been developed, the facility will employ the control measures determined to be adequate to prevent pollution from entering waters of the state. The facility will conduct inspections of the BMPs to ensure they are working properly and re-evaluate any BMP not achieving compliance with permitting requirements. For example if the BMP being employed is deficient in controlling stormwater pollution, corrective action should be taken to repair, improve, or replace the failing BMP. If failures do occur, continue this trial and error process until appropriate BMPs have been established.

The EPA has developed factsheets on the pollutants of concern for specific industries along with the BMPs to control and minimize stormwater (<https://www.epa.gov/npdes/stormwater-discharges-industrial-activities>). Along with EPA's factsheets, the International Stormwater BMP database (<https://bmpdatabase.org/>) may provide guidance on BMPs appropriate for specific industries.

For new, altered, or expanded stormwater discharges, the SWPPP shall identify reasonable and effective BMPs while accounting for environmental impacts of varying control methods. The antidegradation analysis must document why no discharge or no exposure options are not feasible. The selection and documentation of appropriate control measures shall serve as an alternative analysis of technology and fulfill the requirements of antidegradation [10 CSR 20-7.031(3)].

Alternative analysis evaluation of the BMPs is a structured evaluation of BMPs which are reasonable and cost effective. The alternative analysis evaluation should include practices designed to be: 1) non-degrading; 2) less degrading; or 3) degrading water quality. The glossary of the *Antidegradation Implementation Procedure* defines these three terms. The chosen BMP will be the most reasonable and effective management strategy while ensuring the highest statutory and regulatory requirements are achieved and the highest quality water attainable for the facility is discharged. The alternative analysis evaluation must demonstrate why "no discharge" or "no exposure" is not a feasible alternative at the facility. This structured analysis of BMPs serves as the antidegradation review, fulfilling the requirements of 10 CSR 20-7.031(3) Water Quality Standards and *Antidegradation Implementation Procedure*, Section II.B.

- ✓ Applicable: A SWPPP shall be developed and implemented for each site and shall incorporate required practices identified by the Department with jurisdiction, incorporate control practices specific to site conditions, and provide for maintenance and adherence to the plan.

#### **UNDERGROUND INJECTION CONTROL (UIC):**

The UIC program for all classes of wells in the State of Missouri is administered by the Missouri Department of Natural Resources and approved by EPA pursuant to section 1422 and 1425 of the Safe Drinking Water Act (SDWA) and 40 CFR 147 Subpart AA. Injection wells are classified based on the liquids which are being injected. Class I wells are hazardous waste wells which are banned by RSMo 577.155; Class II wells are established for oil and natural gas production; Class III wells are used to inject fluids to extract minerals; Class IV wells are also banned by Missouri in RSMo 577.155; Class V wells are shallow injection wells; some examples are heat pump wells and groundwater remediation wells. Domestic wastewater being disposed of sub-surface is also considered a Class V well.

In accordance with 40 CFR 144.82, construction, operation, maintenance, conversion, plugging, or closure of injection wells shall not cause movement of fluids containing any contaminant into Underground Sources of Drinking Water (USDW) if the presence of any contaminant may cause a violation of drinking water standards or groundwater standards under 10 CSR 20-7.031 or other health-based standards or may otherwise adversely affect human health. If the Department finds the injection activity may endanger USDWs, the Department may require closure of the injection wells or other actions listed in 40 CFR 144.12(c), (d), or (e). In accordance with 40 CFR 144.26, the permittee shall submit a Class V Well Inventory Form for each active or new underground injection well drilled, or when the status of a well changes, to the Missouri Department of Natural Resources, Geological Survey Program, P.O. Box 250, Rolla, Missouri 65402. Single family residential septic systems and non-residential septic systems used solely for sanitary waste and having the capacity to serve fewer than 20 persons a day are excluded from the UIC requirements (40 CFR 144.81(9)).

- ✓ Not applicable; this permit does not authorize subsurface wastewater systems or other underground injection. These activities must be assessed under an application for a site specific permit. Certain discharges of stormwater into sinkholes may qualify as UIC. It is important the permittee evaluate all stormwater basins, even those holding water; as sinkholes have varying seepage rates. This permit does not allow stormwater discharges into sinkholes. The facility must ensure sinkholes are avoided in the construction process. The State's online mapping resource <https://modnr.maps.arcgis.com/apps/webappviewer/index.html?id=87ebef4af15d438ca658ce0b2bbc862e> has a sinkhole layer.

**VARIANCE:**

Per the Missouri Clean Water Law Section 644.061.4, variances shall be granted for such period of time and under such terms and conditions as shall be specified by the commission in its order. The variance may be extended by affirmative action of the commission. In no event shall the variance be granted for a period of time greater than is reasonably necessary for complying with the Missouri Clean Water Law Section 644.006 to 644.141 or any standard, rule, or regulation promulgated pursuant to Missouri Clean Water Law Section 644.006 to 644.141.

- ✓ Not Applicable: This permit is not drafted under premises of a petition for variance.

**WASTELOAD ALLOCATIONS (WLA) FOR LIMITATIONS:**

Per 10 CSR 20-2.010(78), the amount of pollutant each discharger is allowed by the Department to release into a given stream after the Department has determined total amount of pollutant which may be discharged into the stream without endangering its water quality. Water quality based maximum daily and average monthly effluent limitations were calculated using methods and procedures outlined in USEPA's Technical Support Document For Water Quality-based Toxics Control (TSD) (EPA/505/2-90-001).

- ✓ Not applicable; water quality limitations were not applied in this permit.

**WATER QUALITY STANDARDS:**

Per 10 CSR 20-7.031(4), General Criteria shall be applicable to all waters of the state at all times, including mixing zones. Additionally, 40 CFR 122.44(d)(1) directs the Department to include in each NPDES permit conditions to achieve water quality established under Section 303 of the CWA, including state narrative criteria for water quality.

**WHOLE EFFLUENT TOXICITY (WET) TEST:**

Per 10 CSR 20-7.031(1)(FF), a toxicity test conducted under specified laboratory conditions on specific indicator organism; and per 40 CFR 122.2, the aggregate toxic effect of an effluent measured directly by a toxicity test. A WET test is a quantifiable method of determining if a discharge from a facility may be causing toxicity to aquatic life by itself, in combination with, or through synergistic responses when mixed with receiving water.

- ✓ Not applicable: At this time, permittees are not required to conduct a WET test. This permit is for stormwater only.

## **PART IV – EFFLUENT LIMITATIONS DETERMINATION**

### **EPA Construction General Permit (CGP)**

The CGP was used to research and support best professional judgment decisions made in establishing technology-based conditions for this general permit which are consistent with national standards. The permit writer determined the standards established by the CGP are achievable and consistent with federal regulations. Additionally, the conditions reflecting the best practicable technology currently available are utilized to implement the ELG.

In this general permit, technology-based effluent conditions are established through the SWPPP and BMP requirements. Effective BMPs should be designed on a site-specific basis. The implementation of inspections provides a tool for each facility to evaluate the effectiveness of BMPs to ensure protection of water quality. Any flow through an outfall is considered a discharge. Future permit action due to permit modification may contain new operating permit terms and conditions which supersede the terms and conditions, including effluent limitations, of this operating permit.

## **PART V–REPORTING REQUIREMENTS**

### **SAMPLING:**

The permittee is not required to sample stormwater under this permit. The Department may require sampling and reporting as a result of illegal discharges, compliance issues related to water quality concerns or BMP effectiveness, or evidence of off-site impacts from activities at the facility. If such an action is needed, the Department will specify in writing the sampling requirements, including such information as location and extent. If the permittee refuses to perform sampling when required, the Department may terminate the general permit and require the facility to obtain a site-specific permit with sampling requirements.

### **REPORTING:**

There are quarterly reporting requirements for MO-R100xxx land disturbance permits. Project specific information is required to be report to the Department through the eDMR system.

## **PART VI – RAINFALL VALUES FOR MISSOURI & SURFACE WATER BUFFER ZONES**

Knowledge of the 2-year, 24-hour storm event is used in this permit for two main reasons:

- 1) The design, installation, and maintenance of effective erosion and sediment controls to minimize the discharge of pollutants.
- 2) If the seven-day inspection frequency is utilized, an inspection must occur within 48 hours after any storm event equal to or greater than a 2-year, 24 hour storm has ceased.

For site-specific 2-year, 24-hour storm event information utilize the National Oceanic and Atmospheric Administration's National Weather Service Atlas 14 (NOAA Atlas 14) which is located at [https://hdsc.nws.noaa.gov/hdsc/pfds/pfds\\_map\\_cont.html](https://hdsc.nws.noaa.gov/hdsc/pfds/pfds_map_cont.html). For more information visit; [https://www.weather.gov/media/owp/oh/hdsc/docs/Atlas14\\_Volume8.pdf](https://www.weather.gov/media/owp/oh/hdsc/docs/Atlas14_Volume8.pdf).

**Surface Water Buffer Zones:** In order to design controls that match the sediment removal efficiency of a 50-foot buffer, you first need to know what this efficiency is for your site. The sediment removal efficiencies of natural buffers vary according to a number of site-specific factors, including precipitation, soil type, land cover, slope length, width, steepness, and the types of erosion and sediment controls used to reduce the discharge of sediment prior to the buffer. For additional information; [https://www.epa.gov/sites/default/files/2017-02/documents/2017\\_cgp\\_final\\_appendix\\_g\\_-\\_buffer\\_reqs\\_508.pdf](https://www.epa.gov/sites/default/files/2017-02/documents/2017_cgp_final_appendix_g_-_buffer_reqs_508.pdf)

## **PART VII – ADMINISTRATIVE REQUIREMENTS**

On the basis of preliminary staff review and applicable standards and regulations, the Department, as administrative agent for the Missouri Clean Water Commission, proposes to issue a permit(s) subject to certain effluent limitations, schedules, and special conditions contained herein and within the permit. The proposed determinations are tentative pending public comment.

### **PUBLIC MEETING:**

The department hosted three public meetings for this permit. The meetings were held on January 27, February 17, and March 9, 2021.

### **PUBLIC NOTICE:**

The Department shall give public notice when a draft permit has been prepared and its issuance is pending. Additionally, public notice will be issued if a public hearing is to be held because of a significant degree of interest or because of water quality concerns related to a draft permit. No public notice is required when a request for a permit modification or termination is denied; however, the requester and facility must be notified of the denial in writing.

The Department must give public notice of a pending permit or of a new or reissued Missouri State Operating Permit. The public comment period is a length of time not less than thirty (30) days following the date of the public notice, during which interested persons may submit written comments about the proposed permit.

For persons wanting to submit comments regarding this proposed permit, please refer to the Public Notice page located at the front of this draft permit. The Public Notice page gives direction on how and where to submit appropriate comments.

- ✓ The Public Notice period for this permit is started March 25, 2022 and ended April 25, 2022. Two comment letters were received.

**DATE OF FACT SHEET:** 03/2/2022

### **COMPLETED BY:**

**SARAH WRIGHT**

**MS4 & LAND DISTURBANCE PERMITTING COORDINATOR**

**MISSOURI DEPARTMENT OF NATURAL RESOURCES**

**WATER PROTECTION PROGRAM**

**OPERATING PERMITS SECTION - STORMWATER AND CERTIFICATION UNIT**

**(573) 526-1139**

**[Sarah.wright@dnr.mo.gov](mailto:Sarah.wright@dnr.mo.gov), [dnr.generalpermits@dnr.mo.gov](mailto:dnr.generalpermits@dnr.mo.gov)**