

## ADDENDUM NO. 2

TO: PLANS AND SPECIFICATIONS FOR STATE OF MISSOURI

Company Supply & Admin Headquarters Bldg.  
Camp Clark Training Site  
Nevada, Missouri  
PROJECT NO.: T2016-01

Bid Opening Date: 1:30 PM, Tuesday, September 8, 2020 (Not Changed)

Bidders are hereby informed that the construction Plans and/or Specifications are modified as follows:

### **SPECIFICATION CHANGES:**

1. Section 03 41 00 – STRUCTURAL PRECAST CONCRETE
  - a. REVISE Part 2.16-A.1 as follows:
    1. Commercial Architectural (CA) Finish Type: **Equal to PCI Product Number 229.**
  - b. REVISE Part 2.16-A.1.d as follows:
    - d. Exposure: **Medium**
2. Section 07 54 23 – SINGLE-PLY MEMBRANCE ROOFING (TPO)
  - a. ADD “Mule-Hide Products Company, Inc.” as approved Manufacturer in Part 2.02-A.1.
3. Section 09 67 23 – RESINOUS FLOORING
  - a. ADD “Florock” as approved Manufacturer in Part 2.01-A.1.

### **DRAWING CHANGES:**

1. Sheet G-001
  - a. DELETE note in 1/G-001 SITE LOCATION stating “NOTE: FOR ADDITIONAL PROJECT LOCATION MAPS REFER TO INDIVIDUAL ROOF PLAN DRAWINGS”.
2. Sheet G-002
  - a. DELETE work referenced in SCOPE OF WORK SCHEDULE under Sections 28 00 00.
3. Sheet C-102
  - a. ADD work as indicated on sheet C-102.AD2, (attached).
4. Sheet C-104
  - a. REVISE work for electrical utility as indicated on sheet C-104.AD2, (attached).

5. Sheet A-101

- a. REVISE detail reference marked 3/A-102 FIRE STOPPING DETAIL to 3/A-101 FIRE STOPPING DETAIL.

6. Sheet A-201

- a. REVISE the EXTERIOR FINISH SCHEDULE as follows:

**STRUCTURAL PRECAST CONCRETE**

**KEY NOTE NO. 2**

LOCATON: EXTERIOR WALL SYSTEM

FABRICATOR: (REFER TO PROJECT MANUAL)

FINISH: EQUAL TO PCI PRODUCT NUMBER 229

NOTES: PROVIDE (2) COATS CLEAR WATER REPELLANT

7. Sheet E-601

- a. ADD Contactor Schedule as indicated on sheet E-601.AD2, (attached).

**GENERAL COMMENTS:**

1. The Pre-Bid Meeting was held August 25, 2020 followed by a walk-through of the site. The Pre-Bid Meeting sign-in sheet is attached.
2. Please contact Mandy Roberson, Contract Specialist, at 573-522-0074 or [mandy.roberson@oa.mo.gov](mailto:mandy.roberson@oa.mo.gov) for questions about bidding procedures and MBE/WBE/SDVE goals and submittal requirements.
3. **All bids shall be submitted on the bid forms without additional terms and conditions, modifications, or stipulations. Each space on the bid forms shall be properly filled including a bid amounts for the alternates. Failure to do so will result in rejection of the bid.**
4. **MBE/WBE/SDVE participation requirements can be found in DIVISION 00. The MBE/WBE/SDVE participation goals are 10%/10%/3%, respectively. All MBE, WBE, and MBE/WBE contractors, subcontractors, and suppliers must be certified by the State of Missouri, Office of Equal Opportunity. No other certifications from other Missouri certifying agencies will be accepted. If a bidder is unable to meet a participation goal, a Good Faith Effort Determination Form must be completed. Failure to complete this process will result in rejection of the bid.**
5. The deadline for technical questions was August 31, 2020 at noon.
6. Changes to, or clarification of, the bid documents are only made as issued in the addenda.
7. All correspondence with respect to this project must include the State of Missouri project number as indicated above.
8. Current Planholders list available online at: <https://www.oafmdcplanroom.com/jobs/569/planholders/t2016-01-company-supply-admin-building-camp-clark-training-site>
9. Prospective Bidders contact American Document Solutions, 1400 Forum Blvd Suite 1C, Columbia MO 65201, 573-446-7768 to order official plans and specifications.

**ATTACHMENTS:**

1. Sheet C-102.AD2
2. Sheet C-104.AD2
3. Sheet E-601.AD2
4. Pre-Bid Meeting Sign-In Sheet

**September 1, 2020**

**END ADDENDUM NO. 2**




# KEY NOTES

AD2

- 11 190 LF OF 2" CONDUIT FOR FIBER OPTICS LINE TO RUN TO EXISTING SERVICE PEDESTAL. SAWCUT AND REPLACE PAVEMENT ACROSS MCCORY AS NECESSARY. REFER TO DETAIL ON SHEET C-502
- 12 CONTRACTOR TO INSTALL 143 LF OF 2" CONDUIT FOR SINGLE PHASE PRIMARY WIRE FROM EXISTING SWITCH CABINET. PRIMARY WIRE INSTALLED BY EVERYG.
- 13 CONTRACTOR TO SET TRANSFORMER PAD. PAD PROVIDED BY EVERYG. TRANSFORMER PROVIDED & SET BY EVERYG.
- 14 CONTRACTOR TO INSTALL 229± LF OF 3" CONDUIT FOR SINGLE PHASE SECONDARY WIRE. SECONDARY WIRE INSTALLED TO METER BY CONTRACTOR. REFER TO DETAIL ON SHEET C-502
- 15 CONTRACTOR TO INSTALL 48 LF OF 2" CONDUIT FOR SINGLE PHASE PRIMARY WIRE FROM NEW ADMIN BUILDING TRANSFORMER TO NEW BARRACKS TRANSFORMER. PRIMARY WIRE INSTALLED BY EVERYG THE CONDUIT TO END JUST NORTH OF JOHNSTON ROAD. MARK END OF TRANSFORMER AT SURFACE FOR CONTINUATION BY BARRACKS CONTRACTOR. SAWCUT AND REPLACE PAVEMENT ACROSS JOHNSTON AS NECESSARY.



Digitally signed by Aaron Hargrave  
 DN: cn=Aaron Hargrave, o=Anderson Engineering, Inc, ou, email=ahargrave@aaincmo.com, c=US  
 Date: 2020.09.01 10:26:27 -05'00'  
 ANDERSON ENGINEERING, INC  
 COA# 000062 AARON T. HARGRAVE PE# PE-200704020274

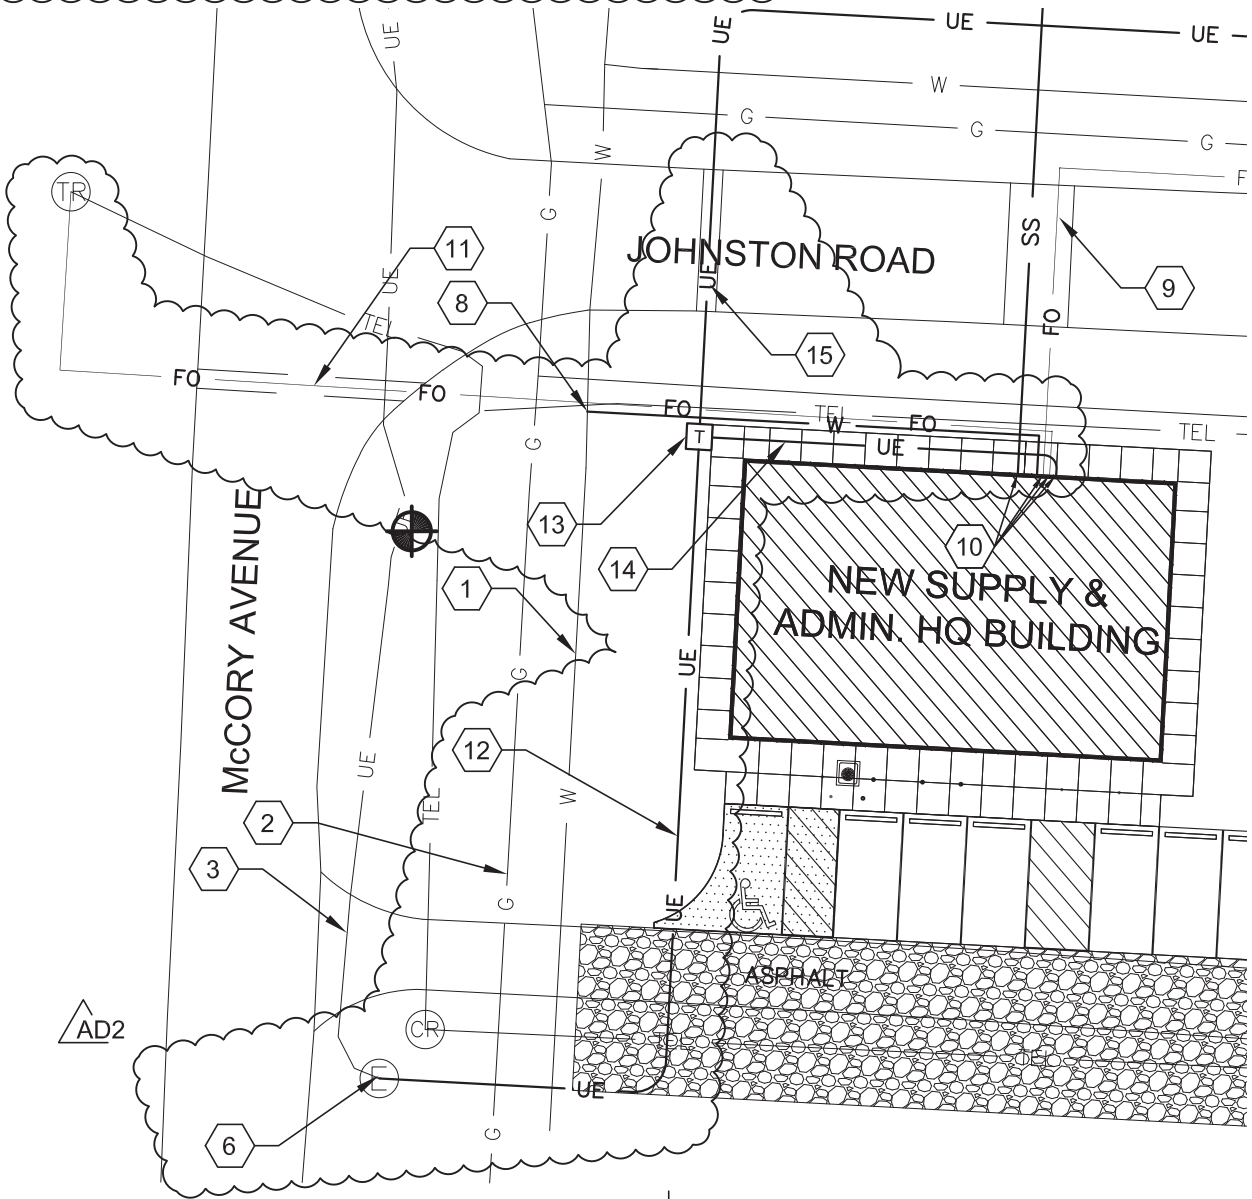

**1 PARTIAL SITE UTILITY PLAN**  
 C-104.AD2 SCALE: 1" = 30'

**Buddy Webb & Company, Inc.**  
 Architect - Consultant  
 3057 EAST CAIRO  
 SPRINGFIELD, MISSOURI 65802 (417) 877-1385 PHONE  
 (417) 877-9736 FAX



MISSOURI NATIONAL GUARD  
 DESIGN & AND CONSTRUCT  
 COMPANY SUPPLY &  
 ADMIN HEADQUARTERS BLDG.  
 CAMP CLARK, NEVADA, MO

PROJECT NO:  
 T2016-01  
 DATE:  
 09/01/2020

C-104.AD2

AD2

## CONTACTOR SCHEDULE

MARK	LOAD			CONTACTOR					INTERLOCK	
	EQUIPMENT SERVED	WATTS	VOLTAGE	TYPE	AMP	POLE	ENCLOSURE	ACCESSORIES	CONTROLLED BY	CONTROLS
LC1	EMERGENCY VENTILATION	-	120/240	NOEH	30	2	NEMA 1	1,2	MANUAL SWITCH	-

ACCESSORIES:

1. H-O-A SELECTOR SWITCH WITH PILOT LIGHT
2. GREEN PILOT LIGHT, WHEN LOAD IS ON

APPROVED MANUFACTURERS:

EATON  
SQUARE D  
SIEMENS

**Buddy Webb & Company, Inc.**

**Architect - Consultant**

3057 EAST CAIRO  
SPRINGFIELD, MISSOURI 65802

(417) 877-1385 PHONE  
(417) 877-9736 FAX

MISSOURI NATIONAL GUARD  
DESIGN & AND CONSTRUCT  
COMPANY SUPPLY &  
ADMIN HEADQUARTERS BLDG.  
CAMP CLARK, NEVADA, MO

PROJECT NO:

T2016-01

DATE:

09/01/2020

E-601.AD2



# Buddy Webb & Company

Architect - Consultant

3057 East Cairo  
Springfield, Missouri 65802  
(417) 877-1385 Phone  
(417) 877-9736 Fax

## PRE-BID MEETING ATTENDANCE SIGN-IN

August 25, 2020 - 10:00 am @ HQ's Building, Camp Clark Trg. Site, 18159 K Hwy, Nevada, MO 64772

Project: Company Supply & Administration Building  
Camp Clark Training Center  
Missouri National Guard  
Nevada, Missouri  
Project T2016-01

Name	Company Name	Phone Number
1. STEVE MISSEY	BARTOLS-MISSEY INC	636-464-3007
2. Aaron Gaddy	Pro-prost JV	573 680.6727 Estimating @ Prost Builders .com
3. Rick Spivey	CDL Electric	richard.spivey@cdl-electric.com 417-214-1222
4. Aaron Smith	JS Smith Consulting Engrs	417-621-0444
5. Chad Calltharp	E&R	816-663-0144
6. David Duggin	Duggin Const	417-321-4357
7. BUDDY WEBB	BWCO ARCHITECT	417-877-1385
8. ANDREW PETERS	BWCO ARCHITECTS	417-877-1385
9. RYAN JONES	CJD ENGINEERING	417.877.1700
10. Kirk Harris	Crossland Const	620-429-1414
11. Rick Nichols	ANDERSON ENG.	417-782-7999

Name	Company Name	Phone Number
12. Kenny Burnett	Black Dog Ent. SDVE kburnett@blackdogke.com	816-591-2622
13. Mark Rice	Digging Const	817-721-6504
14. Joshua Oathout	ANDERSON ENGINEERING	816-416-9707
15. Jeremy Newton	MONG	573-638-9500 Ext. 3748
16. Craig Beck	OA-FMDC	573-751-7831
17. Dick WELSENWEIMER	Dartel V MISSY	917-321-0146
18. Bob Kufina	Dartel V MISSY	417-684-0226
19.		
20.		
21.		
22.		
23.		
24.		
25.		
26.		
27.		