

ADDENDUM NO. 2

TO: PLANS AND SPECIFICATIONS FOR STATE OF MISSOURI

**MSHP Interoperability Site,
Replace Roof & Renovate Basement and Access,
Support Services Bldg.,
2413 East McCarty St.,
Jefferson City, MO 65101
PROJECT NO. R2508-01**

Bid Opening Date: 1:30 PM, June 11, 2026 (Not *Changed*)

Bidders are hereby informed that the Construction Plans and/or Specifications are modified as follows:

SPECIFICATION CHANGES:

1. Section 07 4213 Metal Wall Panels:
 - a. Substitution Request: ADD Drexel Metal DMC 164 Wall Panel is and allowable substitution for the exterior metal wall panel.
2. Section 07 5400 Thermoplastic Membrane Roofing:
 - a. REMOVE AND REPLACE section in its entirety.
3. Section 07 5400 Thermoplastic Membrane Roofing:
 - a. Substitution Request: ADD Mule Hide is an allowable substitution for TPO membrane.
4. Section 08 4313 Aluminum Framed Storefront:
 - a. Substitution Request: ADD Quaker M600 is an allowable substitution for the aluminum framed storefront window.
5. Section 23 07 19 HVAC Piping Insulation:
 - a. a. REPLACE 2.03 (A) with the following. Weatherproof cladding: Self-healing bituminous membrane with UV resistant aluminum foil/polymer laminate equal to Alumaguard All Weather.

DRAWING CHANGES:

1. *SHEET C101*
 - a. ADD Note "E" to demolition plan.
 - b. ADD Note "K" to site plan.
2. *SHEET C101.1 – ADDED AS A NEW SHEET*
3. *SHEET C500*
 - a. ADD Detail 8 – Roof drain detail.

4. *SHEET D102*

- a. ADD Demo existing down spout. Trench to new location. See A102. This occurs on Southeast and Southwest corners.

5. *SHEET A102*

- a. ADD New D.S. connection. See Civil. This occurs on Southeast and Southwest corners.

6. *SHEET A103*

- a. REVISE Demolition notes: Roof
- b. REVISE Downspout leader. This occurs on Southeast and Southwest corners.

7. *SHEET A201*

- a. REVISE Downspout leader. This occurs on East and West elevation.
- b. REVISE Downspout leader and note on South elevation.

8. *SHEET A501*

- a. REVISE Roof divider at change in deck heights detail. 1/A-501
- b. REVISE Scupper through wall and collection box detail. 2/A-501

9. *SHEET M501*

- a. REVISE Mini split schedule to include wall mount bracket for HP-1

GENERAL COMMENTS:

1. Please contact Mandy Roberson, Contract Specialist, at 573-690-9411 or Mandy.Roberson@oa.mo.gov for questions about bidding procedures, MBE\WBE\SDVE Goals, and other submittal requirements.
2. The deadline for technical questions was May 07, 2026, at Noon.
3. Changes to, or clarification of, the bid documents are only made as issued in the addenda.
4. All correspondence with respect to this project must include the State of Missouri project number as indicated above.
5. Current Plan Holders list available online at: [Bid Listing/ Electronic Plans \(Projects Currently Bidding\) | Office of Administration \(mo.gov\)](#) R250801 - MSHP Interoperability Site-Replace Roof & Renovate Basement and Access, Support Services Building
6. Prospective Bidders contact American Document Solutions, 1400 Forum Blvd Suite 7A, Columbia MO 65203, 573-446-7768 to order official plans and specifications.
7. All bids shall be submitted on the bid form without additional terms and conditions,

modifications, or stipulations. Each space on the bid form shall be properly filled including a bid amount for the alternates. Failure to do so will result in rejection of the bid.

8. MBE/WBE/SDVE participation requirements can be found in DIVISION 00. The MBE/WBE/SDVE participation goals are 10%/10%/3%, respectively. Only certified firms as of the bid opening date can be used to satisfy the MBE/WBE/SDVE participation goals for this project. If a bidder is unable to meet a participation goal, a Good Faith Effort Determination Form must be completed. Failure to complete this process will result in rejection of the bid.
9. The Contractor shall pay not less than the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed, as determined by the Missouri Department of Labor and Industrial Relations. Bidders are to adhere to Prevailing Wage Hourly Rate of Wages, and the Department of Labor and Industrial Relations can be contacted to determine the applicable wage rate for the work on this project

ATTACHMENTS:

1. Specification Sections, 07 4213, 07 5400, 08 4313, 23 0719
2. Drawing Sheets C101, C101.1, C500, D102, A102, A103, A201, A501 and M501
3. Existing Roof Information – Contact Sheet -2 pages
4. Substitutions, 07 4213, 07 5400, 08 4313

June 2, 2026

END ADDENDUM NO. 2

Addendum #2

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in installing products specified in this section with minimum three years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Protect panels from accelerated weathering by removing or venting sheet plastic shipping wrap.
- B. Store prefinished material off the ground and protected from weather; prevent twisting, bending, or abrasion; provide ventilation; slope metal sheets to ensure proper drainage.
- C. Prevent contact with materials that may cause discoloration or staining of products.

1.07 FIELD CONDITIONS

- A. Do not install wall panels when air temperature or relative humidity are outside manufacturer's limits.

1.08 WARRANTY

- A. See Division One for additional warranty requirements.
- B. Finish Warranty: Provide 15-year manufacturer warranty against excessive degradation of exterior finish. Include provision for replacement of units with excessive fading, chalking, or flaking. Complete forms in Owner's name and register with warrantor.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Metal Wall Panels - Concealed Fasteners:

- 1. Basis of Design: Berridge Manufacturing Company; HR-16 Panel: www.berridge.com/#sle.
- 2. McElroy Metal: www.mcelroymetal.com/#sle.
- 3. Petersen Aluminum Corporation: www.pac-clad.com/#sle.



- 4. Drexel Metals

- 5. Substitutions: See Division One .

- B. Metal Soffit Panels:

- 1. Basis of Design: Berridge Manufacturing Company; Perforated Vee Panel: www.berridge.com/#sle.
- 2. McElroy Metal: www.mcelroymetal.com/#sle.
- 3. Petersen Aluminum Corporation; www.pac-clad.com/#sle.

SECTION 07 5400
THERMOPLASTIC MEMBRANE ROOFING

PART 1 GENERAL**1.01 SECTION INCLUDES**

- A. Adhered system with thermoplastic roofing membrane.
- B. Insulation, flat and tapered.
- C. Vapor retarder.
- D. Cover boards.
- E. Flashings.
- F. Roofing cant strips, stack boots, roofing expansion joints, and walkway pads.

1.02 REFERENCE STANDARDS

- A. ASTM C1177/C1177M - Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing; 2017.
- B. ASTM C1289 - Standard Specification for Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board; 2023a.
- C. ASTM D6878/D6878M - Standard Specification for Thermoplastic Polyolefin-Based Sheet Roofing; 2021.
- D. FM (AG) - FM Approval Guide; Current Edition.
- E. NRCA (RM) - The NRCA Roofing Manual; 2026.
- F. NRCA (WM) - The NRCA Waterproofing Manual; 2021.

1.03 ADMINISTRATIVE REQUIREMENTS

- A. Preinstallation Meeting: Convene one week before starting work of this section.
 - 1. Review preparation and installation procedures and coordinating and scheduling required with related work.

1.04 SUBMITTALS

- A. See Division One for submittal procedures.
- B. Product Data: Provide data indicating membrane materials, flashing materials, insulation, vapor retarder, surfacing, and fasteners.
- C. Shop Drawings: Submit drawings that indicate joint or termination detail conditions, conditions of interface with other materials, and setting plan for tapered insulation.
- D. Manufacturer's Certificate: Certify that products meet or exceed specified requirements.

- E. Manufacturer's Installation Instructions: Indicate membrane seaming precautions and perimeter conditions requiring special attention.
- F. Manufacturer's Field Reports: Indicate procedures followed, ambient temperatures, humidity, wind velocity during application, and supplementary instructions given.
- G. Manufacturer's qualification statement.
- H. Installer's qualification statement.
- I. Warranty Documentation:
 - 1. Submit manufacturer warranty and ensure that forms have been completed in Owner's name and registered with manufacturer.
 - 2. Submit installer's written verification that installation complies with warranty conditions for waterproof membrane.

1.05 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacturing products specified in this section with minimum three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of this section with at least three years of documented experience.

1.06 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in manufacturer's original containers, dry and undamaged, with seals and labels intact, unless otherwise indicated.
- B. Store materials in weather protected environment, clear of ground and moisture.
- C. Ensure storage and staging of materials does not exceed static and dynamic load-bearing capacities of roof decking.
- D. Protect foam insulation from direct exposure to sunlight.

1.07 FIELD CONDITIONS

- A. Do not apply roofing membrane during unsuitable weather.
- B. Do not apply roofing membrane when ambient temperature is below 40 degrees F or above ____ degrees F.
- C. Do not apply roofing membrane to damp or frozen deck surface or when precipitation is expected or occurring.
- D. Do not expose materials vulnerable to water or sun damage in quantities greater than can be weatherproofed the same day.
- E. Schedule applications so that no partially completed sections of roof are left exposed at end of workday.

1.08 WARRANTY

- A. See Division 1 for additional warranty requirements.
- B. System Warranty: Provide manufacturer's system warranty agreeing to repair or replace roofing that leaks or is damaged due to wind or other natural causes.
 - 1. Warranty Term: 20 years.
 - 2. For repair and replacement include costs of both material and labor in warranty.

PART 2 PRODUCTS**2.01 MANUFACTURERS**

- A. Thermoplastic Polyolefin (TPO) Membrane Roofing Materials:
 - 1. Carlisle SynTec Systems; Sure-Weld TPO: www.carlisle-syntec.com/#sle.
 - 2. Elevate; UltraPly TPO Membrane: www.holcimelevate.com/#sle.
 - 3. GAF; EverGuard SA TPO Self-Adhered Roof Membrane 60 mil: www.gaf.com/#sle.
 - 4. Mule-Hide Products
 - 5. Substitutions: See Division One.
- B. Rigid Insulation: Required for replacement as noted in item 1 below and for areas of new roofing: Polyisocyanurate type as recommended by Roofing Manufacturer:
 - 1. For the existing roof except over concrete roof deck the existing rigid Insulation is to remain except in cases where it is determined that insulation has been damaged. See Section 01 2200 Unit Prices for Quantities to be included in base bid for insulation replacement.
 - 2. Substitutions: See Division One .
- C. Cover Boards:
 - 1. As recommended by Membrane Manufacturer. New Cover Board to replace existing.
 - 2. Substitutions: See Division One.

2.02 ROOFING - UNBALLASTED APPLICATIONS

- A. Thermoplastic Membrane Roofing: One ply membrane, fully adhered.
- B. Acceptable Insulation Types:
- C. Acceptable Insulation Types - Tapered Application:
 - 1. Tapered polyisocyanurate board.

2.03 MEMBRANE ROOFING AND ASSOCIATED MATERIALS

- A. Membrane Roofing Materials:

1. TPO: Thermoplastic polyolefin (TPO) complying with ASTM D6878/D6878M, sheet contains reinforcing fabrics or scrims.
 - a. Thickness: 60 mil, 0.060 inch, minimum.
 2. Sheet Width:
 - a. Adhered Application: Limit width to 120 inches, maximum, when ambient temperatures are less than 40 degrees F for extended period of time during installation.
 3. Color: White.
- B. Seaming Materials: As recommended by membrane manufacturer.
- C. Flexible Flashing Material: Same material as membrane.
- D. Base Sheet (Concrete deck areas only-See drawings for locations): SBS-modified asphalt base sheet for installation on **existing concrete roof decks** prior to installation of new insulation, cover board and membrane roofing.
1. Provide product(s) approved by manufacturer and recommended by manufacturer for specific applications. Product shall be compatible with fully-adhered roofing system.
 2. Material: SBS-modified bituminous sheet with glass fiber reinforcement, complying with ASTM D6163, Type 1, Grade S.
 3. Attachment: Attachment methods recommended by manufacturer for specific applications. Provide cold-applied adhesive for adhering base sheet to existing roof decks .
 4. Thickness: 0.090 inch (90 mil).

2.04 COVER BOARDS

- A. Cover Boards: Glass-mat faced gypsum panels complying with ASTM C1177/C1177M as recommended by roofing manufacturer.
1. Thickness: 1/2 inch, Type X, fire-resistant.

2.05 INSULATION

- A. Polyisocyanurate (ISO) Board Insulation: Rigid cellular foam, complying with ASTM C1289.
1. Classifications:
 - a. Type II: Faced with either cellulosic facers or glass fiber mat facers on both major surfaces of the core foam.
 - 1) Class 1 - Faced with glass fiber reinforced cellulosic facers on both major surfaces of the core foam.
 - 2) Compressive Strength: Classes 1-2-3, Grade 2, 20 psi (138 kPa), minimum.
 - 3) Thermal Resistance, Long Term Thermal Resistance Value (LTTR): 6.0 per inch of thickness, minimum.

2. Board Size: 48 by 96 inches.
3. Board Thickness: 2.0 inches.
4. Tapered Board: Slope as indicated; fabricate of fewest layers possible.
5. Board Edges: Square.

2.06 ACCESSORIES

- A. Stack Boots: Prefabricated flexible boot and collar for pipe stacks through membrane; same material as membrane.
- B. Cant and Edge Strips: Wood fiberboard, compatible with roofing materials; cants formed to 45 degree angle.
- C. Insulation Joint Tape: Glass fiber reinforced type as recommended by insulation manufacturer, compatible with roofing materials; 6 inches wide; self adhering.
- D. Membrane Adhesive: As recommended by membrane manufacturer.
- E. Surface Conditioner for Adhesives: Compatible with membrane and adhesives.
- F. Thinners and Cleaners: As recommended by adhesive manufacturer, compatible with membrane.
- G. Insulation Adhesive: As recommended by insulation manufacturer.
- H. Strip Reglet Devices: Galvanized steel, maximum possible lengths per location, with attachment flanges.
- I. Sealants: As recommended by membrane manufacturer.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that surfaces and site conditions are ready to receive work.
- B. Verify deck is supported and secure.
- C. Verify deck is clean and smooth, flat, free of depressions, waves, or projections, properly sloped and suitable for installation of roof system.
- D. Verify deck surfaces are dry and free of snow or ice.
- E. Verify that roof openings, curbs, and penetrations through roof are solidly set, and cant strips are in place.

3.02 INSTALLATION, GENERAL

- A. Perform work in accordance with manufacturer's instructions, NRCA (RM), and NRCA (WM) applicable requirements.
- B. Do not apply roofing membrane during cold or wet weather conditions.

- C. Do not apply roofing membrane when ambient temperature is outside the temperature range recommended by manufacturer.
- D. Do not apply roofing membrane to damp or frozen deck surface or when precipitation is expected or occurring.
- E. Do not expose materials vulnerable to water or sun damage in quantities greater than can be weatherproofed the same day.
- F. Coordinate this work with installation of associated counterflashings installed by other sections as the work of this section proceeds.

3.03 INSTALLATION - VAPOR RETARDER AND INSULATION, UNDER MEMBRANE

- A. Install vapor retarder to deck surface with adhesive in accordance with manufacturer's instructions.
 - 1. Extend vapor retarder under cant strips and blocking to deck edge.
 - 2. Install flexible flashing from vapor retarder to air seal material of wall construction, lap and seal to provide continuity of the air barrier plane.
- B. Ensure vapor retarder is clean and dry, continuous, and ready for application of insulation.
- C. Attachment of Insulation: Embed insulation in adhesive in full contact, in accordance with roofing and insulation manufacturers' instructions.
- D. Cover Boards: Mechanically fasten cover boards in accordance with roofing manufacturer's instructions and FM (AG) Factory Mutual requirements.
- E. Lay subsequent layers of insulation with joints staggered minimum 6 inches from joints of preceding layer.
- F. Place tapered insulation to the required slope pattern in accordance with manufacturer's instructions.
- G. Lay boards with edges in moderate contact without forcing. Cut insulation to fit neatly to perimeter blocking and around penetrations through roof.
- H. Tape joints of insulation in accordance with roofing and insulation manufacturers' instructions.
- I. Do not install more insulation than can be covered with membrane in same day.

3.04 INSTALLATION - MEMBRANE

- A. Roll out membrane, free from wrinkles or tears. Place sheet into place without stretching.
- B. Shingle joints on sloped substrate in direction of drainage.
- C. Fully Adhered Application: Apply adhesive to substrate at rate recommended by manufacturer. Fully embed membrane in adhesive except in areas directly over or within 3 inches of expansion joints. Fully adhere one roll before proceeding to adjacent rolls.
- D. Overlap edges and ends and seal seams by contact adhesive, minimum 3 inches. Seal permanently waterproof. Apply uniform bead of sealant to joint edge.

- E. At intersections with vertical surfaces:
 - 1. Extend membrane over cant strips and up vertical parapet surfaces to under parapet cap flashings.
- F. Around roof penetrations, seal flanges and flashings with flexible flashing.
- G. Coordinate installation of roof drains and related flashings.

3.05 FIELD QUALITY CONTROL

- A. Provide Certification with on-site attendance of roofing and insulation manufacturer's representative during installation of this work.

3.06 CLEANING

- A. See Section Division One for additional requirements.
- B. Remove bituminous markings from finished surfaces.
- C. In areas where finished surfaces are soiled by work of this section, consult manufacturer of surfaces for cleaning advice and comply with their documented instructions.
- D. Repair or replace defaced or damaged finishes caused by work of this section.

3.07 PROTECTION

- A. Protect installed roofing and flashings from construction operations.
- B. Where traffic must continue over finished roof membrane, protect surfaces using durable materials.

END OF SECTION 07 5400

Addendum #2

1.06 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in performing work of type specified and with at least three years of documented experience.
- B. Installer Qualifications: Company specializing in performing work of type specified and with at least three years of documented experience.

1.07 DELIVERY, STORAGE, AND HANDLING

- A. Handle products of this section in accordance with AAMA CW-10.
- B. Protect finished aluminum surfaces with wrapping. Do not use adhesive papers or sprayed coatings that bond to aluminum when exposed to sunlight or weather.

1.08 FIELD CONDITIONS

- A. Do not install sealants when ambient temperature is less than 40 degrees F. Maintain this minimum temperature during and 48 hours after installation.

1.09 WARRANTY

- A. See Division One for additional warranty requirements.
- B. Correct defective Work within a five year period after Date of Substantial Completion.
- C. Provide five year manufacturer warranty against failure of glass seal on insulating glass units, including interpane dusting or misting. Include provision for replacement of failed units.
- D. Provide five year manufacturer warranty against excessive degradation of exterior finish. Include provision for replacement of units with excessive fading, chalking, or flaking.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Aluminum-Framed Storefronts Manufacturers:
 - 1. Oldcastle BuildingEnvelope: www.oldcastlebe.com/#sle.
 - 2. Tubelite, Inc: www.tubeliteinc.com/#sle.
 - 3. EFCO Corporation; <https://www.efcocorp.com/>.
 - 4. Quaker Window Company
 - 5. Substitutions: See Division One.



2.02 BASIS OF DESIGN -- FRAMING FOR INSULATING GLAZING

- A. Center-Set Style, Thermally-Broken:
 - 1. Vertical Mullion Dimensions: 2 inches wide by 4-1/2 inches deep.

2.02 FLEXIBLE ELASTOMERIC CELLULAR INSULATION

A. Manufacturer:

1. Aeroflex USA, Inc; Aerocel ULP: www.aeroflexusa.com/#sle.
2. Armacell LLC; AP Armaflex: www.armacell.us/#sle.
3. K-Flex USA LLC; K-Flex Titan: www.kflexusa.com/#sle.

B. Insulation: Preformed flexible elastomeric cellular rubber insulation complying with ASTM

C534/C534M Grade 1; use molded tubular material wherever possible.

1. Minimum Service Temperature: Minus 40 degrees F.
2. Maximum Service Temperature: 180 degrees F.
3. Connection: Waterproof vapor barrier adhesive.

2

2.03 JACKETS

- ### **A. Weatherproof cladding: Self healing bituminous membrane with UV resistant aluminum foil/polymer laminate. Equal to Alumaguard All Weather.**

PART 3 EXECUTION

3.01 EXAMINATION




- A. Verify that piping has been tested before applying insulation materials.
- B. Verify that surfaces are clean and dry, with foreign material removed.

3.02 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Exposed Piping: Locate insulation and cover seams in least visible locations.
- C. Continue insulation through walls, sleeves, pipe hangers, and other pipe penetrations. Finish at supports, protrusions, and interruptions. At fire separations, refer to Section 07 84 00.
- D. Pipe Exposed in Mechanical Equipment Rooms or Finished Spaces (less than 10 feet above finished floor): Finish with alumaguard wrap.
- E. Exterior Applications: Cover with aluminum jacket with seams located on bottom side of horizontal piping.

3.03 SCHEDULE

- A. Heating & Cooling Systems:

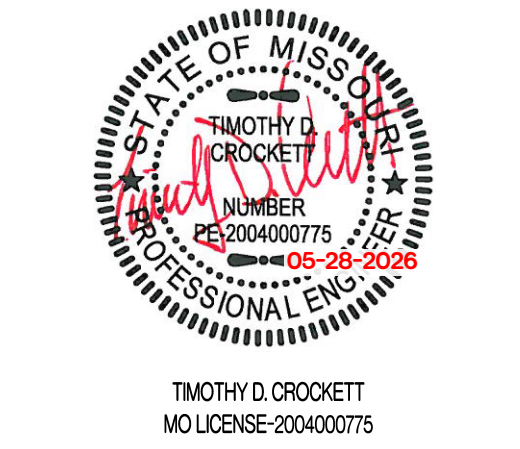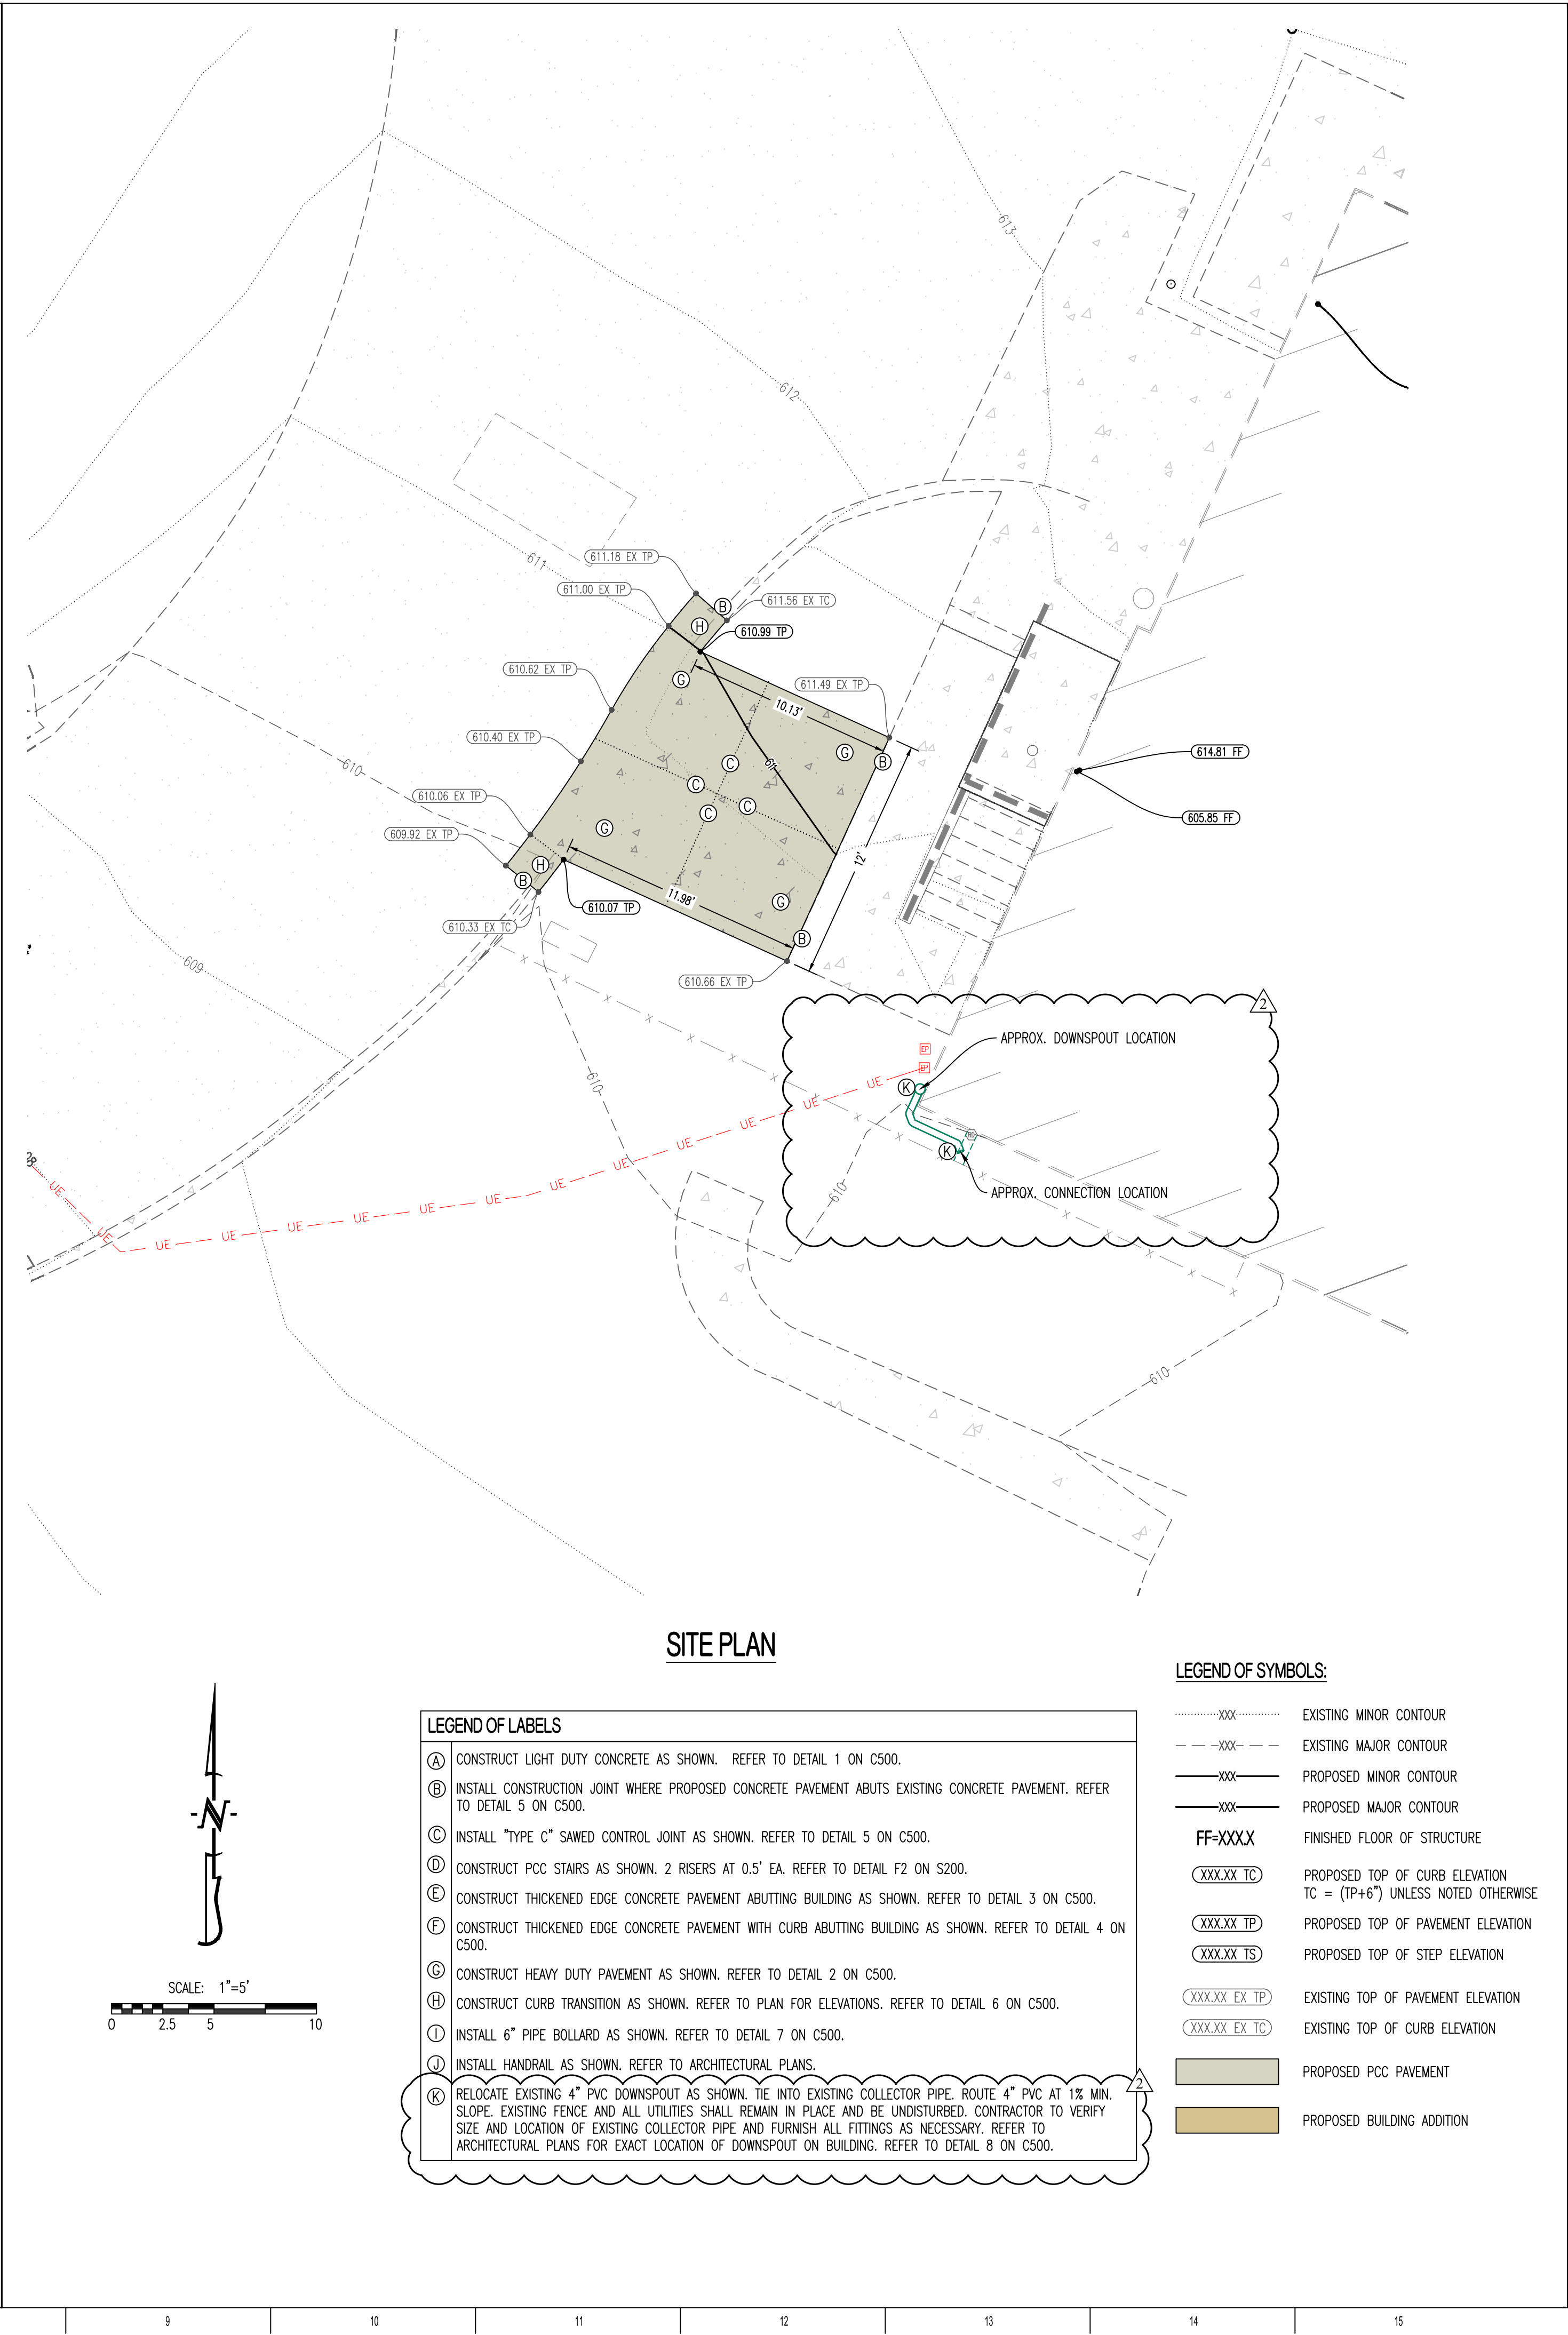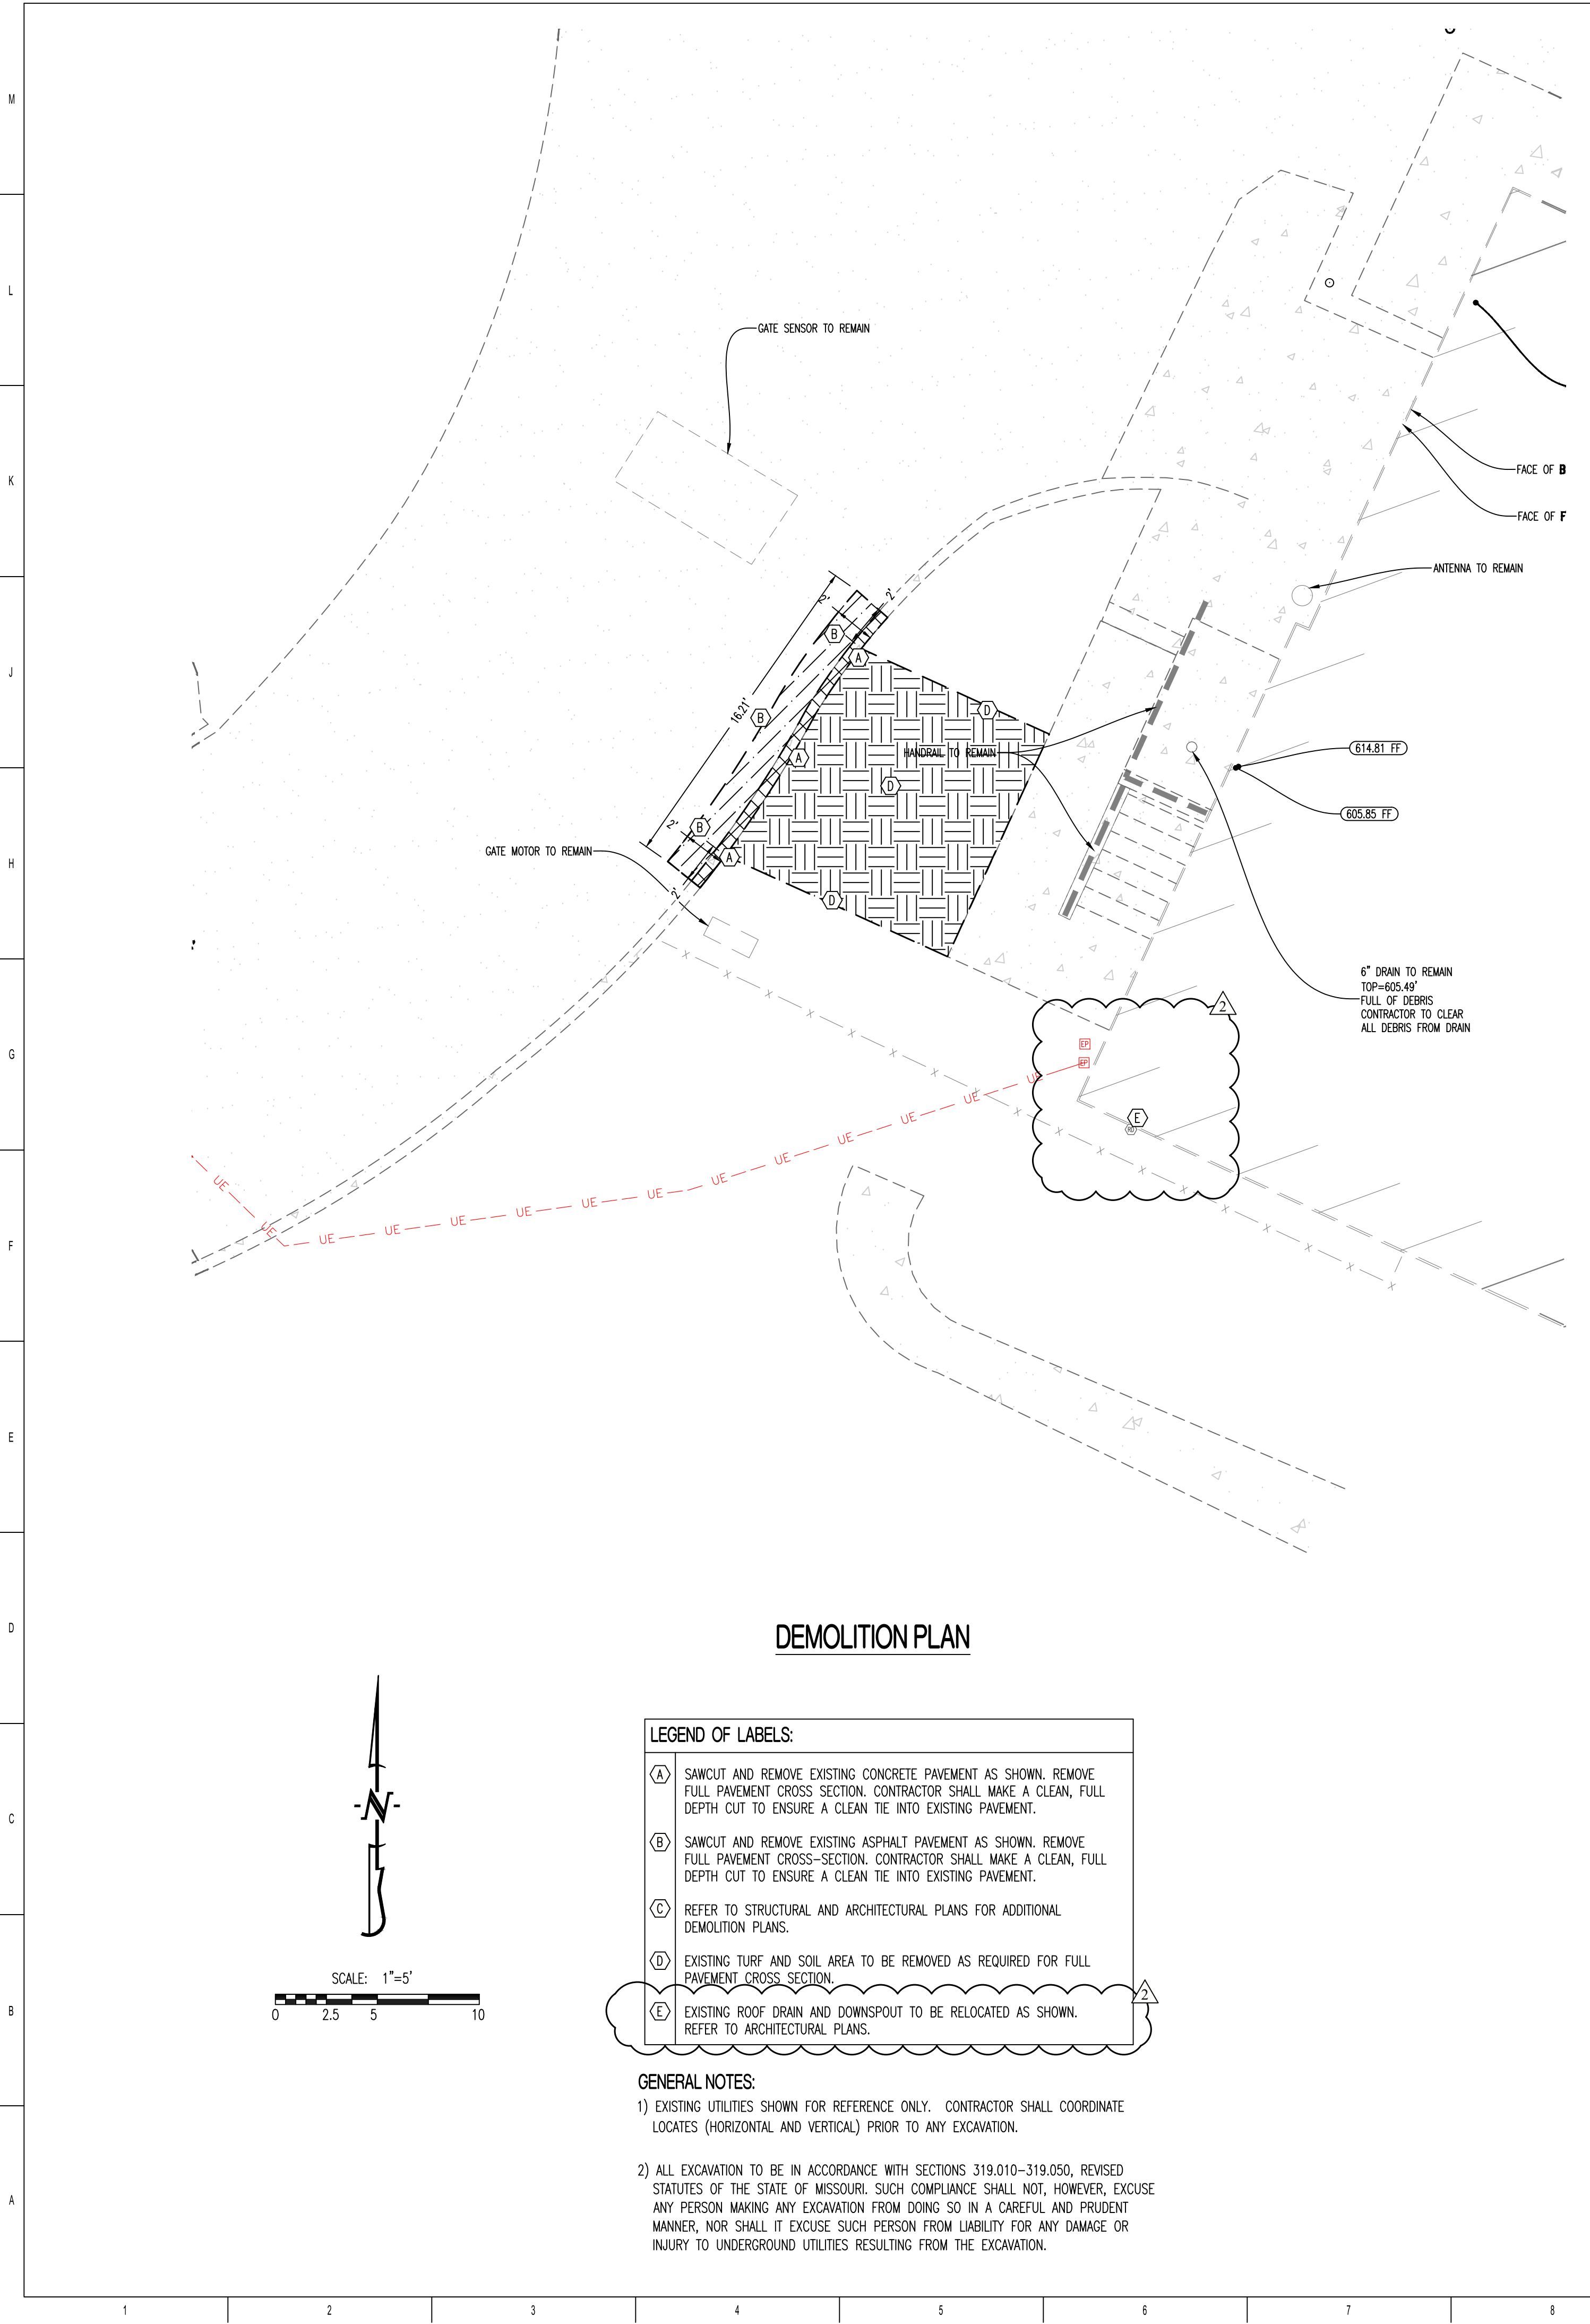

OFFICE OF
ADMINISTRATION
DIVISION OF
FACILITIES
MANAGEMENT,
DESIGN AND
CONSTRUCTION

REPLACE ROOF &
RENOVATE
BASEMENT/ACCESS

MSPH INTEROPERABILITY
2413 EAST MCCARTY ST.
JEFFERSON CITY, MO

PROJECT # R2508-01
SITE # 6027
ASSET # 8136027002



REVISION:	ADD. #2
DATE:	5/28/2026
REVISION:	
DATE:	
REVISION:	
DATE:	
ISSUE DATE:	12/12/2025

CAD DWG FILE: 250208
DRAWN BY: NMD
CHECKED BY: TDC
DESIGNED BY: TDC


SHEET TITLE:
DEMOLITION &
SITE PLAN
WEST STAIR
TOWER

SHEET NUMBER:

C101

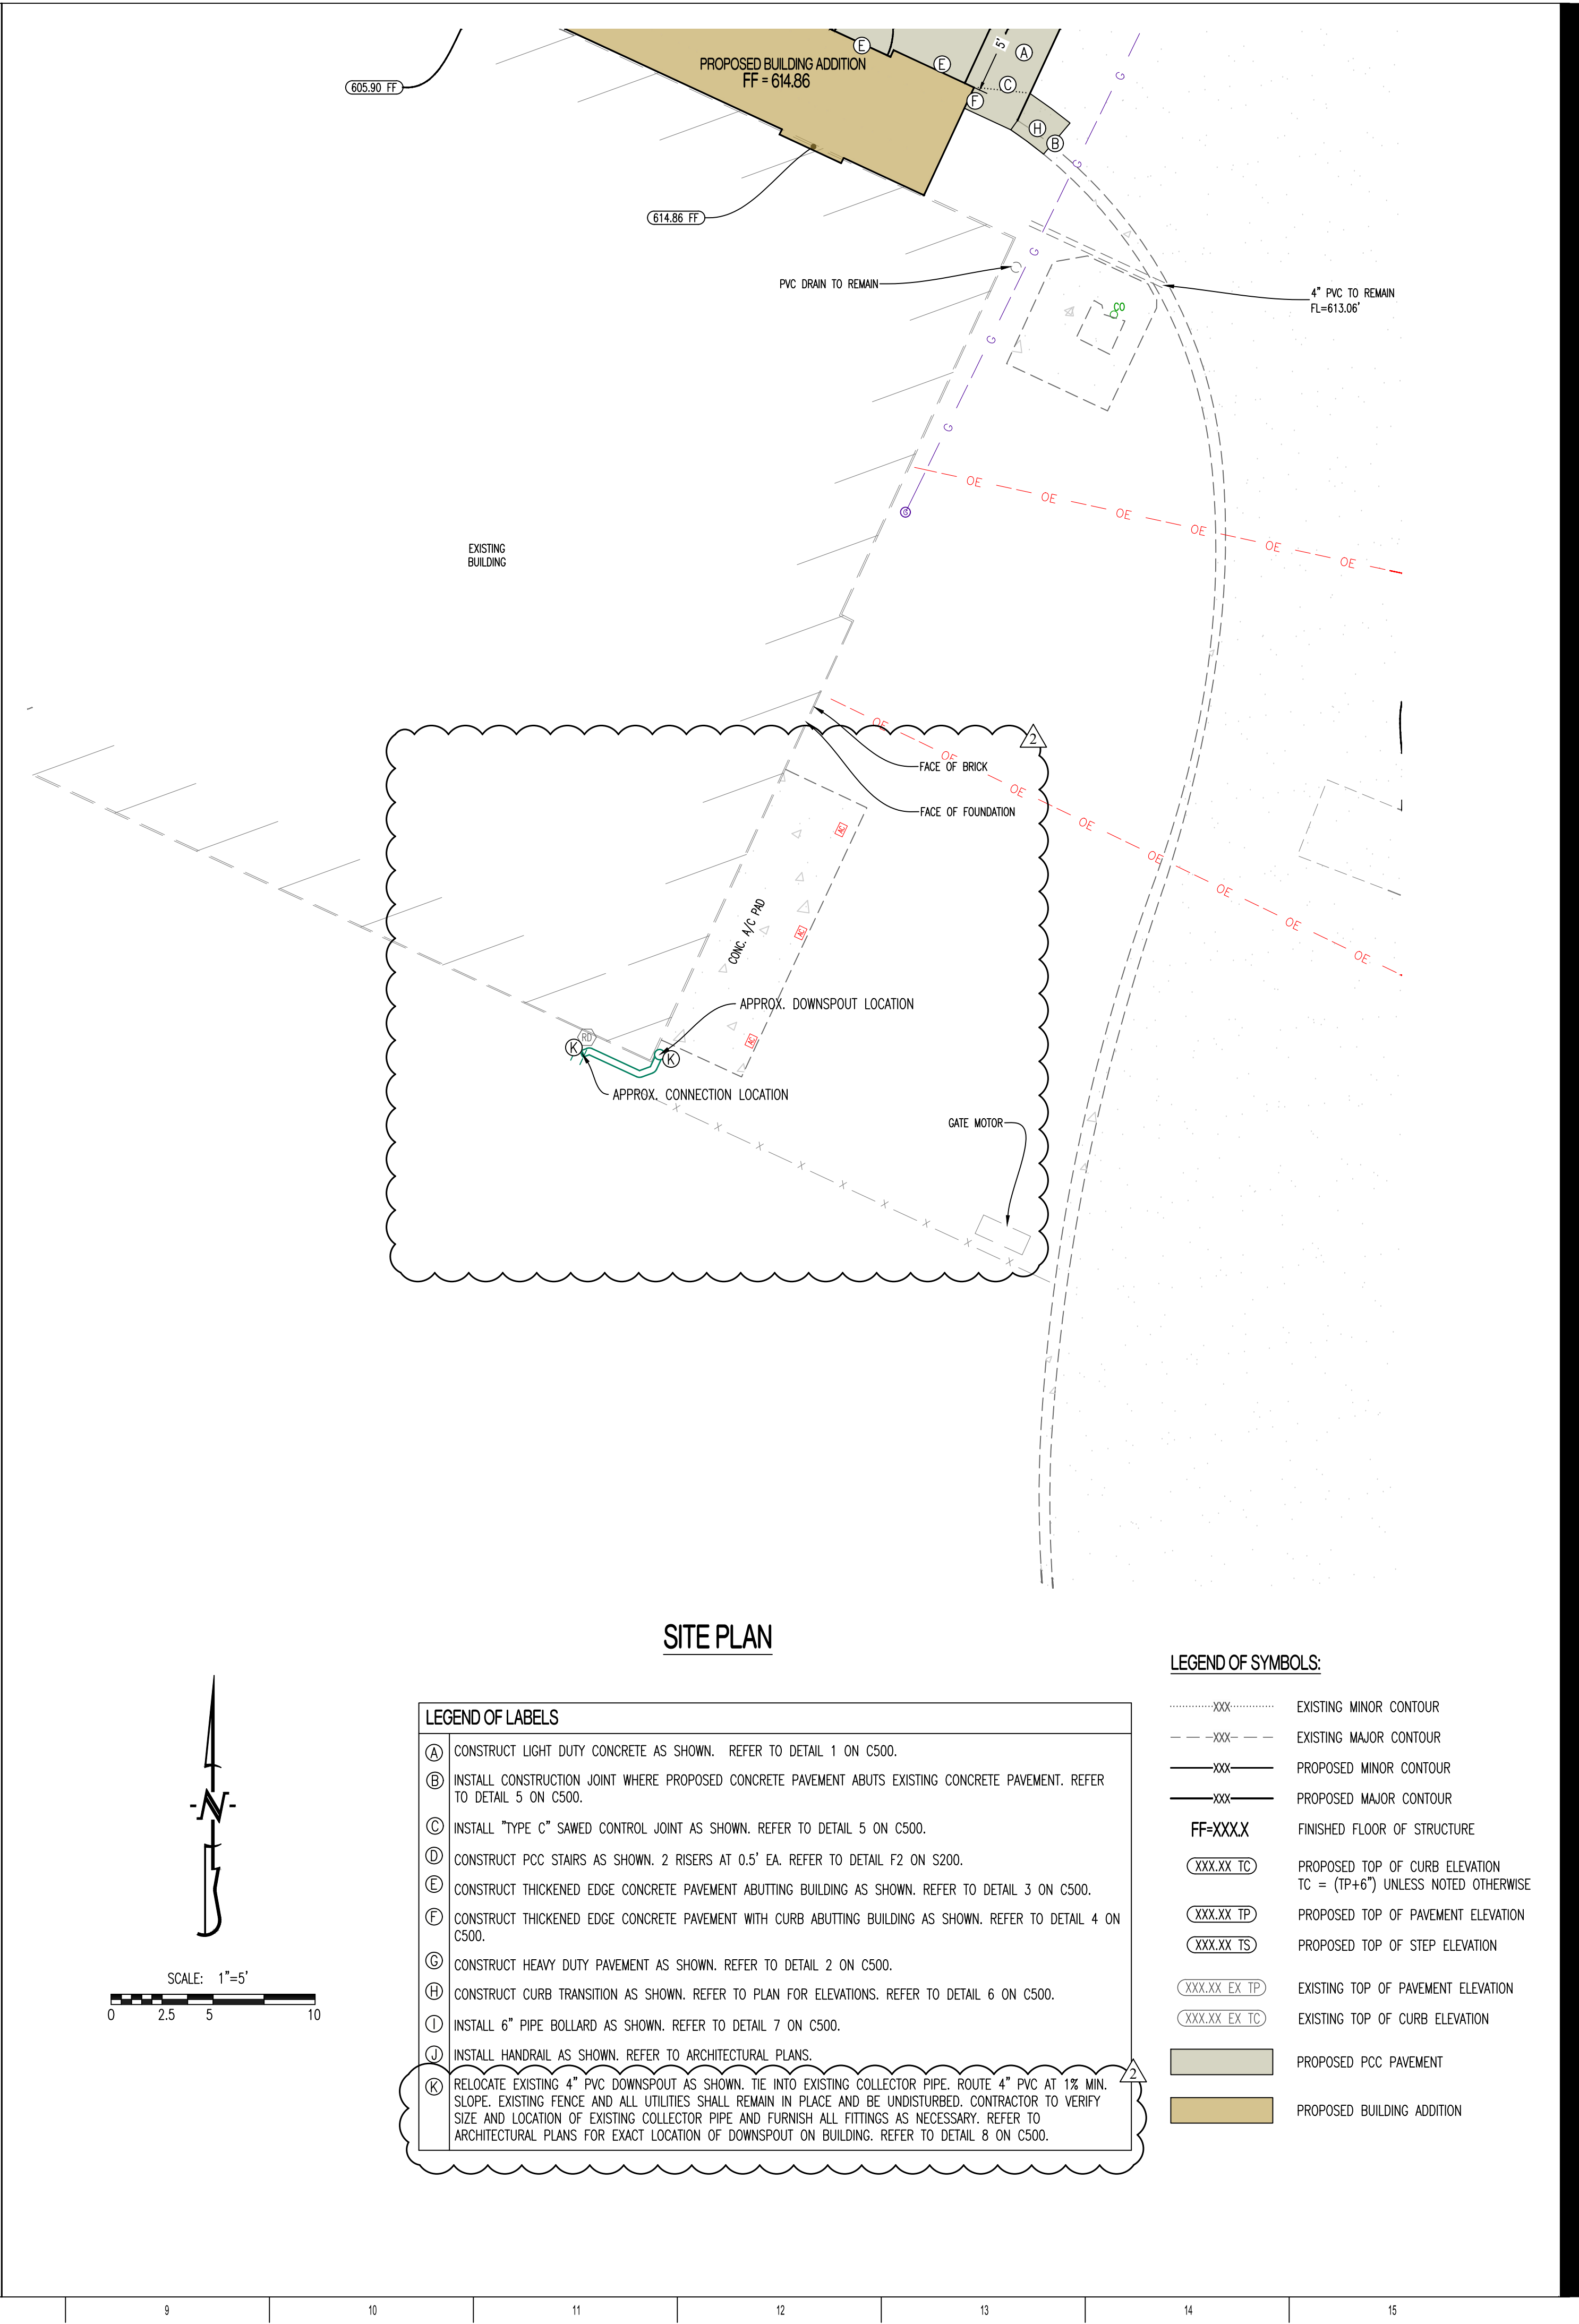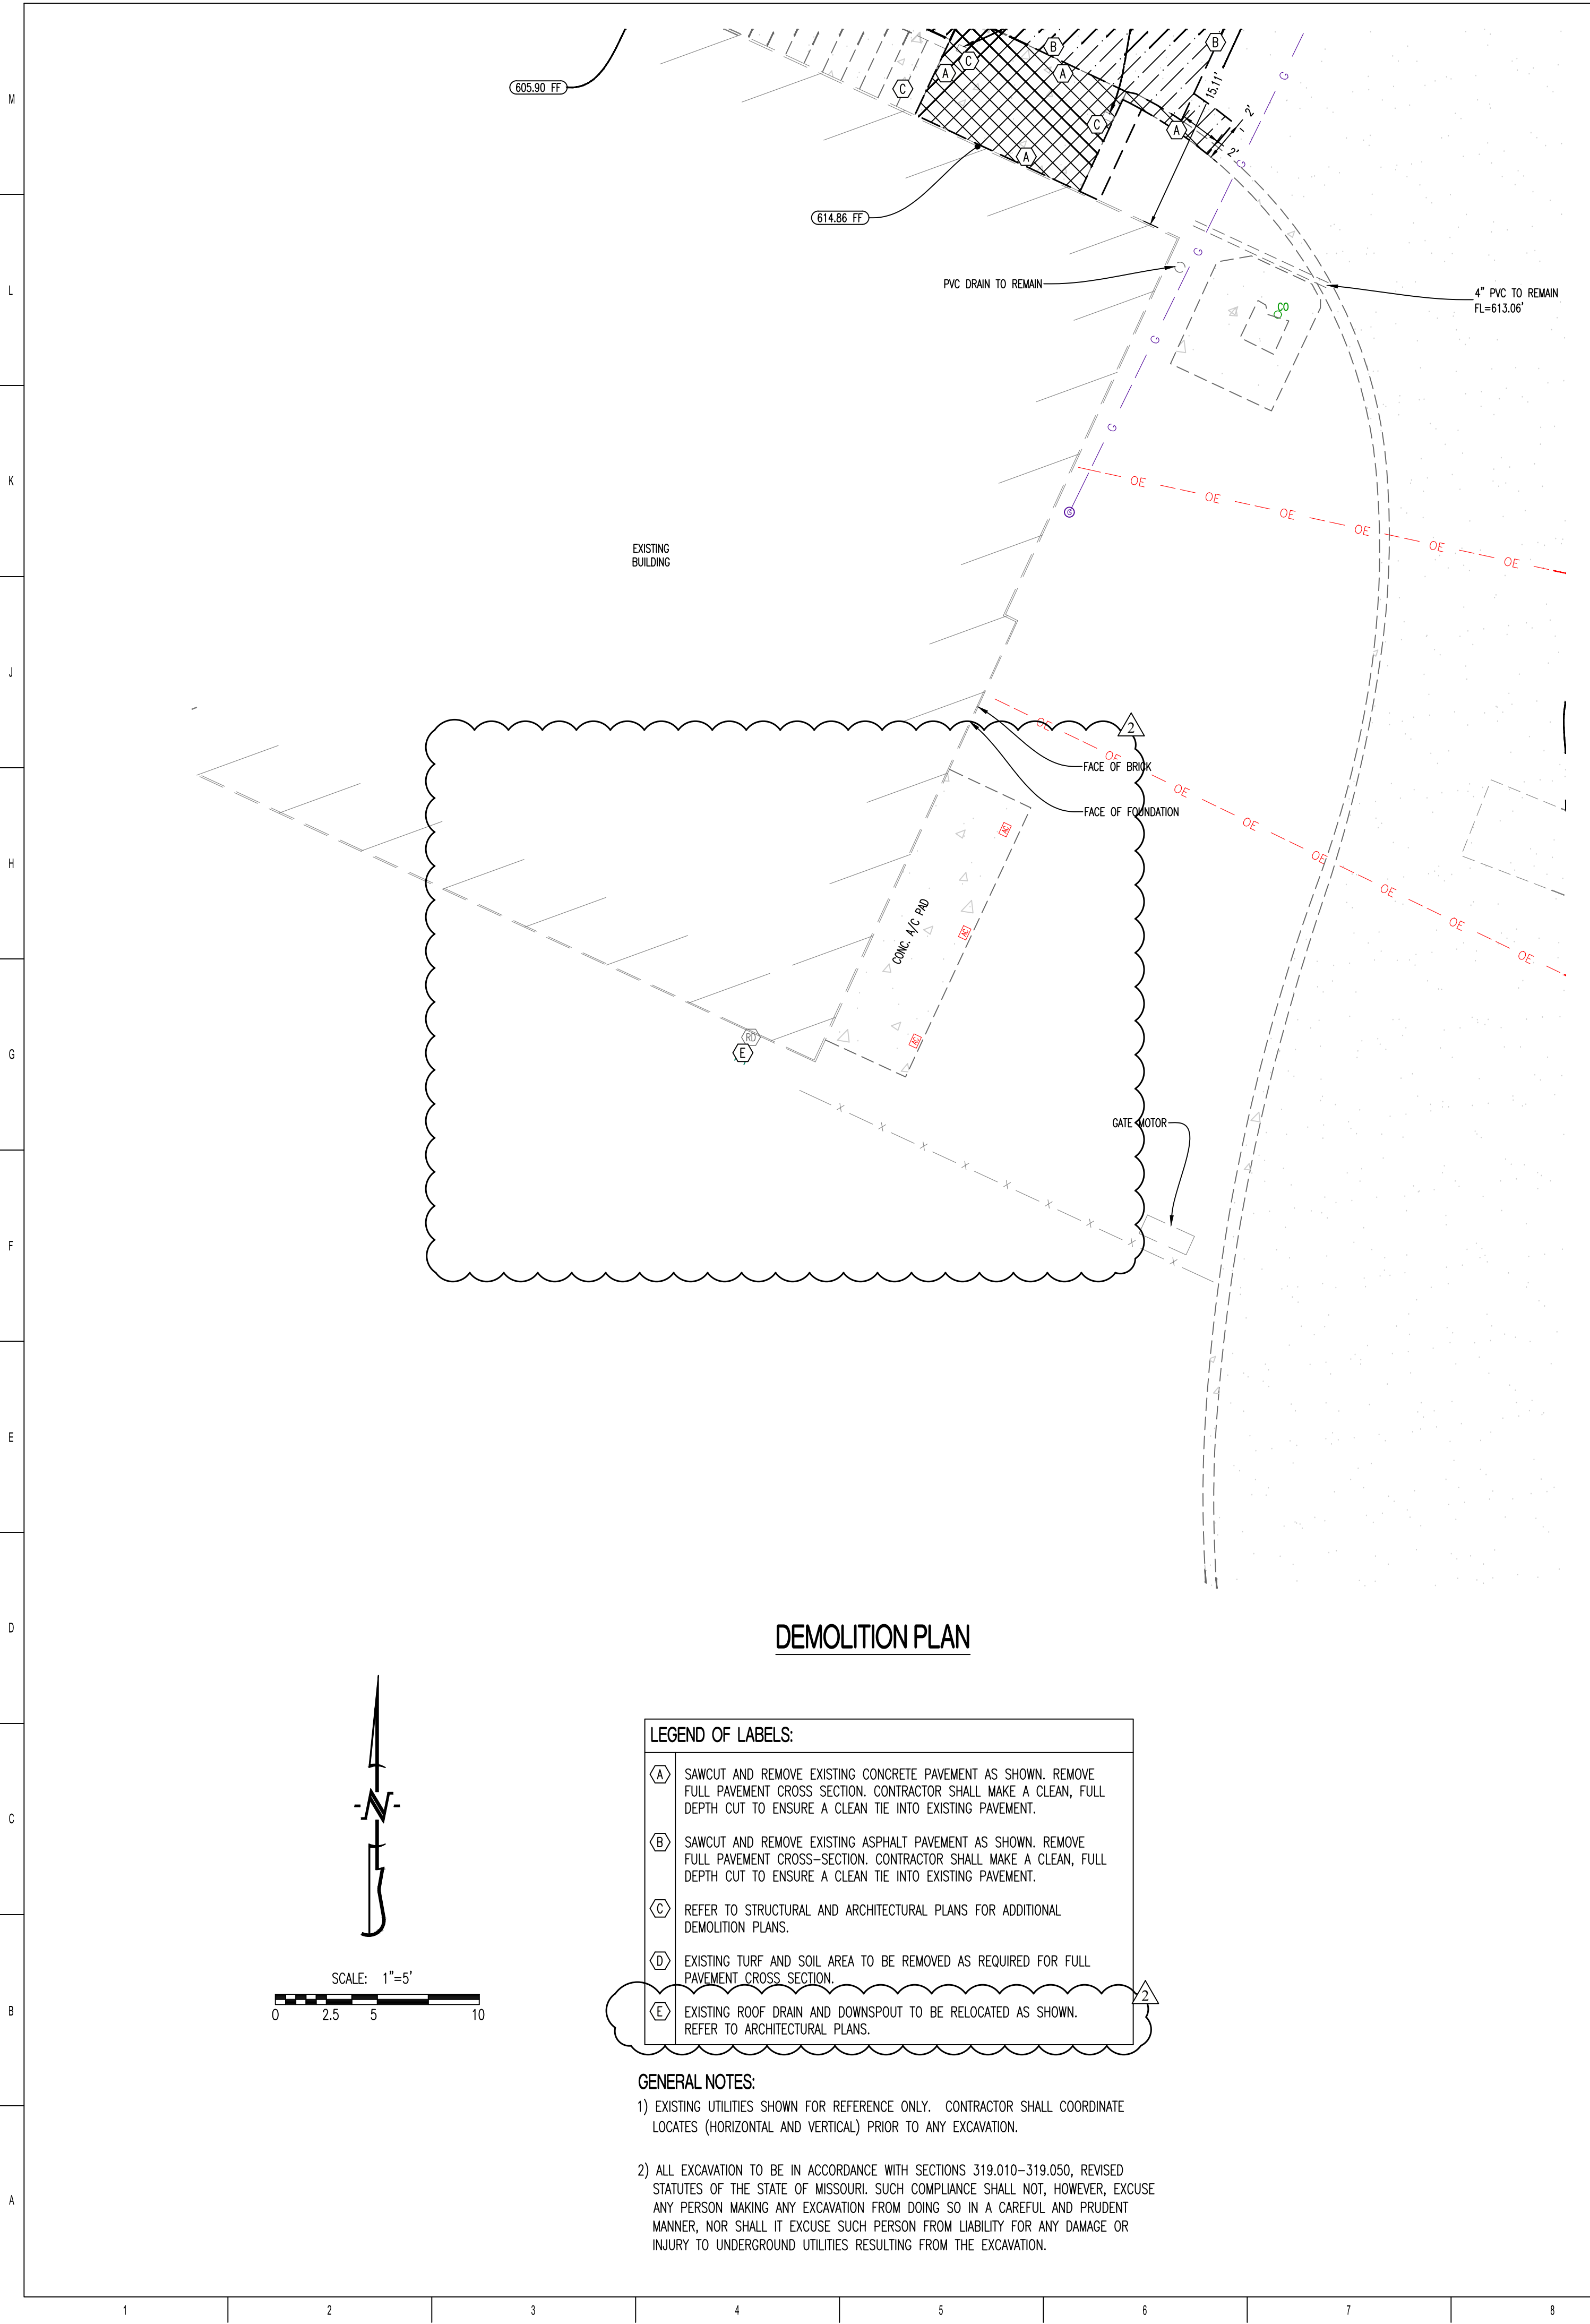

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

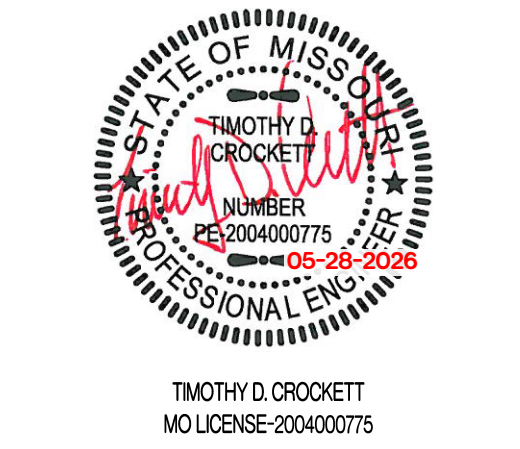

Peckham & Wright Architects, Inc., d.b.a.
PWArchitects, Inc.
2120 Forum Blvd., Ste. 101
Columbia, Missouri 65203
PWArchitects.com | 573.449.2863
Peckham & Wright Architects an Architectural Corporation
Missouri State Certificate of Authority No. 000244

PREPARED BY:
CROCKETT
ENGINEERING CONSULTANTS
1000 W. Illinois Blvd., Ste. 1
Columbia, Missouri 65203
(573) 449-0074
www.crocketteengineering.com
Crockett Engineering Consultants, LLC
Missouri State Certificate of Authority
#0000151501

OFFICE OF
ADMINISTRATION
DIVISION OF
FACILITIES
MANAGEMENT,
DESIGN AND
CONSTRUCTION

REPLACE ROOF &
RENOVATE
BASEMENT/ACCESS

MSHP INTEROPERABILITY
2413 EAST MCCARTY ST.
JEFFERSON CITY, MO

PROJECT # R2508-01
SITE # 6027
ASSET # 8136027002


REVISION: ADD. #2
DATE: 5/28/2026
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 12/12/2025

CAD DWG FILE: 250208
DRAWN BY: NMD
CHECKED BY: TDC
DESIGNED BY: TDC

SHEET TITLE:
**DEMOLITION &
SITE PLAN
SOUTH EAST**

SHEET NUMBER:
C101.1
12/12/2025
8 OF 27 SHEETS

8 ROOF DRAIN DETAIL

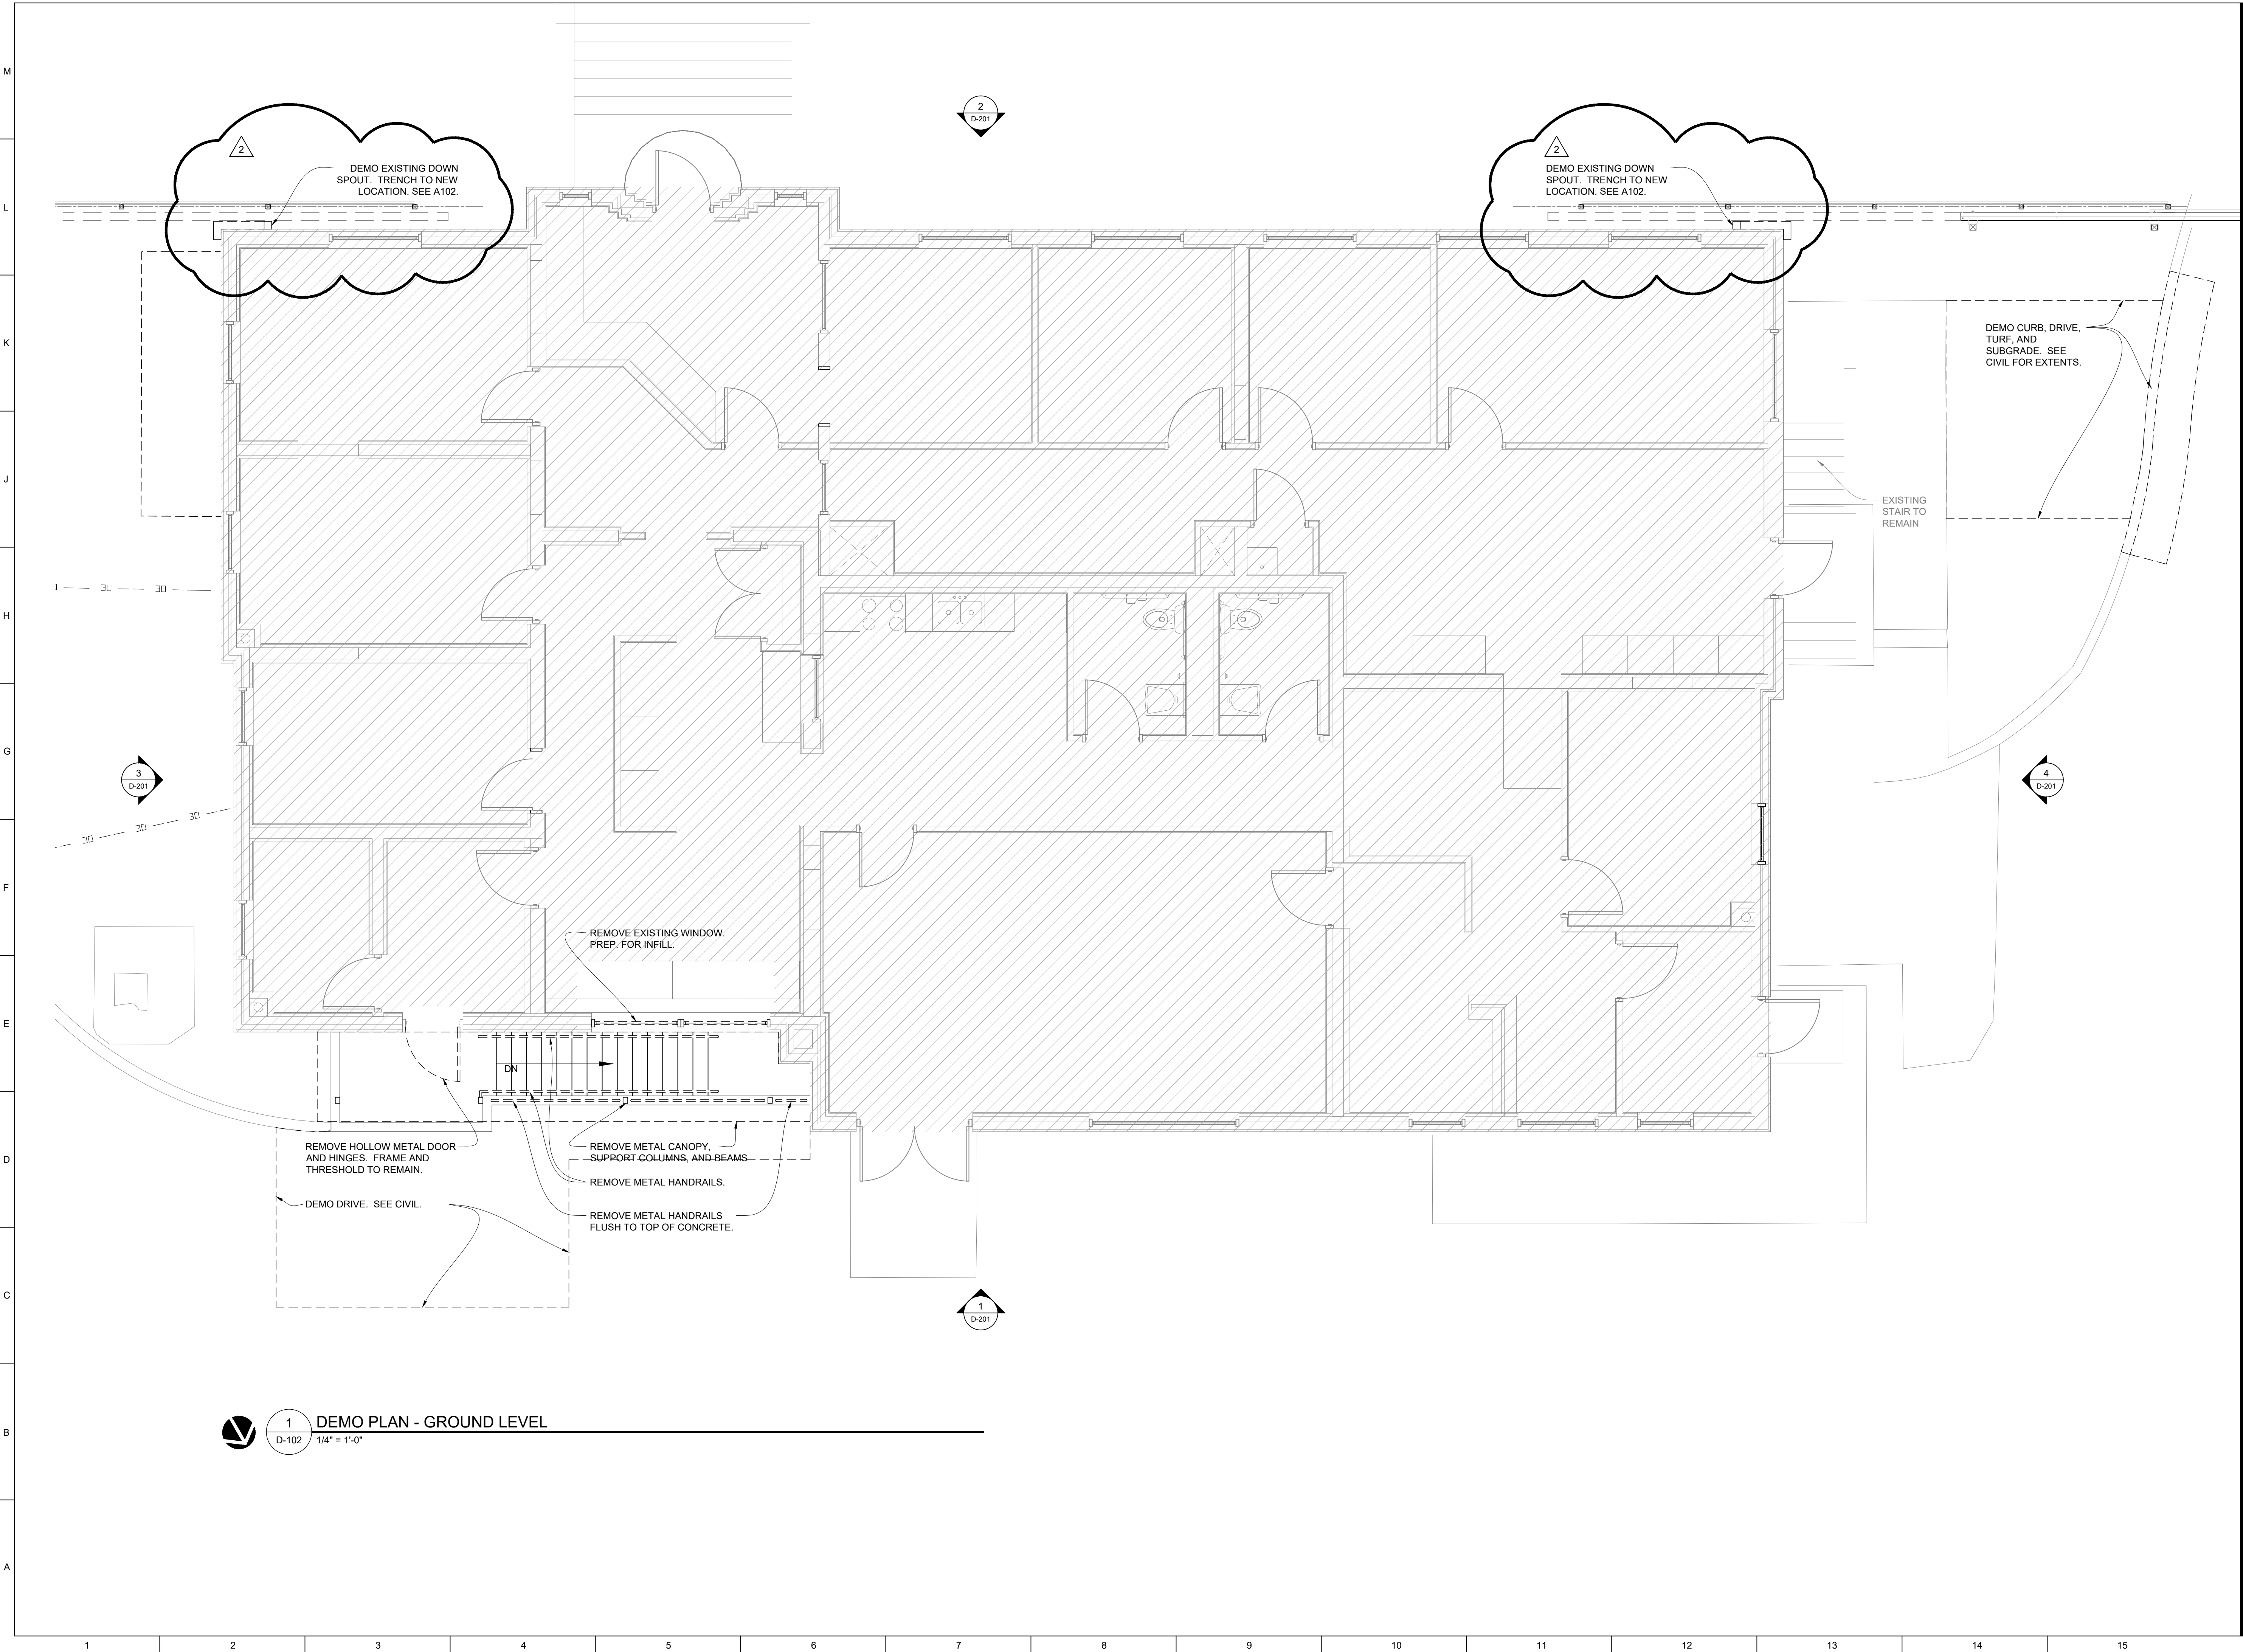

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

12/12/2025

PECKHAM & WRIGHT ARCHITECTS, INC. A-7070

Peckham & Wright Architects, Inc., d.b.a.
PWArchitects, Inc.
2120 Forum Blvd., Ste. 101
Columbia, Missouri 65203
PWArchitects.com | 573.449.2683
Peckham & Wright Architects an Architectural Corporation
Missouri State Certificate of Authority No. 000244

OFFICE OF
ADMINISTRATION
DIVISION OF
FACILITIES
MANAGEMENT,
DESIGN AND
CONSTRUCTION

REPLACE ROOF &
RENOVATE
BASEMENT/ACCESS

MSHP INTEROPERABILITY
2413 EAST MCCARTY ST.
JEFFERSON CITY, MO


PROJECT # R2508-01
SITE # 6027
ASSET # 8136027002



REVISION: ADD #2
DATE: 5/28/2026
REVISION: _____
DATE: _____
REVISION: _____
DATE: _____
ISSUE DATE: 12/12/2025

CAD DWG FILE: _____
DRAWN BY: SI
CHECKED BY: SI
DESIGNED BY: SI

SHEET TITLE:
**DEMO PLAN -
GROUND LEVEL**



SHEET NUMBER:
D-102
12/12/2025
5 OF 27 SHEETS

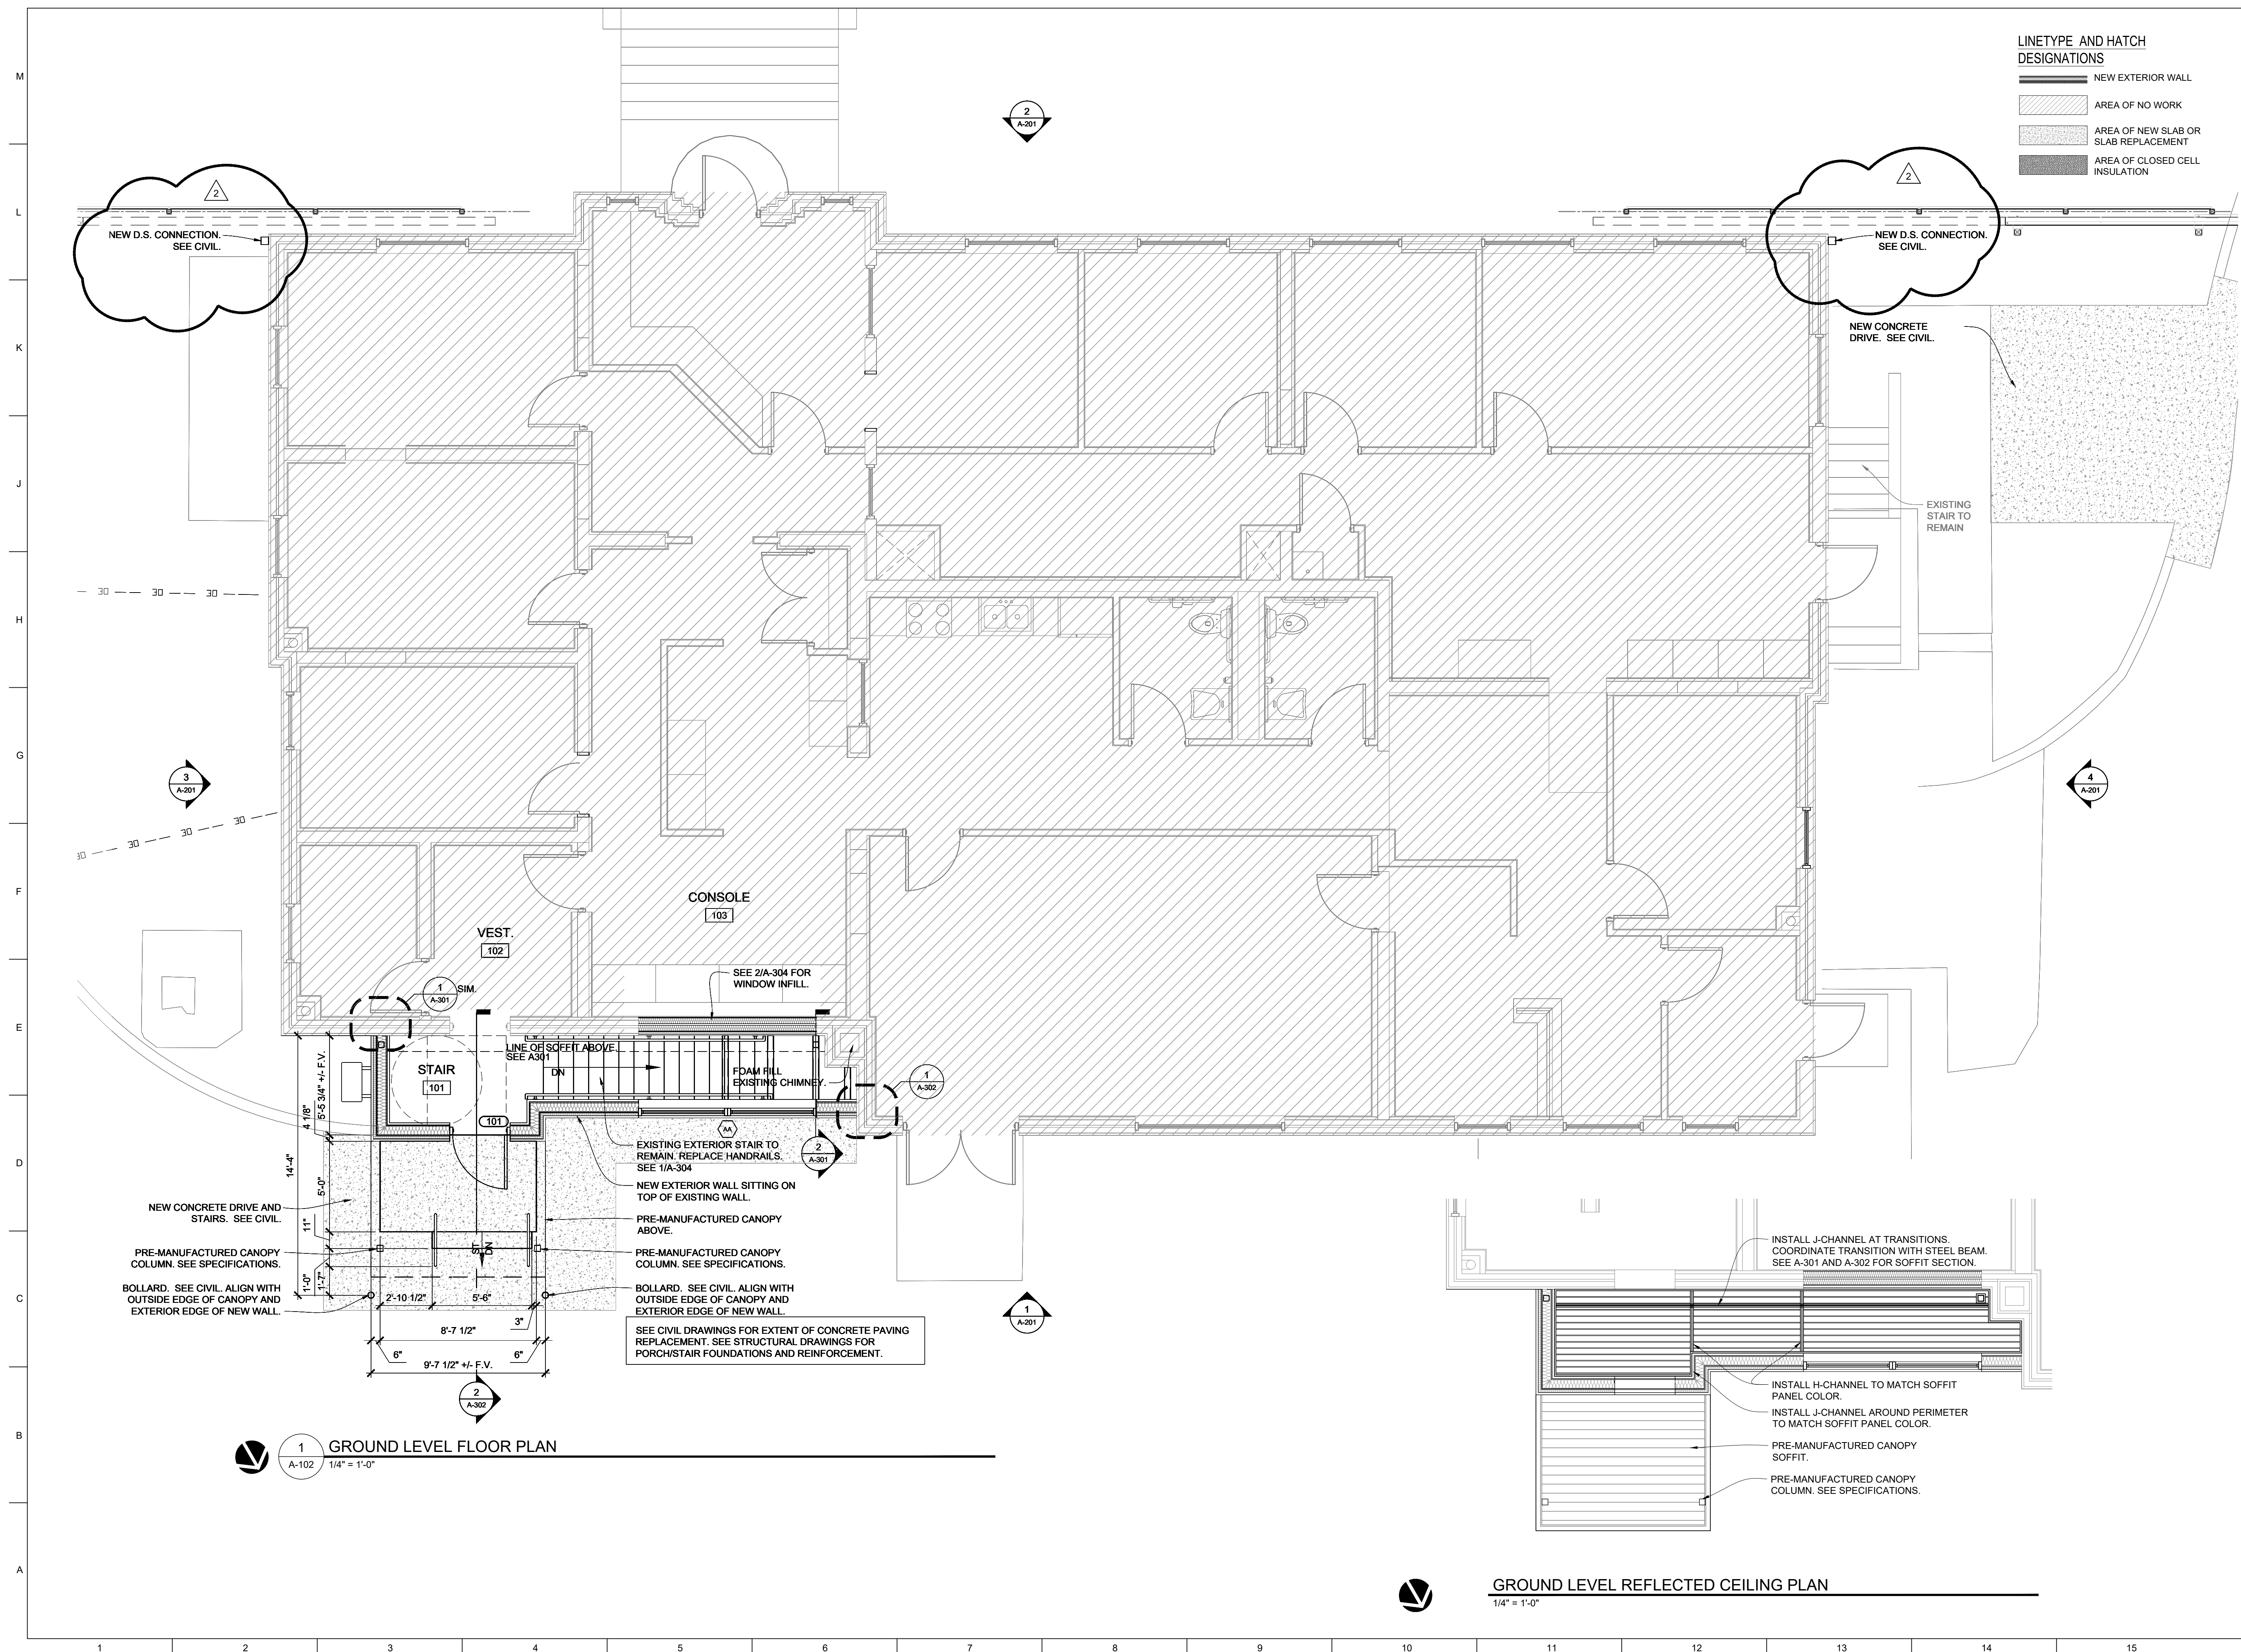

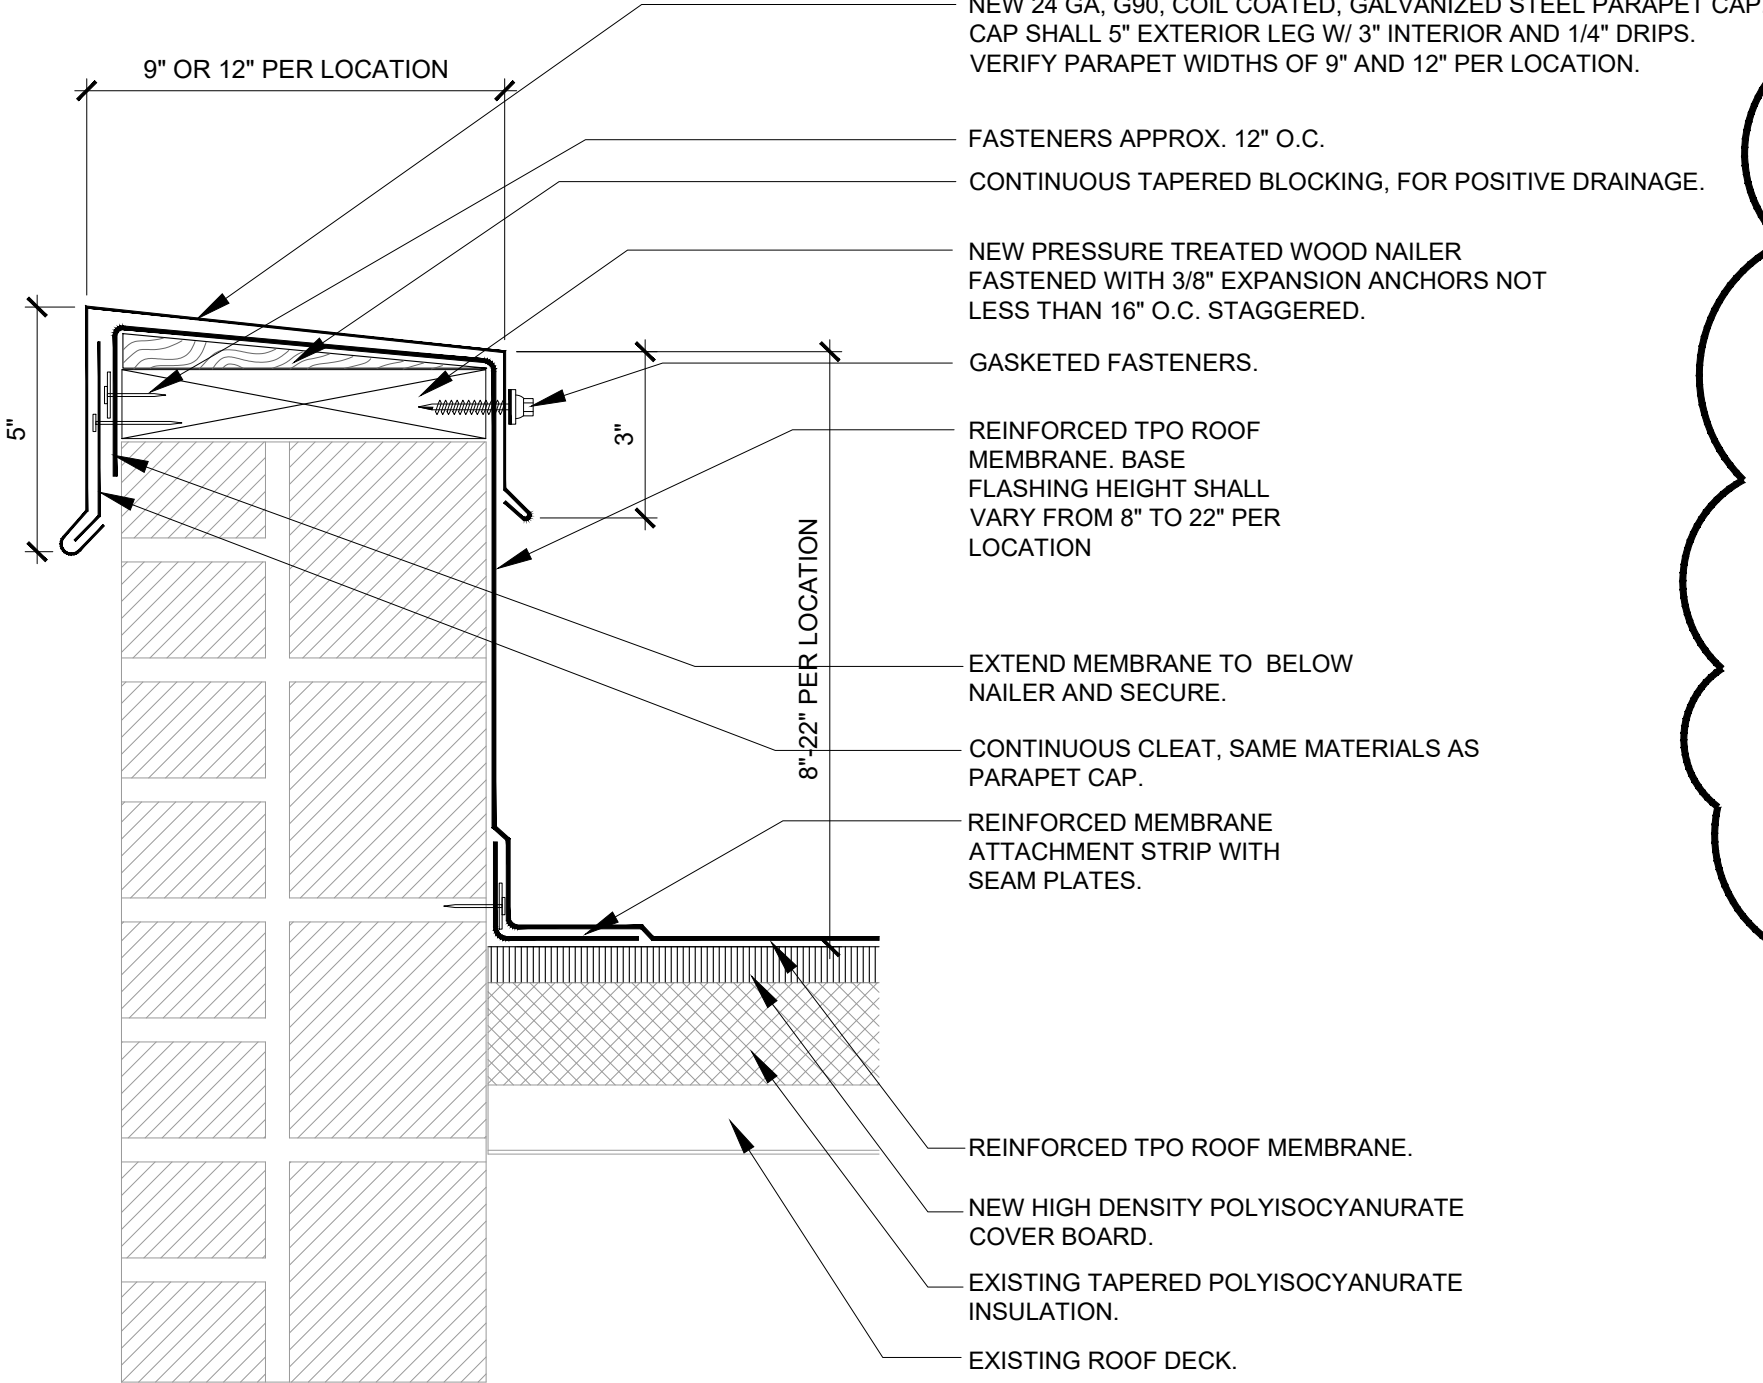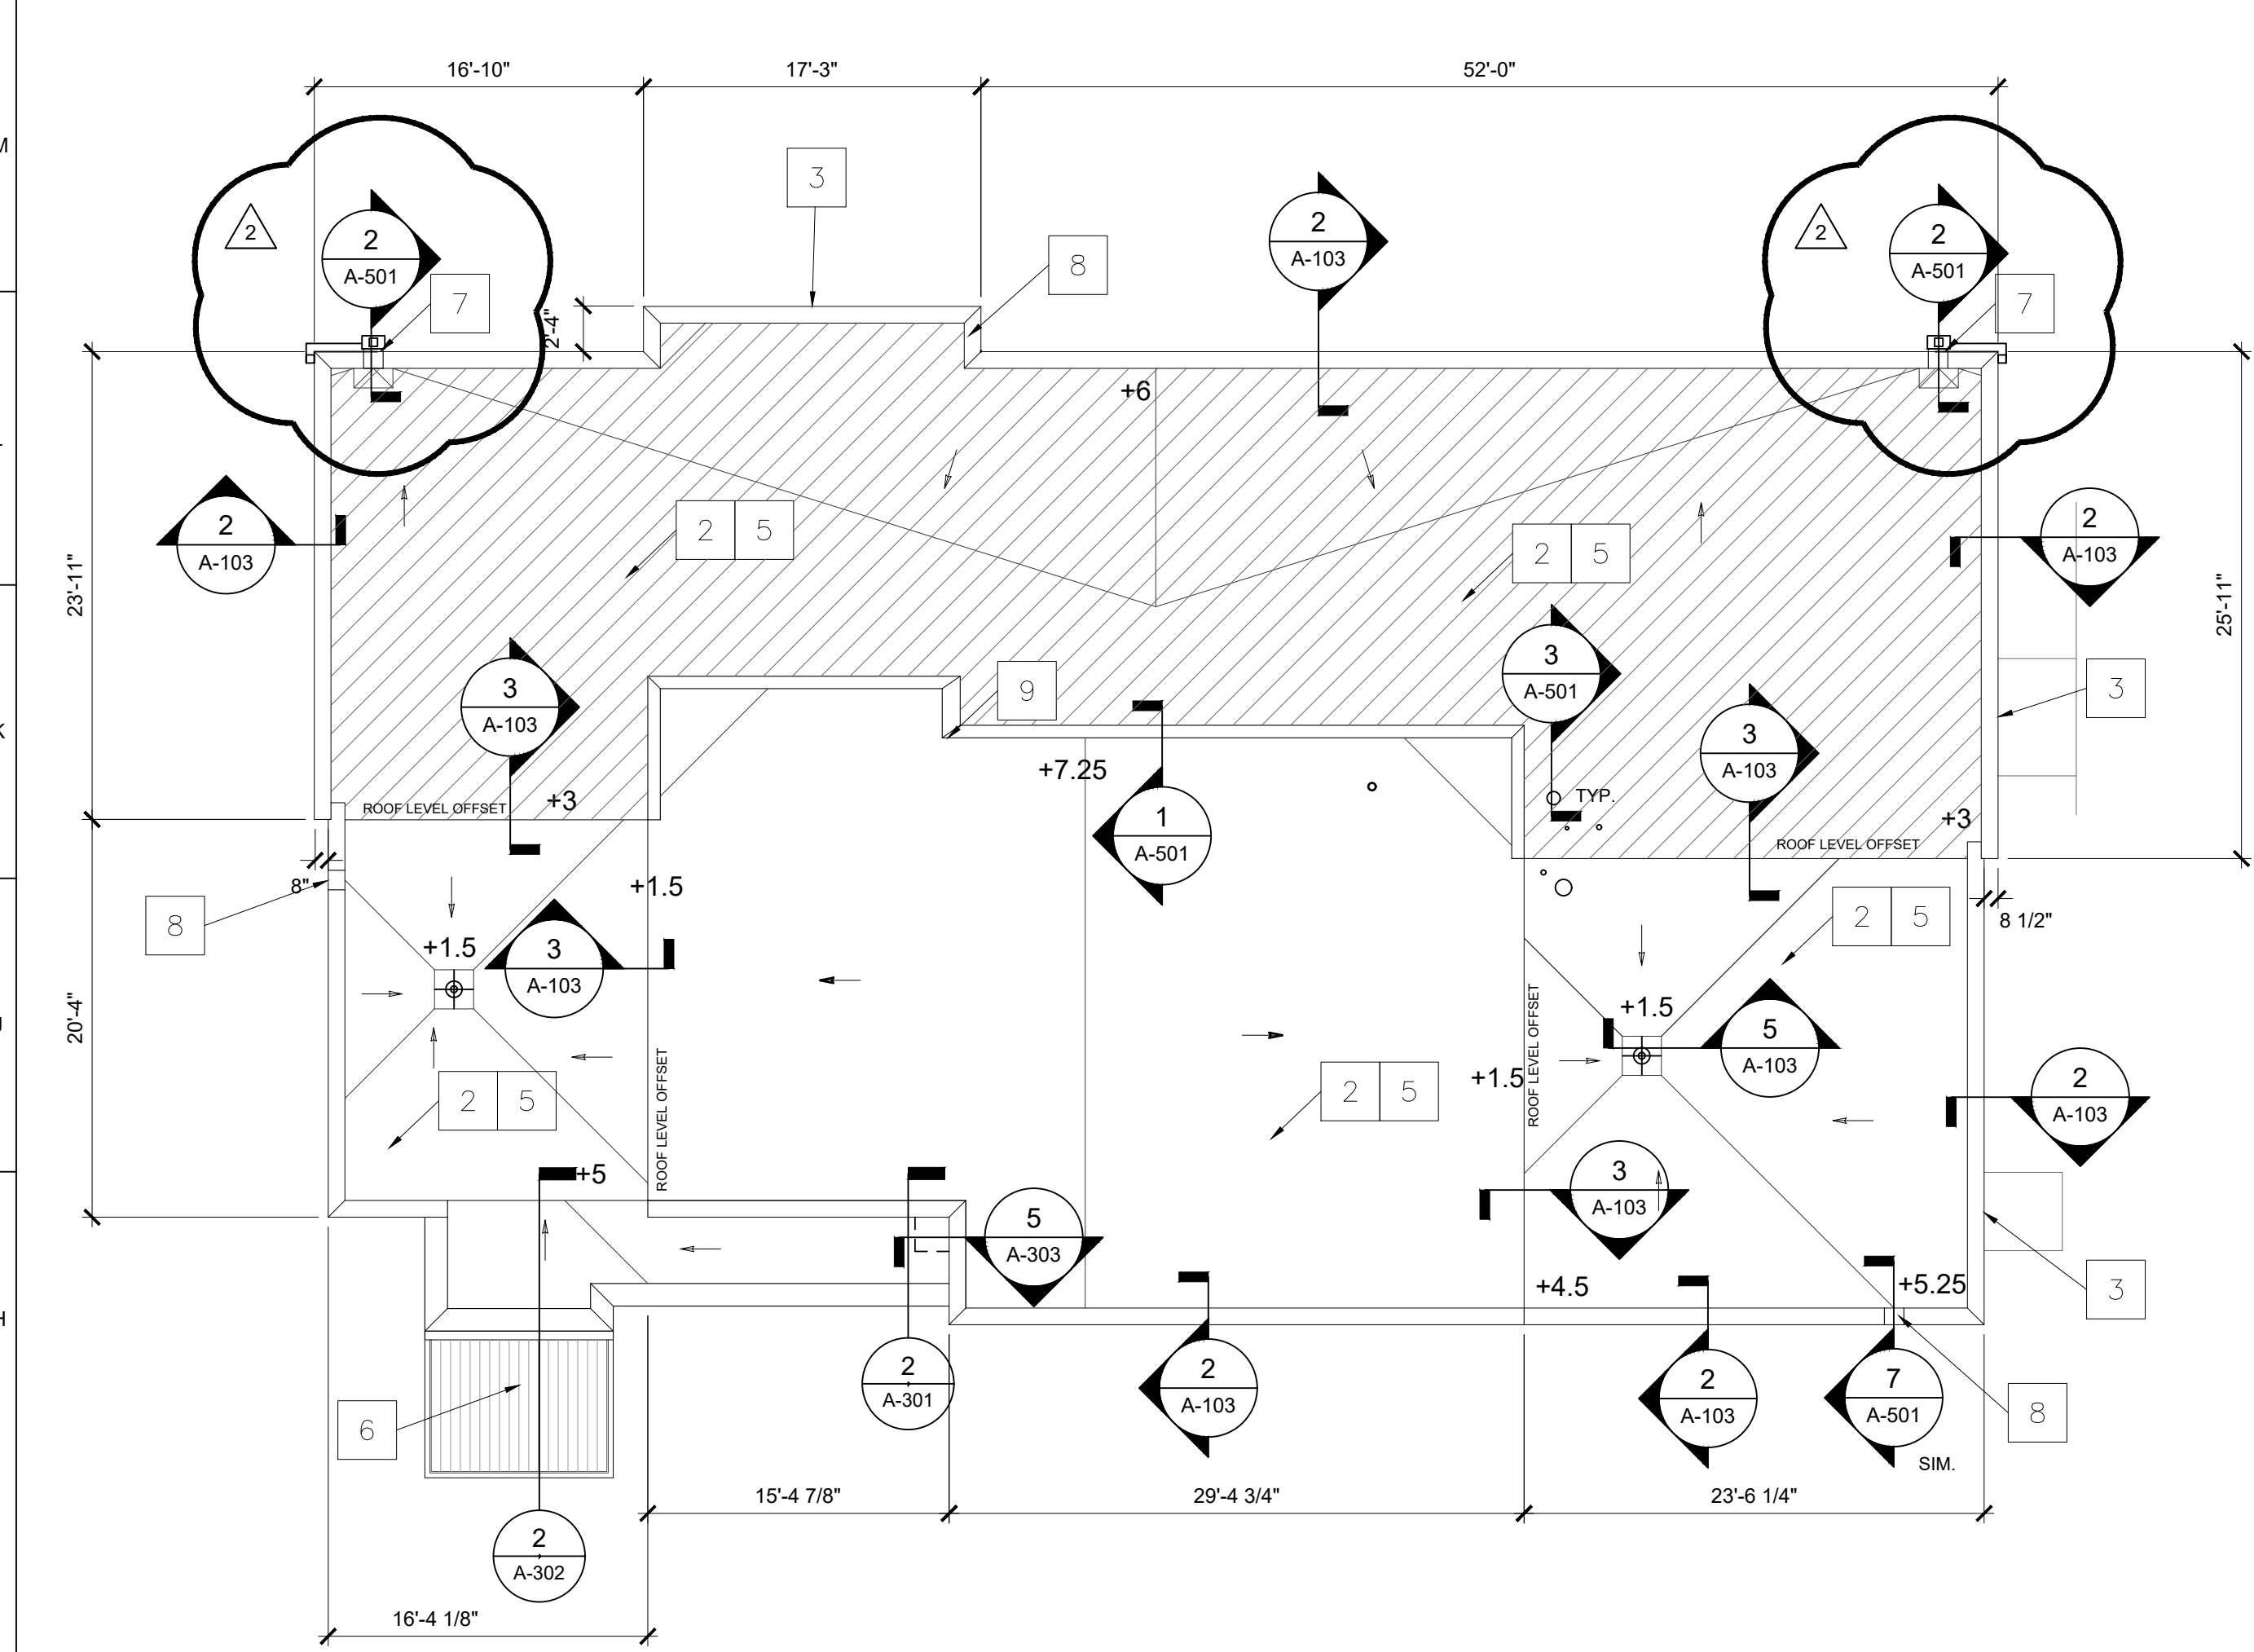


- DEMOLITION NOTES: ROOF**
1. FIELD VERIFY ALL DIMENSIONS SHOWN ON DRAWINGS AND REPORT ANY DISCREPANCIES TO THE ARCHITECT.
 2. REMOVE EXISTING, ROOF MEMBRANE, COVER BOARD, MEMBRANE FLASHINGS, AND SHEET METAL FLASHINGS. LEGALLY DISPOSE OF ALL MATERIALS. SOUTH ROOF [Hatched Pattern] - REMOVE 2-1/2" POLYISOCYANURATE INSULATION DOWN TO CONCRETE ROOF DECK
 3. PROTECT BUILDING ENTRANCES PER SPECIFICATIONS.
 4. THE CONTRACTOR SHALL HAVE THE SOLE RESPONSIBILITY OF PRE-BID SITE INSPECTION TO MAKE ONE'S OWN DETERMINATION OF THE EXTENT OF WORK AND EXISTING CONDITIONS.
- INSTALLATION NOTES: ROOF**
5. INSTALL NEW REINFORCED TPO ROOF MEMBRANE ROOF SYSTEM, NEW COVER BOARD, CRICKETS SHALL BE 1/2" PER 12 SLOPE, BASE FLASHINGS, WOOD BLOCKING AND SHEET METAL FLASHINGS. SOUTH ROOF [Hatched Pattern] - INSTALL NEW 2-1/2" POLYISOCYANURATE INSULATION OVER SLOPED CONCRETE ROOF DECK AS BASE LAYER FOR ABOVE
 6. INSTALL NEW CANOPY SYSTEM. SEE SPECIFICATIONS
 7. INSTALL NEW SCUPPERS W/ SUMP AND ROOF DRAINAGE SYSTEM W/ DOWNSPOUTS. DOWNSPOUTS SHALL MATCH EXISTING LOCATIONS AND TRANSITION INTO EXISTING CAST IRON COLLECTION SYSTEM.
 8. INSTALL NEW 24 GA, G90, COIL COATED, GALVANIZED STEEL OVERFLOW SCUPPER. SCUPPER OPENING SHALL BE APPROX. 10"x10", APPROXIMATELY 1" ABOVE NEW ROOF SURFACE, LOCATED AT THE LOWEST POINT OF TAPERED INSULATION (FIELD VERIFY).
 9. INSTALL NEW ROOF EXPANSION JOINT W/ 24 GA, G90, COIL COATED STEEL CAP SEPARATING DIFFERING ROOF DECK SECTIONS.
 10. CONTRACTOR WILL FURNISH AND INSTALL ALL ROOFING, FLASHING, AND MATERIALS REQUIRED FOR A COMPLETE WATERPROOF INSTALLATION, WHETHER OR NOT SUCH MATERIALS AND DETAILS OF INSTALLATION HAVE BEEN SPECIFICALLY MENTIONED OR SHOWN. CONFORM TO MANUFACTURER'S APPROVED DETAILS OR OTHER CONSTRUCTION AUTHORITY SUCH AS THE NATIONAL ROOFING CONTRACTOR'S ASSOCIATION (NRCA) ROOFING AND WATERPROOFING MANUAL, FIFTH EDITION, VOLUME 2, "LOW-SLOPE ROOFING".

- ROOF SYMBOLS**
- PARAPET WALL
 - ROOF DRAIN W/ SUMP
 - ROOF SLOPE
 - OVERFLOW SCUPPER
 - SCUPPER W/ COLLECTION BOX (DOWNSPOUT)
 - PIPE PENETRATION
 - +5.25 APPROXIMATE INSULATION THICKNESS

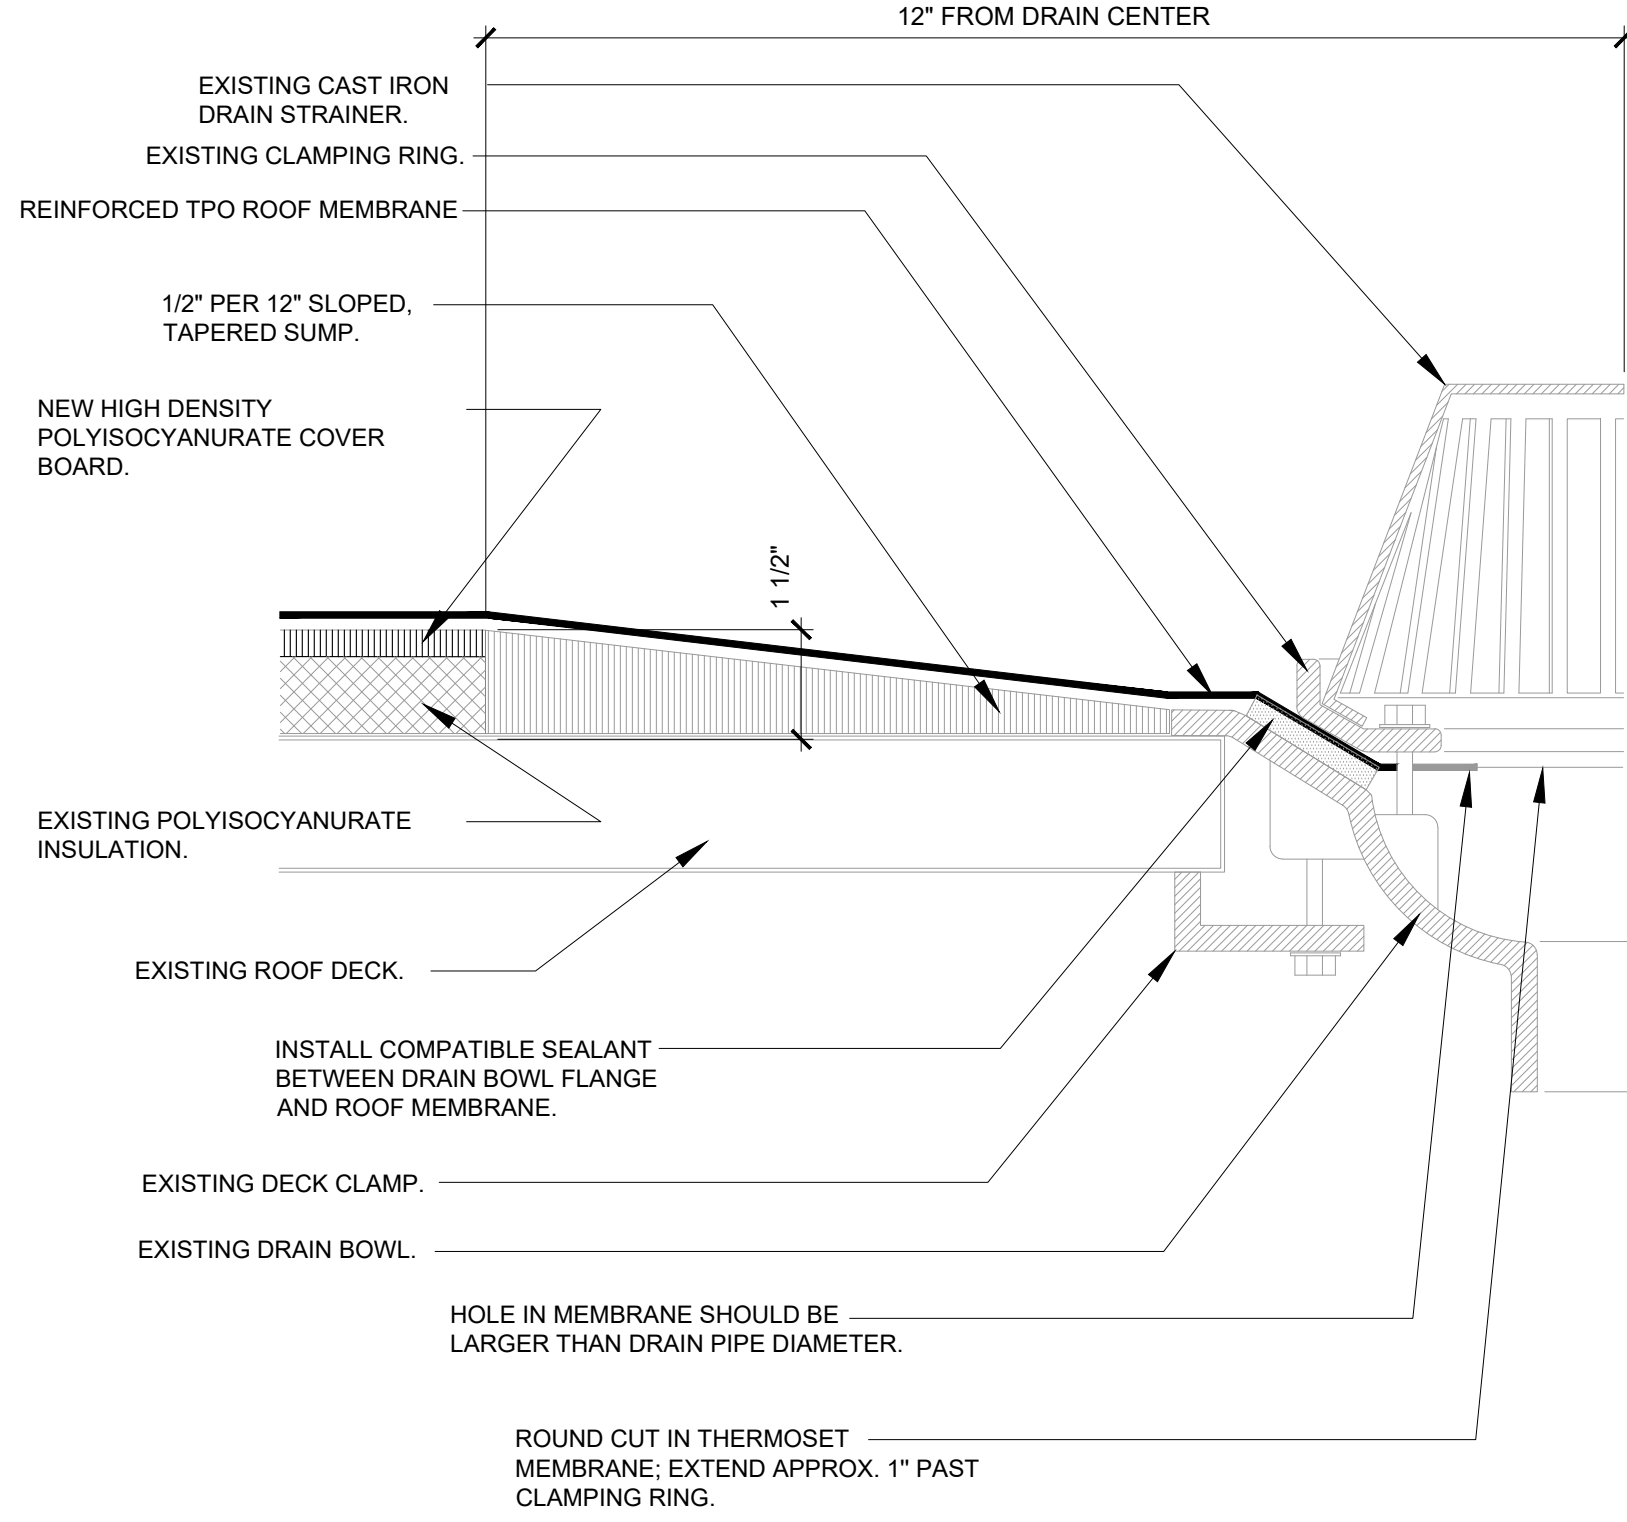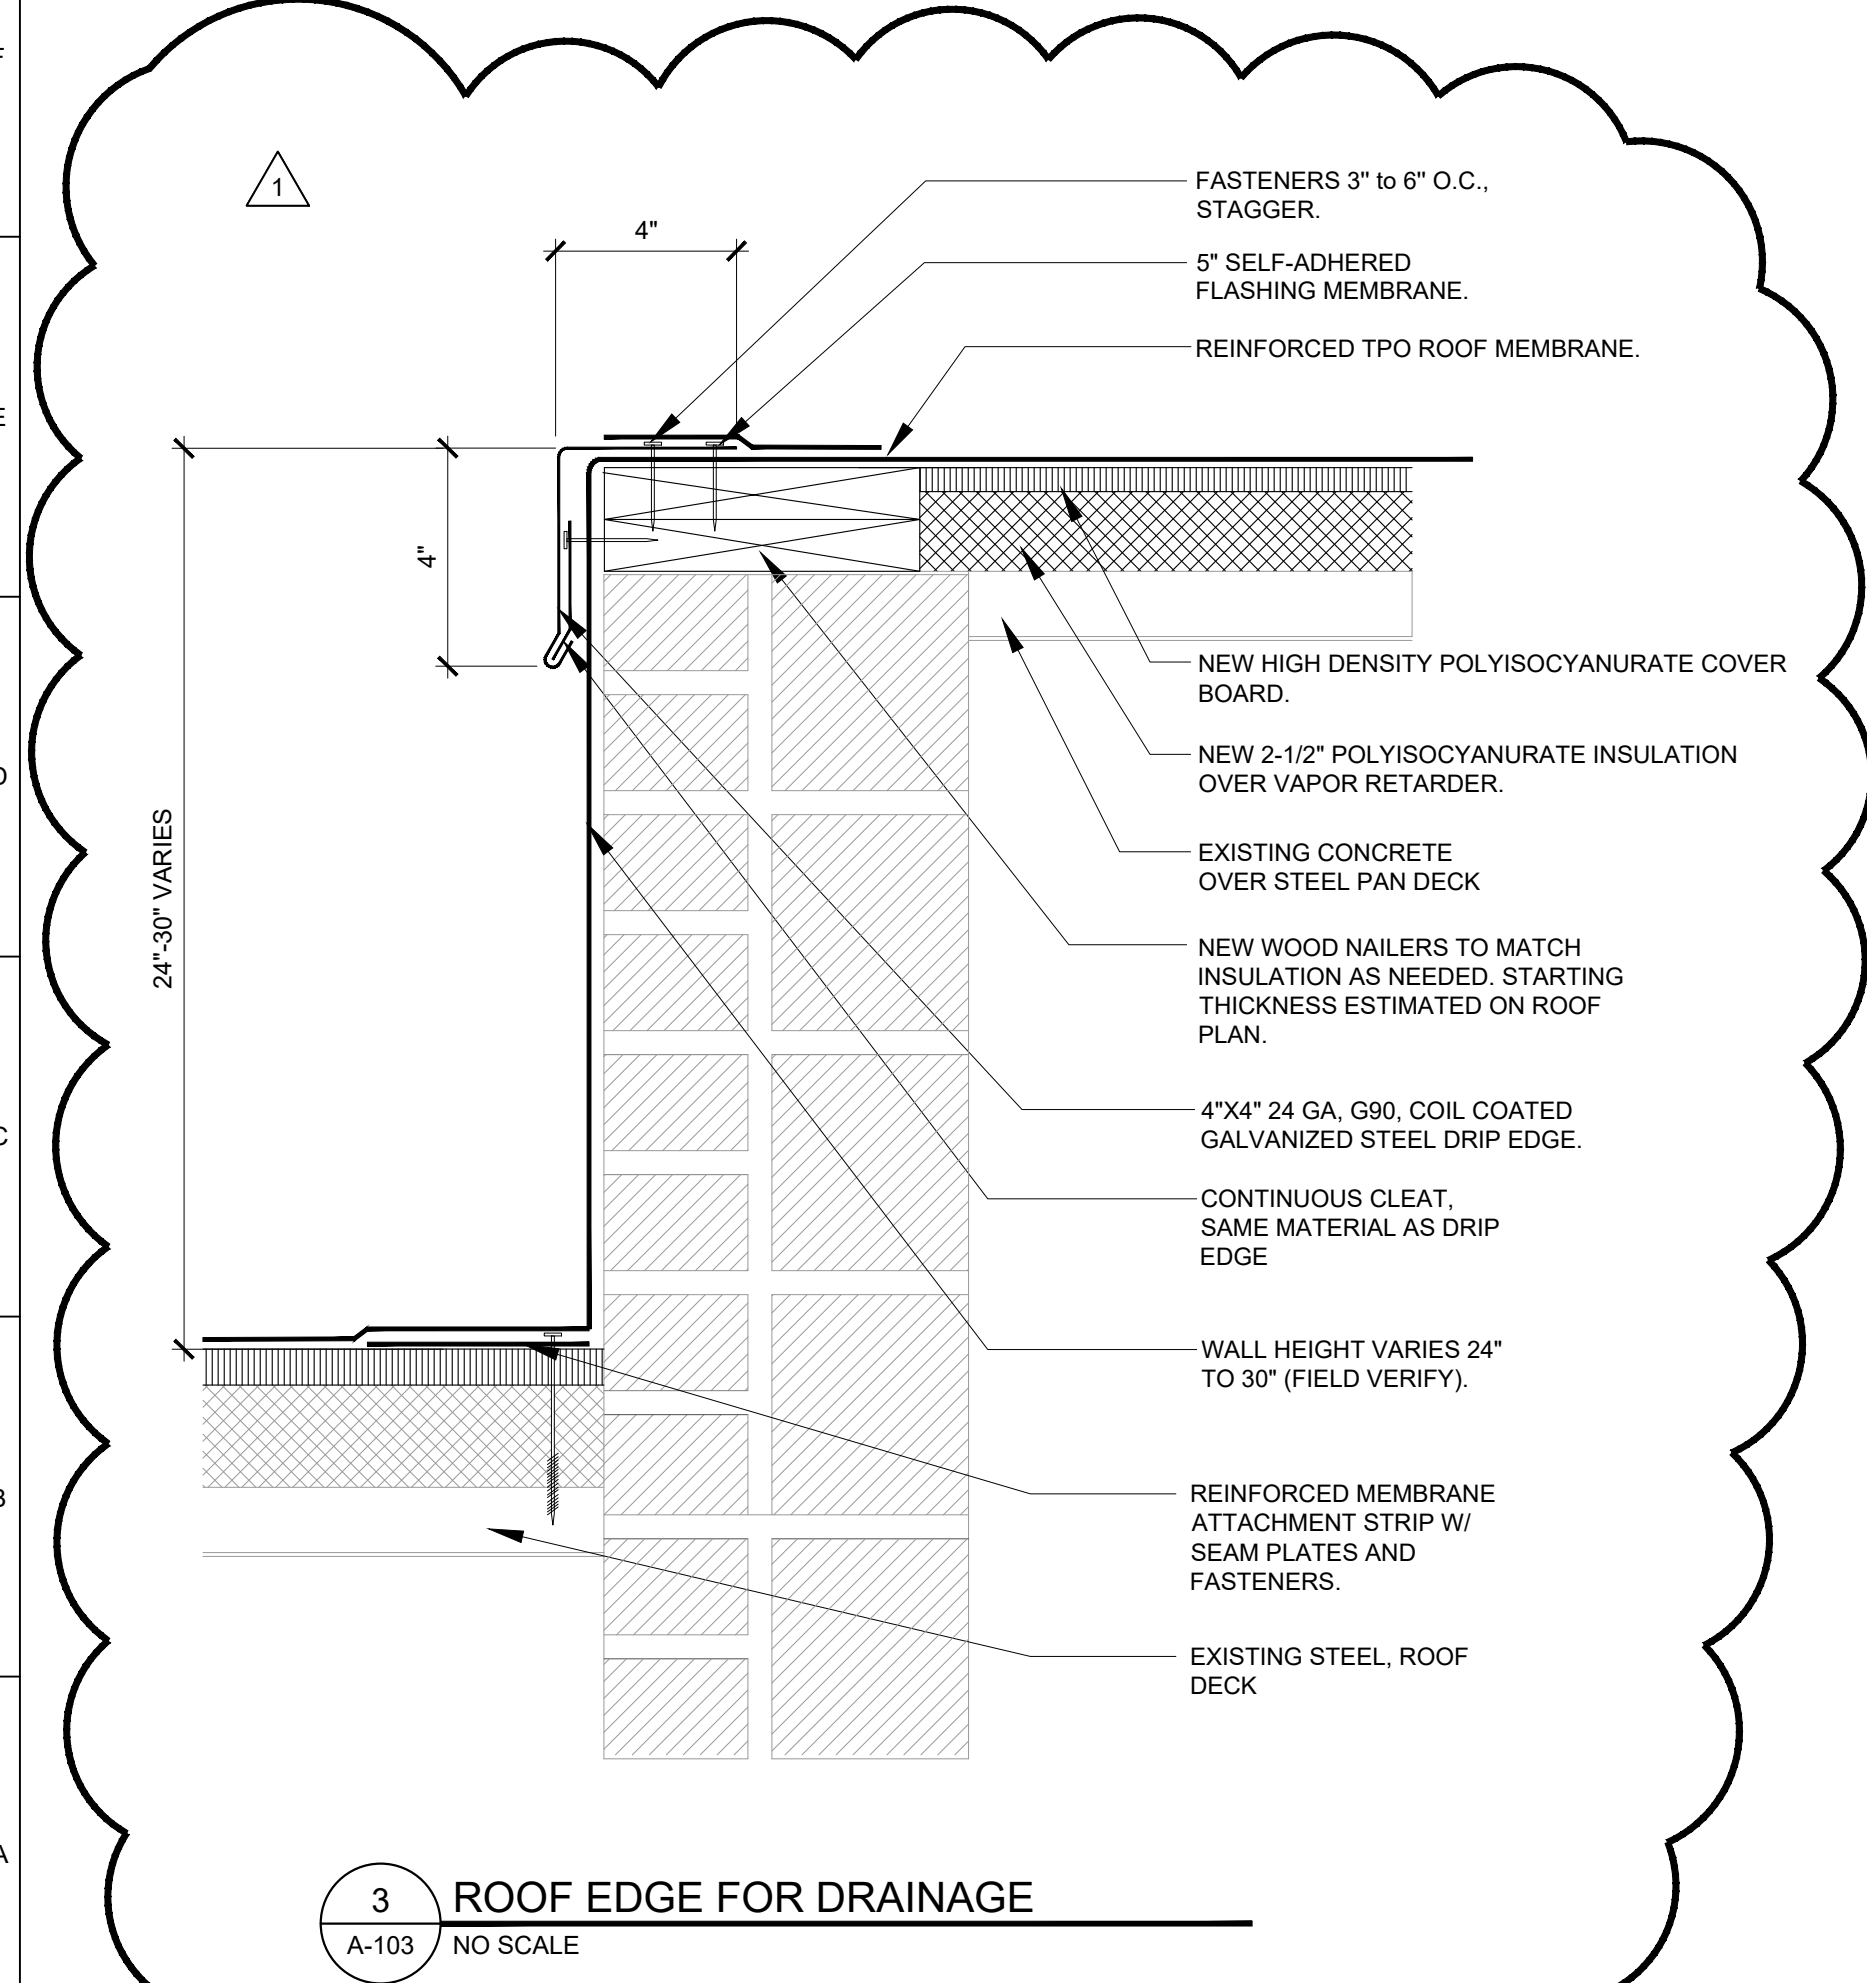

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

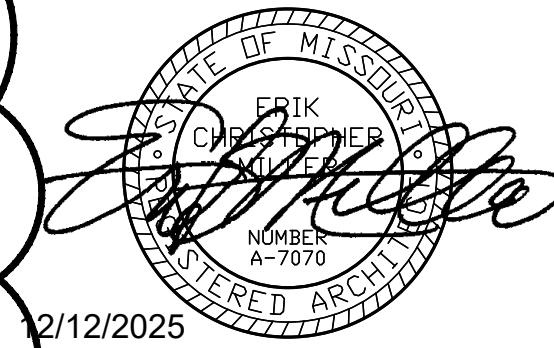

OFFICE OF
ADMINISTRATION
DIVISION OF
FACILITIES
MANAGEMENT,
DESIGN AND
CONSTRUCTION

REPLACE ROOF &
RENOVATE
BASEMENT/ACCESS

MSHP INTEROPERABILITY
2413 EAST MCCARTY ST.
JEFFERSON CITY, MO


PROJECT # R2508-01
SITE # 6027
ASSET # 8136027002


REVISION: ADD #2
DATE: 5/28/2026
REVISION: DATE:
REVISION: DATE:
ISSUE DATE: 12/12/2025

CAD DWG FILE:
DRAWN BY: SI
CHECKED BY: SI
DESIGNED BY: SI

SHEET TITLE:
ROOF PLAN AND
ROOFING DETAILS


SHEET NUMBER:
A-103
12/12/2025
15 OF 27 SHEETS

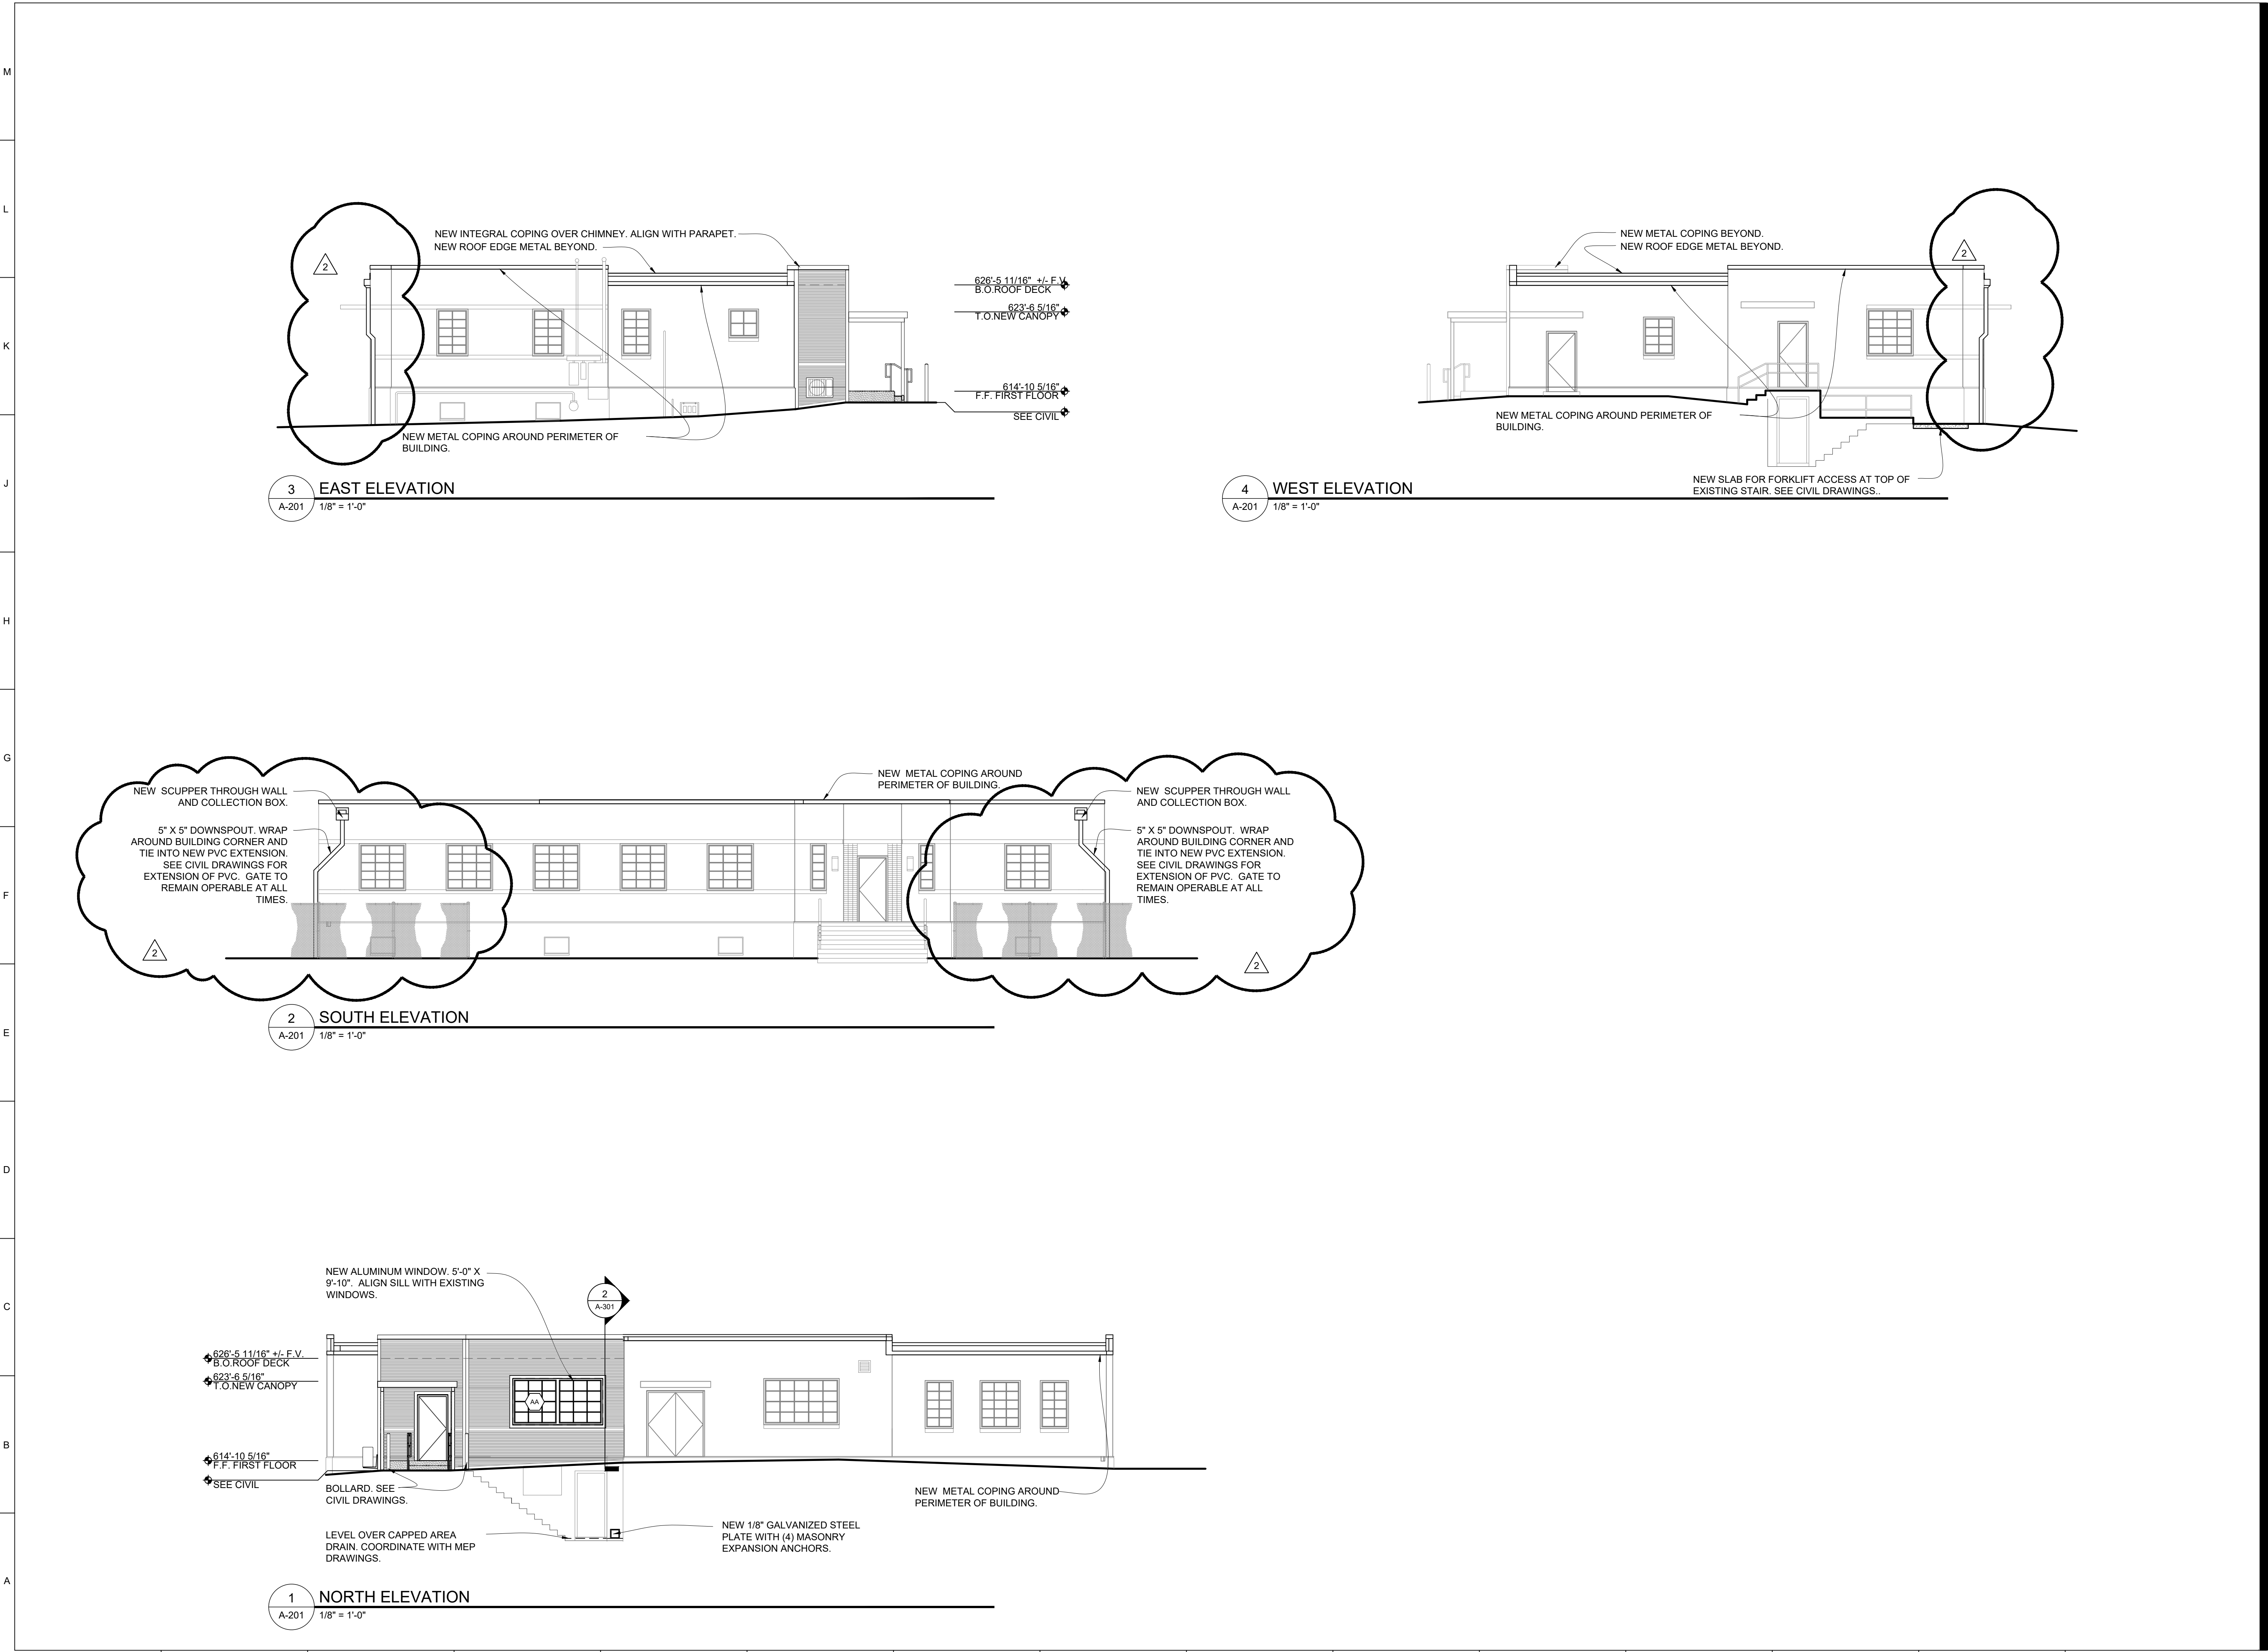

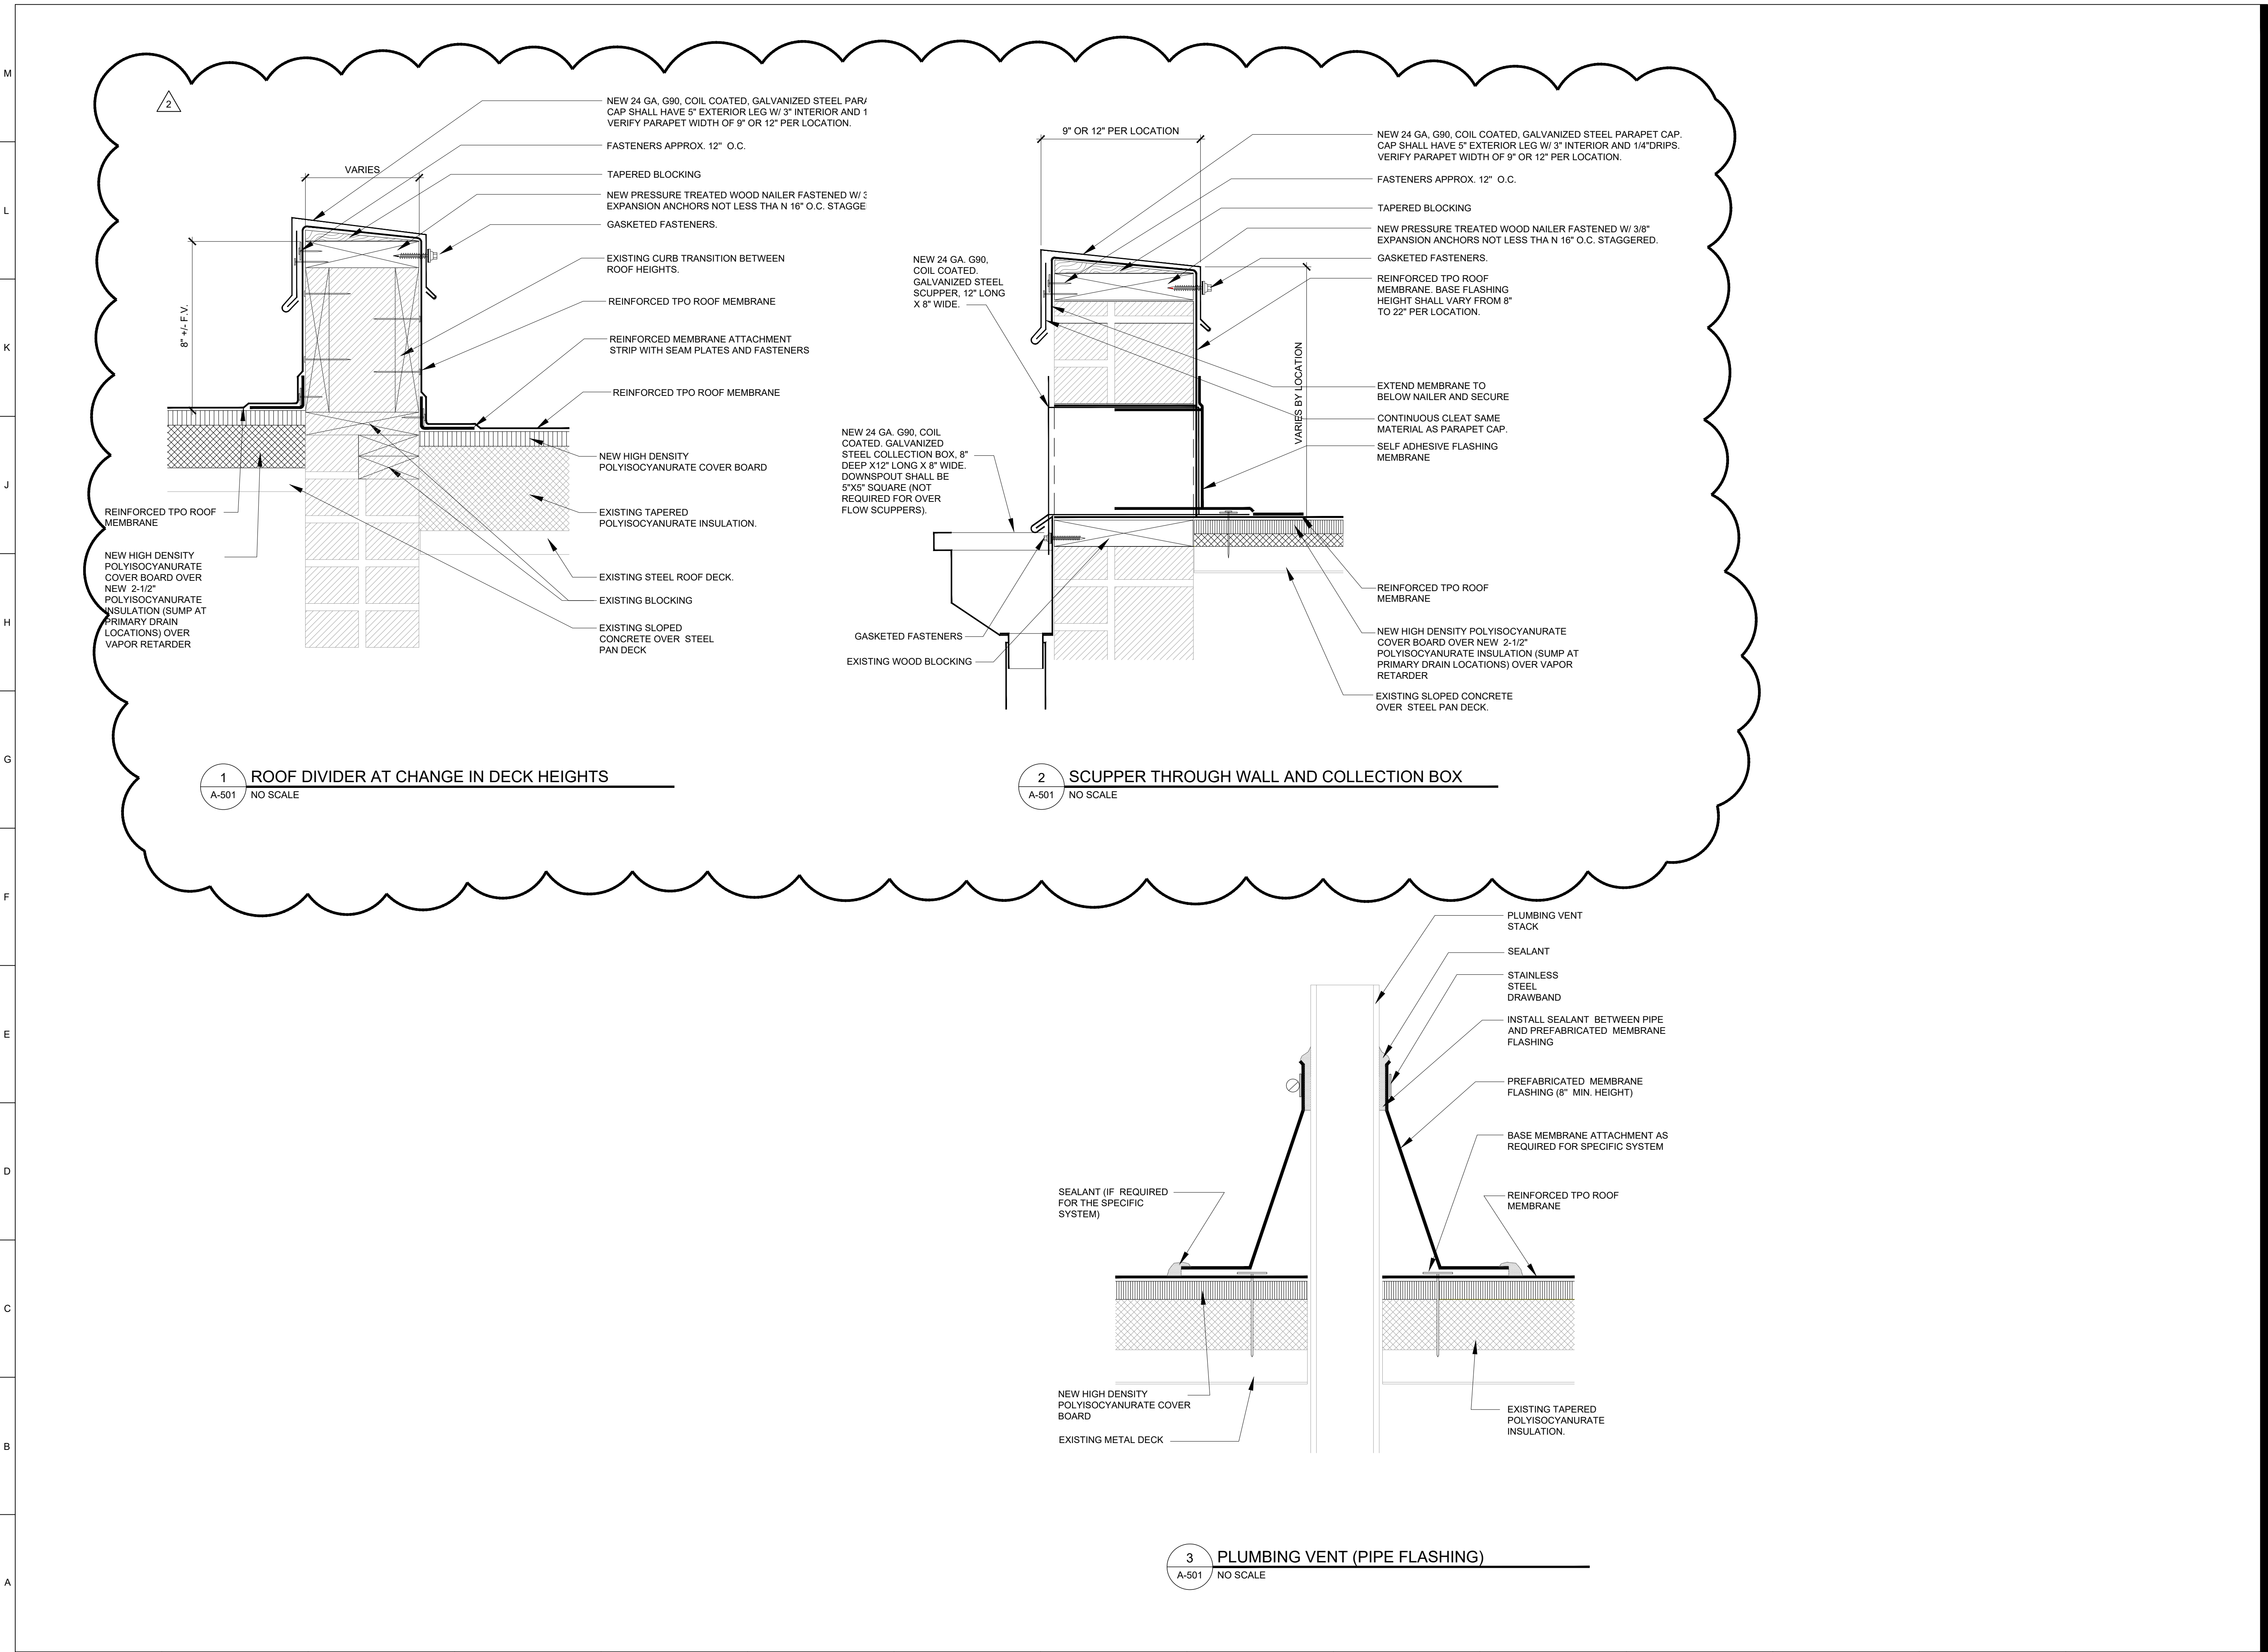


HVAC SPECIFICATIONS


- 1. GENERAL**
- 1.1. REFER TO GENERAL MEP SPECIFICATIONS SECTION FOR ADDITIONAL REQUIREMENTS.
- 2. WORKMANSHIP**
- 2.1. COORDINATE WITH ALL OTHER TRADES SO THAT HVAC EQUIPMENT AND DUCT WORK DOES NOT BLOCK REQUIRED ACCESS OR CLEARANCE TO ANY EQUIPMENT, ACCESS PANELS, ELECTRICAL JUNCTION BOXES, ELECTRICAL PANELS, ETC.
- 2.2. ALL HVAC EQUIPMENT IS TO BE INSTALLED PER MANUFACTURER'S PUBLISHED RECOMMENDATIONS AND/OR INSTALLATION INSTRUCTIONS.
- 2.3. ALL EQUIPMENT TO BE INSTALLED LEVEL AND PLUMB, PARALLEL OR PERPENDICULAR TO BUILDING ORIENTATION WHERE POSSIBLE.
- 2.4. GRADE-MOUNTED CONDENSING UNITS AND HEAT PUMPS TO BE INSTALLED ON 4" REINFORCED CONCRETE PAD EXTENDING 4" BEYOND EACH EDGE OF THE EQUIPMENT, OR A MANUFACTURER APPROVED PRE-MANUFACTURED BASE.
- 2.5. APPROPRIATE ATTENTION SHALL BE GIVEN TO INDOOR AIR QUALITY THROUGHOUT CONSTRUCTION; PROTECT INSIDE OF NEW DUCTWORK & AIR-HANDLING EQUIPMENT FROM DUST, DIRT, DERRIS, PAINT, MOISTURE, ETC. INSULATION SHALL BE REPLACED IF EXPOSED TO MOISTURE. AN INDEPENDENT, PROFESSIONAL DUCT CLEANING COMPANY SHALL CLEAN ALL NEW DUCTWORK IF EQUIPMENT WAS USED DURING CONSTRUCTION, AND EQUIPMENT/COILS SHALL ALSO BE THOROUGHLY CLEANED.
- 2.6. FIELD COORDINATE LOCATIONS OF ALL DIFFUSERS, GRILLES, REGISTERS, ETC. WITH LIGHT FIXTURE LOCATIONS AND ADJUST AS NECESSARY.
- 3. EQUIPMENT**
- 3.1. ALL EQUIPMENT SHOWN ON MECHANICAL PLANS SHALL BE PROVIDED & INSTALLED BY MECHANICAL CONTRACTOR UNLESS NOTED OTHERWISE.
- 3.2. ALL EQUIPMENT MUST PROVIDE PERFORMANCE AS SPECIFIED ON PLANS. WHERE SPECIFIC MANUFACTURERS AND/OR MODELS ARE INDICATED ON PLANS, CONTRACTOR TO PROVIDE MODEL INDICATED OR APPROVED EQUAL. VERIFY SUBSTITUTION APPROVAL PRIOR TO PURCHASE OR INSTALLATION OF EQUIPMENT.
- 3.3. CONTRACTOR TO SUPPLY SUBMITTALS FOR ALL EQUIPMENT FOR REVIEW BY ARCHITECT AND ENGINEER. FORMAL APPROVAL SHALL BE RECEIVED BY CONTRACTOR PRIOR TO EQUIPMENT PURCHASE.
- 3.4. CONTRACTOR TO SHARE APPROVED EQUIPMENT SUBMITTALS WITH ANY PERTINENT ELECTRICAL OR PLUMBING REQUIREMENTS WITH RESPECTIVE CONTRACTORS WITHIN TWO WEEKS OF RECEIVING APPROVED SUBMITTALS FROM ARCHITECT/ENGINEER.
- 3.5. ALL EQUIPMENT SHOWN ON PLANS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS WITH ADEQUATE ACCESS AND CLEARANCE FOR SERVICING OR REPLACEMENT.
- 3.6. ALL HORIZONTAL FURNACES WITH AC COILS SHALL BE EQUIPPED WITH CORROSION RESISTANT DRAIN PAIN. DRAIN PAN TO DISCHARGE TO SANITARY WASTE VIA INDIRECT CONNECTION WITH AIR GAP. DRAIN PAN TO PROVIDE SECONDARY OVERFLOW OR FLOAT SWITCH INTERLOCKED WITH UNIT TO SHUT DOWN UNIT ON HIGH WATER SIGNAL.
- 3.7. ALL EXTERIOR REFRIGERANT COILS TO BE PROTECTED BY FACTORY EQUIPPED HAIL GUARDS.
- 3.8. REFRIGERANT PIPING TO BE ACR COPPER OR TYPE L COPPER.
- 3.9. ALL AIR HANDLING EQUIPMENT SHALL BE EQUIPPED WITH MERV-8 FILTRATION AT RETURN OPENING UNLESS OTHERWISE NOTED.
- 3.10. ALL AIR FILTERS SHALL BE SIZED FOR A MAXIMUM FACE VELOCITY OF 500FPM.
- 3.11. PROVIDE & INSTALL ALL EQUIPMENT FLUES/VENTS PER MANUFACTURER'S SPECIFICATIONS. TERMINATIONS SHALL BE AT LEAST 10' FROM ANY FRESH AIR INTAKE.
- 3.12. PROVIDE NEW AIR FILTERS IN ALL EQUIPMENT PRIOR TO TESTING & BALANCING AND BEFORE TURNING OVER SYSTEM(S) TO OWNERSHIP.
- 3.13. IF ANY EXISTING EQUIPMENT IS TO BE REUSED, CLEAN AND INSPECT EQUIPMENT PRIOR TO BEGINNING WORK. VERIFY THAT EQUIPMENT IS IN GOOD WORKING CONDITION, REPORT ANY DEFICIENCIES TO ENGINEER.
- 4. DUCTWORK**
- 4.1. DUCTWORK TO BE GALVANIZED STEEL, SEAL CLASS B, CONSTRUCTED PER SMACNA STANDARDS.
- 4.2. DUCTWORK THICKNESS:
- 4.2.1. 26 GA. MINIMUM UP TO 16" DUCT
- 4.2.2. 24 GA. UP TO 20"
- 4.2.3. 22 GA. UP TO 24"
- 4.2.4. 20 GA. UP TO 28"
- 4.2.5. 18 GA. UP TO 36"
- 4.3. TURNING VANES SHALL BE PROVIDED AND INSTALLED AT ALL 90° BENDS AND TEES.
- 4.4. ALL DUCT DIMENSIONS LISTED ARE TO INTERIOR OF DUCT LINER UNLESS NOTED OTHERWISE ON PLANS.
- 4.5. BALANCE DAMPERS MUST BE PROVIDED TO ALLOW ADJUSTMENT AT EACH AIR TERMINAL.
- 4.5.1. WHERE BRANCH TAKEOFF IS ACCESSIBLE (ABOVE LAY-IN CEILING OR EXPOSED DUCT), BALANCE DAMPER IS TO BE INSTALLED AT TAKEOFF.
- 4.5.2. WHERE TAKEOFF IS INACCESSIBLE (IN ATTIC OR SOFFIT), BALANCE DAMPER IS TO BE LOCATED SUCH THAT IT IS ACCESSIBLE FROM FACE OF AIR DEVICE.
- 4.6. HVAC CONTRACTOR RESPONSIBLE FOR ALL DUCTWORK TRANSITIONS AND FITTINGS AS REQUIRED FOR FINAL CONNECTIONS TO HVAC EQUIPMENT.
- 4.7. UNLESS NOTED OTHERWISE ON PLANS, FLEXIBLE DUCT CONNECTIONS MAY USED FROM BRANCH DUCTS TO FINAL AIR DEVICES, BUT SHALL NOT EXCEED 8'-0" IN LENGTH. FLEXIBLE DUCT CONNECTORS MUST BE SUPPORTED PER PLAN DETAILS.
- 5. INSULATION**
- 5.1. DUCTWORK
- 5.1.1. SEE "TYPICAL DUCT INSULATION DIAGRAM" FOR INSTALLATION SPECIFIC REQUIREMENTS.
- 5.1.2. EXTERNAL DUCT WRAP TO INCLUDE VAPOR BARRIER. EQUAL TO 'JOHNS MANVILLE MICROLITE' WITH FSK JACKET.
- 5.1.3. WHERE INSULATION IS REQUIRED IN "TYPICAL DUCT INSULATION DIAGRAM", INCLUDE INSULATION ON ALL FITTINGS, INCLUDING CANVAS FLEX CONNECTION FITTINGS.
- 5.2. REFRIGERANT PIPING
- 5.2.1. SPLIT SYSTEM (SUCTION LINE ONLY) - 1" CLOSED CELL ELASTOMERIC FOAM (EQUAL TO 'ARMAFLEX AP').
- 5.3. CONDENSATE PIPING
- 5.3.1. SPLIT SYSTEMS - WHERE CONDENSATE PIPING IS LOCATED IN UNCONDITIONED SPACE, INSULATE WITH ½" ELASTOMERIC. NO INSULATION REQUIRED WITHIN CONDITIONED SPACES.
- 5.3.2. VRV/VRF - INSULATE WITH ½" ELASTOMERIC.

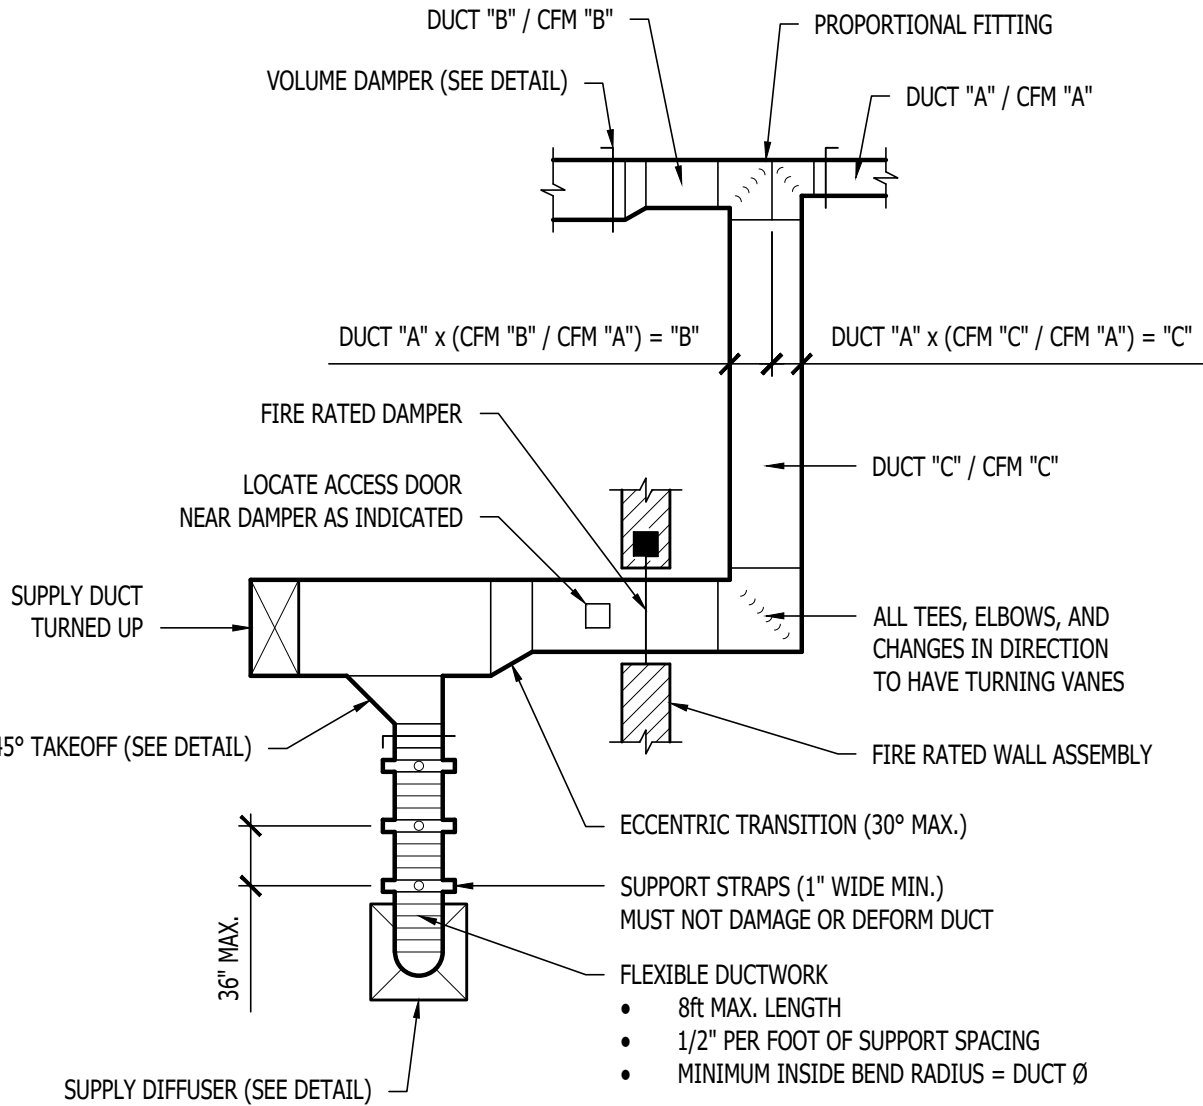

TYPICAL DUCTWORK DETAIL

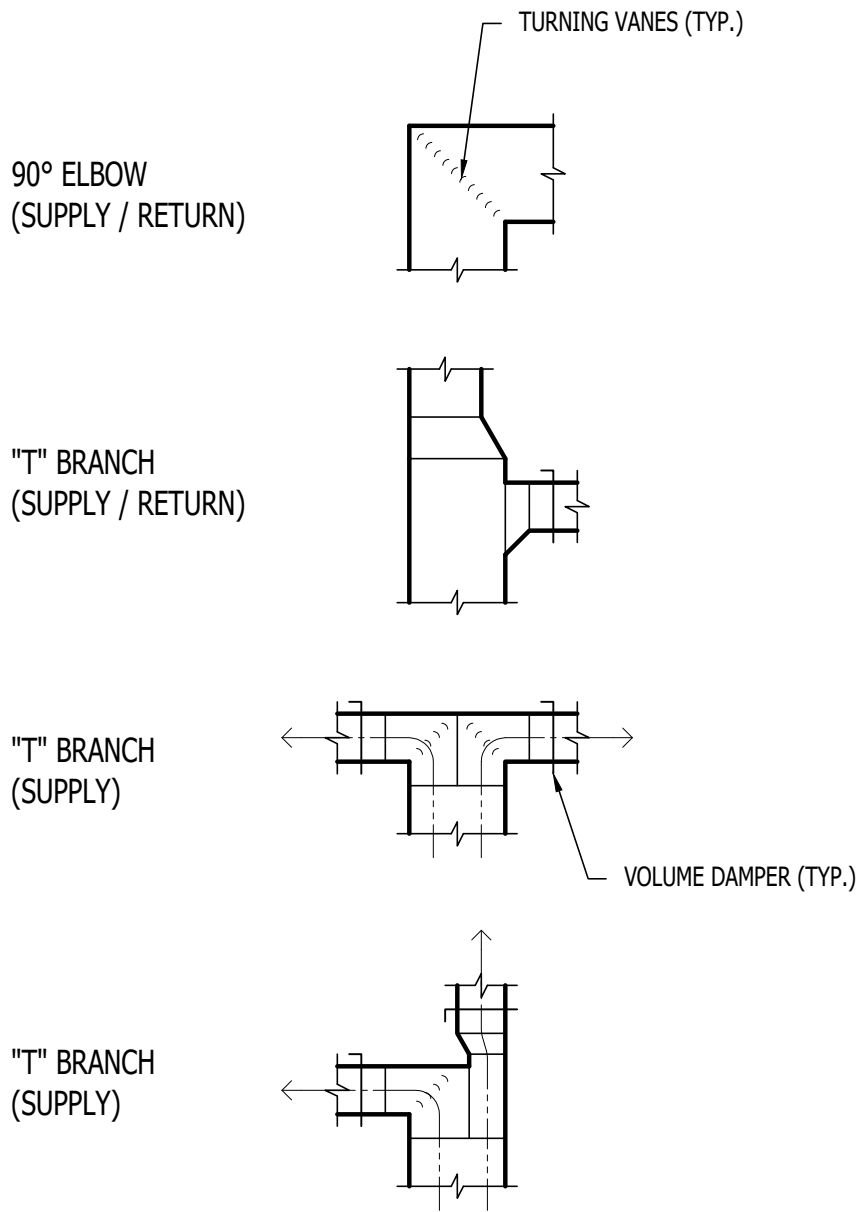

TYPICAL DUCTWORK FITTINGS DETAIL

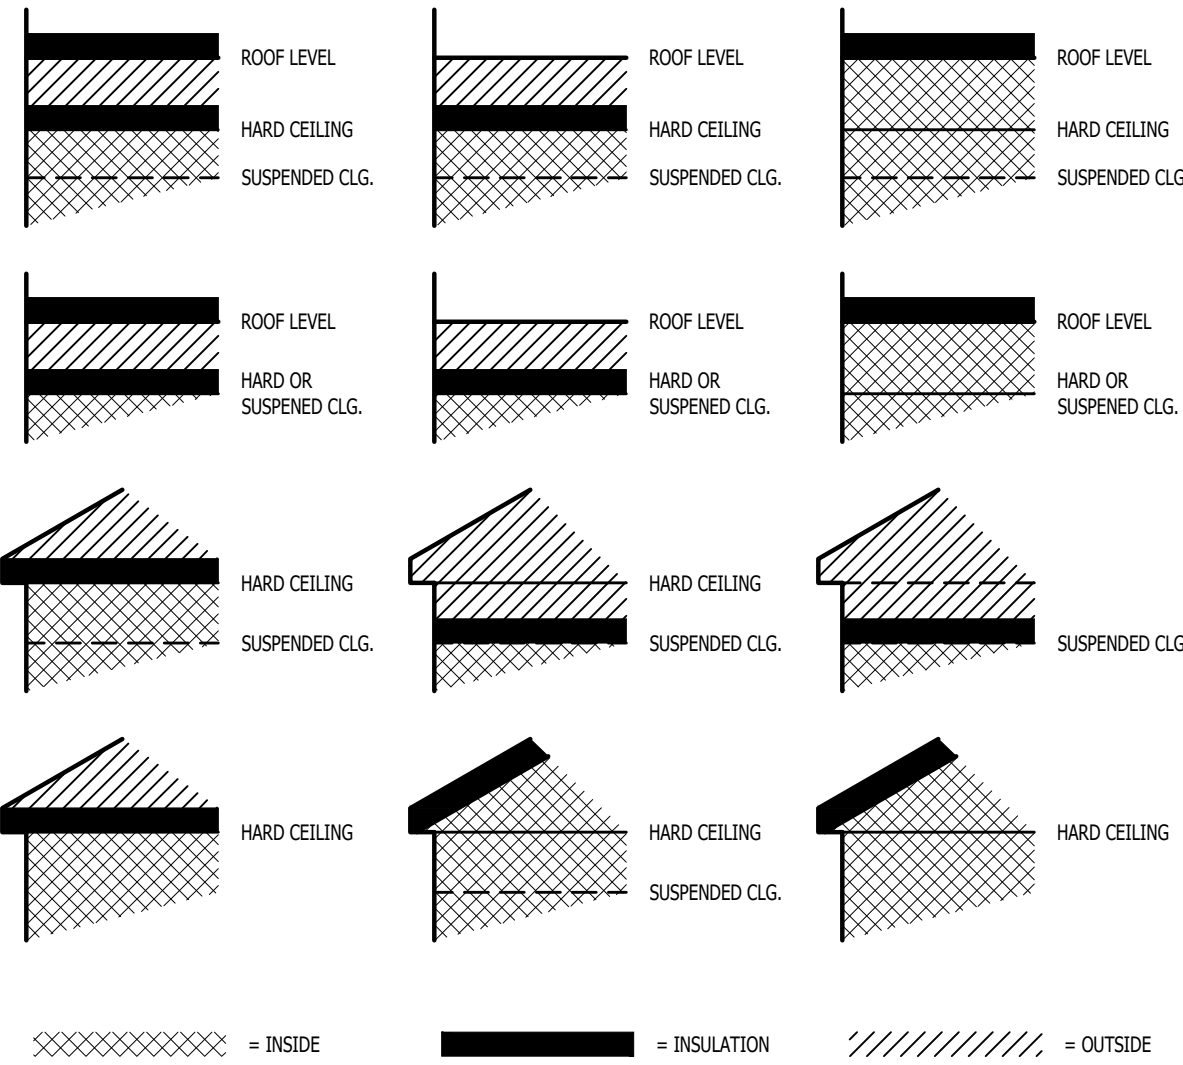


DUCT INSIDE THERMAL ENVELOPE INSULATION REQUIREMENTS

- RECTANGULAR
- SUPPLY = 1½" WRAP
 - RETURN = 1½" WRAP
 - EXHAUST = NONE
 - OUTSIDE AIR = 2" WRAP
- ROUND
- SUPPLY = 1½" WRAP
 - RETURN = NONE
 - EXHAUST = NONE
 - OUTSIDE AIR = 2" WRAP
- SPIRAL
- SUPPLY = NONE
 - RETURN = NONE
 - EXHAUST = NONE
 - OUTSIDE AIR = 2" WRAP

TYPICAL BUILDING INTERIOR DUCT INSULATION DIAGRAM


STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

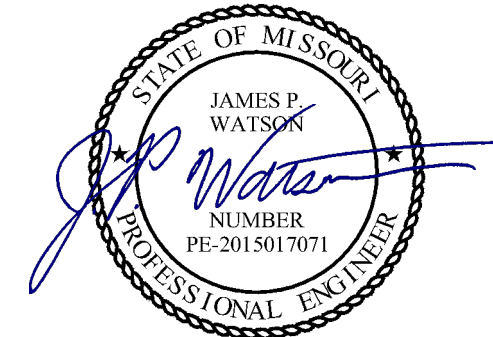

James Watson, P.E. May 29, 2025
PE-2015017071
MO Certificate of Authority # 2018029680



Peckham & Wright Architects an Architectural Corporation
Missouri State Certificate of Authority No. 000244

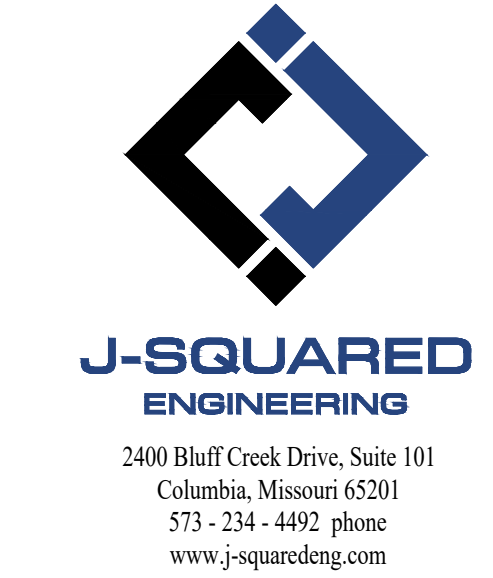

OFFICE OF
ADMINISTRATION
DIVISION OF
FACILITIES
MANAGEMENT,
DESIGN AND
CONSTRUCTION

REPLACE ROOF &
RENOVATE
BASEMENT / ACCESS

MSHP INTEROPERABILITY
2413 EAST MCCARTY ST.
JEFFERSON CITY, MO

PROJECT # R2508-01
SITE # 6027
ASSET # 8136027002

REVISION: #1
DATE: 05/29/2026
REVISION: #2
DATE:
REVISION: #3
DATE:
REVISION: #4
DATE:
REVISION: #5
DATE:
REVISION: #6
DATE:
REVISION: #7
DATE:
REVISION: #8
DATE:
REVISION: #9
DATE:
REVISION: #10
DATE:
REVISION: #11
DATE:
REVISION: #12
DATE:
REVISION: #13
DATE:
REVISION: #14
DATE:
REVISION: #15
DATE:
REVISION: #16
DATE:
REVISION: #17
DATE:
REVISION: #18
DATE:
REVISION: #19
DATE:
REVISION: #20
DATE:
REVISION: #21
DATE:
REVISION: #22
DATE:
REVISION: #23
DATE:
REVISION: #24
DATE:
REVISION: #25
DATE:
REVISION: #26
DATE:
REVISION: #27
DATE:
REVISION: #28
DATE:
REVISION: #29
DATE:
REVISION: #30
DATE:
REVISION: #31
DATE:
REVISION: #32
DATE:
REVISION: #33
DATE:
REVISION: #34
DATE:
REVISION: #35
DATE:
REVISION: #36
DATE:
REVISION: #37
DATE:
REVISION: #38
DATE:
REVISION: #39
DATE:
REVISION: #40
DATE:
REVISION: #41
DATE:
REVISION: #42
DATE:
REVISION: #43
DATE:
REVISION: #44
DATE:
REVISION: #45
DATE:
REVISION: #46
DATE:
REVISION: #47
DATE:
REVISION: #48
DATE:
REVISION: #49
DATE:
REVISION: #50
DATE:
REVISION: #51
DATE:
REVISION: #52
DATE:
REVISION: #53
DATE:
REVISION: #54
DATE:
REVISION: #55
DATE:
REVISION: #56
DATE:
REVISION: #57
DATE:
REVISION: #58
DATE:
REVISION: #59
DATE:
REVISION: #60
DATE:
REVISION: #61
DATE:
REVISION: #62
DATE:
REVISION: #63
DATE:
REVISION: #64
DATE:
REVISION: #65
DATE:
REVISION: #66
DATE:
REVISION: #67
DATE:
REVISION: #68
DATE:
REVISION: #69
DATE:
REVISION: #70
DATE:
REVISION: #71
DATE:
REVISION: #72
DATE:
REVISION: #73
DATE:
REVISION: #74
DATE:
REVISION: #75
DATE:
REVISION: #76
DATE:
REVISION: #77
DATE:
REVISION: #78
DATE:
REVISION: #79
DATE:
REVISION: #80
DATE:
REVISION: #81
DATE:
REVISION: #82
DATE:
REVISION: #83
DATE:
REVISION: #84
DATE:
REVISION: #85
DATE:
REVISION: #86
DATE:
REVISION: #87
DATE:
REVISION: #88
DATE:
REVISION: #89
DATE:
REVISION: #90
DATE:
REVISION: #91
DATE:
REVISION: #92
DATE:
REVISION: #93
DATE:
REVISION: #94
DATE:
REVISION: #95
DATE:
REVISION: #96
DATE:
REVISION: #97
DATE:
REVISION: #98
DATE:
REVISION: #99
DATE:
REVISION: #100
DATE:
REVISION: #101
DATE:
REVISION: #102
DATE:
REVISION: #103
DATE:
REVISION: #104
DATE:
REVISION: #105
DATE:
REVISION: #106
DATE:
REVISION: #107
DATE:
REVISION: #108
DATE:
REVISION: #109
DATE:
REVISION: #110
DATE:
REVISION: #111
DATE:
REVISION: #112
DATE:
REVISION: #113
DATE:
REVISION: #114
DATE:
REVISION: #115
DATE:
REVISION: #116
DATE:
REVISION: #117
DATE:
REVISION: #118
DATE:
REVISION: #119
DATE:
REVISION: #120
DATE:
REVISION: #121
DATE:
REVISION: #122
DATE:
REVISION: #123
DATE:
REVISION: #124
DATE:
REVISION: #125
DATE:
REVISION: #126
DATE:
REVISION: #127
DATE:
REVISION: #128
DATE:
REVISION: #129
DATE:
REVISION: #130
DATE:
REVISION: #131
DATE:
REVISION: #132
DATE:
REVISION: #133
DATE:
REVISION: #134
DATE:
REVISION: #135
DATE:
REVISION: #136
DATE:
REVISION: #137
DATE:
REVISION: #138
DATE:
REVISION: #139
DATE:
REVISION: #140
DATE:
REVISION: #141
DATE:
REVISION: #142
DATE:
REVISION: #143
DATE:
REVISION: #144
DATE:
REVISION: #145
DATE:
REVISION: #146
DATE:
REVISION: #147
DATE:
REVISION: #148
DATE:
REVISION: #149
DATE:
REVISION: #150
DATE:
REVISION: #151
DATE:
REVISION: #152
DATE:
REVISION: #153
DATE:
REVISION: #154
DATE:
REVISION: #155
DATE:
REVISION: #156
DATE:
REVISION: #157
DATE:
REVISION: #158
DATE:
REVISION: #159
DATE:
REVISION: #160
DATE:
REVISION: #161
DATE:
REVISION: #162
DATE:
REVISION: #163
DATE:
REVISION: #164
DATE:
REVISION: #165
DATE:
REVISION: #166
DATE:
REVISION: #167
DATE:
REVISION: #168
DATE:
REVISION: #169
DATE:
REVISION: #170
DATE:
REVISION: #171
DATE:
REVISION: #172
DATE:
REVISION: #173
DATE:
REVISION: #174
DATE:
REVISION: #175
DATE:
REVISION: #176
DATE:
REVISION: #177
DATE:
REVISION: #178
DATE:
REVISION: #179
DATE:
REVISION: #180
DATE:
REVISION: #181
DATE:
REVISION: #182
DATE:
REVISION: #183
DATE:
REVISION: #184
DATE:
REVISION: #185
DATE:
REVISION: #186
DATE:
REVISION: #187
DATE:
REVISION: #188
DATE:
REVISION: #189
DATE:
REVISION: #190
DATE:
REVISION: #191
DATE:
REVISION: #192
DATE:
REVISION: #193
DATE:
REVISION: #194
DATE:
REVISION: #195
DATE:
REVISION: #196
DATE:
REVISION: #197
DATE:
REVISION: #198
DATE:
REVISION: #199
DATE:
REVISION: #200
DATE:
REVISION: #201
DATE:
REVISION: #202
DATE:
REVISION: #203
DATE:
REVISION: #204
DATE:
REVISION: #205
DATE:
REVISION: #206
DATE:
REVISION: #207
DATE:
REVISION: #208
DATE:
REVISION: #209
DATE:
REVISION: #210
DATE:
REVISION: #211
DATE:
REVISION: #212
DATE:
REVISION: #213
DATE:
REVISION: #214
DATE:
REVISION: #215
DATE:
REVISION: #216
DATE:
REVISION: #217
DATE:
REVISION: #218
DATE:
REVISION: #219
DATE:
REVISION: #220
DATE:
REVISION: #221
DATE:
REVISION: #222
DATE:
REVISION: #223
DATE:
REVISION: #224
DATE:
REVISION: #225
DATE:
REVISION: #226
DATE:
REVISION: #227
DATE:
REVISION: #228
DATE:
REVISION: #229
DATE:
REVISION: #230
DATE:
REVISION: #231
DATE:
REVISION: #232
DATE:
REVISION: #233
DATE:
REVISION: #234
DATE:
REVISION: #235
DATE:
REVISION: #236
DATE:
REVISION: #237
DATE:
REVISION: #238
DATE:
REVISION: #239
DATE:
REVISION: #240
DATE:
REVISION: #241
DATE:
REVISION: #242
DATE:
REVISION: #243
DATE:
REVISION: #244
DATE:
REVISION: #245
DATE:
REVISION: #246
DATE:
REVISION: #247
DATE:
REVISION: #248
DATE:
REVISION: #249
DATE:
REVISION: #250
DATE:
REVISION: #251
DATE:
REVISION: #252
DATE:
REVISION: #253
DATE:
REVISION: #254
DATE:
REVISION: #255
DATE:
REVISION: #256
DATE:
REVISION: #257
DATE:
REVISION: #258
DATE:
REVISION: #259
DATE:
REVISION: #260
DATE:
REVISION: #261
DATE:
REVISION: #262
DATE:
REVISION: #263
DATE:
REVISION: #264
DATE:
REVISION: #265
DATE:
REVISION: #266
DATE:
REVISION: #267
DATE:
REVISION: #268
DATE:
REVISION: #269
DATE:
REVISION: #270
DATE:
REVISION: #271
DATE:
REVISION: #272
DATE:
REVISION: #273
DATE:
REVISION: #274
DATE:
REVISION: #275
DATE:
REVISION: #276
DATE:
REVISION: #277
DATE:
REVISION: #278
DATE:
REVISION: #279
DATE:
REVISION: #280
DATE:
REVISION: #281
DATE:
REVISION: #282
DATE:
REVISION: #283
DATE:
REVISION: #284
DATE:
REVISION: #285
DATE:
REVISION: #286
DATE:
REVISION: #287
DATE:
REVISION: #288
DATE:
REVISION: #289
DATE:
REVISION: #290
DATE:
REVISION: #291
DATE:
REVISION: #292
DATE:
REVISION: #293
DATE:
REVISION: #294
DATE:
REVISION: #295
DATE:
REVISION: #296
DATE:
REVISION: #297
DATE:
REVISION: #298
DATE:
REVISION: #299
DATE:
REVISION: #300
DATE:
REVISION: #301
DATE:
REVISION: #302
DATE:
REVISION: #303
DATE:
REVISION: #304
DATE:
REVISION: #305
DATE:
REVISION: #306
DATE:
REVISION: #307
DATE:
REVISION: #308
DATE:
REVISION: #309
DATE:
REVISION: #310
DATE:
REVISION: #311
DATE:
REVISION: #312
DATE:
REVISION: #313
DATE:
REVISION: #314
DATE:
REVISION: #315
DATE:
REVISION: #316
DATE:
REVISION: #317
DATE:
REVISION: #318
DATE:
REVISION: #319
DATE:
REVISION: #320
DATE:
REVISION: #321
DATE:
REVISION: #322
DATE:
REVISION: #323
DATE:
REVISION: #324
DATE:
REVISION: #325
DATE:
REVISION: #326
DATE:
REVISION: #327
DATE:
REVISION: #328
DATE:
REVISION: #329
DATE:
REVISION: #330
DATE:
REVISION: #331
DATE:
REVISION: #332
DATE:
REVISION: #333
DATE:
REVISION: #334
DATE:
REVISION: #335
DATE:
REVISION: #336
DATE:
REVISION: #337
DATE:
REVISION: #338
DATE:
REVISION: #339
DATE:
REVISION: #340
DATE:
REVISION: #341
DATE:
REVISION: #342
DATE:
REVISION: #343
DATE:
REVISION: #344
DATE:
REVISION: #345
DATE:
REVISION: #346
DATE:
REVISION: #347
DATE:
REVISION: #348
DATE:
REVISION: #349
DATE:
REVISION: #350
DATE:
REVISION: #351
DATE:
REVISION: #352
DATE:
REVISION: #353
DATE:
REVISION: #354
DATE:
REVISION: #355
DATE:
REVISION: #356
DATE:
REVISION: #357
DATE:
REVISION: #358
DATE:
REVISION: #359
DATE:
REVISION: #360
DATE:
REVISION: #361
DATE:
REVISION: #362
DATE:
REVISION: #363
DATE:
REVISION: #364
DATE:
REVISION: #365
DATE:
REVISION: #366
DATE:
REVISION: #367
DATE:
REVISION: #368
DATE:
REVISION: #369
DATE:
REVISION: #370
DATE:
REVISION: #371
DATE:
REVISION: #372
DATE:
REVISION: #373
DATE:
REVISION: #374
DATE:
REVISION: #375
DATE:
REVISION: #376
DATE:
REVISION: #377
DATE:
REVISION: #378
DATE:
REVISION: #379
DATE:
REVISION: #380
DATE:
REVISION: #381
DATE:
REVISION: #382
DATE:
REVISION: #383
DATE:
REVISION: #384
DATE:
REVISION: #385
DATE:
REVISION: #386
DATE:
REVISION: #387
DATE:
REVISION: #388
DATE:
REVISION: #389
DATE:
REVISION: #390
DATE:
REVISION: #391
DATE:
REVISION: #392
DATE:
REVISION: #393
DATE:
REVISION: #394
DATE:
REVISION: #395
DATE:
REVISION: #396
DATE:
REVISION: #397
DATE:
REVISION: #398
DATE:
REVISION: #399
DATE:
REVISION: #400
DATE:
REVISION: #401
DATE:
REVISION: #402
DATE:
REVISION: #403
DATE:
REVISION: #404
DATE:
REVISION: #405
DATE:
REVISION: #406
DATE:
REVISION: #407
DATE:
REVISION: #408
DATE:
REVISION: #409
DATE:
REVISION: #410
DATE:
REVISION: #411
DATE:
REVISION: #412
DATE:
REVISION: #413
DATE:
REVISION: #414
DATE:
REVISION: #415
DATE:
REVISION: #416
DATE:
REVISION: #417
DATE:
REVISION: #418
DATE:
REVISION: #419
DATE:
REVISION: #420
DATE:
REVISION: #421
DATE:
REVISION: #422
DATE:
REVISION: #423
DATE:
REVISION: #424
DATE:
REVISION: #425
DATE:
REVISION: #426
DATE:
REVISION: #427
DATE:
REVISION: #428
DATE:
REVISION: #429
DATE:
REVISION: #430
DATE:
REVISION: #431
DATE:
REVISION: #432
DATE:
REVISION: #433
DATE:
REVISION: #434
DATE:
REVISION: #435
DATE:
REVISION: #436
DATE:
REVISION: #437
DATE:
REVISION: #438
DATE:
REVISION: #439
DATE:
REVISION: #440
DATE:
REVISION: #441
DATE:
REVISION: #442
DATE:
REVISION: #443
DATE:
REVISION: #444
DATE:
REVISION: #445
DATE:
REVISION: #446
DATE:
REVISION: #447
DATE:
REVISION: #448
DATE:
REVISION: #449
DATE:
REVISION: #450
DATE:
REVISION: #451
DATE:
REVISION: #452
DATE:
REVISION: #453
DATE:
REVISION: #454
DATE:
REVISION: #455
DATE:
REVISION: #456
DATE:
REVISION: #457
DATE:
REVISION: #458
DATE:
REVISION: #459
DATE:
REVISION: #460
DATE:
REVISION: #461
DATE:
REVISION: #462
DATE:
REVISION: #463
DATE:
REVISION: #464
DATE:
REVISION: #465
DATE:
REVISION: #466
DATE:
REVISION: #467
DATE:
REVISION: #468
DATE:
REVISION: #469
DATE:
REVISION: #470
DATE:
REVISION: #471
DATE:
REVISION: #472
DATE:
REVISION: #473
DATE:
REVISION: #474
DATE:
REVISION: #475
DATE:
REVISION: #476
DATE:
REVISION: #477
DATE:
REVISION: #478
DATE:
REVISION: #479
DATE:
REVISION: #480
DATE:
REVISION: #481
DATE:
REVISION: #482
DATE:
REVISION: #483
DATE:
REVISION: #484
DATE:
REVISION: #485
DATE:
REVISION: #486
DATE:
REVISION: #487
DATE:
REVISION: #488
DATE:
REVISION: #489
DATE:
REVISION: #490
DATE:
REVISION: #491
DATE:
REVISION: #492
DATE:
REVISION: #493
DATE:
REVISION: #494
DATE:
REVISION: #495
DATE:
REVISION: #496
DATE:
REVISION: #497
DATE:
REVISION: #498
DATE:
REVISION: #499
DATE:
REVISION: #500
DATE:
REVISION: #501
DATE:
REVISION: #502
DATE:
REVISION: #503
DATE:
REVISION: #504
DATE:
REVISION: #505
DATE:
REVISION: #506
DATE:
REVISION: #507
DATE:
REVISION: #508
DATE:
REVISION: #509
DATE:
REVISION: #510
DATE:
REVISION: #511
DATE:
REVISION: #512
DATE:
REVISION: #513
DATE:
REVISION: #514
DATE:
REVISION: #515
DATE:
REVISION: #516
DATE:
REVISION: #517
DATE:
REVISION: #518
DATE:
REVISION: #519
DATE:
REVISION: #520
DATE:
REVISION: #521
DATE:
REVISION: #522
DATE:
REVISION: #523
DATE:
REVISION: #524
DATE:
REVISION: #525
DATE:
REVISION: #526
DATE:
REVISION: #527
DATE:
REVISION: #528
DATE:
REVISION: #529
DATE:
REVISION: #530
DATE:
REVISION: #531
DATE:
REVISION: #532
DATE:
REVISION: #533
DATE:
REVISION: #534
DATE:
REVISION: #535
DATE:
REVISION: #536
DATE:
REVISION: #537
DATE:
REVISION: #538
DATE:
REVISION: #539
DATE:
REVISION: #540
DATE:
REVISION: #541
DATE:
REVISION: #542
DATE:
REVISION: #543
DATE:
REVISION: #544
DATE:
REVISION: #545
DATE:
REVISION: #546
DATE:
REVISION: #547
DATE:
REVISION: #548
DATE:
REVISION: #549
DATE:
REVISION: #550
DATE:
REVISION: #551
DATE:
REVISION: #552
DATE:
REVISION: #553
DATE:
REVISION: #554
DATE:
REVISION: #555
DATE:
REVISION: #556
DATE:
REVISION: #557
DATE:
REVISION: #558
DATE:
REVISION: #559
DATE:
REVISION: #560
DATE:
REVISION: #561
DATE:
REVISION: #562
DATE:
REVISION: #563
DATE:
REVISION: #564
DATE:
REVISION: #565
DATE:
REVISION: #566
DATE:
REVISION: #567
DATE:
REVISION: #568
DATE:
REVISION: #569
DATE:
REVISION: #570
DATE:
REVISION: #571
DATE:
REVISION: #572
DATE:
REVISION: #573
DATE:
REVISION: #574
DATE:
REVISION: #575
DATE:
REVISION: #576
DATE:
REVISION: #577
DATE:
REVISION: #578
DATE:
REVISION: #579
DATE:
REVISION: #580
DATE:
REVISION: #581
DATE:
REVISION: #582
DATE:
REVISION: #583
DATE:
REVISION: #584
DATE:
REVISION: #585
DATE:
REVISION: #586
DATE:
REVISION: #587
DATE:
REVISION: #588
DATE:
REVISION: #589
DATE:
REVISION: #590
DATE:
REVISION: #591
DATE:
REVISION: #592
DATE:
REVISION: #593
DATE:
REVISION: #594
DATE:
REVISION: #595
DATE:
REVISION: #596
DATE:
REVISION: #597
DATE:
REVISION: #598
DATE:
REVISION: #599
DATE:
REVISION: #600
DATE:
REVISION: #601
DATE:
REVISION: #602
DATE:
REVISION: #603
DATE:
REVISION: #604
DATE:
REVISION: #605
DATE:
REVISION: #606
DATE:
REVISION: #607
DATE:
REVISION: #608
DATE:
REVISION: #609
DATE:
REVISION: #610
DATE:
REVISION: #611
DATE:
REVISION: #612
DATE:
REVISION: #613
DATE:
REVISION: #614
DATE:
REVISION: #615
DATE:
REVISION: #616
DATE:
REVISION: #617
DATE:
REVISION: #618
DATE:
REVISION: #619
DATE:
REVISION: #620
DATE:
REVISION: #621
DATE:
REVISION: #622
DATE:
REVISION: #623
DATE:
REVISION: #624
DATE:
REVISION: #625
DATE:
REVISION: #626
DATE:
REVISION: #627
DATE:
REVISION: #628
DATE:
REVISION: #629
DATE:
REVISION: #630
DATE:
REVISION: #631
DATE:
REVISION: #632
DATE:
REVISION: #633
DATE:
REVISION: #634
DATE:
REVISION: #635
DATE:
REVISION: #636
DATE:
REVISION: #637
DATE:
REVISION: #638
DATE:
REVISION: #639
DATE:
RE



31-May 06, 2026



32-May 06, 2026



33-May 06, 2026



34-May 06, 2026



35-May 06, 2026



36-May 06, 2026
18-56-04-hhWd.jpg



37-May 06, 2026



STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION
PRODUCT SUBSTITUTION REQUEST

PROJECT NUMBER

PROJECT TITLE AND LOCATION

Missouri Interoperability Center Improvements

CHECK APPROPRIATE BOX



SUBSTITUTION PRIOR TO BID OPENING

(Minimum of (5) working days prior to receipt of Bids as per Article 4 – Instructions to Bidders)



SUBSTITUTION FOLLOWING AWARD

(Maximum of (20) working days from Notice to Proceed as per Article 3 – General Conditions)

FROM: BIDDER/CONTRACTOR (PRINT COMPANY NAME)

Luna & Associates

TO: ARCHITECT/ENGINEER (PRINT COMPANY NAME)

PWArchitects, Inc.

Bidder/Contractor hereby requests acceptance of the following product or systems as a substitution in accordance with provisions of Division One of the Bidding Documents:

SPECIFIED PRODUCT OR SYSTEM

Concealed Fastener Metal Wall Panel System

SPECIFICATION SECTION NO.

07 4213 - Metal Wall Panels

SUPPORTING DATA



Product data for proposed substitution is attached (include description of product, standards, performance, and test data)



Sample



Sample will be sent, if requested

QUALITY COMPARISON

	SPECIFIED PRODUCT	SUBSTITUTION REQUEST
NAME, BRAND	HR-16 Wall Panel	DMC 164 Wall Panel
CATALOG NO.		
MANUFACTURER	Berridge Manufacturing Company	Drexel Metals
VENDOR		

PREVIOUS INSTALLATIONS

PROJECT	ARCHITECT/ENGINEER
LOCATION	DATE INSTALLED

SIGNIFICANT VARIATIONS FROM SPECIFIED PRODUCT

n/a

REASON FOR SUBSTITUTION

The proposed substitution is a similar product from a non-listed manufacturer.

DOES PROPOSED SUBSTITUTION AFFECT OTHER PARTS OF WORK?

☐ YES ☒ NO

IF YES, EXPLAIN

SUBSTITUTION REQUIRES DIMENSIONAL REVISION OR REDESIGN OF STRUCTURE OR A/E WORK

☐ YES ☒ NO

BIDDER'S/CONTRACTOR'S STATEMENT OF CONFORMANCE OF PROPOSED SUBSTITUTION TO CONTRACT REQUIREMENT:

We have investigated the proposed substitution. We believe that it is equal or superior in all respects to specified product, except as stated above; that it will provide the same Warranty as specified product; that we have included complete implications of the substitution; that we will pay redesign and other costs caused by the substitution which subsequently become apparent; and that we will pay costs to modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning as a result of the substitution.

BIDDER/CONTRACTOR

Seth Wilson

DATE

4/20/2026

REVIEW AND ACTION

☐ Resubmit Substitution Request with the following additional information:

☐ Substitution is accepted.

☐ Substitution is accepted with the following comments:


☐ Substitution is not accepted.

ARCHITECT/ENGINEER

DATE

DMC 164 AND DMC 123

DMC WALL SERIES

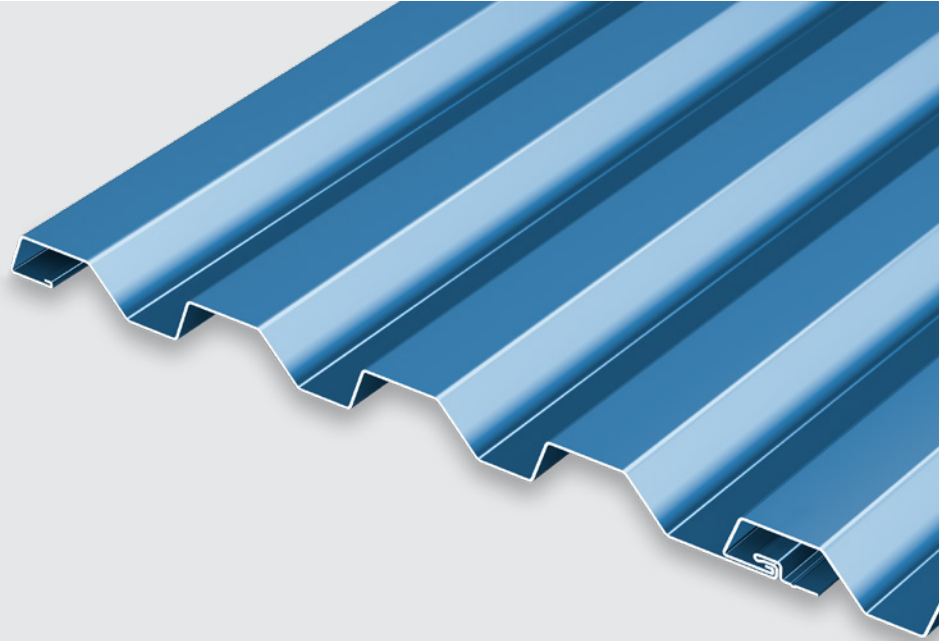

DMC 164-C AND DMC 164-F



AVAILABLE IN TWO FASTENING OPTIONS



CLIP



FASTENER FLANGE

DMC 123-C AND DMC 123-F



AVAILABLE IN TWO FASTENING OPTIONS



CLIP



FASTENER FLANGE

PRODUCT FEATURES

- No-clip panel, or clip installation for expansion/contraction
- Panel depths of $\frac{7}{8}$ "
- Cost-effective installation
- Horizontal or vertical installation
- Panel lengths:
 - 30' maximum for steel
 - 22' maximum for aluminum on the thru-fastened leg; longer lengths available on clip panels

MATERIAL COLOR OPTIONS

- 40 stocked colors (.032 aluminum)
- 28 stocked colors (.040 aluminum)
- 35 stocked colors (.050 aluminum)
- 52 stocked colors (24 gauge steel)
- 18 stocked colors (22 gauge steel)

TESTING

DMC 164-C and 164-F:

- ASTM E 283
- ASTM E 330
- ASTM E 331
- AAMA 501.1

Drexel Metals test reports are for specific attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

MATERIAL SUBSTRATES

- .032 aluminum
- .040 aluminum
- .050 aluminum
- 24 gauge steel
- 22 gauge steel

SPECS

- 12" or 16" Wide
- $\frac{7}{8}$ " High



STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION
PRODUCT SUBSTITUTION REQUEST

PROJECT NUMBER
R2508-01

PROJECT TITLE AND LOCATION

Replace Roof at Support Services Building, Missouri Interoperability Center -Jefferson City, MO

CHECK APPROPRIATE BOX

- ☐ **SUBSTITUTION PRIOR TO BID OPENING**
(Minimum of (5) working days prior to receipt of Bids as per Article 4 – Instructions to Bidders)
- ☒ **SUBSTITUTION FOLLOWING AWARD**
(Maximum of (20) working days from Notice to Proceed as per Article 3 – General Conditions)

FROM: BIDDER/CONTRACTOR (PRINT COMPANY NAME)

Gerlach Roofing & Exteriors

TO: ARCHITECT/ENGINEER (PRINT COMPANY NAME)

Peckham & Wright Architects, Inc.

Bidder/Contractor hereby requests acceptance of the following product or systems as a substitution in accordance with provisions of Division One of the Bidding Documents: **MuleHide 60 mil TPO roof system, including all components and accessories.**

SPECIFIED PRODUCT OR SYSTEM

60 mil TPO roof system by Carlisle Syntec, Elevate or GAF

SPECIFICATION SECTION NO.

07 5400 Thermoplastic Membrane Roofing

SUPPORTING DATA

- ☐ Product data for proposed substitution is attached (include description of product, standards, performance, and test data)
- ☐ Sample ☐ Sample will be sent, if requested

QUALITY COMPARISON

	SPECIFIED PRODUCT	SUBSTITUTION REQUEST
NAME, BRAND	60 mil TPO	TPO-c 60 reinforced membrane
CATALOG NO.		
MANUFACTURER	Carlisle, Elevate or GAF	Mule-Hide Products Co., Inc.
VENDOR		

PREVIOUS INSTALLATIONS

PROJECT	ARCHITECT/ENGINEER
LOCATION	DATE INSTALLED

SIGNIFICANT VARIATIONS FROM SPECIFIED PRODUCT

None, MuleHide TPO membrane and accessories are identical in both physical properties and performance to Carlisle Syntec, one of the specified manufacturers.

REASON FOR SUBSTITUTION

MuleHide Warranty Eligible contractors prefer to use MuleHide materials.

DOES PROPOSED SUBSTITUTION AFFECT OTHER PARTS OF WORK?

☐ YES ☒ NO

IF YES, EXPLAIN

SUBSTITUTION REQUIRES DIMENSIONAL REVISION OR REDESIGN OF STRUCTURE OR A/E WORK

☐ YES ☒ NO

BIDDER'S/CONTRACTOR'S STATEMENT OF CONFORMANCE OF PROPOSED SUBSTITUTION TO CONTRACT REQUIREMENT:

We have investigated the proposed substitution. We believe that it is equal or superior in all respects to specified product, except as stated above; that it will provide the same Warranty as specified product; that we have included complete implications of the substitution; that we will pay redesign and other costs caused by the substitution which subsequently become apparent; and that we will pay costs to modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning as a result of the substitution.

BIDDER/CONTRACTOR

John Negroni

DATE

5/29/2026

REVIEW AND ACTION

☐ Resubmit Substitution Request with the following additional information:

☐ Substitution is accepted.

☐ Substitution is accepted with the following comments:

☐ Substitution is not accepted.

ARCHITECT/ENGINEER

DATE



STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION
PRODUCT SUBSTITUTION REQUEST

PROJECT NUMBER

R2508-01

PROJECT TITLE AND LOCATION

CHECK APPROPRIATE BOX

☒

SUBSTITUTION PRIOR TO BID OPENING

(Minimum of (5) working days prior to receipt of Bids as per Article 4 – Instructions to Bidders)

☐

SUBSTITUTION FOLLOWING AWARD

(Maximum of (20) working days from Notice to Proceed as per Article 3 – General Conditions)

FROM: BIDDER/CONTRACTOR (PRINT COMPANY NAME)

Verslues Construction Co., Inc.

TO: ARCHITECT/ENGINEER (PRINT COMPANY NAME)

PWA Architects Inc

Bidder/Contractor hereby requests acceptance of the following product or systems as a substitution in accordance with provisions of Division One of the Bidding Documents:

SPECIFIED PRODUCT OR SYSTEM

084313 Aluminum Framed Storefronts

SPECIFICATION SECTION NO.

SUPPORTING DATA

☒

Product data for proposed substitution is attached (include description of product, standards, performance, and test data)

☐

Sample

☐

Sample will be sent, if requested

QUALITY COMPARISON

	SPECIFIED PRODUCT	SUBSTITUTION REQUEST
NAME, BRAND	Aluminum Storefront	Aluminum Windows
CATALOG NO.		M600 series windows
MANUFACTURER	Old Castle Building Envelope	Quaker Window Company
VENDOR		

PREVIOUS INSTALLATIONS

PROJECT

Calvary Lutheran High School Phase III

ARCHITECT/ENGINEER

The Architects Alliance

LOCATION

2525 State Route B, Jefferson City, MO 65101

DATE INSTALLED

4-10-26

SIGNIFICANT VARIATIONS FROM SPECIFIED PRODUCT

With Quaker it will be a factory assembled window that is tested for efficiency and durability.

This would also be supporting a Missouri based company.

REASON FOR SUBSTITUTION

Higher quality

DOES PROPOSED SUBSTITUTION AFFECT OTHER PARTS OF WORK?

☐ YES ☒ NO

IF YES, EXPLAIN

SUBSTITUTION REQUIRES DIMENSIONAL REVISION OR REDESIGN OF STRUCTURE OR A/E WORK

☐ YES ☒ NO

BIDDER'S/CONTRACTOR'S STATEMENT OF CONFORMANCE OF PROPOSED SUBSTITUTION TO CONTRACT REQUIREMENT:

We have investigated the proposed substitution. We believe that it is equal or superior in all respects to specified product, except as stated above; that it will provide the same Warranty as specified product; that we have included complete implications of the substitution; that we will pay redesign and other costs caused by the substitution which subsequently become apparent; and that we will pay costs to modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning as a result of the substitution.

BIDDER/CONTRACTOR

Frank Verslues Verslues Construction

DATE

4-29-26

REVIEW AND ACTION

☐ Resubmit Substitution Request with the following additional information:

☐ Substitution is accepted.

☐ Substitution is accepted with the following comments:

☐ Substitution is not accepted.

ARCHITECT/ENGINEER

DATE