PROJECT MANUAL

Interior and Exterior Renovation

Jefferson Barracks Readiness Center

St Louis, Missouri

Designed By: CASCO
12 Sunnen Drive, Suite 100
St. Louis, MO. 63143

Date Issued: August 4, 2026

Project No.: T2504-03

STATE *of* MISSOURI

OFFICE *of* ADMINISTRATION


Facilities Management, Design and Construction

SECTION 000107 - PROFESSIONAL SEALS AND CERTIFICATIONS

PROJECT NUMBER: T2504-03, Jefferson Barracks – Readiness Center Interior Renovation (St. Bernadette)

THE FOLLOWING DESIGN PROFESSIONALS HAVE SIGNED AND SEALED THE ORIGINAL PLANS AND SPECIFICATIONS FOR THIS PROJECT, WHICH ARE ON FILE WITH THE DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION:

Architectural Design:



Michael S. Sundermeyer
Exp. Date: 12/31/26
Lic. #2014026855

Structural Design:




Michael T. Lee
Exp. Date: 12/31/27
Lic. #025090

Electrical Engineering:



Mark Kuhlman
Exp. Date: 12/31/27
PE-2017000321

Mechanical/Plumbing:



Ryan Lafrance
Exp. Date: 12/31/27
PE-2023011019

TABLE OF CONTENTS

SECTION	TITLE	NUMBER OF PAGES
DIVISION 00 – PROCUREMENT AND CONTRACTING INFORMATION		
000000	**INTRODUCTORY INFORMATION**	
000101	Project Manual Cover	1
000107	Professional Seals and Certifications	2
000110	Table of Contents	3
000115	List of Drawings	3
001116	**INVITATION FOR BID (IFB)**	1
002113	**INSTRUCTIONS TO BIDDERS**	7
004000	**PROCUREMENT FORMS & SUPPLEMENTS**	
004113	Bid Form	*
004337	MBE/WBE/SDVE Compliance Evaluation Form	*
004338	MBE/WBE/SDVE Eligibility Determination Form for Joint Ventures	*
004339	MBE/WBE/SDVE Good Faith Effort (GFE) Determination Forms	*
004340	SDVE Business Form	*
004541	Affidavit of Work Authorization	*
004545	Anti-Discrimination Against Israel Act Certification form	*
005000	**CONTRACTING FORMS AND SUPPLEMENTS**	
005213	Construction Contract	3
006000	**PROJECT FORMS**	
006113	Performance and Payment Bond	2
006325	Product Substitution Request	2
006519.16	Final Receipt of Payment and Release Form	1
006519.18	MBE/WBE/SDVE Progress Report	2
006519.21	Affidavit of Compliance with Prevailing Wage Law	1
007000	**CONDITIONS OF THE CONTRACT**	
007213	General Conditions	20
007300	Supplementary Conditions	2
007333	National Guard – Supplementary General Conditions for Federally Funded/ Assisted Construction Projects	11
007346	Wage Rate	4
DIVISION 1 - GENERAL REQUIREMENTS		
011000	Summary of Work	4
012100	Allowances	3
012300	Alternates	2
012600	Contract Modification Procedures	3
013100	Coordination	4
013115	Project Management Communications	4
013200	Schedule – Bar Chart	4

NOTICE TO BIDDERS

The following procurement forms can be found on our website at:
https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans
and shall be submitted with your bid to FMDCBids@oa.mo.gov

013300	Submittals	9
013513.28	Site Security and Health Requirements (MONG)	6
015000	Construction Facilities and Temporary Controls	11
017100	Cleaning	4
017900	Demonstration and Training	6

DIVISON 2 – EXISTING CONDITIONS

024119	Selective Demolition	8
028213	Abatement	18

DIVISION 3 – CONCRETE

033000	Cast-In-Place Concrete	15

DIVISION 4 – MASONRY

042200	Concrete Unit Masonry	11

DIVISION 5 – METALS

051200	Structural Steel Framing	11
054000	Cold- Formed Metal Framing	7
055000	Metal Fabrications	6

DIVISION 6 – WOOD PLASTICS AND COMPISTES

061000	Rough Carpentry	7
061600	Sheathing	7

DIVISION 7 – THERMAL AND MOISTURE PROTECTION

072100	Thermal Insulation	4
074293	Soffit Panels	9
076200	Sheet Metal Flashing and Trim	6
078413	Penetration Firestopping	8
079200	Joint Sealants	10

DIVISION 8 – OPENINGS

081113	Hollow Metal Doors and Frames	9
081416	Flush Wood Doors	9
083113	Access Doors and Frames	3
084213	Aluminum-Framed Entrances	10
085113	Aluminum-Framed Windows	6
087100	Door Hardware	30
088000	Glazing	14

DIVISION 9 – FINISHES

092216	Non-Structural Metal Framing	6
092900	Gypsum Board	9
095123	Acoustical Tile Ceilings	5
096513	Resilient Base and Accessories	5
096723	Resinous Flooring	5
099123	Interior Painting	17

DIVISION 10 – SPECIALTIES

101423.16	Room-Identification Panel Signage	6
102113.17	Phenolic-Core Toilet Compartments	5
102800	Toilet Accessories	5
104416	Fire Extinguishers	3

DIVISION 22 – PLUMBING

220517	Sleeves and Sleeve Seals for Plumbing Piping	5
220518	Escutcheons for Plumbing Piping	3
220519	Meters and Gages for Plumbing Piping	5
220523	General-Duty Valves for Plumbing Piping	6
220529	Hangers and Supports for Plumbing Piping and Equipment	10
220548	Vibration and Seismic Controls for Plumbing Piping and Equipment	10
220553	Identification for Plumbing Piping and Equipment	5
220593	Testing, Adjusting, and Balancing for Plumbing	11
220719	Plumbing Insulation	19
221116	Water Distribution Piping	8
221119	Domestic Water Piping Specialties	10
221316	Sanitary Waste and Vent Piping	7
221319	Sanitary Waste Piping Specialties	7
221323	Sanitary Waste Interceptors	3
221429	Sump Pumps	6
223100	Domestic Water Softeners	8
223400	Fuel-Fired, Domestic-Water Heaters	8
224200	Commercial Plumbing Fixtures	15
224700	Drinking Fountains and Water Coolers	6

DIVISION 23 – HEATING VENTILATING AND AIR CONDITIONING

230500	Common Work Results for HVAC	11
230529	Hangers and Supports for HVAC Piping and Equipment	11
230553	Identification for HVAC and Piping	4
230593	Testing, Adjusting, and Balancing for HVAC	16
230713	Duct Insulation	9
231123	Facility Natural-Gas Piping	15
233113	Metal Ducts	12
233300	Air Duct Accessories	4
233400	HVAC Fans	9
233533	Listed Kitchen Ventilation System Exhaust Ducts	4
233713	Diffusers, Registers and Grilles	2
233813	Commercial-Kitchen Hoods	9
235533.16	Gas-Fired Unit Heaters	6
237416.11	Packaged, Small-Capacity, Rooftop Air-Conditioning Units	18
237433	Dedicated Outdoor Air Units Make Up Air Units	14

DIVISION 26 – ELECTRICAL

260500	Common Work Results for Electrical	4
260519	Low-Voltage Electrical Power Conductors and Cables	5
260526	Grounding and Bonding for Electrical Systems	5
260529	Hangers and Supports for Electrical Systems	6
260533	Raceway and Boxes for Electrical Systems	10
260548	Vibration and Seismic Controls for Electrical Systems	8
260553	Identification for Electrical Systems	8
260923	Lighting Control Devices	5
262416	Panelboards	11
262726	Wiring Devices	10
262816	Enclosed Switches and Circuit Breakers	6
262913	Enclosed Controllers	9
265119	LED Interior Lighting	4

APPENDIX

Exhibit A	Roof Warranty	2
Exhibit B	ACM Report	38

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 000115 – LIST OF DRAWINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section provides a comprehensive list of the drawings that comprise the Bid Documents for this project.

PART 2 - PRODUCTS (NOT APPLICABLE)

PART 3 - EXECUTION

3.1 LIST OF DRAWINGS:

G-001	COVER SHEET	08/04/2026
G-002	LEGEND, GEN. NOTES, AND ABBREVIATIONS	08/04/2026
S-001	GENERAL NOTES	08/04/2026
S-101	EXISTING FOUNDATION PLAN	08/04/2026
S-102	EXISTING ROOF FRAMING PLAN	08/04/2026
S-501	DETAILS	08/04/2026
A-001	CODE DATA AND LIFE SAFETY	08/04/2026
A-101	DEMO FLOOR PLAN	08/04/2026
A-102	FLOOR PLAN	08/04/2026
A-103	ROOF PLANS	08/04/2026
A-201	DEMO EXTERIOR ELEVATION	08/04/2026
A-202	EXTERIOR ELEVATION	08/04/2026
A-401	ENLARGED FLOOR PLANS	08/04/2026
A-402	INTERIOR ELEVATIONS	08/04/2026

A-403	PARTITION TYPES	08/04/2026
A-501	DETAILS	08/04/2026
A-502	DETAILS	08/04/2026
A-601	DOOR & FINISH SCHEDULE	08/04/2026
A-701	REFLECTED CEILING PLAN	08/04/2026
P-001	PLUMBING GENERAL NOTES, LEGENDS, & SYMBOLS	08/04/2026
P-101	PLUMBING BASEMENT PLAN	08/04/2026
P-102	PLUMBING SANITARY & VENT DEMO PLAN	08/04/2026
P-103	PLUMBING DOMESTIC WATER DEMO PLAN	08/04/2026
P-104	PLUMBING SANITARY & VENT PLAN	08/04/2026
P-105	PLUMBING DOMESTIC WATER PLAN	08/04/2026
P-106	PLUMBING ROOF PLAN	08/04/2026
P-201	PLUMBING ENLARGED RESTROOM PLAN	08/04/2026
P-501	PLUMBING DETAILS	08/04/2026
P-502	PLUMBING SANITARY ISOMETRIC	08/04/2026
P-503	PLUMBING DOMESTIC WATER ISOMETRIC	08/04/2026
P-601	PLUMBING SCHEDULES	08/04/2026
		08/04/2026
M-001	MECHANICAL GENERAL NOTES, LEGENDS, & SYMBOLS	08/04/2026
M-101	MECHANICAL BASEMENT PLAN	08/04/2026
M-102	MECHANICAL DEMO FLOOR PLAN	08/04/2026
M-103	MECHANICAL DEMO ROOF PLAN	08/04/2026
M-104	MECHANICAL FLOOR PLAN	08/04/2026
M-105	MECHANICAL ROOF PLAN	08/04/2026
M-501	MECHANICAL DETAILS	08/04/2026
M-601	MECHANICAL SCHEDULES	08/04/2026
M-602	MECHANICAL CONTROLS	08/04/2026
E-001	ELECTRICAL GENERAL NOTES & ABBREVIATIONS	08/04/2026
E-101	ELECTRICAL BASEMENT DEMO PLAN	08/04/2026
E-102	ELECTRICAL FIRST FLOOR DEMO PLAN	08/04/2026
E-103	LIGHTING PLAN	08/04/2026
E-104	POWER AND SYSTEMS PLAN	08/04/2026

E-105	ROOFTOP POWER PLAN	08/04/2026
E-106	ENLARGED POWER AND SYSTEMS PLANS	08/04/2026
E-107	ELECTRICAL SITE PLAN	08/04/2026
E-501	ELECTRICAL DETAILS & RISER	08/04/2026
E-601	ELECTRICAL SCHEDULES	08/04/2026
E-602	ELECTRICAL SCHEDULES	08/04/2026

END OF SECTION 000115

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 001116 - INVITATION FOR BID

1.0 OWNER:

A. The State of Missouri
Office of Administration,
Division of Facilities Management, Design and Construction
Jefferson City, Missouri

2.0 PROJECT TITLE AND NUMBER:

A. Interior and Exterior Renovation
Jefferson Barracks Readiness Center
St Louis, Missouri
Project No.: T2504-03

3.0 BIDS WILL BE RECEIVED:

A. Until: 1:30 PM, September 1, 2026

B. **Only electronic bids sent to FMDCBids@oa.mo.gov shall be accepted: (See Instructions to Bidders for further detail)**

4.0 DESCRIPTION:

A. Scope: The project consists of renovations to the former St. Bernadette Elementary School at Jefferson Barracks in St. Louis, Missouri. The renovations will convert the former school to a Missouri National Guard Readiness Center. The scope is limited to approximately 16,000 square feet, primarily focusing on the cafeteria, classrooms, restrooms, and basement mechanical and plumbing work.

B. MBE/WBE/SDVE Goals: MBE **0%**, WBE **0%**, and SDVE **3%. NOTE: Only MBE/WBE firms certified by the State of Missouri Office of Equal Opportunity as of the date of bid opening, or SDVE(s) meeting the requirements of Section 34.074, RSMo and 1 CSR 30-5.010, can be used to satisfy the MBE/WBE/SDVE participation goals for this project.**

5.0 PRE-BID MEETING:

A. Place/Time**:** 10 AM, August, 18, 2026, at Jefferson Barracks Readiness Center – Gymnasium, 74 Kearney Street, St. Louis, MO. 63125

B. Access to State of Missouri property requires presentation of a photo ID by all persons.

6.0 HOW TO GET PLANS & SPECIFICATIONS:

A. View Only Electronic bid sets are available at no cost or paper bid sets for a deposit of $100.00 from American Document Solutions (ADS). MAKE CHECKS PAYABLE TO: American Document Solutions. Mail to: American Document Solutions, 1400 Forum Blvd., Suite 7A, Columbia, Missouri 65203. Phone 573-446-7768, Fax 573-355-5433, https://www.adsplanroom.net. NOTE: Prime contractors will be allowed a maximum of two bid sets at the deposit rate shown above. Other requesters will be allowed only one bid set at this rate. Additional bid sets or parts thereof may be obtained by any bidder at the cost of printing and shipping by request to American Document Solutions at the address shown above. Bidder must secure at least one bid set to become a planholder.

B. **Refunds: Return plans and specifications in unmarked condition within 15 working days of bid opening to American Document Solutions, 1400 Forum Blvd., Suite 7A, Columbia, Missouri 65203. Phone 573-446-7768, Fax 573-355-5433. Deposits for plans not returned within 15 working days shall be forfeited.**

C. Information for upcoming bids, including downloadable plans, specifications, Invitation for Bid, bid tabulation, award, addenda, and access to the ADS planholders list, is available on the Division of Facilities Management, Design and Construction's web site: https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans.

7.0 POINT OF CONTACT:

A. Project Manager: Jeremy Newton, email: jeremy.l.newton.nfg@army.mil

8.0 GENERAL INFORMATION:

A. The State reserves the right to reject any and all bids and to waive all informalities in bids. No bid may be withdrawn for a period of 20 working days subsequent to the specified bid opening time. The contractor shall pay not less than the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed, as determined by the Missouri Department of Labor and Industrial Relations and as set out in the detailed plans and specifications.

B. Bid results will be available at https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans after it is verified that at least one bid is awardable and affordable.

C. This is a federally funded/assisted construction project that requires compliance by the awarded contractor with applicable federal laws and regulations. The bidder should review Section 007333, SUPPLEMENTARY GENERAL CONDITIONS FOR FEDERALLY FUNDED/ASSISTED CONSTRUCTION PROJECTS, which is made part of the solicitation and will be part of the resulting contract by reference.

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 002113 – INSTRUCTIONS TO BIDDERS

1.0 - SPECIAL NOTICE TO BIDDERS

A. If awarded a contract, the Bidder's employees, and the employees of all subcontractors, who perform the work on the project must adhere to requirements in Section 013513 – Site Security and Health Requirements as applicable per Agency.

B. The Bidder's prices shall include all city, state, and federal sales, excise, and similar taxes that may lawfully be assessed in connection with the performance of work, and the purchased of materials to be incorporated in the work. **THIS PROJECT IS NOT TAX EXEMPT.**

2.0 - BID DOCUMENTS

A. The number of sets obtainable by one (1) party may be limited in accordance with available supply.

B. For the convenience of contractors, subcontractors and suppliers, bidding documents are available on the Owner's website at https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans.

3.0 - BIDDERS' OBLIGATIONS

A. Bidders must carefully examine the entire site of the work and shall make all reasonable and necessary investigations to inform themselves thoroughly as to the facilities available as well as to all the difficulties involved in the completion of all work in accordance with the specifications and the plans. Bidders are required to examine all maps, plans and data mentioned in the specifications. No plea of ignorance concerning observable existing conditions or difficulties that may be encountered in the execution of the work under this contract will be accepted as an excuse for any failure or omission on the part of the successful Bidder (contractor) to fulfill every detail of the requirements of the contract, nor accepted as a basis for any claims for extra compensation or time extension.

B. Under no circumstances will Bidders give their plans and specifications to other Bidders. It is highly encouraged, but not required, that all Bidders be on the official planholders list to receive project updates including but not limited to any addenda that are issued during the bidding process.

4.0 - INTERPRETATIONS

A. No Bidder shall be entitled to rely on oral or written representations from any person as to the meaning of the plans and specifications or the acceptability of alternate products, materials, form or type of construction.

B. Bidders shall make all requests for interpretations in writing and submit all requests to the Project Manager identified in Section 007300 – Supplementary Conditions with all necessary supporting documentation no less than five (5) working days before opening of bids. Responses to requests for interpretation will be issued via a written addendum and will be sent as promptly as is practicable to all official planholders and posted on the Owner's website. All such addenda shall become part of the bid and contract documents.

C. Bidders shall make all requests for an "Acceptable Substitution" on the Section 006325 Substitution Request Form. The request shall be emailed to the Project Manager identified in Section 007300 – Supplementary Conditions no less than five (5) working days before opening of bids. Responses to requests for substitutions will be issued via a written addendum and will be sent as promptly as is practicable to all official planholders and posted on the Owner's website. All such addenda shall become part of the bid and contract documents.

D. An "Acceptable Substitution" requested after the award of bid will only be approved if proven to the satisfaction of the Owner and the Designer that the product is acceptable in design, strength, durability, usefulness, and convenience for the purpose intended. Approval of the substitution after award is at the sole discretion of the Owner and all requests of this nature must be submitted in accordance with Article 3.1 of the General Conditions.

5.0 - BIDS AND BIDDING PROCEDURE

A. Bidders shall submit all submission forms and accompanying documents listed in Section 004113 – Bid Form, Article 5.0, Attachments to Bid by the stated time on the bid documents or the bid will be rejected for being non-responsive.

B. Depending on the specific project requirements, **the following is a GENERIC list** of all possible bid forms that may be due with bid submittals. Bidders must verify each specific project's requirements in Section 004113 to ensure they have provided all the required documentation with their submission.

Bid Submittal – due before stated date and time of bid opening (see IFB):

004113	Bid Form (all pages are always required)
004322	Unit Prices Form
004336	Proposed Subcontractors Form
004337	MBE/WBE/SDVE Compliance Evaluation Form
004338	MBE/WBE/SDVE Eligibility Determination for Joint Ventures
004339	MBE/WBE/SDVE GFE Determination
004340	SDVE Business Form
004541	Affidavit of Work Authorization
004545	Anti-Discrimination Against Israel Act Certification form

C. The Bidder shall submit its bid on the forms provided by the Owner in the same file format (PDF) with each space fully and properly completed, typewritten or legibly printed, including all amounts required for alternate bids, unit prices, cost accounting data, etc. The Owner will reject bids that are not on the Owner's forms and that do not contain all requested information. All forms can be found on the Owner's website at https://oa.mo.gov/facilities/bid-opportunities/bid-listing-electronic-plans and shall be submitted to FMDCBids@oa.mo.gov.

D. All bids shall be submitted without additional terms and conditions, modifications, or reservations. The completed forms shall not include interlineations, alterations, or erasures. Bids not in compliance with the requirements of this paragraph will be rejected as non-responsive.

E. All bids shall be accompanied by a bid bond executed by the bidder and a duly authorized surety company, certified check, cashier's check or bank draft made payable to the Division of Facilities Management, Design and Construction, State of Missouri, in the amount indicated in the bid documents in Section 004113. Failure of the Bidder to submit the duly authorized bid bond or the full amount required shall be sufficient cause to reject his bid. The Bidder agrees that the proceeds of the check, draft, or bond shall become the property of the State of Missouri, if for any reason the Bidder withdraws his bid after bid closing or if the Bidder, within ten (10) working days after notification of award, refuses or is unable to 1) execute the tendered contract, 2) provide an acceptable performance and payment bond, or 3) provide evidence of required insurance coverage.

F. The bid bond check or draft submitted by the successful Bidder will be returned after the receipt of an acceptable performance and payment bond and execution of the formal contract. Checks or drafts of all other Bidders will be returned within a reasonable time after it is determined that the bid represented by same will receive no further consideration by the State of Missouri.

6.0 - SIGNING OF BIDS

A. A bid shall contain the full and correct legal name of the Bidder. If the Bidder is an entity registered with the Missouri Secretary of State, the Bidder's name on the bid form shall appear as shown in the Secretary of State's records. If the Bidder is an entity organized in a state other than Missouri, the Bidder must provide a Certificate of Authority to do business in the State of Missouri.

B. If the successful Bidder is doing business in the State of Missouri under a fictitious name, the Bidder shall furnish to Owner, attached to the Bid Form, a properly certified copy of the certificate of Registration of Fictitious Name from the State of Missouri, and such certificate shall remain on file with the Owner.

C. A bid from an individual shall be signed as noted on the Bid Form.

D. A bid from a partnership or joint venture shall require only one signature of a partner, an officer of the joint venture authorized to bind the venture, or an attorney-in-fact. If the bid is signed by an officer of

a joint venture or an attorney-in-fact, a document evidencing the individual's authority to execute contracts should be included with the bid form.

E. A bid from a limited liability company (LLC) shall be signed by a manager or a managing member of the LLC.

F. A bid from a corporation shall have the correct corporate name thereon and the signature of an authorized officer of the corporation. Title of office held by the person signing for the corporation shall appear, along with typed name of said individual and the corporate license number shall be provided. In addition, for corporate proposals, the President or Vice-President listed per the current filing with the Missouri Secretary of State should sign as the Bidder. If the signatory is other than the corporate president or vice president, the bidder must provide satisfactory evidence that the signatory has the legal authority to bind the corporation.

7.0 - RECEIVING BID SUBMITTALS

A. It is the Bidder's sole responsibility to ensure receipt of the bid submittals by Owner on or before the date and time specified in the Invitation for Bid or as modified via written addenda. Bids received after the date and time specified will not be considered by the Owner.

B. All bids shall be received via email at FMDCBids@oa.mo.gov. A bid submitted through any other means, including hard copies, will not be considered and will be discarded by the Owner unopened.

8.0 - MODIFICATION AND WITHDRAWAL OF BIDS

A. Bidder may withdraw a bid at any time prior to the scheduled closing time for receipt of bids, but no bidder may withdraw his bid for a period of twenty (20) working days after the scheduled closing time for receipt of bids.

B. Bidder may modify a bid until the scheduled closing time by sending a revised bid to FMDCBids@oa.mo.gov with a note in the subject line and body of the email that it is a revised bid. A revised bid sent via any other method will not be considered.

9.0 - AWARD OF CONTRACT

A. The Owner reserves the right to reject any and/or all bids and further to waive all informalities in bidding when deemed in the best interest of the State of Missouri.

B. The Owner reserves the right to let other contracts in connection with the work including, but not limited to, contracts for the furnishing and installation of furniture, equipment, machinery, appliances and other apparatuses.

C. The Owner will award a contract to the lowest, responsive, and responsible Bidder in accordance with Section 8.250, RSMo. No contract will be awarded to any Bidder who has had a contract with the Owner terminated within the preceding twelve months for material breach of contract or who has been suspended or debarred by the Owner.

D. Award of alternates, if any, will be made in numerical order unless all bids received are such that the order of acceptance of alternates does not affect the determination of the lowest, responsive, responsible bidder.

E. No award shall be considered binding upon the Owner until the written contract has been properly executed and the following documentation has been provided: 1) performance and payment bond consistent with Article 6.1 of the General Conditions; 2) proof of the required insurance coverage; 3) an executed Section 004541 - Affidavit of Work Authorization form; and 4) documentation evidence enrollment and participation in a federal work authorization program.

F. Failure to execute and return the contract and associated documents within the prescribed period shall be treated, at the option of the Owner, as a breach of Bidder's obligation and the Owner shall be under no further obligation to Bidder.

G. Transient employers subject to Sections 285.230 and 285.234, RSMo, (out-of-state employers who temporarily transact any business in the State of Missouri) may be required to file a bond with the Missouri Department of Revenue. No contract will be awarded by the Owner unless the successful Bidder certifies that he has complied with all applicable provisions of Section 285.230-234.

H. Sections 285.525 and 285.530, RSMo, require business entities to enroll and participate in a federal work authorization program in order to be eligible to receive award of any state contract in excess of $5,000. Bidders should submit with their bid an Affidavit of Work Authorization (Section 004541) along with appropriate documentation evidencing such enrollment and participation. Bidders must also submit an E-Verify Memorandum before the Owner may award a contract to the Bidder. Information regarding E-Verify is located at https://www.e-verify.gov/employers/enrolling-in-e-verify. The contractor shall be responsible for ensuring that all subcontractors and suppliers associated with this contract enroll in E-Verify.

I. The successful Bidder must be registered in MissouriBUYS powered by MOVERS at https://missouribuys.mo.gov/supplier-registration# as an approved vendor prior to being issued a contract.

10.0 - CONTRACT SECURITY

A. The successful Bidder shall furnish a performance/payment bond as set forth in General Conditions Article 6.1 prior to the State executing the contract and issuing a notice to proceed.

11.0 - WORKING DAYS

A. Contract duration time is stated in working days and will use the following definition in determining the actual calendar date for contract completion:

1. Working days are defined as all calendar days except Saturdays, Sundays and the following State of Missouri observed holidays: New Year's Day, Martin Luther King, Jr. Day, Lincoln Day, Washington's Birthday, Truman Day, Memorial Day, Juneteenth, Independence Day, Labor Day, Columbus Day, Veterans Day, Thanksgiving Day and Christmas Day.

12.0 - AMERICAN AND MISSOURI - MADE PRODUCTS AND FIRMS

A. By signing the bid form and submitting a bid on this project, the Bidder certifies that it will use American and Missouri products as set forth in Article 1.7 of the General Conditions. Bidders are advised to review those requirements carefully prior to bidding.

B. A preference shall be given to Missouri firms, corporations or individuals, or firms, corporations or individuals that maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less.

C. Pursuant to Section 34.076, RSMo, a contractor or Bidder domiciled outside the boundaries of the State of Missouri shall be required, in order to be successful, to submit a bid the same percent less than the lowest bid submitted by a responsible contractor or Bidder domiciled in Missouri as would be required for such a Missouri domiciled contractor or Bidder to succeed over the bidding contractor or Bidder domiciled outside Missouri on a like contract or bid being let in the Bidder's domiciliary state and, further, the contractor or Bidder domiciled outside the boundaries of Missouri shall be required to submit an audited financial statement as would be required of a Missouri domiciled contractor or Bidder on a like contract or bid being let in the domiciliary state of that contractor or Bidder.

13.0 – ANTI-DISCRIMINATION AGAINST ISRAEL ACT CERTIFICATION:

A. If the Bidder meets the section 34.600, RSMo., definition of a "company" and the Bidder has ten or more employees, the Bidder must certify in writing that the Bidder is not currently engaged in a boycott of goods or services from the State of Israel and shall not engage in a boycott of goods or services from the State of Israel, if awarded a contract, for the duration of the contract. The Bidder is required to complete and submit the applicable portion of Section 004545 - Anti-Discrimination Against Israel Act Certification with its Bid Form. The applicable portion of the exhibit must be submitted prior to execution of a contract by the Owner and issuance of Notice to Proceed.

14.0 - MBE/WBE/SDVE INSTRUCTIONS

A. Definitions:

1. **"MBE"** means a Minority Business Enterprise.

2. **"MINORITY"** has the same meaning as set forth in 1 C.S.R. 10-17.010.

3. **"MINORITY BUSINESS ENTERPRISE"** has the same meaning as set forth in section 37.020, RSMo.

4. **"WBE"** means a Women's Business Enterprise.

5. **"WOMEN'S BUSINESS ENTERPRISE"** has the same meaning as set forth in section 37.020, RSMo.

6. **"SDVE"** means a Service-Disabled Veterans Enterprise.

7. **"SERVICE-DISABLED VETERAN"** has the same meaning as set forth in section 34.074, RSMo.

8. **"SERVICE-DISABLED VETERAN ENTERPRISE"** has the same meaning as "Service-Disabled Veteran Business" set forth in section 34.074, RSMo.

B. MBE/WBE/SDVE General Requirements:

1. For all bids greater than $100,000, the Bidder shall obtain MBE, WBE and SDVE participation in an amount equal to or greater than the percentage goals set forth in the Invitation for Bid and the Bid Form, unless the Bidder is granted a Good Faith Effort waiver by the Director of the Division, as set forth below. If the Bidder does not meet the MBE, WBE and SDVE goals, or make a good faith effort to do so, the Bidder shall be nonresponsive, and its bid shall be rejected.

2. The Bidder should submit with its bid all the information requested in the MBE/WBE/SDVE Compliance Evaluation Form for every MBE, WBE, or SDVE subcontractor or material supplier the Bidder intends to use for the contract work. The Bidder is required to submit all MBE/WBE/SDVE documentation before the stated time and date set forth in the Invitation for Bid. If the Bidder fails to provide such information by the specified date and time, the Owner shall reject the bid.

3. The Director reserves the right to request additional information from a Bidder to clarify the Bidder's proposed MBE, WBE, and/or SDVE participation. The Bidder shall submit the clarifying information requested by the Owner within two (2) working days of receiving the request for clarification.

4. Pursuant to section 34.074, RSMo, a Prime Bidder that qualifies as an SDVE shall receive a three-percentage point bonus preference in the contract award evaluation process. The bonus preference will be calculated and applied by reducing the bid amount of the eligible SDVE by three percent of the apparent low responsive Bidder's bid. Based on this calculation, if the eligible SDVE's evaluation is less than the apparent low responsive Bidder's bid, the eligible SDVE's bid will become the apparent low responsive bid. This reduction is for evaluation purposes only and will have no impact on the actual amount(s) of the bid or the amount(s) of any contract awarded. In order to be eligible for the SDVE preference, the Bidder must complete and submit with its bid the Missouri Service-Disabled Veteran Business Form, and any information required by the form.

C. Computation of MBE/WBE/SDVE Goal Participation:

1. A Bidder who is a MBE, WBE, or SDVE may count 100% of the contract towards the MBE, WBE or SDVE goal, less any amounts awarded to another MBE, WBE or SDVE. (NOTE: a MBE firm that bids as general contractor must obtain WBE and SDVE participation; a WBE firm that bids as a general contractor must obtain MBE and SDVE participation; and a SDVE firm that bids as general contractor must obtain MBE and WBE participation.) For the remaining contract amount to be counted towards the MBE, WBE or SDVE goal, the Bidder must complete the MBE/WBE/SDVE Compliance Evaluation Form (Section 004337) identifying itself as an MBE, WBE or SDVE.

2. The total dollar value of the work granted to a certified MBE, WBE or SDVE by the Bidder shall be counted towards the applicable goal.

3. Expenditures for materials and supplies obtained from a certified MBE, WBE, or SDVE supplier or manufacturer may be counted towards the MBE, WBE and SDVE goals, if the MBE, WBE, or SDVE assumes the actual and contractual responsibility for the provision of the materials and supplies.

4. The total dollar value of the work granted to a second or subsequent tier subcontractor or a supplier may be counted towards a Bidder's MBE, WBE and SDVE goals, if the MBE, WBE, or SDVE properly assumes the actual and contractual responsibility for the work.

5. The total dollar value of work granted to a certified joint venture equal to the percentage of the ownership and control of the MBE, WBE, or SDVE partner in the joint venture may be counted towards the MBE/WBE/SDVE goals.

6. Only expenditures to a MBE, WBE, or SDVE that performs a commercially useful function in the work may be counted towards the MBE, WBE and SDVE goals. A MBE, WBE, or SDVE performs a commercially useful function when it is responsible for executing a distinct element of the work and carrying out its responsibilities by performing, managing and supervising the work or providing supplies or manufactured materials.

D. Certification of MBE/WBE/SDVE Subcontractors:

1. In order to be counted towards the goals, an MBE or WBE must be certified by the State of Missouri Office of Equal Opportunity and an SDVE must be certified by the State of Missouri, Office of Equal Opportunity or by the Federal U.S. Small Business Administration directory.

2. The Bidder may determine the certification status of a proposed MBE or WBE subcontractor or supplier by referring to the Office of Equal Opportunity (OEO)'s online MBE/WBE directory https://apps1.mo.gov/MWBCertifiedFirms/. The Bidder may determine the eligibility of a SDVE subcontractor or supplier by referring to the Office of Equal Opportunity online SDVE directory at https://oeo.mo.gov/sdve-certification-program/ or the Federal U.S. Small Business Administration directory https://veterans.certify.sba.gov/#search.

3. Additional information, clarifications, or other information regarding the MBE/WBE/SDVE listings in the directories may be obtained by contacting the Contract Specialist of record as shown in the Supplementary Conditions (Section 007300).

E. Waiver of MBE/WBE/SDVE Participation:

1. If a Bidder has made a good faith effort to secure the required MBE, WBE and/or SDVE participation and has failed, the Bidder shall submit with its bid the information requested in MBE/WBE/SDVE Good Faith Effort (GFE) Determination form. The Director will determine if the Bidder made a good faith effort to meet the applicable goals. If the Director determines that the Bidder did not make a good faith effort, the bid shall be rejected as being nonresponsive to the bid requirements. Bidders who demonstrate that they have made a good faith effort to include MBE, WBE, and/or SDVE participation will be granted a waiver and will be considered to be responsive to the applicable participation goals, regardless of the percent of actual participation obtained, if the bid is otherwise acceptable.

2. In determining whether a Bidder has made a good faith effort to obtain MBE, WBE and/or SDVE participation, the Director may evaluate the factors set forth in 1 CSR 30-5.010(6)(C) and the following:

   a. The amount of actual participation obtained;

   b. How and when the Bidder contacted potential MBE, WBE, and SDVE subcontractors and suppliers;

   c. The documentation provided by the Bidder to support its contacts, including whether the Bidder provided the names, addresses, phone numbers, and dates of contact for MBE/WBE/SDVE firms contacted for specific categories of work;

   d. If project information, including plans and specifications, were provided to MBE/WBE/SDVE subcontractors;

   e. Whether the Bidder made any attempts to follow-up with MBE, WBE or SDVE firms prior to bid;

f. Amount of bids received from any of the subcontractors and/or suppliers that the Bidder contacted;

g. The Bidder's stated reasons for rejecting any bids;

F. Contractor MBE/WBE/SDVE Obligations

1. If awarded a contract, the Bidder will be contractually required to subcontract with or obtain materials from the MBE, WBE, and SDVE firms listed in its bid, in amounts equal to or greater than the dollar amount in the bid, unless the amount is modified in writing by the Owner.

2. If the Contractor fails to meet or maintain the participation requirements contained in the Contractor's bid, the Contractor must satisfactorily explain to the Director why it cannot comply with the requirement and why failing meeting the requirement was beyond the Contractor's control. If the Director finds the Contractor's explanation unsatisfactory, the Director may take any appropriate action including, but not limited to:

   a. Declaring the Contractor ineligible to participate in any contracts with the Division for up to twelve (12) months (suspension); and/or

   b. Declaring the Contractor be nonresponsive to the Invitation for Bid, or in breach of contract and rejecting the bid or terminating the contract.

3. If the Contractor replaces an MBE, WBE, or SDVE during the course of the contract, the Contractor shall replace it with another MBE, WBE, or SDVE or make a good faith effort to do so. All MBE, WBE and SDVE substitutions must be approved by the Director in writing.

4. The Contractor shall provide the Owner with regular reports on its progress in meeting its MBE/WBE/SDVE obligations. At a minimum, the Contractor shall report the dollar-value of work completed by each MBE, WBE, or SDVE during the preceding month and the cumulative total of work completed by each MBE, WBE or SDVE to date with each monthly application for payment. The Contractor shall also make a final report, which shall include the total dollar-value of work completed by each MBE, WBE, and SDVE during the entire contract.

THIS PAGE INTENTIONALLY LEFT BLANK

State of Missouri
Construction Contract

THIS AGREEMENT is made (DATE) by and between:

Contractor Name and Address

hereinafter called the "Contractor," and the **State of Missouri**, hereinafter called the **"Owner"**, represented by the Office of Administration, Division of Facilities Management, Design and Construction.

WITNESSETH, that the Contractor and the Owner, for the consideration stated herein agree as follows:

ARTICLE 1. STATEMENT OF WORK

The Contractor shall furnish all labor and materials and perform all work required for furnishing and installing all labor, materials, equipment and transportation and everything necessarily inferred from the general nature and tendency of the plans and specifications for the proper execution of the work for:

Project Name:	**Interior and Exterior Renovation** **Jefferson Barracks Readiness Center** **St Louis, Missouri**
Project Number:	**T2504-03**

in strict accordance with the Contract Documents as enumerated in Article 7, all of which are made a part hereof.

ARTICLE 2. TIME OF COMPLETION

The contract performance time is **240 working days** from the transmittal date of this agreement. The contract completion date is **MONTH, DAY, YEAR**. This time includes ten (10) working days for the Contractor to receive, sign and return the contract form along with required bonding and insurance certificates. Failure of the Contractor to provide correct bonding and insurance within the ten (10) working days shall not be grounds for a time extension. Receipt of proper bonding and insurance is a condition precedent to the formation of the contract and if not timely received, may result in forfeiture of the Contractor's bid security. Work may not commence until the Owner issues a written Notice to Proceed and must commence within seven (7) working days thereafter.

ARTICLE 3. LIQUIDATED DAMAGES

Whenever time is mentioned in this contract, time shall be and is of the essence of this contract. The Owner would suffer a loss should the Contractor fail to have the work embraced in this contract fully completed on or before the time above specified. THEREFORE, the parties hereto realize in order to adjust satisfactorily the damages on account of such failure that it might be impossible to compute accurately or estimate the amount of such loss or damages which the Owner would sustain by reason of failure to complete fully said work within the time required by this contract. The Contractor hereby covenants and agrees to pay the Owner, as and for **liquidated damages, the sum of $1,000** per day for each and every day, Sunday and legal holidays excepted, during which the work remains incomplete and unfinished. Any sum which may be due the Owner for such damages shall be deducted and retained by the Owner from any balance which may be due the Contractor when said work shall have been finished and accepted. But such provisions shall not release the Bond of the Contractor from liability according to its terms. In case of failure to complete, the Owner will be under no obligation to show or prove any actual or specific loss or damage.

SAMPLE

ARTICLE 4. CONTRACT SUM

The Owner shall pay the Contractor for the prompt, faithful and efficient performance of the conditions and undertakings of this contract, subject to additions, and deductions as provided herein, in current funds the sum of:

Base Bid: $

Accepted Alternates, if applicable to the Project and accepted by the Owner.

TOTAL CONTRACT AMOUNT: ($CONTRACT AMOUNT)

UNIT PRICES: The Owner accepts the following Unit Prices:

For changing specified quantities of work from those indicated by the contract drawings and specifications, upon written instructions of Owner, the following unit prices shall prevail. The unit prices include all labor, overhead and profit, materials, equipment, appliances, bailing, shoring, shoring removal, etc., to cover the finished work of the several kinds of work called for. Only a single unit price shall be given and it shall apply for either MORE or LESS work than that shown on the drawings and called for in the specifications or included in the Base Bid. In the event of more or less units than so indicated or included, change orders may be issued for the increased or decreased amount.

ARTICLE 5. PREVAILING WAGE RATE

MISSOURI PREVAILING WAGE LAW (Sections 290.210 to 290.340, RSMo): The Contractor shall pay not less than the specified hourly rate of wages, as set out in the wage order attached to and made part of the specifications for work under this contract, to all workers performing work under the contract, in accordance with sections 290.210 to 290.340, RSMo. The Contractor shall forfeit a penalty to the Owner of one hundred dollars per day (or portion of a day) for each worker that is paid less than the specified rates for any work done under the contract by the Contractor or by any subcontractor, in accordance with section 290.250, RSMo.

DAVIS-BACON ACT: If this Project is financed in whole or in part from Federal funds (as indicated in the Instructions to Bidders or other bid or contract documents for this Project), then this contract shall be subject to all applicable federal labor statutes, rules and regulations, including provisions of the Davis-Bacon Act, 40 U.S.C. §3141 et seq., and the "Federal Labor Standards Provisions," as further set forth in Section 007333 – Supplementary General Conditions for Federally Funded/Assisted Construction Projects, which is incorporated into the contract by reference. Where the Missouri Prevailing Wage Law and the Davis-Bacon Act require payment of different wages for work performed under this contract, the Contractor and all Subcontractors shall pay the greater of the wages required under either law, on a classification-by-classification basis.

ARTICLE 6. MINORITY/WOMEN/SERVICE DISABLED VETERAN BUSINESS ENTERPRISE PARTICIPATION

The Contractor has been granted a waiver of the 0% MBE and 0% WBE and 3% SDVE participation goals. The Contractor agrees to secure the MBE/WBE/SDVE participation amounts for this project as follows: (OR)

The Contractor has met the MBE/WBE/SDVE participation goals and agrees to secure the MBE/WBE/SDVE participation amounts for this project as follows:

MBE/WBE/SDVE Firm: Subcontract Amt:$
MBE/WBE/SDVE Firm: Subcontract Amt:$
MBE/WBE/SDVE Firm: Subcontract Amt:$

Total $

MBE/WBE/SDVE assignments identified above shall not be changed without a contract change signed by the Owner.

The Director of the Division of Facilities Management, Design and Construction or his Designee shall be the final authority to resolve disputes and disagreements between the Contractor and the MBE/WBE/SDVE firms listed above when such disputes impact the subcontract amounts shown above.

SAMPLE

ARTICLE 7. CONTRACT DOCUMENTS

The following documents are hereby incorporated into this contract by reference (all division/section numbers and titles are as utilized in the Project Manual published by the Owner for this Project):

1. Division 0 – Procurement and Contracting Information, including, but not limited to:
    a. Invitation for Bid (Section 001116)
    b. Instructions to Bidders (Section 002113)
    c. Supplementary Instructions to Bidders (if applicable) (Section 002213)
    d. The following documents as completed and executed by the Contractor and accepted by the Owner, if applicable:
        i. Bid Form (Section 004113)
        ii. Unit Prices (Section 004322)
        iii. Proposed Contractors Form (Section 004336)
        iv. MBE, WBE, SDVE Compliance Evaluation Form(s) (Section 004337)
        v. MBE, WBE, SDVE Eligibility Determination Form for Joint Ventures (Section 004338)
        vi. MBE, WBE, SDVE Good Faith Effort (GFE) Determination Form (Section 004339)
        vii. Missouri Service Disabled Veteran Business Form (Section 004340)
        viii. Affidavit of Work Authorization (Section 004541)
    e. Performance and Payment Bond, completed and executed by the Contractor and surety (Section 006113)
    f. General Conditions (Section 007213)
    g. Supplementary Conditions (Section 007300)
    h. Supplementary General Conditions for Federally Funded/Assisted Construction Projects (Section 007333), if applicable
    i. Wage Rate(s) (Section 007346)
2. Division 1 – General Requirements
3. All Drawings identified in the Project Manual
4. All Technical Specifications included in the Project Manual
5. Addenda, if applicable

ARTICLE 8 – CERTIFICATION

By signing this contract, the Contractor hereby re-certifies compliance with all legal requirements set forth in Section 6.0, Bidder's Certifications of the Bid Form.

By signature below, the parties hereby execute this contract document.

APPROVED:

_____
Crystal Wessing, Interim Director
Division of Facilities Management,
Design and Construction

_____
Contractor's Authorized Signature

I, Corporate Secretary, certify that I am Secretary of the corporation named above and that (CONTRACTOR NAME), who signed said contract on behalf of the corporation, was then (TITLE) of said corporation and that said contract was duly signed for and in behalf of the corporation by authority of its governing body, and is within the scope of its corporate powers.

_____
Corporate Secretary

SAMPLE

THIS PAGE INTENTIONALLY LEFT BLANK

Bond No._____

SECTION 006113 - PERFORMANCE AND PAYMENT BOND FORM

KNOW ALL MEN BY THESE PRESENTS, THAT we _____

as principal, and _____

_____as Surety, are held and firmly bound unto the

STATE OF MISSOURI. in the sum of _____ Dollars ($)

for payment whereof the Principal and Surety bind themselves, their heirs, executors, administrators and successors, jointly and severally, firmly by these presents.

WHEREAS, the Principal has, by means of a written agreement dated the _____

day of_____, 20_____, enter into a contract with the State of Missouri for

_____

_____

_____

(Insert Project Title and Number)

NOW, THEREFORE, if the Principal shall faithfully perform and fulfill all the undertakings, covenants, terms, conditions and agreements of said contract during the original term of said contract and any extensions thereof that may be granted by the State of Missouri, with or without notice to the Surety and during the life of any guaranty required under the contract; and shall also faithfully perform and fulfill all undertakings, covenants, terms, conditions and agreements of any and all duly authorized modifications of said contract that may hereafter be made with or without notice to the Surety; and shall also promptly make payment for materials incorporated, consumed or used in connection with the work set forth in the contract referred to above, and all insurance premiums, both compensation and all other kinds of insurance, on said work, and for all labor performed on such work, whether by subcontractor or otherwise, at not less than the prevailing hourly rate of wages for work of a similar character (exclusive of maintenance work) in the locality in which the work is performed and not less than the prevailing hourly rate of wages for legal holiday and overtime work (exclusive of maintenance work) in the locality in which the work is performed both as determined by the Department of Labor and Industrial Relations or determined by the Court of Appeal, as provided for in said contract and in any and all duly authorized modifications of said contract that may be hereafter made, with or without notice to the Surety, then, this obligation shall be void and of no effect, but it is expressly understood that if the Principal should make default in or should fail to strictly, faithfully and efficiently do, perform and comply with any or more of the covenants, agreements, stipulations, conditions, requirements or undertakings, as specified in or by the terms of said contract, and with the time therein named, then this obligation shall be valid and binding upon each of the parties hereto and this bond shall remain in full force and effect; and the same may be sued on at the instance of any material man, laborer, mechanic, subcontractor, individual, or otherwise to whom such payment is due, in the name of the State of Missouri, to the use of any such person.

AND, IT IS FURTHER specifically provided that any modifications which may hereinafter be made in the terms of the contract or in the work to be done under it or the giving by the Owner of any extension of the time for the performance of the contract or any other forbearance on the part of either the Owner or the Principal to the other, shall not in any way release the Principal and the Surety, or either or any of them, their heirs, executors, administrators and successors, from their liability hereunder, notice to the Surety of any such extension, modifications or forbearance being hereby waived.

IN WITNESS WHEREOF, the above bounden parties have executed the within instrument this _____ day of _____, 20 ____.

AS APPLICABLE:

AN INDIVIDUAL

Name: _____

Signature: _____

A PARTNERSHIP

Name of Partner: _____

Signature of Partner: _____

Name of Partner: _____

Signature of Partner: _____

CORPORATION

Firm Name: _____

Signature of President: _____

SURETY

Surety Name: _____

Attorney-in-Fact: _____

Address of Attorney-in-Fact: _____

_____

Telephone Number of Attorney-in-Fact: _____

Signature Attorney-in-Fact: _____

NOTE: Surety shall attach Power of Attorney

STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION

PRODUCT SUBSTITUTION REQUEST

PROJECT NUMBER

PROJECT TITLE AND LOCATION

CHECK APPROPRIATE BOX

☐ SUBSTITUTION PRIOR TO BID OPENING
(Minimum of (5) working days prior to receipt of Bids as per Article 4 – Instructions to Bidders)

☐ SUBSTITUTION FOLLOWING AWARD
(Maximum of (20) working days from Notice to Proceed as per Article 3 – General Conditions)

FROM: BIDDER/CONTRACTOR (PRINT COMPANY NAME)

TO: ARCHITECT/ENGINEER (PRINT COMPANY NAME)

Bidder/Contractor hereby requests acceptance of the following product or systems as a substitution in accordance with provisions of Division One of the Bidding Documents:

SPECIFIED PRODUCT OR SYSTEM

SPECIFICATION SECTION NO.

SUPPORTING DATA

☐ Product data for proposed substitution is attached (include description of product, standards, performance, and test data)

☐ Sample ☐ Sample will be sent, if requested

QUALITY COMPARISON

	SPECIFIED PRODUCT	SUBSTITUTION REQUEST
NAME, BRAND		
CATALOG NO.		
MANUFACTURER		
VENDOR		

PREVIOUS INSTALLATIONS

PROJECT	ARCHITECT/ENGINEER	
LOCATION		DATE INSTALLED

SIGNIFICANT VARIATIONS FROM SPECIFIED PRODUCT

REASON FOR SUBSTITUTION

DOES PROPOSED SUBSTITUTION AFFECT OTHER PARTS OF WORK?

☐ YES ☐ NO

IF YES, EXPLAIN

SUBSTITUTION REQUIRES DIMENSIONAL REVISION OR REDESIGN OF STRUCTURE OR A/E WORK

☐ YES ☐ NO

BIDDER'S/CONTRACTOR'S STATEMENT OF CONFORMANCE OF PROPOSED SUBSTITUTION TO CONTRACT REQUIREMENT:

We have investigated the proposed substitution. We believe that it is equal or superior in all respects to specified product, except as stated above; that it will provide the same Warranty as specified product; that we have included complete implications of the substitution; that we will pay redesign and other costs caused by the substitution which subsequently become apparent; and that we will pay costs to modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning as a result of the substitution.

BIDDER/CONTRACTOR	DATE

REVIEW AND ACTION

☐ Resubmit Substitution Request with the following additional information:

☐ Substitution is accepted.

☐ Substitution is accepted with the following comments:

☐ Substitution is not accepted.

ARCHITECT/ENGINEER	DATE

STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION

FINAL RECEIPT OF PAYMENT AND RELEASE

PROJECT NUMBER

KNOW ALL MEN BY THESE PRESENT THAT: hereinafter called "Subcontractor" who heretofore entered into an agreement with hereinafter called "Contractor", for the performance of work and/or furnishing of material for the construction of the project entitled

(PROJECT TITLE, PROJECT LOCATION, AND PROJECT NUMBER)

at

(ADDRESS OF PROJECT)

for the State of Missouri (Owner) which said subcontract is by this reference incorporated herein, in consideration of such final payment by Contractor.

DOES HEREBY:

1. ACKNOWLEDGE that they have been **PAID IN FULL** all sums due for work and materials contracted or done by their Subcontractors, Material Vendors, Equipment and Fixture Suppliers, Agents and Employees, or otherwise in the performance of the Work called for by the aforesaid Contract and all modifications or extras or additions thereto, for the construction of said project or otherwise.
2. RELEASE and fully, finally, and forever discharge the Owner from any and all suits, actions, claims, and demands for payment for work performed or materials supplied by Subcontractor in accordance with the requirements of the above referenced Contract.
1. REPRESENT that all of their Employees, Subcontractors, Material Vendors, Equipment and Fixture Suppliers, and everyone else has been **paid in full** all sums due them, or any of them, in connection with performance of said Work, or anything done or omitted by them, or any of them in connection with the construction of said improvements, or otherwise.

DATED this day of , 20 .

NAME OF SUBCONTRACTOR

BY (TYPED OR PRINTED NAME)

SIGNATURE

TITLE

ORIGINAL: FILE/Closeout Documents

THIS PAGE INTENTIONALLY LEFT BLANK

STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT,
DESIGN AND CONSTRUCTION

PAY APP NO.	PROJECT NUMBER
CHECK IF FINAL ☐**FINAL**	DATE

MBE/WBE/SDVE PROGRESS REPORT

Remit with **ALL** Progress and Final Payments

(Please check appropriate box) ☐CONSULTANT ☐CONSTRUCTION

PROJECT TITLE	
PROJECT LOCATION	
FIRM	
ORIGINAL CONTRACT SUM (Same as Line Item 1. on Form A of Application for Payment) **$**	TOTAL CONTRACT SUM TO DATE (Same as Line Item 3. on Form A of Application for Payment) **$**

THE TOTAL MBE/WBE/SDVE PARTICIPATION DOLLAR AMOUNT OF THIS PROJECT AS INDICATED IN THE ORIGINAL CONTRACT: **$**

SELECT MBE, WBE, SDVE	ORIGINAL CONTRACT PARTICIPATION AMOUNT	PARTICIPATION AMOUNT PAID-TO-DATE (includes approved contract changes)	CONSULTANT/SUBCONSULTANT OR CONTRACTOR/SUBCONTRACTOR/SUPPLIER COMPANY NAME
☐ MBE ☐ WBE ☐ SDVE	$	$	
☐ MBE ☐ WBE ☐ SDVE	$	$	
☐ MBE ☐ WBE ☐ SDVE	$	$	
☐ MBE ☐ WBE ☐ SDVE	$	$	
☐ MBE ☐ WBE ☐ SDVE	$	$	
☐ MBE ☐ WBE ☐ SDVE	$	$	

Revised 06/2023

INSTRUCTIONS FOR MBE/WBE/SDVE PROGRESS REPORT

CONTRACTOR OR CONSULTANT TO FILL OUT AND REMIT WITH EACH PAY APPLICATION:

The MBE/WBE/SDVE Progress Report for the project is issued with the contract comprising values reported in the consultant's Proposal or on the successful contractor's Section 004337 Compliance Evaluation Forms.

At Initial Pay Application fill in the following:

1. Pay App No. Start with 1.
2. Fill in the Project Number and Date.
3. Enter Project Title, Project Location, and Firm.
4. Fill in the "Original Contract Sum" and "Total Contract Sum To Date" (Reference applicable Line Items on Form A of Application for Payment).
5. Indicate the Total Participation Dollar Amount from the Original Contract.
6. Select MBE, WBE, or SDVE for each Consultant/Subconsultant or Contractor/Subcontractor/Supplier.
7. Enter the "Total Amount of Subcontract", "$ Amount (Paid-To-Date)", and Company Name.

For all subsequent Pay Applications fill in the following:

1. Pay App No.
2. If Final Pay App, check box.
3. Fill in the Project Number and Date.
4. Enter Project Title, Project Location, and Firm
5. At each Pay App fill in the "Original Contract Sum" and "Total Contract Sum To Date" (reference applicable Line Items on Form A of Application for Payment).
6. Indicate the Total Participation Dollar Amount from the Original Contract.
7. Select MBE, WBE, or SDVE for each Consultant/Subconsultant or Contractor/Subcontractor/Supplier
8. Enter the "Total Amount of Subcontract", "$ Amount (Paid-To-Date)", and Company Name.

STATE OF MISSOURI
OFFICE OF ADMINISTRATION
DIVISION OF FACILITIES MANAGEMENT, DESIGN AND CONSTRUCTION
AFFIDAVIT – COMPLIANCE WITH PREVAILING WAGE LAW

PROJECT NUMBER

Before me, the undersigned Notary Public, in and for the County of _____

State of _____ personally came and appeared _____
(NAME)

_____ of the _____
(POSITION) (NAME OF THE COMPANY)

(a corporation) (a partnership) (a proprietorship) and after being duly sworn did depose and say that all provisions and requirements set out in Chapter 290, Sections 290.210 through and including 290.340, Missouri Revised Statutes, pertaining to the payment of wages to workmen employed on public works project have been fully satisfied and there has been no exception to the full and completed compliance with said provisions and requirements and with Wage Determination No: _____ issued by the Department of Labor and Industrial Relations, State of Missouri on the _____ day of _____ 20 __ in carrying out the contract and working in connection with _____
(NAME OF PROJECT)

Located at _____ in _____ County
(NAME OF THE INSTITUTION)

Missouri, and completed on the _____ day of _____ 20 __

SIGNATURE

NOTARY INFORMATION

NOTARY PUBLIC EMBOSSER OR BLACK INK RUBBER STAMP SEAL	STATE		COUNTY (OR CITY OF ST. LOUIS)
	SUBSCRIBED AND SWORN BEFORE ME, THIS DAY OF YEAR		**USE RUBBER STAMP IN CLEAR AREA BELOW**
	NOTARY PUBLIC SIGNATURE	MY COMMISSION EXPIRES	
	NOTARY PUBLIC NAME (TYPED OR PRINTED)		

FILE: Closeout Documents

THIS PAGE INTENTIONALLY LEFT BLANK

GENERAL CONDITIONS

INDEX

ARTICLE:

1. General Provisions

1.1. Definitions

1.2. Drawings and Specifications

1.3. Compliance with Laws, Permits, Regulations and Inspections

1.4. Nondiscrimination in Employment

1.5. Anti-Kickback

1.6. Patents and Royalties

1.7. Preference for American and Missouri Products and Services

1.8. Communications

1.9. Separate Contracts and Cooperation

1.10. Assignment of Contract

1.11. Indemnification

1.12. Disputes and Disagreements

2. Owner/Designer Responsibilities

3. Contractor Responsibilities

3.1. Acceptable Substitutions

3.2. Submittals

3.3. As-Built Drawings

3.4. Guaranty and Warranties

3.5. Operation and Maintenance Manuals

3.6. Other Contractor Responsibilities

3.7. Subcontracts

4. Changes in the Work

4.1. Changes in the Work

4.2. Changes in Completion Time

5. Construction and Completion

5.1. Construction Commencement

5.2. Project Construction

5.3. Project Completion

5.4. Payments

6. Bond and Insurance

6.1. Bond

6.2. Insurance

7. Termination or Suspension of Contract

7.1. For Site Conditions

7.2. For Cause

7.3. For Convenience

A. These General Conditions apply to each section of these specifications. The Contractor is subject to the provisions contained herein.

B. The General Conditions are intended to define the relationship of the Owner, the Designer and the Contractor thereby establishing certain rules and provisions governing the operation and performance of the work so that the work may be performed in a safe, orderly, expeditious and workmanlike manner.

ARTICLE 1 – GENERAL PROVISIONS

ARTICLE 1.1 - DEFINITIONS

As used in these contract documents, the following terms shall have the meanings and refer to the parties designated in these definitions.

1. **"COMMISSIONER":** The Commissioner of the Office of Administration.
2. **"CONSTRUCTION DOCUMENTS":** The "Construction Documents" shall consist of the Project Manual, Drawings and Addenda.
3. **"CONSTRUCTION REPRESENTATIVE:"** Whenever the term "Construction Representative" is used, it shall mean the Owner's Representative at the work site.
4. **"CONTRACTOR"**: Party or parties who have entered into a contract with the Owner to furnish work under these specifications and drawings.
5. **"DESIGNER"**: When the term "Designer" is used herein, it shall refer to the Architect, Engineer, or Consultant of Record specified and defined in Paragraph 2.0 of the Supplemental Conditions, or his duly authorized representative. The Designer may be either a consultant or state employee.
6. **"DIRECTOR"**: Whenever the term "Director" is used, it shall mean the Director of the Division of Facilities Management, Design and Construction or his Designee, representing the Office of Administration, State of Missouri. The Director is the agent of the Owner.
7. **"DIVISION":** Shall mean the Division of Facilities Management, Design and Construction, State of Missouri.
8. **"INCIDENTAL JOB BURDENS":** Shall mean those expenses relating to the cost of work, incurred either in the home office or on the job-site, which are necessary in the course of doing business but are incidental to the job. Such costs include office supplies and equipment, postage, courier services, telephone expenses including long distance, water and ice and other similar expenses.
9. **"JOINT VENTURE"**: An association of two (2) or more businesses to carry out a single business enterprise for profit for which purpose they combine their property, capital, efforts, skills and knowledge.
10. **"OWNER"**: Whenever the term "Owner" is used, it shall mean the State of Missouri. Acting by and through the Office of Administration, Division of Facilities Management, Design and Construction.
11. **"PROJECT"**: Wherever the term "Project" is used, it shall mean the work required to be completed by the construction contract.
12. **"PROJECT MANUAL"**: The "Project Manual" shall consist of Introductory Information, Invitation for Bid, Instructions to Bidders, Bid Documents, Additional Information, Standard Forms, General Conditions, Supplemental General Conditions, General Requirements and Technical Specifications.
13. **"SUBCONTRACTOR"**: Party or parties who contract under, or for the performance of part or this entire Contract between the Owner and Contractor. The subcontract may or may not be direct with the Contractor.
14. **"WORK"**: All supervision, labor, materials, tools, supplies, equipment, and any incidental operations and/or activities required by or reasonably inferable from the Contract Documents necessary to construct the Project and to produce the results intended by the Contract Documents in a safe, expeditious, orderly, and workmanlike manner so that the project shall be complete and finished in the best manner known to each respective trade.
15. "**WORKING DAYS**": are all calendar days except Saturdays, Sundays and the following holidays: New Year's Day, Martin Luther King, Jr. Day, Lincoln Day, Washington's Birthday (observed), Truman Day, Memorial Day, Juneteenth, Independence Day, Labor Day, Columbus Day, Veterans Day (observed), Thanksgiving Day, Christmas Day.

ARTICLE 1.2 DRAWINGS AND SPECIFICATIONS

A. In case of discrepancy between drawings and specifications, specifications shall govern. Should discrepancies in architectural drawings, structural drawings and mechanical drawings occur, architectural drawings shall govern and, in case of conflict between structural and mechanical drawings, structural drawings shall govern.

B. Specifications are separated into titled divisions for convenience of reference only and to facilitate letting of contracts and subcontracts. The Contractor is responsible for establishing the scope of work for subcontractors, which may cross titled divisions. Neither the Owner nor Designer will establish limits and jurisdiction of subcontracts.

C. Figured dimensions take precedence over scaled measurements and details over smaller scale general drawings. In the event of conflict between any of the documents contained within the contract, the documents shall take precedence and be controlling in the following sequence: addenda, supplementary general conditions, general conditions, division 1 specifications, technical division specifications, drawings, bid form and instructions to bidders.

D. Anything shown on drawings and not mentioned in these specifications or vice versa, as well as any incidental work which is obviously necessary to complete the project within the limits established by the drawings and specifications, although not shown on or described therein, shall be performed by the Contractor at no additional cost as a part of his contract.

E. Upon encountering conditions differing materially from those indicated in the contract documents, the Contractor shall promptly notify the Designer and Construction Representative in writing before such conditions are disturbed. The Designer shall promptly investigate said conditions and report to the Owner, with a recommended course of action**.** If conditions do materially differ and cause an increase or decrease in contract cost or time required for completion of any portion of the work, a contract change will be initiated as outlined in Article 4 of these General Conditions.

E. Only work included in the contract documents is authorized, and the Contractor shall do no work other than that described therein or in accordance with appropriately authorized and approved contract changes.

ARTICLE 1.3 - COMPLIANCE WITH LAWS, PERMITS, REGULATIONS AND INSPECTIONS

A. Since the Owner is the State of Missouri, municipal or political subdivisions, zoning ordinances, construction codes (other than licensing of trades), and other like ordinances are not applicable to construction on Owner's property, and Contractor will not be required to submit drawings and specifications to any municipal or political subdivision, authority, obtain construction permits or any other licenses (other than licensing of trades) or permits from or submit to inspections by any municipality or political subdivision relating to the construction for this project. All permits or licenses required by municipality or political subdivision for operation on property not belonging to Owner shall be obtained by and paid for by Contractor. Each Contractor shall comply with all applicable laws, ordinances, rules and regulations that pertain to the work of this contract.

B. Contractors, subcontractors and their employees engaged in the businesses of electrical, mechanical, plumbing, carpentry, sprinkler system work, and other construction related trades shall be licensed to perform such work by the municipal or political subdivision where the project is located, if such licensure is required by local code. Local codes shall dictate the level (master, journeyman, and apprentice) and the number, type and ratio of licensed tradesmen required for this project within the jurisdiction of such municipal or political subdivision.

C. Equipment and controls manufacturers and their authorized service and installation technicians that do not maintain an office within the jurisdiction of the municipal or political subdivision but are a listed or specified contractor or subcontractor on this project are exempt from Paragraph 1.3 B above.

D. The Contractor shall post a copy of the wage determination issued for the project and included as a part of the contract documents, in a prominent and easily accessible location at the site of construction for the duration of the project.

E. Any contractor or subcontractor to such contractor at any tier signing a contract to work on this project shall provide a ten-hour Occupational Safety and Health Administration (OSHA) construction safety program for their on-site employees which includes a course in construction safety and health approved by OSHA or a similar program approved by the Department of Labor and Industrial Relations which is at least as stringent as an approved OSHA program. The contractor shall forfeit as a penalty to the public body on whose

behalf the contract is made or awarded, two thousand five hundred dollars plus one hundred dollars for each employee employed by the contractor or subcontractor, for each calendar day, or portion thereof, such employee is employed without the required training.

ARTICLE 1.4 - NONDISCRIMINATION IN EMPLOYMENT

A. The Contractor and his subcontractors will not discriminate against individuals based on race, color, religion, national origin, sex, disability, or age, but may use restrictions which relate to bona fide occupational qualifications. Specifically, the Contractor and his subcontractors shall not discriminate:

1. Against recipients of service on the basis of race, color, religion, national origin, sex, disability or age.
2. Against any employee or applicant, for employment on the basis of race, color, religion, national origin, sex or otherwise qualified disability status.
3. Against any applicant for employment or employee on the basis of age, where such applicant or employee is between ages 40 and 70 and where such Contractor employs at least 20 persons.
4. Against any applicant for employment or employee on the basis of that person's status as a disabled or Vietnam-era veteran.

The Contractor and his Subcontractors will ensure applicants for employment and employees are treated equally without regard to race, color, religion, national origin, sex, disability, or age. Such action shall include, but not be limited to, the following: employment, upgrading, demotion and transfer; recruitment or recruitment advertising; and selection for training, including apprenticeship. The Contractor and his Subcontractors will give written notice of their commitments under this clause to any labor union with which they have bargaining or other agreements under this clause to any labor union with which they have bargaining or other agreements.

B. In the event of the Contractor's or his subcontractor's noncompliance with any provisions of this Article of the Contract, the Owner may cancel this contract in whole or in part or require the Contractor to terminate his contract with the subcontractor.

ARTICLE 1.5 - ANTI-KICKBACK

No employee of the division, shall have or acquire any pecuniary interest, whether direct or indirect, in this contract or in any part hereof. No officer, employee, designer, attorney, or administrator of or for the Owner who is authorized in such capacity and on behalf of the Owner to exercise any legislative, executive, supervisory or other similar functions in connection with the construction of the project, shall have or acquire any pecuniary interest, whether direct or indirect, in this contract, any material supply contract, subcontract, insurance contract, or any other contract pertaining to the project.

ARTICLE 1.6 - PATENTS AND ROYALTIES

A. The Contractor shall hold and save the Owner and its officers, agents, servants, and employees harmless from liabilities of any nature or kind, including cost and expenses, for, or on account of, any patented or unpatented invention, process, article or appliance manufactured or used in the performance of this contract, including its use by the Owner, unless otherwise specifically stipulated in the contract documents.

B. If the Contractor uses any design, device or materials covered by letters, patent or copyright, the Contractor shall provide for such use by suitable agreement with the Owner of such patented or copyrighted design, device or material. It is mutually agreed and understood, without exception, that the contract prices shall include all royalties or costs arising from the use of such design, device or materials, in any way involved in the work. The Contractor and/or his sureties shall indemnify and save harmless the Owner of the project from any and all claims for infringement by reason of the use of such patented or copyrighted design, device or materials or any trademark or copyright in connection with work agreed to be performed under this contract and shall indemnify the Owner for any cost, expense or damage it may be obliged to pay by reason of such infringement at any time during the prosecution of the work or after completion of the work.

ARTICLE 1.7 - PREFERENCE FOR AMERICAN AND MISSOURI PRODUCTS AND SERVICES

A. By virtue of statutory authority a preference will be given to Missouri labor and to products of mines, forests and quarries of the state of Missouri when they are found in marketable quantities in the state, and all such materials shall be of the best quality and suitable character that can be obtained at reasonable market prices, all as provided for in Section 8.280, Missouri Revised Statutes and Cumulative Supplements.

B. Furthermore, pursuant to Section 34.076 Missouri Revised Statutes and Cumulative Supplements, a preference shall be given to those persons doing business as Missouri firms, corporations, or individuals, or which maintain Missouri offices or places of business, when the quality of performance promised is equal or better and the price quoted is the same or less. In addition, in order for a non-domiciliary bidder to be successful, his bid must be that same percentage lower than a domiciliary Missouri bidder's bid, as would be required for a Missouri bidder to successfully bid in the non-domiciliary state.

C In accordance with the Missouri Domestic Products Procurement Act Section 34.350 RSMo and Cumulative Supplements any manufactured goods or commodities used or supplied in the performance of this contract or any subcontract thereto shall be manufactured, assembled or produced in the United States, unless the specified products are not manufactured, assembled or produced in the United States in sufficient quantities to meet the agency's requirements or cannot be manufactured, assembled or produced in the United States within the necessary time in sufficient quantities to meet the contract requirements, or if obtaining the specified products manufactured, assembled or produced in the United States would increase the cost of this contract for purchase of the product by more than ten percent.

ARTICLE 1.8 - COMMUNICATIONS

A. All notices, requests, instructions, approvals, and claims must be in writing and shall be delivered to the Designer and copied to the Construction Representative for the project except as required by Article 1.12 Disputes and Disagreements, or as otherwise specified by the Owner in writing as stated in Section 012600. Any such notice shall be deemed to have been given as of the time of actual receipt.

B. The Contractor shall attend on-site progress and coordination meetings, as scheduled by the Construction Representative, no less than once a month.

C. The Contractor shall ensure that major subcontractors and suppliers shall attend monthly progress meetings as necessary to coordinate the work, and as specifically requested by the Construction Representative.

ARTICLE 1.9 - SEPARATE CONTRACTS AND COOPERATION

A. The Owner reserves the right to let other contracts in connection with this work. The Contractor shall afford other contractors reasonable opportunity for the introduction and storage of their materials and the execution of their work and shall properly connect and coordinate his work with theirs.

B. The Contractor shall consult the drawings for all other contractors in connection with this work. Any work conflicting with the above shall be brought to the attention of the Owner’s Representative before the work is performed. If the Contractor fails to do this, and constructs any work which interferes with the work of another contractor, the Contractor shall remove any part so conflicting and rebuild same, as directed by the Owner’s Representative at no additional cost to the Owner.

C. Each contractor shall be required to coordinate his work with other contractors so as to afford others reasonable opportunity for execution of their work. No contractor shall delay any other contractor by neglecting to perform contract work at the proper time. If any contractor causes delay to another, they shall be liable directly to that contractor for such delay in addition to any liquidated damages which might be due the Owner.

D. Should the Contractor or project associated subcontractors refuse to cooperate with the instructions and reasonable requests of other Contractors or other subcontractors in the overall coordinating of the work, the Owner may take such appropriate action and issue directions, as required, to avoid unnecessary and unwarranted delays.

E. Each Contractor shall be responsible for damage done to Owner's or other Contractor's property by him/her or workers in his employ through their fault or negligence.

F. Should a Contractor sustain any damage through any act or omission of any other Contractor having a contract with the Owner, the Contractor so damaged shall have no claim or cause of action against the Owner for such damage, but shall have a claim or cause of action against the other Contractor to recover any and all damages sustained by reason of the acts or omissions of such Contractor. The phrase "acts or omissions" as used in this section shall be defined to include, but

not be limited to, any unreasonable delay on the part of any such contractors.

ARTICLE 1.10 - ASSIGNMENT OF CONTRACT

A. No assignment by Contractor of any amount or any part of this contract or of the funds to be received there under will be recognized unless such assignment has had the written approval of the Director and the surety has been given due notice of such assignment and has furnished written consent thereto. In addition to the usual recitals in assignment contracts, the following language must be set forth: "It is agreed that the funds to be paid to the assignee under this assignment are subject to performance by the Contractor of this contract and to claims or liens for services rendered or materials supplied for the performance of the work called for in said contract in favor of all persons, firms or corporations rendering such services or supplying such materials."

ARTICLE 1.11 - INDEMNIFICATION

A. Contractor agrees to indemnify and save harmless Owner and its respective commissioners, officers, officials, agents, consultants and employees and Designer, their agents, servants and employees, from and against any and all liability for damage arising from injuries to persons or damage to property occasioned by any acts or omissions of Contractor, any subcontractors, agents, servants or employees, including any and all expense, legal or otherwise, which may be incurred by Owner or Designer, its agents, servants or employees, in defense of any claim, action or suit.

B. The obligations of the Contractor under this paragraph shall not extend to the liability of the Designer, his agents or employees, arising out of (1) the preparation or approval of maps, drawings, opinions, reports, surveys, contract changes, design or specifications, or (2) giving of or the failure to give directions or instructions by the Designer, his agents or employees as required by this contract documents provided such giving or failure to give is the primary cause of the injury or damage.

ARTICLE 1.12 - DISPUTES AND DISAGREEMENTS

It is hereby expressly agreed and understood that in case any controversy or difference of opinion arises during construction, best efforts will be given to resolution at the field level. Should those efforts be unsuccessful, the Contractor has the right to appeal in writing, the decision of the Director's Designee to the Director at Room 730 Truman Building, P.O. Box 809, Jefferson City, Missouri 65102. The decision of the Director shall be final and binding on all parties.

ARTICLE 2 -- OWNER/DESIGNER RESPONSIBILITIES

A. The Owner shall give all orders and directions contemplated under this contract relative to the execution of the work. During progress of work the Owner will be represented at the project site by the Construction Representative and/or Designer, whose responsibilities are to see that this contract is properly fulfilled.

B. The Owner shall at all times have access to the work whenever it is in preparation or progress. The Contractors shall provide proper facilities for such access and for inspection and supervision.

C. All materials and workmanship used in the work shall be subject to the inspection of the Designer and Construction Representative, and any work which is deemed defective shall be removed, rebuilt or made good immediately upon notice. The cost of such correction shall be borne by the Contractor. Contractor shall not be entitled to an extension of the contract completion date in order to remedy defective work. All rejected materials shall be immediately removed from the site of the work.

D. If the Contractor fails to proceed at once with the correction of rejected defective materials or workmanship, the Owner may, by separate contract or otherwise, have the defects remedied or rejected. Materials removed from the site and charge the cost of the same against any monies which may be due the Contractor, without prejudice to any other rights or remedies of the Owner.

E. Failure or neglect on the part of Owner to observe faulty work, or work done which is not in accordance with the drawings and specifications shall not relieve the Contractor from responsibility for correcting such work without additional compensation.

F. The Owner shall have the right to direct the Contractor to uncover any completed work.

1. If the Contractor fails to adequately notify the Construction Representative and/or Designer of an inspection as required by the Contract Documents, the Contractor shall, upon written request, uncover the work. The Contractor shall bear all costs associated with uncovering and again covering the work exposed.

2. If the Contractor is directed to uncover work, which was not otherwise required by the Contract Documents to be inspected, and the work is found to be defective in any respect, no compensation shall be allowed for this work. If, however, such work is found to meet

the requirements of this contract, the actual cost of labor and material necessarily involved in the examination and replacement plus 10% shall be allowed the Contractor.

G. The Designer shall give all orders and directions contemplated under this contract relative to the scope of the work and shall give the initial interpretation of the contract documents.

H. The Owner may file a written notice to the Contractor to dismiss immediately any subcontractors, project managers, superintendents, foremen, workers, watchmen or other employees whom the Owner may deem incompetent, careless or a hindrance to proper or timely execution of the work. The Contractor shall comply with such notice as promptly as practicable without detriment to the work or its progress.

I. If in the Owner's judgment it becomes necessary at any time to accelerate work, when ordered by the Owner in writing, the Contractor shall redirect resources to such work items and execute such portions of the work as may be required to complete the work within the current approved contract schedule.

ARTICLE 3 -- CONTRACTOR RESPONSIBILITIES

The Contractor shall register and utilize the Owner's eBuilder digital project management system for submission of documents described in the following sections. This includes but is not limited to submittals as required by designer, payment applications, Request for Information (RFI), construction change orders, Request for Proposals (RFP), Designer Supplemental Instructions (DSI), etc.

ARTICLE 3.1 -- ACCEPTABLE SUBSTITUTIONS

A. The Contractor may request use of any article, device, product, material, fixture, form or type of construction which in the judgment of the Owner and Designer is equal in all respects to that named. Standard products of manufacturers other than those specified will be accepted when, prior to the ordering or use thereof, it is proven to the satisfaction of the Owner and Designer that they are equal in design, strength, durability, usefulness and convenience for the purpose intended.

B. Any changes required in the details and dimensions indicated on the drawings for the substitution of products other than those specified shall be properly made at the expense of the Contractor requesting the substitution or change.

C. The Contractor shall submit a request for such substitutions in writing to the Owner and Designer within twenty (20) working days after the date of the "Notice to Proceed." Thereafter no consideration will be given to alternate forms of accomplishing the work. This Article does not preclude the Owner from exercising the provisions of Article 4 hereof.

D. Any request for substitution by the Contractor shall be submitted in accordance with SECTION 002113 - INSTRUCTIONS TO BIDDERS.

E. When a material has been approved, no change in brand or make will be permitted unless:

1. Written verification is received from the manufacturer stating they cannot make delivery on the date previously agreed, or
2. Material delivered fails to comply with contract requirements.

ARTICLE 3.2 -- SUBMITTALS

A. The Contractor's submittals must be submitted with such promptness as to allow for review and approval so as not to cause delay in the work. The Contractor shall coordinate preparation and processing of submittals with performance of construction activities.

Coordinate each submittal with fabrication, = purchasing, testing, delivery, other submittals, and related activities that require sequential activity.

Submit four (4) copies to the Designer and additional copies as required for the subcontractors and material suppliers. Also provide copies to meet the requirements for maintenance manuals.

B. All subcontractors' shop drawings and schedules shall be submitted by the Contractor and shall bear evidence that Contractor has received, reviewed, and approved them. Any shop drawings and schedules submitted without this evidence will be returned to the Contractor for resubmission.

C. The Contractor shall include with the shop drawing, a letter indicating any and all deviations from the drawings and/or specifications. Failure to notify the Designer of such deviations will be grounds for subsequent rejection of the related work or materials. If, in the opinion of the Designer, the deviations are not acceptable, the Contractor will be required to furnish the item as specified and indicated on the drawings.

D. The Designer shall check shop drawings and schedules with reasonable promptness and approve them only if they conform to the design concept of the project and comply with the information given in the contract documents. The approval shall not relieve the Contractor from the responsibility to comply with the drawings and specifications, unless the Contractor has called the Designer's attention to the deviation, in writing, at the time of

submission and the Designer has knowingly approved thereof. An approval of any such modification will be given only under the following conditions:

1. It is in the best interest of the Owner
2. It does not increase the contract sum and/or completion time
3. It does not deviate from the design intent
4. It is without prejudice to any and all rights under the surety bond.

E. No extension of time will be granted because of the Contractor's failure to submit shop drawings and schedules in ample time to allow for review, possible resubmission, and approval. Fabrication of work shall not commence until the Contractor has received approval. The Contractor shall furnish prints of approved shop drawings and schedules to all subcontractors whose work is in any way related to the work under this contract. Only prints bearing this approval will be allowed on the site of construction

F. The Contractor shall maintain a complete file on-site of approved shop drawings available for use by the Construction Representative.

ARTICLE 3.3 – AS-BUILT DRAWINGS

A. The Contractor shall update a complete set of the construction drawings, shop drawings and schedules of all work monthly by marking changes, and at the completion of their work (prior to submission of request for final payment) note all changes and turn the set over to the Construction Representative. The updates shall show all addenda, all field changes that were made to adapt to field conditions, changes resulting from contract changes or supplemental instructions, and all locations of structures, buried installations of piping, conduit, and utility services. All buried and concealed items both inside and outside shall be accurately located as to depth and referenced to permanent features such as interior or exterior wall faces and dimensions shall be given in a neat and legible manner in a contrasting colored pencil or ink. If approved by the Designer, an electronic file format may be provided.

ARTICLE 3.4 – GUARANTY AND WARRANTIES

A. General Guaranty

1. Neither the final certificate of payment nor any provision in the contract documents nor partial use or occupancy of the premises by the Owner shall constitute an acceptance of work not done in accordance with contract requirements.
2. The Contractor or surety shall remedy any defects in the work and pay for any damage to property resulting there from which shall appear within a period of one (1) year from the date of substantial completion unless a longer period is otherwise specified or a differing guaranty period has been established in the substantial completion certificate. The Owner will give notice of observed defects with reasonable promptness.
3. In case of default on the part of the Contractor in fulfilling this part of this contract, the Owner may correct the work or repair the damage and the cost and expense incurred in such event shall be paid by or recoverable from the Contractor or surety.
4. The work will be free from defects not inherent in the quality required or permitted, and that the Work will conform to the requirements of the Contract Documents. Work not conforming to these requirements, including substitutions not properly approved and authorized, may be considered defective. The Contractor's guaranty excludes remedy for damage or defect caused by abuse, modifications not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear under normal usage. If required by the Owner, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment

B. Extended Warranty

Manufacturer's certificates of warranty shall be obtained for all major equipment. Warranty shall be obtained for at least one year. Where a longer period is offered at no additional cost or called for in the specific equipment specifications, the longer period shall govern.

ARTICLE 3.5 -- OPERATION AND MAINTENANCE MANUALS

A. Immediately after equipment submittals are approved and no later than ten (10) working days prior to the substantial completion inspection, the Contractor shall provide to the Designer three (3) copies of operating instructions and service manuals, containing the following:

1. Start-up and Shut-down Procedures: Provide a step-by-step write up of all major equipment. When manufacturer’s printed start-up, trouble shooting and shut-down procedures are available; they may be incorporated into the operating manual for reference.

2. Operating Instructions: Written operating instructions shall be included for the efficient and safe operation of all equipment.

3. Equipment List: List of all major equipment as installed shall be prepared to include model number, capacities, flow rate, name place data, shop drawings and air and water balance reports.

4. Service Instructions: Provide the following information for all pieces of equipment.

    a. Recommended spare parts including catalog number and name of local supplier or factory representative.

    b. Belt sizes, types, and lengths.

    c. Wiring diagrams.

5. Manufacturer's Certificate of Warranty as described in Article 3.4.

6. Prior to the final payment, furnish to the Designer three (4) copies of parts catalogs for each piece of equipment furnished by him/her on the project with the components identified by number for replacement ordering.

B. Submission of operating instructions shall be done in the following manner.

1. Manuals shall be in quadruplicate, and all materials shall be bound into volumes of standard 8½" x 11" hard binders. Large drawings too bulky to be folded into 8½" x 11" shall be separately bound or folded and in envelopes, cross referenced and indexed with the manuals.

2. The manuals shall identify project name, project number, and include the name and address of the Contractor, subcontractors and manufacturers who were involved with the activity described in that particular manual.

3. Internally subdivide the binder contents with permanent page dividers, logically organized with tab titles clearly printed under reinforced laminated plastic tabs.

4. Contents: Prepare a Table of Contents for each volume, with each product or system description identified.

ARTICLE 3.6 – OTHER CONTRACTOR RESPONSIBILITIES

A. The Contractor shall keep on site, during progress of the work, a competent superintendent satisfactory to the Construction Representative. The superintendent shall represent the Contractor and all agreements made by the superintendent shall be binding. The superintendent shall carefully study and compare all drawings, specifications and other instructions and shall promptly notify the Construction Representative and Designer, in writing, any error, inconsistency or omission which may be discovered. The superintendent shall coordinate all work on the project. Any change of the superintendent shall be approved by the Construction Representative.

B. Contractor shall, at all times, enforce strict discipline and good order among his employees, and shall not employ on the work any unfit person or anyone not skilled in the work assigned to him/her.

C. The Contractor shall supply sufficient labor, material, plant and equipment and pay when due any laborer, subcontractor or supplier for supplies furnished and otherwise prosecute the work with diligence to prevent work stoppage and ensure completion thereof within the time specified.

D. The Contractor and each of his subcontractors shall submit to the Construction Representative, through the Designer such schedules of quantities and costs, progress schedules, payrolls, reports, estimates, records and other data as the Owner may request concerning work performed or to be performed under this contract.

E. The Contractor, subcontractors, and material suppliers shall upon written request, give the Owner access to all time cards, material invoices, payrolls, estimates, profit and loss statements, and all other direct or indirect costs related to this work.

F. The Contractor shall be responsible for laying out all contract work such as layout of architectural, structural, mechanical and electrical work, which shall be coordinated with layouts of subcontractors for general construction work. The Contractor is also responsible for unloading, uncrating and handling of all materials and equipment to be erected or placed by him/her, whether furnished by Contractor or others. No extra charges or compensation will be allowed as a result of failure to verify dimensions before ordering materials or fabricating items.

G. The Contractor must notify the Construction Representative at least one working day before placing concrete or burying underground utilities, pipelines, etc.

H. Contractors shall prearrange time with the Construction Representative for the interruption of any facility operation. Unless otherwise specified in these documents, all connections, alterations or relocations as well as all other portions of the work will be performed during normal working hours.

I. The Contractor shall coordinate all work so there will not be prolonged interruptions of existing equipment operation. Any existing plumbing, heating, ventilating, air conditioning or electrical disconnections necessary for the project, which affect portions of this construction or building or any other building must be scheduled with the Construction Representative to minimize or avoid any disruption of facility operations. In no case, unless previously approved in writing by the Construction Representative, shall utilities be left disconnected at the end of a work day or over a weekend. Any interruption of utilities either intentionally or accidentally shall not relieve the Contractor responsible for the interruption from the responsibility to repair and restore the utility to normal service. Repairs and restoration shall be made before the workers responsible for the repair and restoration leave the job.

J. Contractors shall limit operations and storage of materials to the area within the project, except as necessary to connect to existing utilities, and shall not encroach on neighboring property. The Contractor shall be responsible for repair of their damage to property on or off the project site occurring during construction of project. All such repairs shall be made to the satisfaction of the property owner.

K. Unless otherwise permitted, all materials shall be new and both workmanship and materials shall be of the best quality.

L. Unless otherwise provided and stipulated within these specifications, the Contractor shall furnish, construct, and/or install and pay for materials, devices, mechanisms, equipment, all necessary personnel, utilities including, but not limited to water, heat, light and electric power, transportation services, applicable taxes of every nature, and all other facilities necessary for the proper execution and completion of the work.

M. Contractor shall carefully examine the plans and drawings and shall be responsible for the proper fitting of his material, equipment and apparatus into the building.

N. The Contractor or subcontractors shall not overload, or permit others to overload, any part of any structure during the performance of this contract.

O. All temporary shoring, bracing, etc., required for the removal of existing work and/or for the installation of new work shall be included in this contract. The Contractor shall make good, at no cost to the Owner, any damage caused by improper support or failure of shoring in any respect. Each Contractor shall be responsible for shoring required to protect his work or adjacent property and improvements of Owner and shall be responsible for shoring or for giving written notice to adjacent property owners. Shoring shall be removed only after completion of permanent supports.

P. The Contractor shall provide at the proper time such material as is required for support of the work. If openings are required, whether shown on drawings or not, the Contractor shall see that they are properly constructed.

Q. During the performance of work the Contractor shall be responsible for providing and maintaining warning signs, lights, signal devices, barricades, guard rails, fences and other devices appropriately located on site which will give proper and understandable warning to all persons of danger of entry onto land, structure or equipment.

R. The Contractor shall be responsible for protection, including weather protection, and proper maintenance of all equipment and materials.

S. The Contractor shall be responsible for care of the finished work and shall protect same from damage or defacement until substantial completion by the Owner. If the work is damaged by any cause, the Contractor shall immediately begin to make repairs in accordance with the drawings and specifications. Contractor shall be liable for all damage or loss unless attributable to the acts or omissions of the Owner or Designer. Any claim for reimbursement shall be submitted in accordance with Article 4. After substantial completion the Contractor will only be responsible for damage resulting from acts or omissions of the Contractor or subcontractors through final warranty.

T. In the event the Contractor encounters an unforeseen hazardous material, the Contractor shall immediately stop work in the area affected and report the condition to the Owner and Designer in writing. The Contractor shall not be required, pursuant to Article 4, to perform, any work relating to hazardous materials.

U. In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 4.

V. Before commencing work, Contractors shall confer with the Construction Representative and facility representative and review any facility rules and regulations which may affect the conduct of the work.

W. Project signs will only be erected on major projects and only as described in the specifications. If no sign is specified, none shall be erected.

ARTICLE 3.7 -- SUBCONTRACTS

A. Subcontractor assignments as identified in the bid form shall not be changed without written approval of the Owner. The Owner will not approve changes of a listed subcontractor unless the Contractor documents, to the satisfaction of the Owner that the subcontractor cannot or will not perform the work as specified.

B. The Contractor is fully responsible to the Owner for the acts and omissions of all subcontractors and of persons either directly or indirectly employed by them.

C. Every subcontractor shall be bound by the applicable terms and provisions of these contract documents, but no contractual relationship shall exist between any subcontractor and the Owner unless the right of the Contractor to proceed with the work is suspended or this contract is terminated as herein provided, and the Owner in writing elects to assume the subcontract.

D. The Contractor shall upon receipt of "Notice to Proceed" and prior to submission of the first payment request, notify the Designer and Construction Representative in writing of the names of any subcontractors to be used in addition to those identified in the bid form and all major material suppliers proposed for all parts of the work.

ARTICLE 4 -- CHANGES IN THE WORK

4.1 CHANGES IN THE WORK

A. The Construction Representative, without giving notice to the surety and without invalidating this contract, may order extra work or make changes by altering, adding to or deducting from the work, this contract sum being adjusted accordingly. All such work shall be executed under the conditions of the original contract. A claim for extension of time caused by any change must be adjusted at the time of ordering such change. No future request for time will be considered.

B. Each Contract Change shall include all costs required to perform the work including all labor, material, equipment, overheads and profit, delay, disruptions, or other miscellaneous expenses. No subsequent requests for additional compensation including claims for delay, disruption, or reduced efficiency as a result of each change will be considered. Values from the Schedule of Values will not be binding as a basis for additions to or deductions from the contract price.

C. The amount of any adjustment in this contract price for authorized changes shall be agreed upon before such changes become effective and shall be determined, through submission of a request for proposal, as follows:

1. By an acceptable fixed price proposal from the Contractor. Breakdowns shall include all takeoff sheets of each Contractor and subcontractor. Breakdown shall include a listing of each item of material with unit prices and number of hours of labor for each task. Labor costs per hour shall be included with labor burden identified, which shall be not less than the prevailing wage rate, etc. Overhead and profit shall be shown separately for each subcontractor and the Contractor.

2. By a cost-plus-fixed-fee (time and material) basis with maximum price, total cost not to exceed said maximum. Breakdown shall include a listing of each item of material with unit prices and number of hours of labor for each task. Labor costs per hour shall be included with labor burden identified, which shall be not less than the prevailing wage rate, etc. Overhead and profit shall be shown separately for each subcontractor and the Contractor.

3. By unit prices contained in Contractor's original bid form and incorporated in the construction contract.

D. Overhead and Profit on Contract Changes shall be applied as follows:

1. The overhead and profit charge by the Contractor and all subcontractors shall be considered to include, but is not limited to: incidental job burdens, small truck (under 1 ton) expense, mileage, small hand tools, warranty costs, company benefits and general office overhead. Project supervision including field supervision and job site office expense shall be considered a part of overhead and profit unless a compensable time extension is granted.

2. The percentages for overhead and profit charged on Contract Changes shall be subject to the following limits: (a) the percentage mark-up for the Contractor shall be limited to the Contractor’s fee: (b) fifteen percent (15%) maximum for Work directly performed by employees of a subcontractor, or sub-subcontractor; (c) five percent (5%) maximum for the Work performed or passed through to the Owner by the Contractor; (d) five percent (5%) maximum subcontractor’s mark-up for

Work performed by a sub-subcontractor and passed through to the Owner by the subcontractor and Contractor; and (e) in no case shall the total overhead and profit paid by the Owner on any Contract Changes exceed twenty-five percent (25%) of the cost of materials, labor and equipment (exclusive of Contractor or any Subcontractor overhead and profit) necessary to put the contract change work in place.

3. The Contractor will be allowed to add the cost of Contractor's payment and performance bonding, builder's risk insurance, and general liability insurance to their cost of work. The above listed bonding and insurance cost shall not exceed two percent (2%) and shall be allowed on the total cost of the added work, including overhead and profit.

4. On proposals covering both increases and decreases in the amount of this contract, the application of overhead and profit shall be on the net change in the cost of the work.

5. The percentage(s) for overhead and profit to be credited to the Owner on Contract Changes that are solely decreases in the quantity of work or materials shall be the same as those for additive Contract Changes provided above.

E. No claim for an addition to this contract sum shall be valid unless authorized as aforesaid in writing by the Owner. In the event that none of the foregoing methods are agreed upon, the Owner may order the Contractor to perform work on a time and material basis. The cost of such work shall be determined by the Contractor's actual labor and material cost to perform the work plus overhead and profit as outlined herein. The Designer and Construction Representative shall approve the Contractor's daily time and material invoices for the work involved.

F. If the Contractor claims that any instructions involve extra cost under this contract, the Contractor shall give the Owner's Representative written notice thereof within a reasonable time after the receipt of such instructions, and in any event before proceeding to execute the work. No such claim shall be valid unless so made and authorized by the Owner, in writing.

G. In an emergency affecting the safety of life or of the structure or of adjoining property, the Contractor, without special instruction or authorization from the Construction Representative, is hereby permitted to act at their discretion to prevent such threatened loss or injury. The Contractor shall submit a claim for compensation for such emergency work in writing to the Owner's Representative.

ARTICLE 4.2 – CHANGES IN COMPLETION TIME

A. Extension of the number of work days stipulated in the Contract for completion of the work with compensation may be made when:

1. The contractor documents that proposed Changes in the work, as provided in Article 4.1, extends construction activities critical to contract completion date, OR

2. The Owner suspends all work for convenience of the Owner as provided in Article 7.3, OR

3. An Owner caused delay extends construction activities critical to contract completion (except as provided elsewhere in these General Conditions). The Contractor is to review the work activities yet to begin and evaluate the possibility of rescheduling the work to minimize the overall project delay.

B. Extension of the number of work days stipulated in the Contract for completion of the work <u>without</u> compensation may be made when:

1. Weather-related delays occur, subject to provisions for the inclusion of a specified number of "bad weather" days when provided for in Section 012100-Allowances, OR

2. Labor strikes or acts of God occur, OR

3. The work of the Contractor is delayed on account of conditions which were beyond the control of the Contractor, subcontractors or suppliers, and were not the result of their fault or negligence.

C. No time extension or compensation will be provided for delays caused by or within the control of the Contractor, subcontractors or suppliers and for concurrent delays caused by the Owner.

D. The Contractor shall notify the Owner promptly of any occurrence or conditions which in the Contractor's opinion results in a need for an extension of time. The notice shall be in writing and shall include all necessary supporting materials with details of any resultant costs and be submitted in time to permit full investigation and evaluation of the Contractor's claim. The Owner shall promptly acknowledge the Contractor's notice and, after recommendation from the Owner's Representative and/or Designer, shall provide a decision to the Contractor. Failure on the part of the Contractor to provide such notice and to detail the costs shall constitute a waiver by the Contractor of any claim. Requests for extensions of time shall be for working days only.

ARTICLE 5 - CONSTRUCTION AND COMPLETION

ARTICLE 5.1 – CONSTRUCTION COMMENCEMENT

A. Upon receipt of the "Intent to Award" letter, the Contractor must submit the following properly executed instruments to the Owner:

1. Contract;
2. Performance/payment bond as described in Article 6.1;
3. Certificates of Insurance, or the actual policies themselves, showing that the Contractor has obtained the insurance coverage required by Article 6.2.

Above referenced items must be received by the Owner within ten (10) working days after the effective date of the contract. If not received, the Owner may treat the failure to timely submit them as a refusal by the Contractor to accept a contract for this work and may retain as liquidated damages the Contractor's bid bond, cashier's check or certified check as provided in the Instructions to Bidders. Upon receipt the Owner will issue a "Notice to Proceed" with the work to the Contractor.

B. Within the time frame noted in Section 013200 - Schedules, following receipt of the "Notice to Proceed", the Contractor shall submit to the Owner a progress schedule and schedule of values, showing activities through the end of the contract period. Should the Contractor not receive written notification from the Owner of the disapproval of the schedule of values within fifteen (15) working days, the Contractor may consider it approved for purpose of determining when the first monthly Application and Certification for Payment may be submitted.

C. The Contractor may commence work upon receipt of the Division of Facilities Management, Design and Construction's "Notice to Proceed" letter. Contractor shall prosecute the work with faithfulness and energy, and shall complete the entire work on or before the completion time stated in the contract documents or pay to the Owner the damages resulting from the failure to timely complete the work as set out within Article 5.4.

ARTICLE 5.2 -- PROJECT CONSTRUCTION

A. Each Contractor shall submit for the Owner's approval, in reproducible form, a progress schedule showing the rate of progress and the order of the work proposed to carry on various phases of the project. The schedule shall be in conformance with the requirements outlined in Section 013200 – Schedules.

B. Contractor shall employ and supply a sufficient force of workers, material, and equipment and shall pay when due, any worker, subcontractor or supplier and otherwise prosecute the work with such diligence so as to maintain the rate of progress indicated on the progress schedule, prevent work stoppage, and insure completion of the project within the time specified.

ARTICLE 5.3 -- PROJECT COMPLETION

A. Substantial Completion. A Project is substantially complete when construction is essentially complete and work items remaining to be completed can be done without interfering with the Owner's ability to use the Project for its intended purpose.

1. Once the Contractor has reached what they believe is Substantial Completion, the Contractor shall notify the Designer and the Construction Representative of the following:
   a. That work is essentially complete with the exception of certain listed work items. The list shall be referred to as the "Contractor's Punch."
   b. That all Operation and Maintenance Manuals have been assembled and submitted in accordance with Article 3.5A.
   c. That the Work is ready for inspection by the Designer and Construction Representative. The Owner shall be entitled to a minimum of ten working days notice before the inspection shall be performed.
2. If the work is acceptable, the Owner shall issue a Certificate of Substantial Completion, which shall set forth the responsibilities of the Owner and the Contractor for utilities, security, maintenance, damage to the work and risk of loss. The Certificate shall also identify those remaining items of work to be performed by the Contractor. All such work items shall be complete within 30 working days of the date of the Certificate, unless the Certificate specifies a different time. If the Contractor shall be required to perform tests that must be delayed due to climatic conditions, it is understood that such tests and affected equipment will be identified on the Certificate and shall be accomplished by the Contractor at the earliest possible date. Performance of the tests may not be required before Substantial Completion can be issued. The date of the issuance of the Certificate of

Substantial Completion shall determine whether or not the work was completed within the contract time and whether or not Liquidated Damages are due.

3. If the work is not acceptable, and the Owner does not issue a Certificate of Substantial Completion, the Owner shall be entitled to charge the Contractor with the Designer's and Owner's costs of re-inspection, including time and travel.

B. Partial Occupancy. Contractor agrees that the Owner shall be permitted to occupy and use any completed or partially completed portions of the Project, when such occupancy and use is in the Owner's best interest. Owner shall notify Contractor of its desire and intention to take Partial Occupancy as soon as possible but at least ten (10) working days before the Owner intends to occupy. If the Contractor believes that the portion of the work the Owner intends to occupy is not ready for occupancy, the Contractor shall notify the Owner immediately. The Designer shall inspect the work in accordance with the procedures above. If the Contractor claims increased cost of the project or delay in completion as a result of the occupancy, he shall notify the Owner immediately but in all cases before occupancy occurs.

C. Final Completion. The Project is finally complete when the Certificate of Substantial Completion has been issued and all work items identified therein as incomplete have been completed, and when all administrative items required by the contract have been completed. Final Completion entitles the Contractor to payment of the outstanding balance of the contract amount including all change orders and retainage. Within five (5) working days of the date of the Certificate of Substantial Completion, the Contractor shall identify the cost to complete any outstanding items of work. The Designer shall review the Contractor's estimate and either approve it or provide an independent estimate for all such items. If the Contractor fails to complete the remaining items within the time specified in the Certificate, the Owner may terminate the contract and go to the surety for project completion in accordance with Article 7.2 or release the contract balance to the Contractor less 150% of the approved estimate to complete the outstanding items. Upon completion of the outstanding items, when a final cost has been established, any monies remaining shall be paid to the Contractor. Failure to complete items of work does not relieve the Contractor from the obligation to complete the administrative requirements of the contract, such as the provisions of Article 5.3 FAILURE TO COMPLETE ALL ITEMS OF WORK UNDER THE CONTRACT SHALL BE CONSIDERED A DEFAULT AND BE GROUNDS FOR CONTRACT TERMINATION AND DEBARMENT.

D. Liquidated Damages. Contractor agrees that the Owner may deduct from the contract price and retain as liquidated damages, and not as penalty or forfeiture, the sum stipulated in this contract for each work day after the Contract Completion Day on which work is not Substantially Complete. Assessment of Liquidated Damages shall not relieve the Contractor or the surety of any responsibility or obligation under the Contract. In addition, the Owner may, without prejudice to any other rights, claims, or remedies the Owner may have including the right to Liquidated Damages, charge the Contractor for all additional expenses incurred by the Owner and/or Designer as the result of the extended contract period through Final Completion. Additional Expenses shall include but not be limited to the costs of additional inspections.

E. Early Completion. The Contractor has the right to finish the work before the contract completion date; however, the Owner assumes no liability for any hindrances to the Contractor unless Owner caused delays result in a time extension to the contract completion date. The Contractor shall not be entitled to any claims for lost efficiencies or for delay if a Certificate of Substantial Completion is given on or before the Contract Completion Date.

ARTICLE 5.4 -- PAYMENT TO CONTRACTOR

A. Payments on account of this contract will be made monthly in proportion to the work which has been completed. Request for payment must be submitted on the Owner's forms. No other pay request will be processed. Supporting breakdowns must be in the same format as Owner's forms and must provide the same level of detail. The Designer will, within 5 working days from receipt of the contractor's request for payment either issue a Certificate for Payment to the Owner, for such amount as the Designer determines is properly due, or notify the Contractor in writing of reasons for withholding a Certificate. The Owner shall make payment within 30 calendar days after the "Application and Certification for Payment" has been received and certified by the Designer. The following items are to be attached to the contractor's pay request:

1. Updated construction schedule
2. Certified payrolls consisting of name, home addresses of all workers, occupation and craft, number of hours worked and actual wages paid for each individual employee, of the Contractor and all subcontractors working on the project

B. The Owner shall retain 5 percent of the amount of each such payment application, except as allowed by Article 5.4, until final completion and acceptance of all work covered by this contract.

C. Each payment made to Contractor shall be on account of the total amount payable to Contractor and all material and work covered by paid partial payment shall thereupon become the sole property of Owner. This provision shall not be construed as relieving Contractor from sole responsibility for care and protection of materials and work upon which payments have been made or restoration of any damaged work or as a waiver of the right of Owner to require fulfillment of all terms of this contract.

D. Materials delivered to the work site and not incorporated in the work will be allowed in the Application and Certification for Payment on the basis of one hundred (100%) percent of value, subject to the 5% retainage providing that they are suitably stored on the site or in an approved warehouse in accordance with the following requirements:

1. Material has previously been approved through submittal and acceptance of shop drawings conforming to requirements of Article 3.2 of General Conditions.

2. Delivery is made in accordance with the time frame on the approved schedule.

3. Materials, equipment, etc., are properly stored and protected from damage and deterioration and remain so - if not, previously approved amounts will be deleted from subsequent pay applications.

4. The payment request is accompanied by a breakdown identifying the material equipment, etc. in sufficient detail to establish quantity and value.

E. The Contractor shall be allowed to include in the Application and Certification for Payment, one hundred (100%) of the value, subject to retainage, of major equipment and material stored off the site if all of the following conditions are met:

1. The request for consideration of payment for materials stored off site is made at least 15 working days prior to submittal of the Application for Payment including such material. Only materials inspected will be considered for inclusion on Application for Payment requests.

2. Materials stored in one location off site are valued in excess of $25,000.

3. That a Certificate of Insurance is provided indicating adequate protection from loss, theft conversion or damage for materials stored off site. This Certificate shall show the State of Missouri as an additional insured for this loss.

4. The materials are stored in a facility approved and inspected, by the Construction Representative.

5. Contractor shall be responsible for, Owner costs to inspect out of state facilities, and any delays in the completion of the work caused by damage to the material or for any other failure of the Contractor to have access to this material for the execution of the work.

F. The Owner shall determine the amount, quality and acceptability of the work and materials which are to be paid for under this contract. In the event any questions shall arise between the parties, relative to this contract or specifications, determination or decision of the Owner or the Construction Representative and the Designer shall be a condition precedent to the right of the Contractor to receive any money or payment for work under this contract affected in any manner or to any extent by such question.

G. Payments Withheld: The Owner may withhold or nullify in whole or part any certificate to such extent as may be necessary to protect the Owner from loss on account of:

1. Defective work not remedied. When a notice of noncompliance is issued on an item or items, corrective action shall be undertaken immediately. Until corrective action is completed, no monies will be paid and no additional time will be allowed for the item or items. The cost of corrective action(s) shall be borne by the Contractor.

2. A reasonable doubt that this contract can be completed for the unpaid balance.

3. Failure of the Contractor to update as-built drawings monthly for review by the Construction Representative.

4. Failure of the Contractor to update the construction schedule.

When the Construction Representative is satisfied the Contractor has remedied above deficiencies, payment shall be released.

H. Final Payment: Upon receipt of written notice from the Contractor to the Designer and Project Representative that the work is ready for final inspection and acceptance, the Designer and Project Representative, with the Contractor, shall promptly make such inspection. If the work is acceptable and the contract fully performed, the Construction Representative shall complete a final acceptance report and the Contractor will be

directed to submit a final Application and Certification for Payment. If the Owner approves the same, the entire balance shall be due and payable, with the exception of deductions as provided for under Article 5.4.

1. Where the specifications provide for the performance by the Contractor of (certain tests for the purpose of balancing and checking the air conditioning and heating equipment and the Contractor shall have furnished and installed all such equipment in accordance with the specifications, but said test cannot then be made because of climatic conditions, such test shall may be considered as required under the provisions of the specifications, Section 013300 and this contract may be substantial Full payment will not be made until the tests have been made and the equipment and system is finally accepted. If the tests are not completed when scheduled, the Owner may deduct 150% of the value of the tests from the final payment.
2. The final payment shall not become due until the Contractor delivers to the Construction Representative:

    a) A complete file of releases, on the standard form included in the contract documents as "Final Receipt of Payment and Release Form", from subcontractors and material suppliers evidencing payment in full for services, equipment and materials, as the case may require, if the Owner approves, or a consent from the Surety to final payment accepting liability for any unpaid amounts.

    b) An Affidavit of Compliance with Prevailing Wage Law, in the form as included in this contract specifications, properly executed by each subcontractor, and the Contractor

    c) Certified copies of all payrolls

    d) As-built drawings

3. If any claim remains unsatisfied after all payments are made, the Contractor shall refund to the Owner all monies that the latter may be compelled to pay in discharging such a claim including all costs and a reasonable attorney's fee.
4. Missouri statute requires prompt payment from the Owner to the Contractor within thirty calendar days and from the Contractor to his subcontractors within fifteen calendar days. Failure to make payments within the required time frame entitles the receiving party to charge interest at the rate of one and one half percent per month calculated from the expiration of the statutory time period until paid.
5. The value of all unused unit price allowances and/or 150% of the value of the outstanding work items, and/or liquidated damages may be deducted from the final pay request without executing a Contract Change. Any unit price items which exceed the number of units in the contract may be added by Contract Change.

ARTICLE 6 -- INSURANCE AND BONDS

ARTICLE 6.1 -- BOND

A. Contractor shall furnish a performance/payment bond in an amount equal to 100% of the contract price to guarantee faithful performance of the contract and 100% of the contract price to guarantee the payment of all persons performing labor on the project and furnishing materials in connection therewith under this contract as set forth in the standard form of performance and payment bond included in the contract documents. The surety on such bond shall be issued by a surety company authorized by the Missouri Department of Insurance to do business in the state of Missouri.

B. All Performance/Payment Bonds furnished in response to this provision shall be provided by a bonding company with a rating of B+ or higher as established by A.M. Best Company, Inc. in their most recent publication.

ARTICLE 6.2 – INSURANCE

A. The successful Contractor shall procure and maintain for the duration of the contract issued a policy or policies of insurance for the protection of both the Contractor and the Owner and their respective officers, officials, agents, consultants and employees. The Owner requires certification of insurance coverage from the Contractor prior to commencing work.

B. Minimum Scope and Extent of Coverage

1. General Liability

Commercial General Liability, ISO coverage form number or equivalent CG 00 01 ("occurrence" basis), or I-SO coverage form number CG 00 02, or ISO equivalent.

If ISO equivalent or manuscript general liability coverage forms are used, minimum coverage will be as follows: Premises/Operations; Independent Contractors; Products/Completed Operations; personal Injury; Broad Form Property Damage including Completed Operations; Broad Form Contractual Liability Coverage to include Contractor's obligations under Article 1.11 Indemnification and any other Special Hazards required by the work of the contract.

2. Automobile Liability

Business Automobile Liability Insurance, ISO Coverage form number or equivalent CA 00 01 covering automobile liability, code 1 "ANY AUTO".

3. Workers' Compensation and Employer's Liability

Statutory Workers' Compensation Insurance for Missouri and standard Employer's Liability Insurance, or the authorization to self-insure for such liability from the Missouri Division of Workers' Compensation.

4. Builder's Risk or Installation Floater Insurance

Insurance upon the work and all materials, equipment, supplies, temporary structures and similar items which may be incident to the performance of the work and located at or adjacent to the site, against loss or damage from fire and such other casualties as are included in extended coverage in broad "All Risk" form, including coverage for Flood and Earthquake, in an amount not less than the replacement cost of the work or this contact price, whichever is greater, with loss payable to Contractor and Owner as their respective interests may appear.

Contractor shall maintain sufficient insurance to cover the full value of the work and materials as the work progresses, and shall furnish Owner copies of all endorsements. If Builder's Risk Reporting- Form of Endorsement is used, Contractor shall make all reports as required therein so as to keep in force an amount of insurance which will equal the replacement cost of the work, materials, equipment, supplies, temporary structures, and other property covered thereby; and if, as a result of Contractor's failure to make any such report, the amount of insurance so recoverable shall be less than such replacement cost, Contractor's interest in the proceeds of such insurance, if any, shall be subordinated to Owner's interest to the end that Owner may receive full reimbursement for its loss.

C. Minimum Limits of Insurance

1. General Liability

Contractor

$2,000,000	combined single limit per occurrence for bodily injury, personal injury, and property damage
$2,000,000	annual aggregate

2. Automobile Liability

$2,000,000	combined single limit per occurrence for bodily injury and property damage

3. Workers' Compensation and Employers Liability

Workers' Compensation limits as required by applicable State Statutes (generally unlimited) and minimum of $1,000,000 limit per accident for Employer's Liability.

General Liability and Automobile Liability insurance may be arranged under individual policies for the full limits required or by a combination of underlying policies with the balance provided by a form-following Excess or Umbrella Liability policy.

D. Deductibles and Self-Insured Retentions

All deductibles, co-payment clauses, and self-insured retentions must be declared to and approved by the Owner. The Owner reserves the right to request the reduction or elimination of unacceptable deductibles or self-insured retentions, as they would apply to the Owner, and their respective officers, officials, agents, consultants and employees. Alternatively, the Owner may request Contractor to procure a bond guaranteeing

payment of losses and related investigations, claims administration, and defense expenses.

E. Other Insurance Provisions and Requirements

The respective insurance policies and coverage, as specified below, must contain, or be endorsed to contain the following conditions or provisions:

1. General Liability

The Owner, and its respective commissioners, officers, officials, agents, consultants and employees shall be endorsed as additional insured's by ISO form CG 20 26 Additional Insured - Designated Person or Organization. As additional insured's, they shall be covered as to work performed by or on behalf of the Contractor or as to liability which arises out of Contractor's activities or resulting from the performance of services or the delivery of goods called for by the Contract.

Contractor's insurance coverage shall be primary with respect to all additional insured's. Insurance of self-insurance programs maintained by the designated additional -insured's shall be excess of the Contractor's insurance and shall not contribute with it.

Additionally, the Contractor and Contractor's general liability insurer shall agree to waive all rights of subrogation against the Owner and any of their respective officers, officials, agents, consultants or employees for claims, losses, or expenses which arise out of Contractor's activities or result from the performance of services or the delivery of goods called for by the Contract.

Contractor's failure to comply with the terms and conditions of these insurance policies shall not affect or abridge coverage for the Owner, or for any of their officers, officials, agents, consultants or employees.

2. Automobile Insurance

The Owner, and their respective officers, officials, agents, consultants and employees shall be endorsed as additional insured's by ISO form CG 20 26 - Additional Insured Designated Person or Organization. As additional insured's, they shall be covered as to work performed by or on behalf of the Contractor or as to liability which arises out of Contractor's activities or resulting from the performance of services or the delivery of goods called for by the Contract.

Contractor's insurance coverage shall be primary with respect to all additional insured's. Insurance or self-insurance programs maintained by the designated additional insured's shall be in excess of the Contractor's insurance and shall not contribute with it.

Additionally, the Contractor and Contractor's automobile insurer shall agree to waive all rights of subrogation against the Owner and any of their respective officers, officials, agents, consultants or employees for claims, losses, or expenses which arise out of Contractor's activities or result from the performance of services or the delivery of goods called for by the Contract.

Contractor's failure to comply with the terms and conditions of these insurance policies shall not affect or abridge coverage for the Owner or for any of its officers, officials, agents, consultants or employees.

3. Workers' Compensation/Employer's Liability

Contractor's workers' compensation insurance shall be endorsed with NCCI form WC 00 03 01 A - Alternative Employer Endorsement. The Alternative Employer Endorsement shall designate the Owner as "alternate employers."

4. All Coverages

Each insurance policy required by this section of the Contract shall contain a stipulation, endorsed if necessary, that the Owner will receive a minimum of a thirty (30) calendar day advance notice of any policy cancellation. Ten (10) calendar days advance notice is required for policy cancellation due to non-payment of premium.

F. Insurer Qualifications and Acceptability

Insurance required hereunder shall be issued by an A.M. Best, "B+" rated, Class IX insurance company approved to conduct insurance business in the state of Missouri.

G. Verification of Insurance Coverage

Prior to Owner issuing a Notice to Proceed, the Contractor-shall furnish the Owner with Certificate(s) of Insurance and with any applicable original endorsements evidencing the required insurance coverage. The insurance certificates and endorsements are to be signed by a person authorized by that insurer to bind coverage on its behalf. All certificates and endorsements received by the Owner are subject to review and approval by the Owner. The Owner reserves the right to require certified copies of all required policies at any time. If the scope of this contract will exceed one (1) year - or, if any of Contractor's applicable insurance coverage expires prior to completion of the work or services required under this contract -

the Contractor will provide a renewal or replacement certificate before continuing work or services hereunder. If the Contractor fails to provide documentation of required insurance coverage, the Owner may issue a stop work order and no additional contract completion time and/or compensation shall be granted as a result thereof.

ARTICLE 7 – SUSPENSION OR TERMINATION OF CONTRACT

ARTICLE 7.1 - FOR SITE CONDITIONS

When conditions at the site of the proposed work are considered by the Owner to be unsatisfactory for prosecution of the work, the Contractor may be ordered in writing to suspend the work or any part thereof until reasonable conditions exist. When such suspension is not due to fault or negligence of the Contractor, time allowed for completion of such suspended work will be extended by a period of time equal to that lost due to delay occasioned by ordered suspension. This will be a no cost time extension.

ARTICLE 7.2 - FOR CAUSE

A. Termination or Suspension for Cause:

1. If the Contractor shall file for bankruptcy, or should make a general assignment for the benefit of the creditors, or if a receiver should be appointed on account of insolvency, or if the contractor should persistently or repeatedly refuse or fail to supply enough properly skilled workers or proper materials, or if the contractor should fail to make prompt payment to subcontractors or for material or labor, or persistently disregard laws, ordinances or the instructions of the Owner, or otherwise be guilty of a substantial violation of any provision of this contract, then the Owner may serve notice on the Contractor and the surety setting forth the violations and demanding compliance with this contract. Unless within ten (10) consecutive calendar days after serving such notice, such violations shall cease and satisfactory arrangements for correction be made, the Owner may suspend the Contractor's right to proceed with the work or terminate this contract.

2. In the event the Owner suspends Contractor's right to proceed with the work or terminates the contract, the Owner may demand that the Contractor's surety take over and complete the work on this contract, after the surety submits a written proposal to the Owner and receives written approval and upon the surety's failure or refusal to do so within ten (10) consecutive calendar days after demand therefore, the Owner may take over the work and prosecute the same to completion by bid or negotiated contract, or the Owner may elect to take possession of and utilize in completing the work such materials, supplies, appliances and plant as may be on the site of the work, and all subcontractors, if the Owner elects, shall be bound to perform their contracts.

B. The Contractor and its surety shall be and remain liable to the Owner for any excess cost or damages occasioned to the Owner as a result of the actions above set forth.

C. The Contractor in the event of such suspension or termination shall not be entitled to receive any further payments under this contract until the work is wholly finished. Then if the unpaid balance under this contract shall exceed all expenses of the Owner as certified by the Director, such excess shall be paid to the Contractor; but, if such expenses shall exceed the unpaid balance as certified by the Director, the Contractor and their surety shall be liable for and shall pay the difference and any damages to the Owner.

D. In exercising Owner's right to secure completion of the work under any of the provisions hereof, the Director shall have the right to exercise Owner's sole discretion as to the manner, methods and reasonableness of costs of completing the work.

E. The rights of the Owner to suspend or terminate as herein provided shall be cumulative and not exclusive and shall be in addition to any other remedy provided by law.

F. The Contractor in the event of such suspension or termination may be declared ineligible for Owner contracts for a minimal period of twelve (12) months. Further, no contract will be awarded to any Contractor who lists in their bid form any subcontractor whose prior performance has contributed, as determined by the Owner, to a breach of a contract. In order to be considered for state-awarded contracts after this period, the Contractor/subcontractor will be required to forward acceptance reports to the Owner regarding successful completion of non-state projects during the intervening twelve (12) months from the date of default. No contracts will be awarded to a subcontractor/Contractor until the ability to perform responsibly in the private sector has been proven to the Owner.

ARTICLE 7.3 -- FOR CONVENIENCE

A. The Owner may terminate or suspend the Contract or any portion of the Work without cause at any time, and at the Owner's convenience. Notification of a termination or suspension shall be in writing

and shall be given to the Contractor and their surety. If the Contract is suspended, the notice will contain the anticipated duration of the suspension or the conditions under which work will be permitted to resume. If appropriate, the Contractor will be requested to demobilize and re-mobilize and will be reimbursed time and costs associated with the suspension.

B. Upon receipt of notification, the Contractor shall:

1. Cease operations when directed.

2. Take actions to protect the work and any stored materials.

3. Place no further subcontracts or orders for material, supplies, services or facilities except as may be necessary to complete the portion of the Contract that has not been terminated. No claim for payment of materials or supplies ordered after the termination date shall be considered.

4. Terminate all existing subcontracts, rentals, material, and equipment orders.

5. Settle all outstanding liabilities arising from termination with subcontractors and suppliers.

6. Transfer title and deliver to the Owner, work in progress, completed work, supplies and other material produced or acquire for the work terminated, and completed or partially completed plans, drawings information and other property that, if the Contract had been completed, would be required to be furnished to the Owner.

C. For termination without cause and at the Owner's convenience, in addition to payment for work completed prior to date of termination, the Contractor may be entitled to payment of other documented costs directly associated with the early termination of the contract. Payment for anticipated profit and unapplied overhead will not be allowed.

SECTION 007300 - SUPPLEMENTARY CONDITIONS

1.0 GENERAL:

A. These Supplementary General Conditions clarify, add, delete, or otherwise modify standard terms and conditions of DIVISION 0, BIDDING AND CONTRACTING REQUIREMENTS.

2.0 CONTACTS:

MONG Project Manager /
Construction Representative:

Jeremy Newton
Missouri National Guard-CFMO Office
6819A North Boundary Road
Jefferson City, MO 65101
Email: jeremy.l.newton.nfg@army.mil

3.0 NOTICE: ALL BID MATERIALS ARE DUE AT THE TIME OF BID SUBMITTAL. THERE IS NO SECOND SUBMITTAL FOR THIS PROJECT.

4.0 FURNISHING CONSTRUCTION DOCUMENTS:

A. The Owner will furnish the Contractor with approximately 1 complete sets of drawings and specifications at no charge.

B. The Owner will furnish the Contractor with approximately 1 sets of explanatory or change drawings at no charge.

C. The Contractor may make copies of the documents as needed with no additional cost to the Owner.

5.0 SAFETY REQUIREMENTS

Contractor and subcontractors at any tier shall comply with RSMo 292.675 and Article 1.3, E, of Section 007213, General Conditions.

6.0 ENVIRONMENTAL MANAGEMENT SYSTEM (eMS):

The Missouri Army National Guard (MOARNG) has implemented an Environmental Management System (eMS). One of the key components of the eMS is the establishment of an Environmental Policy that must be communicated to all persons working for or on behalf of the organization including all suppliers and contractors. This policy stresses commitment to compliance with accepted environmental practices, and meeting or exceeding applicable environmental requirements, legal and otherwise. This policy also stresses commitment to waste minimization, pollution prevention, and management of personnel, processes, real property, and materials in a manner to reduce environmental impacts. The policy is available upon request to all parties by contacting the Environmental Management Office at (573) 638-9514.

7.0 OFF-SITE BORROW & SPOIL DEPOSIT SITES FOR FEDERALLY FUNDED PROJECTS:

All Federally funded projects which involve off-site borrow and/or off-site spoil deposit sites will require written certification that the site(s) are in compliance with the National Environmental Protection Act and all related applicable Federal and State laws and regulations. If the need for off-site borrow and/or spoil sites is stipulated in the Contract Documents, the following applies:

A. The Contractor is required to use only the designated site described in the Contract Documents. If another off-site area is proposed by the Contractor, the Contractor must provide written certification to the Division of Facilities Management, Design and Construction Project Representative that the proposed borrow or spoil site has been cleared of environmental concerns in accordance with all applicable Federal and State laws and regulations. These include but are not limited to the following: Clean Water Act; the Endangered Species Act; the National Historic Preservation Act (NHPA) (The site must have Section 106 Clearance); the Farmland Protection Act; Resource Conservation and Recovery Act; Comprehensive Environmental Response; Compensation and Liability Act; and RSMo Chapter 194, Section 194.400, Unmarked Human Burial Sites. Certifications shall include clearance letters and other evidence of coordination with the appropriate regulatory agencies. The Missouri Historic Preservation Office, PO Box

176 Jefferson City, MO 65102, may be contacted to provide assistance with the NHPA and cultural resource issues pertaining to the borrow and spoil site regulations. The Missouri State Historic Preservation Office can provide a list of qualified and certified archaeologists to assist in borrow and spoil site investigations.

B. If project conditions require off-site borrow or off-site deposit of spoils, the Contractor will be required to provide written certification to the Division of Facilities Management, Design and Construction Project Representative that the proposed borrow or spoil site has been cleared of environmental concerns in accordance with all applicable Federal and State laws and regulations. These include but are not limited to the following: Clean Water Act; the Endangered Species Act; the National Historic Preservation Act (NHPA) (The site must have Section 106 Clearance); the Farmland Protection Act; Resource Conservation and Recovery Act; Comprehensive Environmental Response; Compensation and Liability Act; and RSMo Chapter 194, Section 194.400, Unmarked Human Burial Sites. Certifications shall include clearance letters and other evidence of coordination with the appropriate regulatory agencies. The Missouri Historic Preservation Office, PO Box 176 Jefferson City, MO 65102, may be contacted to provide assistance with the NHPA and cultural resource issues pertaining to the borrow and spoil site regulations. The Missouri State Historic Preservation Office can provide a list of qualified and certified archaeologists to assist in borrow and spoil site investigations.

C. The Owner recognizes that additional time (beyond what is allowed in the Construction Contract) may be required in order to secure the aforementioned certifications and approvals. Should more time be required, the Owner will consider approval of a no-cost time extension contract change. The Contractor will be required to provide documentation that substantiates the need for the time extension.

SECTION 007333 – NATIONAL GUARD - SUPPLEMENTARY GENERAL CONDITIONS FOR FEDERALLY FUNDED/ASSISTED CONSTRUCTION PROJECTS

1.0 Notice of Federal Funding

This project is being performed in whole or in part using federal funds. Therefore, all work or services performed by the Contractor and its subcontractors shall be subject to the terms and conditions set forth below in addition to all terms and conditions in the Construction Contract, General Conditions, and other contract documents. The concepts, rules, and guidelines set forth in 2 C.F.R. 200 describing allowable costs and administrative requirements apply.

2.0 Definitions

As used herein, "Federal Government" means the government of the United States of America. "Federal Agency" means an agency, entity, department or division of the Federal Government that is providing funding for this project. All other terms shall have the meanings established in the Construction Contract, General Conditions, and/or Project Manual, unless such definitions conflict with a definition provided in an applicable statute or regulation.

3.0 Conflicting Terms or Conditions

To the extent that any terms or conditions set forth herein conflict with the Construction Contract or its General Conditions, the more stringent of the two terms and conditions shall govern.

4.0 No Obligation by Federal Government

The Federal Government is not a party to this contract and is not subject to any obligations or liabilities to the non-Federal entity, Contractor, or any other party pertaining to any matter resulting from the contract.

5.0 Compliance with Federal Laws, Regulations and Executive Orders

The Contractor and its subcontractors and suppliers are required to comply with all applicable Federal laws, regulations, and executive orders, regardless of whether set forth herein. The Contractor shall assist and enable the State of Missouri in complying with any requirements imposed by the Federal Agency as a condition of funding.

6.0 Compliance with Civil Rights Provisions

The Contractor shall comply with all Federal statutes, executive orders, and regulations relating to nondiscrimination. These include, but are not limited to the following:

Title VI of the Civil Rights Act of 1964 (P.L. 88-352) which prohibits discrimination on the basis of race, color or national origin;

Title IX of the Education Amendments of 1972, as amended (20 U.S.C. §§1681-1683, and 1685-1686), which prohibits discrimination on the basis of sex;

Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. §794), which prohibits discrimination on the basis of handicaps;

The Age Discrimination Act of 1975, as amended (42 U.S.C. §§6101-6107), which prohibits discrimination on the basis of age;

Title VIII of the Civil Rights Act of 1968 (42 U.S.C. §§3601 et seq.), as amended, relating to nondiscrimination in the sale, rental or financing of housing;

Title VII of the Civil Rights Act of 1964 (42 U.S.C. part 2000(e), which prohibits discrimination against employees on the basis of religion;

Any other nondiscrimination provisions in the specific statute(s) under which application for Federal assistance is being made; and

The requirements of any other nondiscrimination statute(s) that may apply to the application.

7.0 Equal Employment Opportunity (41 C.F.R. 60-1.4(b)).

During the performance of this contract, the Contractor agrees as follows:

(1) The Contractor will not discriminate against any employee or applicant for employment because of race, color, religion, sex, sexual orientation, gender identity, or national origin. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their race, color, religion, sex, sexual orientation, gender identity, or national origin. Such action shall include, but not be limited to the following:

Employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

(2) The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, sexual orientation, gender identity, or national origin.

(3) The Contractor will not discharge or in any other manner discriminate against any employee or applicant for employment because such employee or applicant has inquired about, discussed, or disclosed the compensation of the employee or applicants or another employee or applicant. This provision shall not apply to instances in which an employee who has access to the compensation information of other employees or applicants as a part of such employee's essential job functions discloses the compensation of such other employees or applicants to individuals who do not otherwise have access to such information, unless such disclosure is in response to a formal complaint or charge, in furtherance of an investigation, proceeding, hearing, or action, including an investigation conducted by the employer, or is consistent with the Contractor's legal duty to furnish information.

(4) The Contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor

union or workers' representatives of the Contractor's commitments under this section and shall post copies of the notice in conspicuous places available to employees and applicants for employment.

The Contractor will include the portion of the sentence immediately preceding paragraph (1) and the provisions of paragraphs (1) through (4) in every subcontract or purchase order. The Contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provisions, including sanctions for noncompliance: *Provided*, however, that in the event a Contractor becomes involved in, or is threatened with, litigation with a subcontractor or vendor as a result of such direction by the administering agency, the Contractor may request the United States to enter into such litigation to protect the interests of the United States.

The applicant further agrees that it will be bound by the above equal opportunity clause with respect to its own employment practices when it participates in federally assisted construction work: *Provided,* That if the applicant so participating is a State or local government, the above equal opportunity clause is not applicable to any agency, instrumentality or subdivision of such government which does not participate in work on or under the contract.

The applicant agrees that it will assist and cooperate actively with the administering agency and the Secretary of Labor in obtaining the compliance of contractors and sub-contractors with the equal opportunity clause and the rules, regulations, and relevant orders of the Secretary of Labor, that it will furnish the administering agency and the Secretary of Labor such information as they may require for the supervision of such compliance, and that it will otherwise assist the administering agency in the discharge of the agency's primary responsibility for securing compliance.

8.0 Prohibition of Segregated Facilities

(1) The Contractor agrees that it does not and will not maintain or provide for its employees any segregated facilities at any of its establishments, and that it does not and will not permit its employees to perform their services at any location under its control where segregated facilities are maintained. The Contractor agrees that a breach of this clause is a violation of the Equal Employment Opportunity clause in this contract.

(2) "Segregated facilities," as used in this clause, means any waiting rooms, work areas, rest rooms and wash rooms, restaurants and other eating areas, time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees that are segregated by explicit directive or are in fact segregated on the basis of race, color, religion, sex, or national origin because of written or oral policies or employee custom. The term does not include separate or single-user rest rooms or necessary dressing or sleeping areas provided to assure privacy between the sexes.

(3) The Contractor shall include this clause in every subcontract and purchase order that is subject to the Equal Employment Opportunity clause of this contract.

9.0 Copeland "Anti-Kickback" Act

(1) The Contractor shall comply with 18 U.S.C. § 874, 40 U.S.C. § 3145, and the requirements of 29 C.F.R. pt. 3 as may be applicable, which are incorporated by reference into this contract. The Contractor and subcontractors are prohibited from inducing, by any means, any person employed on the project to give up any part of the compensation to which the employee is entitled.

(2) The Contractor or subcontractor shall insert in any subcontracts the clause above, and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime Contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all of these contract clauses.

(3) A breach of the contract clauses above may be grounds for termination of the contract, and for debarment as a Contractor and subcontractor as provided in 29 C.F.R. 5.12.

10.0 Contract Work Hours and Safety Standards Act (40 U.S.C. 3701 to 3708, 29 C.F.R. 5.5)

(1) Overtime requirements. No Contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

(2) Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1) of this section the Contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such Contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1) of this section, in the sum of $27 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (b)(1) of this section.

(3) Withholding for unpaid wages and liquidated damages. The Owner shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the Contractor or subcontractor under any such contract or any other Federal contract with the same prime Contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime Contractor, such sums as may be determined to be necessary to satisfy any liabilities of such Contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2) of this section.

(4) Subcontracts. The Contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1) through (4) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime Contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1) through (4) of this section.

11.0 Suspension and Debarment (Executive Orders 12549 and 12689, 2 C.F.R. pt. 180)

(1) A contract award (see 2 C.F.R. 180.220) must not be made to parties listed on the government-wide exclusions in the System for Award Management (SAM), in accordance with the OMB guidelines at 2 C.F.R. 180 that implement Executive Orders 12549 (3 C.F.R. pt. 1986 Comp., p. 189) and 12689 (3

C.F.R. pt. 1989 Comp., p. 235), "Debarment and Suspension." SAM Exclusions contains the names of parties debarred, suspended, or otherwise excluded by agencies, as well as parties declared ineligible under statutory or regulatory authority other than Executive Order 12549.

(2) The contractor is required to verify that none of the contractor's principals (defined at 2 C.F.R. 180.995) or its affiliates (defined at 2 C.F.R. 180.905) are excluded (defined at 2 C.F.R. 180.940) or disqualified (defined at 2 C.F.R. 180.935).

(3) The contractor must comply with 2 C.F.R. pt. 180, subpart C and the regulations of the granting Federal Agency regarding suspension and debarment and must include a requirement to comply with these regulations in any lower tier covered transaction it enters into.

(4) This certification is a material representation of fact relied upon by the Owner. If it is later determined that the Contractor did not comply with 2 C.F.R. pt. 180, subpart C in addition to remedies available to the Owner, the Federal Government may pursue available remedies, including but not limited to suspension and/or debarment.

(5) By submitting a bid, the bidder or proposer agrees to comply with the requirements of 2 C.F.R. pt. 180, subpart C while this offer is valid and throughout the period of any contract that may arise from this offer. The bidder or proposer further agrees to include a provision requiring such compliance in its lower tier covered transactions.

12.0 Byrd Anti-Lobbying Amendment (31 U.S.C. § 1352)

(1) Contractors that apply or bid for an award exceeding $100,000 agree to file the required certification (set forth below), in compliance with 31 U.S.C. § 1352 (as amended).

(2) Each tier certifies to the tier above that it will not and has not used Federal appropriated funds to pay any person or organization for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, officer or employee of Congress, or an employee of a Member of Congress in connection with obtaining any Federal contract, grant, or any other award covered by 31 U.S.C. § 1352.

(3) Each tier shall also disclose any lobbying with non-Federal funds that takes place in connection with obtaining any Federal award. Such disclosures are forwarded from tier to tier up to the recipient who in turn will forward the certification(s) to the awarding agency.

CERTIFICATION REGARDING LOBBYING

The Bidder or Offeror certifies by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

(1) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of an agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

(2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form–LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

(3) The undersigned shall require that the language of this certification be included in the award documents for all subawards at all tiers (including subcontracts, subgrants, and contracts under grants, loans, and cooperative agreements) and that all subrecipients shall certify and disclose accordingly.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by section 1352, title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

13.0 Procurement of Recovered Materials

The Contractor shall comply with section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act (42 U.S.C. § 6962). The requirements of Section 6002 include procuring only items designated in guidelines of the Environmental Protection Agency (EPA) at 40 CFR part 247 that contain the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, where the purchase price of the item exceeds $10,000 or the value of the quantity acquired during the preceding fiscal year exceeded $10,000; procuring solid waste management services in a manner that maximizes energy and resource recovery; and establishing an affirmative procurement program for procurement of recovered materials identified in the EPA guidelines.

Information about this requirement, along with the list of EPA designated items, is available at EPA's Comprehensive Procurement Guidelines web site, https://www.epa.gov/smm/comprehensive-procurement-guideline-cpg-program.

14.0 Fair Labor Standards Act

All contracts and subcontracts that result from this solicitation incorporate by reference the provisions of 29 C.F.R. pt. 201, the Federal Fair Labor Standards Act (FLSA), with the same force and effect as if given in full text. The FLSA sets minimum wage, overtime pay, recordkeeping, and child labor standards for full and part-time workers. The Contractor has full responsibility to monitor compliance to the referenced statute or regulation. The Contractor must address any claims or disputes that arise from this requirement directly with the U.S. Department of Labor – Wage and Hour Division.

15.0 Access to Records and Reports

The Contractor must maintain an acceptable cost accounting system. The Contractor agrees to provide the Owner, the Federal Agency and the Comptroller General of the United States or any of their duly authorized representatives access to any books, documents, papers and records of the Contractor which are directly pertinent to the specific contract for the purpose of making audit, examination, excerpts and transcriptions. The Contractor agrees to maintain all books, records and reports required under this contract for a period of not less than three years after final payment is made and all pending matters are closed.

16.0 Occupational Health and Safety Act

All contracts and subcontracts that result from this solicitation incorporate by reference the requirements of 29 C.F.R. pt. 1910 with the same force and effect as if given in full text. The employer must provide a work environment that is free from recognized hazards that may cause death or serious physical harm to the employee. The employer retains full responsibility to monitor its compliance and their subcontractor's compliance with the applicable requirements of the Occupational Safety and Health Act of 1970 (20 C.F.R. pt. 1910). The employer must address any claims or disputes that pertain to a referenced requirement directly with the U.S. Department of Labor – Occupational Safety and Health Administration.

17.0 Rights to Inventions

Contracts or agreements that include the performance of experimental, developmental, or research work must provide for the rights of the Federal Government and the Owner in any resulting invention as established by 37 C.F.R. pt. 401, Rights to Inventions Made by Non-profit Organizations and Small Business Firms under Government Grants, Contracts, and Cooperative Agreements. This contract incorporates by reference the patent and inventions rights as specified within 37 C.F.R. 401.14. Contractor must include this requirement in all sub-tier contracts involving experimental, developmental, or research work.

18.0 Energy Conservation

The Contractor agrees to comply with mandatory standards and policies relating to energy efficiency which are contained in the state energy conservation plan issued in compliance with the Energy Policy and Conservation Act (42 U.S.C. § 6201et seq.).

19.0 Clean Air Act and Federal Water Pollution Control Act

(1) If the amount of the Contract exceeds $150,000, the Contractor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act, as amended, 42 U.S.C. § 7401 et seq. and the Federal Water Pollution Control Act, as amended, 33 U.S.C. § 1251 et seq.

(2) The Contractor agrees to report each violation to the Owner, and understands and agrees that the Owner will, in turn, report each violation as required to assure notification to the Federal Agency and the appropriate Environmental Protection Agency Regional Office.

(3) The Contractor agrees to include these requirements in each subcontract exceeding $150,000 financed in whole or in part with Federal assistance.

20.0 Contractor Employee Whistleblower Rights and Requirement to Inform Employees of Whistleblower Rights

(1) This contract and employees working on this contract will be subject to the whistleblower rights and remedies in the pilot program on contractor employee whistleblower protections established at 41 U.S.C. § 4712 by section 828 of the National Defense Authorization Act for Fiscal Year 2013 (Pub. L. 112-239) and FAR 3.908.

(2) The Contractor shall inform its employees in writing, in the predominant language of the workforce, of employee whistleblower rights and protections under 41 U.S.C. § 4712, as described in section 3.908 of the Federal Acquisition Regulation.

(3) The Contractor shall insert the substance of this clause, including this paragraph (c), in all subcontracts over the simplified acquisition threshold.

21.0 Veteran's Preference

In the employment of labor (excluding executive, administrative, and supervisory positions), the Contractor and all sub-tier contractors must give preference to covered veterans as defined within Title 49 United States Code Section 47112. Covered veterans include Vietnam-era veterans, Persian Gulf veterans, Afghanistan-Iraq war veterans, disabled veterans, and small business concerns (as defined by 15 U.S.C. § 632) owned and controlled by disabled veterans. This preference only applies when there are covered veterans readily available and qualified to perform the work to which the employment relates.

22.0 Drug Free Workplace Act

The Contractor shall provide a drug free workplace in accordance with the Drug Free Workplace Act of 1988, 41 U.S.C. Chapter 81, and all applicable regulations. The Contractor shall report any conviction of the Contractor's personnel under a criminal drug statute for violations occurring on the Contractor's premises or off the Contractor's premises while conducting official business. A report of a conviction shall be made to the state agency within five (5) working days after the conviction.

23.0 Access Requirements for Persons with Disabilities

Contractor shall comply with 49 U.S.C. § 5301(d), stating Federal policy that the elderly and persons with disabilities have the same rights as other persons to use mass transportation services and facilities and that special efforts shall be made in planning and designing those services and facilities to implement that policy. Contractor shall also comply with all applicable requirements of Sec. 504 of the Rehabilitation Act (1973), as amended, 29 U.S.C. § 794, which prohibits discrimination on the basis of handicaps, and the Americans with Disabilities Act of 1990 (ADA), as amended, 42 U.S.C. § 12101 et seq., which requires that accessible facilities and services be made available to persons with disabilities, including any subsequent amendments thereto.

24.0 Seismic Safety

The Contractor agrees to ensure that all work performed under this contract, including work performed by subcontractors, conforms to a building code standard that provides a level of seismic safety substantially equivalent to standards established by the National Earthquake Hazards Reduction Guidelines for Contract Provisions for Obligated Sponsors and Airport Improvement Program Projects Issued on June 19, 2018 Page 61 Program (NEHRP). Local building codes that model their code after the current version of the International Building Code (IBC) meet the NEHRP equivalency level for seismic safety.

25.0 Required Use of American Iron, Steel, Manufactured Products, and Construction Materials – Build America, Buy America (Pub. L. No. 117-58, §§ 70901-52)

The Owner is the recipient of an award of Federal financial assistance from a program for infrastructure for this project. Pursuant to the Build America, Buy America Act of the Infrastructure Investment and Jobs Act

("IIJA"), Pub. L. No. 117-58, none of the funds provided under the Federal award may be used unless the requirements of the domestic content procurement preference outlined below are met. Therefore, the Contractor shall ensure the following:

(1) all iron and steel used in the project are produced in the United States--this means all manufacturing processes, from the initial melting stage through the application of coatings, occurred in the United States;

(2) all manufactured products used in the project are produced in the United States—this means the manufactured product was manufactured in the United States; and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 65 percent of the total cost of all components of the manufactured product, unless another standard for determining the minimum amount of domestic content of the manufactured product has been established under applicable law or regulation; and

(3) all construction materials are manufactured in the United States—this means that all manufacturing processes for the construction material occurred in the United States.

The Buy America preference only applies to articles, materials, and supplies that are consumed in, incorporated into, or affixed to an infrastructure project. As such, it does not apply to tools, equipment, and supplies, such as temporary scaffolding, brought to the construction site and removed at or before the completion of the infrastructure project. Nor does a Buy America preference apply to equipment and furnishings, such as movable chairs, desks, and portable computer equipment, that are used at or within the finished infrastructure project, but are not an integral part of the structure or permanently affixed to the infrastructure project.

Waivers

When necessary, recipients of Federal financial assistance may apply for, and the awarding agency may grant, a waiver from the domestic content procurement preference.

When the Federal agency has made a determination that one of the following exceptions applies, the awarding official may waive the application of the domestic content procurement preference in any case in which the agency determines that:

(1) applying the domestic content procurement preference would be inconsistent with the public interest;

(2) the types of iron, steel, manufactured products, or construction materials are not produced in the United States in sufficient and reasonably available quantities or of a satisfactory quality; or

(3) the inclusion of iron, steel, manufactured products, or construction materials produced in the United States will increase the cost of the overall project by more than 25 percent. A request to waive the application of the domestic content procurement preference must be in writing. The agency will provide instructions on the format, contents, and supporting materials required for any waiver request. Waiver requests are subject to public comment periods of no less than 15 days and must be reviewed by the Made in America Office.

There may be instances where an award qualifies, in whole or in part, for an existing waiver described on the awarding agency web site.

If the Contractor determines that an application for a waiver is necessary or an existing waiver is applicable to this project, the Contractor shall timely notify the Owner. The Owner will make a determination if a waiver is applicable or if a waiver application is necessary. The Contractor shall not submit any waiver application or information directly to the Federal agency without prior approval by the Owner.

Definitions

"Construction materials" includes an article, material, or supply—other than an item of primarily iron or steel; a manufactured product; cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives—that is or consists primarily of: • non-ferrous metals; • plastic and polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables); • glass (including optic glass); • lumber; or • drywall.

"Domestic content procurement preference'' means all iron and steel used in the project are produced in the United States; the manufactured products used in the project are produced in the United States; or the construction materials used in the project are produced in the United States.

"Infrastructure" includes, at a minimum, the structures, facilities, and equipment for, in the United States, roads, highways, and bridges; public transportation; dams, ports, harbors, and other maritime facilities; intercity passenger and freight railroads; freight and intermodal facilities; airports; water systems, including drinking water and wastewater systems; electrical transmission facilities and systems; utilities; broadband infrastructure; and buildings and real property. Infrastructure includes facilities that generate, transport, and distribute energy.

"Project" means the construction, alteration, maintenance, or repair of infrastructure in the United States.

26.0 Prohibition on Certain Telecommunication and Video Surveillances Services or Equipment (Pub. L. 115-232, Section 889)

Section 889(b) of the John S. McCain National Defense Authorization Act for Fiscal Year 2019, Pub. L. No. 115-232, and 2 C.F.R. § 200.216 prohibit the head of a Federal executive agency and recipients or subrecipients of funds from such agencies from obligating or expending grant, cooperative agreement, loan, or loan guarantee funds on certain telecommunications products or from certain entities for national security reasons. Pursuant to such provisions, the Contractor understands and agrees that the Contractor and its subcontractors shall not obligate or expend loan or grant funds from the Federal Agency under this Contract to:

(1) Procure or obtain;

(2) Extend or renew a contract to procure or obtain; or

(3) Enter into a contract (or extend or renew a contract) to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as a substantial or essential component of any system, or as critical technology as part of any system. As described in Public Law 115–232, section 889, covered telecommunications equipment is telecommunications equipment produced by Huawei Technologies Company or ZTE Corporation (or any subsidiary or affiliate of such entities).

(i) For the purpose of public safety, security of government facilities, physical security surveillance of critical infrastructure, and other national security purposes, video surveillance and telecommunications equipment produced by Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

(ii) Telecommunications or video surveillance services provided by such entities or using such equipment.

(iii) Telecommunications or video surveillance equipment or services produced or provided by an entity that the Secretary of Defense, in consultation with the Director of the National Intelligence or the Director of the Federal Bureau of Investigation, reasonably believes to be an entity owned or controlled by, or otherwise connected to, the government of a covered foreign country.

THIS PAGE INTENTIONALLY LEFT BLANK

Missouri
Division of Labor Standards
WAGE AND HOUR SECTION

MIKE KEHOE, Governor

Annual Wage Order No. 33

Section 100
ST. LOUIS COUNTY

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by
Logan Hobbs, Director
Division of Labor Standards

Filed With Secretary of State: **March 10, 2026**

Last Date Objections May Be Filed: **April 9, 2026**

Prepared by Missouri Department of Labor and Industrial Relations

ST. LOUIS COUNTY

OCCUPATIONAL TITLE	**Prevailing Hourly Rate
Asbestos Worker	$72.26
Boilermaker	$44.93*
Bricklayer - Stone Mason	$65.89
Carpenter	$69.38
Lather	
Linoleum Layers & Cutter	
Millwright	
Pile Driver	
Cement Mason	$61.40
Plasterer	
Communication Technician	$67.84
Electrician (Inside Wireman)	$79.41
Electrician (Outside Lineman)	$44.93*
Outside - Groundman	
Outside - Groundman Tree Trimmer	
Outside - Lineman Operator	
Outside - Lineman Tree Trimmer	
Elevator Constructor	$106.30
Glazier	$71.63
Iron Worker	$75.80
Laborer	$58.92
Laborer - First Semi-Skilled	
Laborer - General	
Laborer - Second Semi-Skilled	
Laborer - Skilled	
Mason	$57.31
Marble Finisher	
Marble Mason	
Terrazzo Finisher	
Terrazzo Worker	
Tile Finisher	
Tile Setter	
Operating Engineer	$76.62
Operating Engineer - Group I	
Operating Engineer - Group II	
Operating Engineer - Group III	
Operating Engineer - Group III - A	
Operating Engineer - Group IV	
Operating Engineer - Group V	
Painter	$57.67
Plumber	$83.99
Pipe Fitter	
Roofer/WaterProofer	$62.13
Sheet Metal Worker	$78.63
Sprinkler Fitter - Fire Protection	$88.12
Truck Driver	$44.93*
Truck Control Service Driver	
Truck Driver, Teamsters Group I	
Truck Driver, Teamsters Group II	
Truck Driver, Teamsters Group III	
Truck Driver, Teamsters Group IV	

*** The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. The public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.**

****The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title as defined in RSMo Section 290.210.**

ST. LOUIS COUNTY

OCCUPATIONAL TITLE	**Prevailing Hourly Rate
Carpenter	$70.28
Millwright	
Pile Driver	
Electrician (Outside Lineman)	$77.51
Outside - Groundman	
Outside - Groundman Tree Trimmer	
Outside - Lineman Operator	
Outside - Lineman Tree Trimmer	
Laborer	$59.45
Laborer - General	
Laborer - Skilled	
Operating Engineer	$76.52
Operating Engineer - Group I	
Operating Engineer - Group II	
Operating Engineer - Group III	
Operating Engineer - Group IV	
Truck Driver	$40.45
Truck Control Service Driver	
Truck Driver, Teamsters Group I	
Truck Driver, Teamsters Group II	
Truck Driver, Teamsters Group III	
Truck Driver, Teamsters Group IV	

Use Heavy Construction Rates on Highway and Heavy construction in accordance iwth the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title shown on the Building Construction Rate Sheet.

***The Division of Labor Standards received fewer than 1,000 reportable hours for this occupational title. Public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.**

****The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title.**

OVERTIME
and
HOLIDAYS

OVERTIME

For all work performed on a Sunday or a holiday, not less than twice (2x) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work.

For all overtime work performed, not less than one and one-half (1½) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work or contractual obligation. For purposes of this subdivision, **"overtime work"** shall include work that exceeds ten hours in one day and work in excess of forty hours in one calendar week; and

A thirty-minute lunch period on each calendar day shall be allowed for each worker on a public works project, provided that such time shall not be considered as time worked.

HOLIDAYS

January first;
The last Monday in May;
July fourth;
The first Monday in September;
November eleventh;
The fourth Thursday in November; and
December twenty-fifth;

If any holiday falls on a Sunday, the following Monday shall be considered a holiday.

SECTION 011000 – SUMMARY OF WORK

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions and Division 1 Specification Sections apply to this Section.

1.2 WORK COVERED BY CONTRACT DOCUMENTS

A. The Project consists of renovations to the former St. Bernadette Elementary School at Jefferson Barracks in St. Louis, Missouri. The renovations will convert the former school to a Missouri National Guard Readiness Center. The scope is limited to approximately 16,000 square feet, primarily focusing on the cafeteria, classrooms, restrooms, and basement mechanical and plumbing work.

1. Project Location: 74 Kearney St., St. Louis, MO 63125
2. Owner: Missouri National Guard, 2302 Militia Drive, Jefferson City, MO 65101
3. Contract Documents, dated **08/04/2026** were prepared for the Project by **CASCO, 12 Sunnen Drive, Suite 100, St. Louis, MO 63143.**

B. The Work consists of converting a former elementary school to a new Missouri National Guard Readiness Center.

C. The scope of work includes selective demolition, renovation, and new construction within the existing classroom wing, kitchen support spaces, and associated building systems, as indicated on the Drawings and specified herein. The Work includes reconfiguration of the existing restrooms, classrooms, and storage rooms to create enlarged restroom facilities, separate shower rooms, and a shared locker room, including all associated architectural, structural, mechanical, plumbing, and electrical modifications required for a complete and operational installation. The Work further includes demolition and replacement of seven existing, exterior west wall “bays”, located between structural masonry columns. The existing non loading-bearing walls consists of masonry kneewalls and aluminum storefront window assemblies. The new non load-bearing infill walls with new very low threat level concrete block walls and window systems. Roof edge coping, soffits, fascia, gutters and downspouts will be placed on the Classroom wing. One aluminum storefront door will be replaced on the west wall, matching the same threat resistance level as the walls and windows. Additional windows, doors, and exterior east, non loading-bearing wall replacement, and new exterior door hardware are included as indicated in the Base Bid and Alternate No. 1. Existing skylights and roof exhaust fans shall be removed and replaced with prefabricated insulated curb cover assemblies. All rooms and corridors within the renovation area shall receive new interior finishes including acoustical ceiling systems, LED lighting fixtures, floor finishes, wall finishes, and related accessories.

The Work also includes modification of existing corridor wall assemblies to create two 2-hour fire-resistance-rated barriers complete with 90-minute fire-rated doors, frames, and

hardware, in compliance with applicable Life Safety Code requirements. Mechanical improvements include installation of new rooftop units to provide centralized air conditioning and upgraded heating systems serving the classroom wing and cafeteria, together with replacement of the existing cafeteria hood and associated kitchen exhaust system. Plumbing Work includes installation of two new water heaters, hot water storage tank, water softener, recirculation pump, piping, and accessories within the basement Mechanical Room, as well as replacement of sanitary waste piping extending to the existing sewer lateral located in the entry courtyard. Existing sanitary piping not designated for reuse shall be abandoned in place unless otherwise indicated on the Drawings.

Electrical Work includes replacement of existing electrical panels serving the building, including gymnasium and kitchen equipment loads, installation of dedicated circuits for telecommunications, security, and alarm systems, and installation of new receptacles in classrooms as required by code. Each classroom shall receive three new data outlets. The Work also includes installation of new conduit pathways and Category 6 cabling to the new Server Room, including all terminations and testing. Structural Work includes modifications necessary to support new rooftop unit openings and associated roof framing. The existing building is generally constructed of load-bearing masonry walls, grade beams, and composite roof deck construction, and the Contractor shall coordinate all demolition and new construction activities to maintain structural integrity throughout the duration of the Work.

D. Alternate No. 1 consists of demolition and replacement of the four east wall bays not included in the Base Bid, including existing kneewalls and window assemblies, with new construction as indicated on the Drawings. Alternate No. 1 further includes insulated metal stud framing and gypsum board wall furring systems, together with all related finishes, accessories, and work necessary for a complete installation. In addition, Alternate No. 1 includes all additional window and door replacements specifically identified on the Drawings as part of the alternate scope.

E. The Work will be constructed under a single prime contract.

1.3 WORK SEQUENCE

A. The Work will be conducted in one phase.

1.4 CONTRACTOR USE OF PREMISES

A. General: During the construction period the Contractor shall have full use of the premises for construction operations, including use of the site. The Contractor’s use of the premises limited only by the Owner’s right to perform work or to retain other contractors on portions of the Project.

B. Use of the Site: Limit use of the premises to work in areas indicated. Confine operations to areas within contract limits indicated. Do not disturb portions of the site beyond the areas in which the Work is indicated.

1. Owner Occupancy: Allow for Owner occupancy (areas not within the scope of this project).

2. Driveways and Entrances: Keep driveways and entrances serving the premises clear and available to the Owner, the Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

C. Use of the Existing Building: Maintain the existing building in a weathertight condition throughout the construction period. Repair damage cause by construction operations. Take all precautions necessary to protect the building and its occupants during the construction period..

1.5 OCCUPANCY REQUIREMENTS

A. Full Owner Occupancy: The Owner will occupy the site and existing building during the entire construction period. Cooperate with the Owner during construction operations to minimize conflicts and facilitate owner usage. Perform the Work so as not to interfere with the Owner's operations.

B. Partial Owner Occupancy: The Owner reserves the right to occupy and to place and install equipment in completed areas of the building prior to Substantial Completion, provided such occupancy does not interfere with completion of the Work. Such placing of equipment and partial occupancy shall not constitute acceptance of the total Work.

1. The Designer will prepare a Certificate of Partial Occupancy for each specific portion of the Work to be occupied prior to substantial completion.

2. Prior to partial Owner occupancy, mechanical and electrical systems shall be fully operational. Required inspections and tests shall have been successfully completed. Upon occupancy, the Owner will operate and maintain mechanical and electrical systems serving occupied portions for the building.

3. Upon occupancy, the Owner will assume responsibility for maintenance and custodial service for occupied portions for the building.

1.6 OWNER-FURNISHED PRODUCTS

A. The Owner will furnish all reservist lockers, toilet paper dispensers, battery powered, automatic soap and paper towel dispensers, and shower curtains. Contractor is to install Owner provided items as shown in documents. The Work includes providing support systems to receive Owner's equipment, and mechanical and electrical connections.

1. The Owner will arrange for and deliver necessary shop drawings, product data, and samples to the Contractor.

2. The Owner will arrange and pay for delivery of Owner-furnished items according to the contractor's Construction Schedule.

3. The Contractor is responsible for receiving, unloading and handling Owner furnished items at the site.

4. Following delivery, the Contractor will inspect items delivered for damage. The Contractor shall not accept damaged items and shall notify the Owner of rejection of damaged items.

5. If Owner-furnished items are damaged, defective, or missing, the Owner will arrange for replacement.
6. The Owner will arrange for manufacturer's field services and for the delivery of manufacturer's warranties to the appropriate Contractor.
7. The Contractor shall designate delivery dates of Owner-furnished items in the Contractor's Construction Schedule.
8. The Contractor shall review shop drawings, product data and samples and return them to the Designer noting discrepancies or problems anticipated in use of the project.
9. The Contractor is responsible for protecting Owner-furnished items from damage, including damage from exposure to the elements. The Contractor shall repair or replace items damaged as a result of his operations.

END OF SECTION 011000

SECTION 012100 – ALLOWANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes administrative and procedural requirements governing allowances.

1. Certain items are specified in the Contract Documents by allowances. Allowances have been established in lieu of additional requirements and to defer selection of actual materials and equipment to a later date when additional information is available for evaluation. If necessary, additional requirements will be issued by Change Order.

B. Types of allowances include the following:
1. Weather allowances.

C. Related Sections include the following:

1. Division 1 Section "Contract Modification Procedures" for procedures for submitting and handling Change Orders for allowances.

1.3 WEATHER ALLOWANCE

A. Included within the completion period for this project are a specified number of “bad weather” days (see Schedule of Allowances).

B. The Contractor’s progress schedule shall clearly indicate the bad weather day allowance as an “activity” or “activities”. In the event weather conditions preclude performance of critical work activities for 50% or more of the Contractor’s scheduled workday, that day shall be declared unavailable for work due to weather (a “bad weather” day) and charged against the above allowance. Critical work activities will be determined by review of the Contractor’s current progress schedule.

C. The Contractor’s Representative and the Construction Representative shall agree daily on the number of “bad weather” days to be charged against the allowance. This determination will be documented in writing and be signed by the Contractor and the Construction Representatives. If there is a failure to agree on all or part of the “bad weather” days for a particular month, that disagreement shall be noted on this written document and signed by each party’s representative. Failure of the Contractor’s

representative to sign the "bad weather" day documentation after it is presented, with or without the notes of disagreement, shall constitute agreement with the "bad weather" day determination contained in that document.

D. There will be no modification to the time of contract performance due solely to the failure to deplete the "bad weather" day allowance.

E. Once this allowance is depleted, a no cost Change Order time extension will be executed for "bad weather" days, as defined above, encountered during the remainder of the Project.

1.4 FACILITY INTERRUPTION ALLOWANCE

A. Included within the completion period for this project are a specified number of "Facility Interruption" days (see Schedule of Allowances).

B. The Contractor's progress schedule shall clearly indicate the facility interruption day allowance as an "activity" or "activities". In the event facility interruptions preclude performance of critical work activities for 50% or more of the Contractor's scheduled workday, that day shall be declared unavailable for work due to facility interruption and charged against the above allowance. Critical work activities will be determined by review of the Contractor's current progress schedule.

C. The Contractor's Representative and the Construction Representative shall agree monthly on the number of "facility interruption" days to be charged against the allowance. This determination will be documented in writing and be signed by the Contractor and the Construction Representatives. If there is a failure to agree on all or part of the "facility interruption" days for a particular month, that disagreement shall be noted on this written document and signed by each party's representative. Failure of the Contractor's representative to sign the "facility interruption" day documentation after it is presented, with or without the notes of disagreement, shall constitute agreement with the "facility interruption" day determination contained in that document.

D. There will be no modification to the time of contract performance due solely to the failure to deplete the "facility interruption" day allowance.

E. Once this allowance is depleted, a no cost Change Order time extension will be executed for "facility interruption days" days, as defined above, encountered during the remainder of the Project.

1.5 SELECTION AND PURCHASE

A. At the earliest practical date after award of the Contract, Designer of the date when final selection and purchase of each product or system described by an allowance must be completed to avoid delaying the Work.

B. At Designer's request, obtain proposals for each allowance for use in making final selections. Include recommendations that are relevant to performing the Work.

C. Purchase products and systems selected by Designer from the designated supplier.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine products covered by an allowance promptly on delivery for damage or defects. Return damaged or defective products to manufacturer for replacement.

3.2 PREPARATION

A. Coordinate materials and their installation for each allowance with related materials and installations to ensure that each allowance item is completely integrated and interfaced with related work.

3.3 SCHEDULE OF ALLOWANCES

A. Weather Allowance: Included within the completion period for this Project 5 “bad weather” days.

B. Facility Interruption: Included within the completion period for this Project 5 “facility interruption” days.

END OF SECTION 012100

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 012300 - ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions, Bid Form and other Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes administrative and procedural requirements governing Alternates.

1.3 DEFINITIONS

A. Definition: An alternate is an amount proposed by bidders and stated on the Bid Form for certain work defined in the Bidding Requirements that may be added to the Base Bid amount if the Owner decides to accept a corresponding change in either the amount of construction to be completed, or in the products, materials, equipment, systems, or installation methods described in the Contract Documents..

1. The cost for each alternate is the net addition to the Contract Sum to incorporate the Alternate into the Work. No other adjustments are made to the Contract Sum.

B. No additional time will be allowed for alternate work unless the number of work days is so stated on the bid form.

1.4 PROCEDURES

A. Coordination: Modify or adjust affected adjacent Work as necessary to completely and fully integrate the Alternate Work into the Project.

1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not mentioned as part of the Alternate.

B. Notification: The award of the Contract will indicate whether alternates have been accepted or rejected.

C. Execute accepted alternates under the same conditions as other Work of this Contract.

D. Schedule: A “Schedule of Alternates” is included at the end of this Section. Specification Sections referenced in the Schedule contain requirements for materials necessary to achieve the Work described under each alternate.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

A. Alternate No. 1: Demolition and replacement of the four east wall bays not included in the Base Bid, including existing kneewalls and window assemblies, with new construction as indicated on the Drawings. Alternate No. 1 further includes insulated metal stud framing and gypsum board wall furring systems, together with all related finishes, accessories, and work necessary for a complete installation at the four east bays. In addition, Alternate No. 1 includes all additional windows and basement door replacements specifically identified on the Drawings as part of the alternate scope.

END OF SECTION 012300

SECTION 012600 – CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section specifies administrative and procedural requirements for handling and processing Contract Modifications.

B. Related Sections include the following:

1. Division 0, Section 007213, Article 3.1 "Acceptable Substitutions" for administrative procedures for handling Requests for Substitutions made after
2. Contract award. Division 0, Section 007213, Article 4.0 "Changes in the Work" for Change Order requirements.
3. Division 1, Section 012100 "Allowances" for procedural requirements for handling and processing Allowances.
4. Division 1, Section 013115 “Project Management Communications” for administrative requirements for communications.

1.3 REQUESTS FOR INFORMATION

A. In the event that the Contractor or Subcontractor, at any tier, determines that some portion of the Drawings, Specifications, or other Contract Documents requires clarification or interpretation, the Contractor shall submit a “Request for Information” (RFI) in writing to the Designer. A RFI may only be submitted by the Contractor and shall only be submitted on the RFI forms provided by the Owner. The Contractor shall clearly and concisely set forth the issue for which clarification or interpretation is sought and why a response is needed. In the RFI, the Contractor shall set forth an interpretation or understanding of the requirement along with reasons why such an understanding was reached.

B. Responses to RFI shall be issued within ten (10) working days of receipt of the Request from the Contractor unless the Designer determines that a longer time is necessary to provide an adequate response. If a longer time is determined necessary by the Designer, the Designer will, within five (5) working days of receipt of the request, notify the Contractor of the anticipated response time. If the Contactor submits a RFI on a time

sensitive activity on the current project schedule, the Contractor shall not be entitled to any time extension due to the time it takes the Designer to respond to the request provided that the Designer responds within the ten (10) working days set forth above.

C. Responses from the Designer will not change any requirement of the Contract Documents. In the event the Contractor believes that a response to a RFI will cause a change to the requirements of the Contract Document, the Contractor shall give written notice to the Designer requesting a Change Order for the work. Failure to give such written notice within ten (10) working days, shall waive the Contractor's right to seek additional time or cost under Article 4, "Changes in the Work" of the General Conditions.

1.4 MINOR CHANGES IN THE WORK

A. Designer will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Amount or the Contract Time, on "Designer's Supplemental Instructions" (DSI).

1.5 PROPOSAL REQUESTS

A. The Designer or Owner Representative will issue a detailed description of proposed Changes in the Work that may require adjustment to the Contract Amount or the Contract Time. The proposed Change Description will be issued using the "Request for Proposal" (RFP) form. If necessary, the description will include supplemental or revised Drawings and Specifications.

1. Proposal Requests issued by the Designer or Owner Representative are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
2. Within ten (10) working days after receipt of Proposal Request, submit a proposal for the cost adjustments to the Contract Amount and the Contract Time necessary to execute the Change. The Contractor shall submit his proposal on the appropriate Change Order Detailed Breakdown form. Subcontractors may use the appropriate Change Order Detailed Breakdown form or submit their proposal on their letterhead provided the same level of detail is included. All proposals shall include:

    a. A detailed breakdown of costs per Article 4.1 of the General Conditions.
    b. If requesting additional time per Article 4.2 of the General Conditions, include an updated Contractor's Construction Schedule that indicates the effect of the Change including, but not limited to, changes in activity duration, start and finish times, and activity relationship.

1.6 CHANGE ORDER PROCEDURES

A. On Owner's approval of a Proposal Request, the Designer or Owner Representative will issue a Change Order for signatures of Owner and Contractor on the "Change Order" form.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012600

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 013100 – COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes administrative provisions for coordinating construction operations on Projects including, but not limited to, the following:

1. Coordination Drawings.
2. Administrative and supervisory personnel.
3. Project meetings.

B. Related Sections include the following:

1. Division 1, Section 013200 "Schedules" for preparing and submitting Contractor's Construction Schedule.
2. Articles 1.8.B and 1.8.C of Section 007213 "General Conditions" for coordinating meetings onsite.
3. Article 5.4.H of Section 007213 "General Conditions" for coordinating Closeout of the Contract.

1.3 COORDINATION

A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections, which depend on each other for proper installation, connection, and operation.

1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
2. Make adequate provisions to accommodate items scheduled for later installation.
3. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair of all components including mechanical and electrical.

B. Prepare memoranda for distribution to each party involved outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.

1. Prepare similar memoranda for Owner and separate Contractors if coordination of their Work is required.

C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other Contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:

1. Preparation of Contractor's Construction Schedule.
2. Preparation of the Schedule of Values.
3. Installation and removal of temporary facilities and controls.
4. Delivery and processing of submittals.
5. Progress meetings.
6. Preinstallation conferences.
7. Startup and adjustment of systems.
8. Project Closeout activities.

D. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.

1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. Refer to other Sections for disposition of salvaged materials that are designated as Owner's property.

1.4 SUBMITTALS

A. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.

B. Key Personnel Names: Within fifteen (15) work days of starting construction operations, submit a list of key personnel assignments including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project.

1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.

1.5 PROJECT MEETINGS

A. The Owner's Construction Representative will schedule a Pre-Construction Meeting prior to beginning of construction. The date, time, and exact place of this meeting will be determined after Contract Award and notification of all interested parties. The Contractor shall arrange to have the Job Superintendent and all prime Subcontractors present at the meeting. During the Pre-Construction Meeting, the construction procedures and information necessary for submitting payment requests will be discussed and materials distributed along with any other pertinent information.

1. Minutes: Designer will record and distribute meeting minutes.

B. Progress Meetings: The Owner's Construction Representative will conduct Monthly Progress Meetings as stated in Articles 1.8.B and 1.8.C of Section 007213 "General Conditions".

1. Minutes: Designer will record and distribute to Contractor the meeting minutes.

C. Preinstallation Conferences: Contractor shall conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.

1. Attendees: Installer and representatives of Manufacturers and Fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Designer and Construction Representative of scheduled meeting dates.
2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration including requirements for the following:

a. Contract Documents
b. Options
c. Related RFIs
d. Related Change Orders
e. Purchases
f. Deliveries
g. Submittals
h. Review of mockups
i. Possible conflicts
j. Compatibility problems
k. Time schedules
l. Weather limitations
m. Manufacturer's written recommendations
n. Warranty requirements
o. Compatibility of materials
p. Acceptability of substrates
q. Temporary facilities and controls
r. Space and access limitations
s. Regulations of authorities having jurisdiction

t. Testing and inspecting requirements
u. Installation procedures
v. Coordination with other Work
w. Required performance results
x. Protection of adjacent Work
y. Protection of construction and personnel

3. Contractor shall record significant conference discussions, agreements, and disagreements including required corrective measures and actions.
4. Reporting: Distribute minutes of the meeting to each party present and to parties who should have been present.
5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
6. Revise paragraph below if Project requires holding progress meetings at different intervals. Insert special intervals such as "every third Tuesday" to suit special circumstances.
7. Project name
8. RFI number including RFIs that were dropped and not submitted
9. RFI description
10. Date the RFI was submitted
11. Date Designer's response was received
12. Identification of related DSI or Proposal Request, as appropriate

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013115 - PROJECT MANAGEMENT COMMUNICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

B. Division 1, Section 013300 - Submittals

C. Division 1, Section 012600 – Contract Modification Procedures

1.2 SUMMARY

A. Project Management Communications: The Contractor shall use the Internet web-based project management communications tool, Trimble Unity Construct® (Formerly eBuilder) ASP software, and protocols included in that software during this project. The use of project management communications as herein described does not replace or change any contractual responsibilities of the participants.

1. Project management communications is available through Trimble Unity Construct® (Formerly eBuilder) as provided by "Trimble Unity Construct®" in the form and manner required by the Owner.
2. The project communications database is on-line and fully functional. User registration, electronic and computer equipment, and Internet connections are the responsibility of each project participant. The sharing of user accounts is prohibited

B. Support: Trimble Unity Construct® (Formerly eBuilder) will provide on-going support through on-line help files.

C. Copyrights and Ownership: Nothing in this specification or the subsequent communications supersedes the parties' obligations and rights for copyright or document ownership as established by the Contract Documents. The use of CAD/BIM files, processes or design information distributed in this system is intended only for the project specified herein.

D. Purpose: The intent of using Trimble Unity Construct®(Formerly eBuilder) is to improve project work efforts by promoting timely initial communications and responses. Secondly, to reduce the number of paper documents while providing improved record keeping by creation of electronic document files

E. Authorized Users: Access to the web site will be by individuals who are authorized users.

1. Individuals shall complete the Trimble Unity Construct (Formerly eBuilder) New Company/User Request Form located at the following web site: https://oa.mo.gov/facilities/vendor-links/contractor-forms. Completed forms shall be emailed to the following email address: OA.FMDCE-BuilderSupport@oa.mo.gov.

2. Authorized users will be contacted directly and assigned a temporary user password.
3. Individuals shall be responsible for the proper use of their passwords and access to data as agents of the company in which they are employed.

F. Administrative Users: Administrative users have access and control of user licenses and all posted items. DO NOT POST PRIVATE OR YOUR COMPANY CONFIDENTIAL ITEMS IN THE DATABASE! Improper or abusive language toward any party or repeated posting of items intended to deceive or disrupt the work of the project will not be tolerated and will result in deletion of the offensive items and revocation of user license at the sole discretion of the Administrative User(s).

G. Communications: The use of fax, email and courier communication for this project is discouraged in favor of using Trimble Unity Construct® (Formerly eBuilder) to send messages. Communication functions are as follows:

1. Document Integrity and Revisions:

   a. Documents, comments, drawings and other records posted to the system shall remain for the project record. The authorship time and date shall be recorded for each document submitted to the system. Submitting a new document or record with a unique ID, authorship, and time stamp shall be the method used to make modifications or corrections.
   b. The system shall make it easy to identify revised or superseded documents and their predecessors.
   c. Server or Client-side software enhancements during the life of the project shall not alter or restrict the content of data published by the system. System upgrades shall not affect access to older documents or software.

2. Document Security:

   a. The system shall provide a method for communication of documents. Documents shall allow security group assignment to respect the contractual parties communication except for Administrative Users. DO NOT POST PRIVATE OR YOUR COMPANY CONFIDENTIAL ITEMS IN THE DATABASE!

3. Document Integration:

   a. Documents of various types shall be logically related to one another and discoverable. For example, requests for information, daily field reports, supplemental sketches and photographs shall be capable of reference as related records.

4. Reporting:

   a. The system shall be capable of generating reports for work in progress, and logs for each document type. Summary reports generated by the system shall be available for team members.

5. Notifications and Distribution:

a. Document distribution to project members shall be accomplished both within the extranet system and via email as appropriate. Project document distribution to parties outside of the project communication system shall be accomplished by secure email of outgoing documents and attachments, readable by a standard email client.

6. Required Document Types:

a. RFI, Request for Information.
b. Submittals, including record numbering by drawing and specification section.
c. Transmittals, including record of documents and materials delivered in hard copy.
d. Meeting Minutes.
e. Application for Payments (Draft or Pencil).
f. Review Comments.
g. Field Reports.
h. Construction Photographs.
i. Drawings.
j. Supplemental Sketches.
k. Schedules.
l. Specifications.
m. Request for Proposals
n. Designer's Supplemental Instructions
o. Punch Lists

H. Record Keeping: Except for paper documents, which require original signatures and large format documents (greater than 8½ x 11 inches), all other 8½ x 11 inches documents shall be submitted by transmission in electronic form to the Trimble Unity Construct® (Formerly eBuilder) web site by licensed users.

a. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier shall respond to documents received in electronic form on the web site and consider them as if received in paper document form.
b. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier reserves the right to and shall reply or respond by transmissions in electronic form on the web site to documents actually received in paper document form.
c. The Owner and his representatives, the Designer and his consultants, and the Contractor and his Subcontractors and suppliers at every tier reserves the right to and shall copy any paper document into electronic form and make same available on the web site.

I. Minimum Equipment and Internet Connection: In addition to other requirements specified in this Section, the Owner and his representatives, the Construction Manager and his representatives, the Architect and his consultants, and the Contractor and his sub-contractors and suppliers at every tier required to have a user license(s) shall be responsible for the following:

1. Providing suitable computer systems for each licensed user at the users normal work location[1] with high-speed Internet access, i.e. DSL, local cable company's Internet connection, or T1 connection.
2. Each of the above referenced computer systems shall have the following minimum system[2] and software requirements:

    a. Desktop configuration (Laptop configurations are similar and should be equal to or exceed desktop system.)

        1) Operating System: Windows XP or newer
        2) Internet Browser: Internet Explorer 6.01SP2+ (Recommend IE7.0+)
        3) Minimum Recommend Connection Speed: 256K or above
        4) Processor Speed: 1 Gigahertz and above
        5) RAM: 512 mb
        6) Operating system and software shall be properly licensed.
        7) Internet Explorer version 7 (current version is a free distribution for download). This specification is not intended to restrict the host server or client computers provided that industry standard HTTP clients may access the published content.
        8) Adobe Acrobat Reader (current version is a free distribution for download).
        9) Users should have the standard Microsoft Office Suite (current version must be purchased) or the equivalent.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable.)

END OF SECTION 013115

[1] The normal work location is the place where the user is assigned for more than one-half of his time working on this project.
[2] The minimum system herein will not be sufficient for many tasks and may not be able to process all documents and files stored in the Trimble Unity Construct® (Formerly eBuilder) Documents area.

SECTION 013200 – SCHEDULE – BAR CHART

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes requirements for a Bar Chart Schedule for the project construction activities, schedule of submittals, and schedule for testing.

PART 2 - PRODUCTS – (Not Applicable)

PART 3 - EXECUTION

3.1 SUBMITTAL PROCEDURES

A. The Contractor shall submit to the Designer, within ten (10) working days following the Notice to Proceed, a Progress Schedule including Schedule of Values showing the rate of progress the Contractor agrees to maintain and the order in which he proposed to carry out the various phases of Work. No payments shall be made to the Contractor until the Progress Schedule has been approved by the Owner.

1. The Schedule of Values must have the following line items included with the value of the item as indicated below:

   a. O&M's (Owner's Manual)
      1) $1,000,000.00 (One million) and under – 2% of the total contract amount
      2) Over $1,000,000.00 (One million) – 1% of the total contract amount

   b. Close Out Documents
      1) $1,000,000.00 (One million) and under – 2% of the total contract amount
      2) Over $1,000,000.00 (One million) – 1% of the total contract amount

   c. General Conditions

1) No more than 10%

B. The Contractor shall submit an updated Schedule for presentation at each Monthly Progress Meeting. The Schedule shall be updated by the Contractor as necessary to reflect the current Schedule and its relationship to the original Schedule. The updated Schedule shall reflect any changes in the logic, sequence, durations, or completion date. Payments to the Contractor shall be suspended if the Progress Schedule is not adequately updated to reflect actual conditions.

C. The Contractor shall submit Progress Schedules to Subcontractors to permit coordinating their Progress Schedules to the general construction Work. The Contractor shall coordinate preparation and processing of Schedules and reports with performance of other construction activities.

3.2 CONSTRUCTION PROGRESS SCHEDULE – BAR CHART SCHEDULE

A. Bar-Chart Schedule: The Contractor shall prepare a comprehensive, fully developed, horizontal bar chart-type Contractor's Construction Schedule. The Contractor for general construction shall prepare the Construction Schedule for the entire Project. The Schedule shall show the percentage of work to be completed at any time, anticipated monthly payments by Owner, as well as significant dates (such as completion of excavation, concrete foundation work, underground lines, superstructure, rough-ins, enclosure, hanging of fixtures, etc.) which shall serve as check points to determine compliance with the approved Schedule. The Schedule shall also include an activity for the number of "bad" weather days specified in Section 012100 – Allowances.

1. The Contractor shall provide a separate time bar for each significant construction activity. Provide a continuous vertical line to identify the first working day of each week.

    a. If practical, use the same Schedule of Values breakdown for schedule time bars.

2. The Contractor shall provide a base activity time bar showing duration for each construction activity. Each bar is to indicate start and completion dates for the activity. The Contractor is to place a contrasting bar below each original schedule activity time for indicating actual progress and planned remaining duration for the activity.
3. The Contractor shall prepare the Schedule on a minimal number of separate sheets to readily show the data for the entire construction period.
4. Secure time commitments for performing critical elements of the Work from parties involved. Coordinate each element on schedule with other construction activities. Include minor elements involved in the overall sequence of the Work. Show each activity in proper sequence. Indicate graphically the sequences necessary for completion of related portions of the Work.
5. Coordinate the Contractor's Construction Schedule with the Schedule of Values, list of subcontracts, Submittal Schedule, progress reports, payment requests, and other required schedules and reports.
6. Indicate the Intent to Award and the Contract Substantial Completion dates on the schedule.

B. Phasing: Provide notations on the schedule to show how the sequence of the Work is affected by the following:
1. Work by the Owner
2. Pre-purchased materials
3. Coordination with existing construction
4. Limitations of continued occupancies
5. Un-interruptible services
6. Partial Occupancy prior to Substantial Completion
7. Site restrictions
8. Provisions for future construction
9. Seasonal variations
10. Environmental control

C. Work Stages: Use crosshatched bars to indicate important stages of construction for each major portion of the Work. Such stages include, but are not necessarily limited to, the following:
1. Subcontract awards
2. Submittals
3. Purchases
4. Mockups
5. Fabrication
6. Sample testing
7. Deliveries
8. Installation
9. Testing
10. Adjusting
11. Curing
12. Startup and placement into final use and operation

D. Area Separations: Provide a separate time bar to identify each major area of construction for each major portion of the Work. For the purposes of this Article, a "major area" is a story of construction, a separate building, or a similar significant construction element.

1. Indicate where each construction activity within a major area must be sequenced or integrated with other construction activities to provide for the following:
   a. Structural completion.
   b. Permanent space enclosure
   c. Completion of mechanical installation
   d. Completion of the electrical portion of the Work
   e. Substantial Completion

3.3 SCHEDULE OF SUBMITTALS

A. Upon acceptance of the Construction Progress Schedule, prepare and submit a complete schedule of submittals. Coordinate the submittal schedule with Section 013300 SUBMITTALS, the approved Construction Progress Schedule, list of subcontracts, Schedule of Values and the list of products.

B. Prepare the schedule in chronological order. Provide the following information

1. Scheduled date for the first submittal
2. Related Section number
3. Submittal category
4. Name of the Subcontractor
5. Description of the part of the Work covered
6. Scheduled date for resubmittal
7. Scheduled date for the Designer's final release or approval

C. Distribution: Following the Designer's response to the initial submittal schedule, print and distribute copies to the Designer, Owner, subcontractors, and other parties required to comply with submittal dates indicated.
   1. Post copies in the Project meeting room and temporary field office.
   2. When revisions are made, distribute to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned part of the Work and are no longer involved in construction activities.

D. Schedule Updating: Revise the schedule after each meeting or other activity where revisions have been recognized or made. Issue the updated schedule concurrently with the report of each meeting.

3.4 SCHEDULE OF INSPECTIONS AND TESTS

A. Prepare a schedule of inspections, tests, and similar services required by the Contract Documents. Submit the schedule with (15) days of the date established for commencement of the Contract Work. The Contractor is to notify the testing agency at least (5) working days in advance of the required tests unless otherwise specified.

B. Form: This schedule shall be in tabular form and shall include, but not be limited to, the following:
   1. Specification Section number
   2. Description of the test
   3. Identification of applicable standards
   4. Identification of test methods
   5. Number of tests required
   6. Time schedule or time span for tests
   7. Entity responsible for performing tests
   8. Requirements for taking samples
   9. Unique characteristics of each service

C. Distribution: Distribute the schedule to the Owner, Architect, and each party involved in performance of portions of the Work where inspections and tests are required.

END OF SECTION 013200

SECTION 013300 – SUBMITTALS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

B. Division 1, Section 013115 “Project Management Communications” for administrative requirements for communications.

1.2 SUMMARY

A. This Section includes administrative and procedural requirements for submittals required for performance of the Work including the following:

1. Shop Drawings
2. Product Data
3. Samples
4. Quality Assurance Submittals
5. Construction Photographs
6. Operating and Maintenance Manuals
7. Warranties

B. Administrative Submittals: Refer to General and Supplementary Conditions other applicable Division 1 Sections and other Contract Documents for requirements for administrative submittals. Such submittals include, but are not limited to, the following:

1. Construction Progress Schedule including Schedule of Values
2. Performance and Payment Bonds
3. Insurance Certificates
4. Applications for Payment
5. Certified Payroll Reports
6. Partial and Final Receipt of Payment and Release Forms
7. Affidavit – Compliance with Prevailing Wage Law
8. Record Drawings
9. Notifications, Permits, etc.

C. The Contractor is obliged and responsible to check all shop drawings and schedules to assure compliance with contract plans and specifications. The Contractor is responsible for the content of the shop drawings and coordination with other contract work. Shop drawings and schedules shall indicate, in detail, all parts of an

Item or Work including erection and setting instructions and integration with the Work of other trades.

D. The Contractor shall at all times make a copy, of all approved submittals, available on site to the Construction Representative.

1.3 SUBMITTAL PROCEDURES

A. The Contractor shall comply with the General and Supplementary Conditions and other applicable sections of the Contract Documents. The Contractor shall submit, with such promptness as to cause no delay in his work or in that of any other contractors, all required submittals indicated in Part 3.1 of this section and elsewhere in the Contract Documents. Coordinate preparation and processing of submittals with performance of construction activities. Transmit each submittal sufficiently in advance of performance of related construction activities to avoid delay.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
2. Coordinate transmittal of different types of submittals for related elements of the Work so processing will not be delayed by the need to review submittals concurrently for coordination.

    a. The Designer reserves the right to withhold action on a submittal requiring coordination with other submittals until all related submittals are received.

B. Each drawing and/or series of drawings submitted must be accompanied by a letter of transmittal giving a list of the titles and numbers of the drawings. Each series shall be numbered consecutively for ready reference and each drawing shall be marked with the following information:

1. Date of Submission
2. Name of Project
3. Location
4. Section Number of Specification
5. State Project Number
6. Name of Submitting Contractor
7. Name of Subcontractor
8. Indicate if Item is submitted as specified or as a substitution

1.4 SHOP DRAWINGS

A. Comply with the General Conditions, Article 3.2.

B. The Contractor shall submit newly prepared information drawn accurately to scale. Highlight, encircle, or otherwise indicate deviations from the Contract Documents. Do not reproduce Contract Documents or copy standard information as the basis of

Shop Drawings. Standard information prepared without specific reference to the Project is not a Shop Drawing.

C. Shop Drawings include fabrication and installation drawings, setting diagrams, schedules, patterns, templates, and similar drawings including the following information:

1. Dimensions
2. Identification of products and materials included by sheet and detail number
3. Compliance with specified standards
4. Notation of coordination requirements
5. Notation of dimensions established by field measurement
6. Sheet Size: Except for templates, patterns and similar full-size Drawings, submit Shop Drawings on sheets at least 8½”x11” but no larger than 36”x48”.

1.5 PRODUCT DATA

A. The Contractor shall comply with the General Conditions, Article 3.2.

B. The Contractor shall collect Product Data into a single submittal for each element of construction or system. Product Data includes printed information, such as manufacturer’s installation instructions, catalog cuts, standard color charts, roughing-in diagrams and templates, standard wiring diagrams, and performance curves.

1. Mark each copy to show applicable choices and options. Where printed Product Data includes information on several products that are not required, mark copies to indicate the applicable information including the following information:

a. Manufacturer’s printed recommendations
b. Compliance with Trade Association standards
c. Compliance with recognized Testing Agency standards
d. Application of Testing Agency labels and seals
e. Notation of dimensions verified by field measurement
f. Notation of coordination requirements

2. Do not submit Product Data until compliance with requirements of the Contract Documents has been confirmed.

1.6 SAMPLES

A. The Contractor shall comply with the General Conditions, Article 3.2.

B. The Contractor shall submit full-size, fully fabricated samples, cured and finished as specified, and physically identical with the material or product proposed. Samples include partial sections of manufactured or fabricated components, cuts or

containers of materials, color range sets, and swatches showing color, texture, and pattern.

1. The Contractor shall mount or display samples in the manner to facilitate review of qualities indicated. Prepare samples to match the Designer's sample including the following:
   a. Specification Section number and reference
   b. Generic description of the Sample
   c. Sample source
   d. Product name or name of the Manufacturer
   e. Compliance with recognized standards
   f. Availability and delivery time

2. The Contractor shall submit samples for review of size, kind, color, pattern, and texture. Submit samples for a final check of these characteristics with other elements and a comparison of these characteristics between the final submittal and the actual component as delivered and installed.

   a. Where variation in color, pattern, texture, or other characteristic is inherent in the material or product represented, submit at least three (3) multiple units that show approximate limits of the variations.
   b. Refer to other Specification Sections for requirements for samples that illustrate workmanship, fabrication techniques, details of assembly, connections, operation, and similar construction characteristics.
   c. Refer to other Sections for samples to be returned to the Contractor for incorporation in the Work. Such samples must be undamaged at time of use. On the transmittal, indicate special requests regarding disposition of sample submittals.
   d. Samples not incorporated into the Work, or otherwise designated as the Owner's property, are the property of the Contractor and shall be removed from the site prior to Substantial Completion.

1.7 QUALITY ASSURANCE DOCUMENTS

A. The Contractor shall comply with the General Conditions, Article 3.2

B. The Contractor shall submit quality control submittals including design data, certifications, manufacturer's instructions, manufacturer's field reports, and other quality-control submittals as required under other Sections of the Specifications.

C. Certifications: Where other Sections of the Specifications require certification that a product, material, or installation complies with specified requirements, submit a notarized certification from the Manufacturer certifying compliance with specified requirements.

   1. Signature: Certification shall be signed by an officer of the Manufacturer or other individual authorized to contractually bind the Company.

D. Inspection and Test Reports: The Contractor shall submit the required inspection and test reports from independent testing agencies as specified in this Section and in other Sections of the Contract Documents.

E. Construction Photographs: The Contractor shall submit record construction photographs as specified in this Section and in other Sections of the Contract Documents.

1. The Contractor shall submit digital photographs. The Construction Administrator shall determine the quantity and naming convention at the preconstruction meeting.
2. The Contractor shall identify each photograph with project name, location, number, date, time, and orientation.
3. The Contractor shall submit progress photographs monthly unless specified otherwise. Photographs shall be taken one (1) week prior to submitting.
4. The Contractor shall take four (4) site photographs from differing directions and a minimum of five (5) interior photographs indicating the relative progress of the Work.

1.8 OPERATING AND MAINTENANCE MANUALS AND WARRANTIES

A. The Contractor shall submit all required manufacturer's operating instructions, maintenance/service manuals, and warranties in accordance with the General Conditions, Article 3.5, and Supplementary Conditions along with this and other Sections of the Contract Documents.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 REQUIRED SUBMITTALS

A. Contractor shall submit the following information for materials and equipment to be provided under this contract.

SPEC SECTION	TITLE	CATEGORY
013200	Schedules	Construction Schedule
013200	Schedules	Schedule of Values
013200	Schedules	List of Subcontractors
013200	Schedules	Major Material Suppliers
017900	Demonstration and Training	Certification
024119	Selective Demolition	Construction Schedule
024119	Selective Demolition	Warranty

028213	Abatement	Certification
033000	Cast in Place Concrete	Product Data
033000	Cast in Place Concrete	Test Report
042200	Concrete Unit Masonry	Product Data
042200	Concrete Unit Masonry	Certification
051200	Structural Steel Framing	Product Data
051200	Structural Steel Framing	Test Report
054000	Cold-Formed Metal Framing	Product Data
054000	Cold-Formed Metal Framing	Certification
055000	Metal Fabrications	Product Data
055000	Metal Fabrications	Certification
061000	Rough Carpentry	Product Data
061000	Rough Carpentry	Certification
061600	Sheathing	Product Data
072100	Thermal Insulation	Product Data
074293	Soffit Panels	Product Data
074293	Soffit Panels	Sample
074293	Soffit Panels	Operation / Maintenance Manual
074293	Soffit Panels	Warranty
076200	Sheet Metal Flashing and Trim	Product Data
076200	Sheet Metal Flashing and Trim	Sample
078413	Penetration Firestopping	Product Data
078413	Penetration Firestopping	Certification
079200	Joint Sealants	Product Data
079200	Joint Sealants	Warranty
081113	Hollow Metal Doors and Frames	Product Data
083113	Access Doors and Frames	Product Data
084213	Aluminum-Framed Entrances	Product Data
084213	Aluminum-Framed Entrances	Operation / Maintenance Manual
084213	Aluminum-Framed Entrances	Certification
085113	Aluminum Windows	Product Data
085113	Aluminum Windows	Test Report
085113	Aluminum Windows	Sample
085113	Aluminum Windows	Operation / Maintenance Manual
087100	Door Hardware	Product Data
087100	Door Hardware	Operation / Maintenance Manual
08800	Glazing	Product Data
08800	Glazing	Shop Drawings
08800	Glazing	Test Report
08800	Glazing	Certification
08800	Glazing	Warranty

092216	Non-Structural Metal Framing	Product Data
092216	Non-Structural Metal Framing	Certification
092900	Gypsum Board	Product Data
095123	Acoustical Tile Ceilings	Product Data
095123	Acoustical Tile Ceilings	Operation / Maintenance Manual
096513	Resilient Base and Accessories	Product Data
096513	Resilient Base and Accessories	Operation / Maintenance Manual
096723	Resinous Flooring	Product Data
096723	Resinous Flooring	Certification
096723	Resinous Flooring	Sample
096723	Resinous Flooring	Operation / Maintenance Manual
099123	Interior Painting	Product Data
099123	Interior Painting	Sample
101423.16	Room-Identification Panel Signage	Product Data
101423.16	Room-Identification Panel Signage	Warranty
102113.17	Phenolic-Core Toilet Compartments	Product Data
102800	Toilet Accessories	Product Data
102800	Toilet Accessories	Warranty
102800	Toilet Accessories	Operation / Maintenance Manual
104416	Fire Extinguishers	Product Data
104416	Fire Extinguishers	Warranty
220517	Sleeves and Sleeve Seals for Plumbing Piping	Product Data
220518	Escutcheons for Plumbing Piping	Product Data
220518	Escutcheons for Plumbing Piping	Certification
220519	Meters and Gages for Plumbing Piping	Product Data
220519	Meters and Gages for Plumbing Piping	Certification
220523	General-Duty Valves for Plumbing Piping	Product Data
220523	General-Duty Valves for Plumbing Piping	Operation / Maintenance Manual
220529	Hangers and Supports for Plumbing Piping and Equipment	Product Data
220548	Vibration and Seismic Controls for Plumbing Piping and Equipment	Product Data
220553	Identification for Plumbing Piping and Equipment	Product Data
220593	Testing, Adjusting, and Balancing for Plumbing	Test Report
220593	Testing, Adjusting, and Balancing for Plumbing	Certification
220719	Plumbing Insulation	Product Data
221119	Domestic Water Piping Specialties	Product Data
221119	Domestic Water Piping Specialties	Test Report
221316	Sanitary Waste and Vent Piping	Product Data

221319	Sanitary Waste Piping Specialties	Operation / Maintenance Manual
223400	Sanitary Waste Interceptors	Product Data
223400	Sanitary Waste Interceptors	Operation / Maintenance Manual
221429	Sump Pumps	Product Data
221429	Sump Pumps	Operation / Maintenance Manual
223100	Domestic Water Softeners	Product Data
223100	Domestic Water Softeners	Operation / Maintenance Manual
223400	Fuel-Fired, Domestic-Water Heaters	Product Data
223400	Fuel-Fired, Domestic-Water Heaters	Operation / Maintenance Manual
224200	Commercial Plumbing Fixtures	Product Data
224200	Commercial Plumbing Fixtures	Operation / Maintenance Manual
224700	Drinking Fountains and Water Coolers	Product Data
224700	Drinking Fountains and Water Coolers	Operation / Maintenance Manual
2300529	Hangers and Supports for HVAC Piping and Equipment	Product Data
230553	Identification for HVAC Piping and Equipment	Product Data
230593	Testing, Adjusting, and Balancing for HVAC	Test Report
230713	Duct Insulation	Product Data
231123	Facility Natural-Gas Piping	Product Data
231123	Facility Natural-Gas Piping	Certification
231123	Facility Natural-Gas Piping	Operation / Maintenance Manual
233113	Metal Ducts	Product Data
233300	Air Duct Accessories	Product Data
233300	Air Duct Accessories	Operation / Maintenance Manual
233400	HVAC Fans	Product Data
233400	HVAC Fans	Operation / Maintenance Manual
233533	Listed Kitchen Ventilation System Exhaust Ducts	Product Data
233533	Listed Kitchen Ventilation System Exhaust Ducts	Certification
233713.23	Diffusers, Registers and Grilles	Product Data
233813	Commercial -Kitchen Hoods	Product Data
233813	Commercial -Kitchen Hoods	Shop Drawings
235533.16	Gas-Fired Unit Heaters	Product Data
235533.16	Gas-Fired Unit Heaters	Operation / Maintenance Manual
235533.16	Gas-Fired Unit Heaters	Warranty
237416.11	Packaged, Small-Capacity, Rooftop Air-Conditioning Units	Product Data
237416.11	Packaged, Small-Capacity, Rooftop Air-Conditioning Units	Operation / Maintenance Manual

237416.11	Packaged, Small-Capacity, Rooftop Air-Conditioning Units	Warranty
237433	Dedicated Outdoor-Air Units/Make-Up Air Units	Product Data
237433	Dedicated Outdoor-Air Units/Make-Up Air Units	Certification
237433	Dedicated Outdoor-Air Units/Make-Up Air Units	Operation / Maintenance Manual
260529	Hangers and Supports for Electrical Systems	Product Data
260533	Raceway and Boxes for Electrical Systems	Product Data
260548	Vibration and Seismic Controls for Electrical Systems	Product Data
260923	Lighting Control Devices	Product Data
262416	Panelboards	Product Data
262726	Wiring Devices	Product Data
262726	Wiring Devices	Operation / Maintenance Manual
262816	Enclosed Switches and Circuit Breakers	Product Data
262913	Enclosed Controllers	Product Data
265119	LED Interior Lighting	Product Data
265119	LED Interior Lighting	Operation / Maintenance Manual

END OF SECTION 013300

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 013513.28 - SITE SECURITY AND HEALTH REQUIREMENTS (MONG)

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes general Institution rules.

B. This Section includes requirements for environments that employees are domiciled in, or public participation in program activities in or adjacent to the Scope of Work area:

1. The Contractor shall have the applicable measures specified below in-place any time demolition or construction activities occur in occupied or non-occupied project work areas.
2. The Contractor shall complete all specified cleaning procedures and receive clearance from the Construction Representative prior to removing any barriers and other precautionary measures – even for areas that the employees or public do not occupy during construction.

1.3 SUBMITTALS

A. List of required submittals:

1. Materials Safety Data Sheets for all hazardous materials to be brought onsite.
2. Schedule of proposed shutdowns, if applicable.
3. A list of the names of all employees who will submit fingerprints for a background check, and the signed privacy documents identified below for each employee.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 ACCESS TO THE SITE

A. The Contractor shall arrange with Facility Representatives to establish procedures for the controlled entry of workers and materials into the work areas at the Facility.

B. The Contractor shall establish regular working hours with Facility Representatives. The Contractor must report changes in working hours or overtime to Facility Representatives and obtain approval twenty-four (24) hours ahead of time. The Contractor shall report emergency

overtime to Facility Representatives as soon as it is evident that overtime is needed. The Contractor must obtain approval from Facility Representatives for all work performed after dark.

C. The Contractor shall provide the name and phone number of the Contractor's employee or agent who is in charge onsite; this individual must be able to be contacted in case of emergency. The Contractor must be able to furnish names and address of all employees upon request.

D. All construction personnel shall visibly display issued identification badges

3.2 FIRE PROTECTION, SAFETY, AND HEALTH CONTROLS

A. The Contractor shall take all necessary precautions to guard against and eliminate possible fire hazards.

1. Onsite burning is prohibited.
2. The Contractor shall store all flammable or hazardous materials in proper containers located outside the buildings or offsite, if possible.
3. The Contractor shall provide and maintain, in good order, during construction fire extinguishers as required by the National Fire Protection Association. In areas of flammable liquids, asphalt, or electrical hazards, 15-pound carbon dioxide or 20-pound dry chemical extinguishers shall be provided.

B. The Contractor shall not obstruct streets or walks without permission from the Owner's Construction Representative and Facility Representatives.

C. The Contractor's personnel shall not exceed the speed limit of 15 mph while at the Facility unless otherwise posted.

D. The Contractor shall take all necessary, reasonable measures to reduce air and water pollution by any material or equipment used during construction. The Contractor shall keep volatile wastes in covered containers and shall not dispose of volatile wastes or oils in storm or sanitary drains.

E. The Contractor shall keep the project site neat, orderly, and in a safe condition at all times. The Contractor shall immediately remove all hazardous waste and shall not allow rubbish to accumulate. The Contractor shall provide onsite containers for collection of rubbish and shall dispose of it at frequent intervals during the progress of the Work.

F. Fire exits, alarm systems, and sprinkler systems shall remain fully operational at all times, unless written approval is received from the Owner's Construction Representative and the appropriate Facility Representative at least twenty-four (24) hours in advance. The Contractor shall submit a written time schedule for any proposed shutdowns.

G. For all hazardous materials brought onsite, Material Safety Data Sheets shall be on site and readily available upon request at least a day before delivery.

H. Alcoholic beverages or illegal substances shall not be brought upon the Facility premises. The

Contractor's workers shall not be under the influence of any intoxicating substances while on the Facility premises.

3.3 SECURITY CLEARANCES AND RESTRICTIONS

A. FMDC CONTRACTOR BACKGROUND AND ID BADGE PROCESS

1. All employees of the Contractor and Subcontractor(s) are required to submit fingerprints to the Missouri State Highway Patrol to enable the Office of Administration (OA), Division of Facilities Management, Design and Construction's (FMDC) Contractor Screening program to enter the interior of a state office building unescorted. If no access to the interior of the building is needed, background screening is not required. FMDC reserves the right to prohibit any employee of the Contractor or Subcontractor(s) from performing work in or on the premises of any facility owned, operated, or utilized by the State of Missouri for any reason.
2. The Contractor, Subcontractor(s), and their employees must comply with the process for background checks and contractor ID badges found on FMDC's website at: https://oa.mo.gov/facilities/facilities-operations/security-information/fmdc-contractor-background-and-id-badge.
3. Effective June 1, 2026, FMDC requires all forms to be submitted via the online application system and will no longer accept any other submission format for these required forms. The Contractor or Subcontractor shall submit a signed Missouri Applicant Fingerprint Privacy Notice, Authorization for Release of Information Confidentiality Oath, State Identification Badge Agreement, and a forward-facing photo with no headwear or face coverings and a solid neutral background for each employee at least 45 days prior to the expected project start date to initiate the background check process via FMDC's website at: https://oa.mo.gov/facilities/facilities-operations/security-information/fmdc-contractor-background-and-id-badge.
4. The Contractor or Subcontractor shall pay for the cost of such background checks.
5. All employees of the Contractor and Subcontractor(s) approved by FMDC to work at a State facility must obtain a contractor ID badge from FMDC prior to beginning work on-site.
6. Pursuant to section 43.540, RSMo, FMDC participates in the Missouri Rap Back and National Rap Back programs as of August 28, 2023. This means that the Missouri State Highway Patrol, Central Records Repository, and the Federal Bureau of Investigation will retain the fingerprints submitted by each of the Contractor's and Subcontractor's employees, and those fingerprints will be searched against other fingerprints on file, including latent fingerprints. While retained, an employee's fingerprints may continue to be compared against other fingerprints submitted or retained by the Federal Bureau of Investigation, including latent fingerprints.
7. As part of the Missouri and National Rap Back programs, FMDC will receive notification if a new arrest is reported for an employee whose fingerprints have been submitted for FMDC after August 28, 2023. If the employee is performing work on a State contract at the time of the arrest notification, FMDC will request and receive the employee's updated criminal history records. If the employee is no longer performing work on a State contract, FMDC will not obtain updated criminal records.
8. The Contractor or Subcontractor shall require its employees to report all arrests or convictions to the contractor immediately, and the contractor shall notify the state agency at FMDCContractorScreenings@oa.mo.gov within five (5) calendar days of the arrest or

conviction.

9. Pursuant to section 43.540, RSMo, the Missouri State Highway Patrol will provide the results of the employee's background check directly to FMDC. FMDC may NOT release the results of a background check to the Contractor or Subcontractor or provide the Contractor or Subcontractor any information obtained from a background check, either verbally or in writing. FMDC will notify the Contractor or Subcontractor only whether an employee is approved to work on State property.
10. The Contractor shall notify FMDC via email to FMDCContractorScreenings@oa.mo.gov if an employee is terminated or resigns from employment with the Contractor or Subcontractor. If the Contractor or Subcontractor does not anticipate performing work on a State contract in the future, the Contractor and Subcontractor must request that FMDC remove its employees from the Rap Back programs. However, if removed from the Rap Back programs, employees will be required to submit new fingerprints should the contractor be awarded another State contract.
11. Upon award of a Contract, the Contractor and Subcontractor(s) should contact FMDC at FMDCContractorScreenings@oa.mo.gov to determine if its employees need to provide a new background check. If a Contractor's or Subcontractor's employee has previously submitted a fingerprint background check to FMDC as part of the Missouri and National Rap Back programs, the employee may not need to submit another fingerprint search, depending upon the circumstances. The Contractor and Subcontractor(s) understand and agree that FMDC may require more frequent background checks without providing any explanation to the Contractor. The fact that an additional background check is requested by FMDC does not indicate that the employee has a criminal record.

3.4 DISRUPTION OF UTILITIES

A. The Contractor shall give a minimum of seventy-two (72) hours written notice to the Construction Representative and the Facility Representative before disconnecting electric, gas, water, fire protection, or sewer service to any building.

B. The Contractor shall give a minimum of seventy-two (72) hours written notice to the Construction Representative and Facility Representative before closing any access drives, and shall make temporary access available, if possible. The Contractor shall not obstruct streets, walks, or parking.

3.5 PROTECTION OF PERSONS AND PROPERTY

A. SAFETY PRECAUTIONS AND PROGRAMS

1. The Contractor shall at all times conduct operations under this Contract in a manner to avoid the risk of bodily harm to persons or risk of damage to any property. The Contractor shall promptly take precautions which are necessary and adequate against conditions created during the progress of the Contractor's activities hereunder which involve a risk of bodily harm to persons or a risk of damage to property. The Contractor shall continuously inspect Work, materials, and equipment to discover and determine any such conditions and shall be solely responsible for discovery, determination, and correction of any such conditions. The Contractor shall comply with applicable safety laws, standards, codes, and regulations in the jurisdiction where the Work is being

performed, specifically, but without limiting the generality of the foregoing, with rules regulations, and standards adopted pursuant to the Williams-Steiger Occupational Safety and Health Act of 1970 and applicable amendments.

2. All contractors, subcontractors and workers on this project are subject to the Construction Safety Training provisions 292.675 RSMo.
3. In the event the Contractor encounters on the site, material reasonably believed to be asbestos, polychlorinated biphenyl (PCB), lead, mercury, or other material known to be hazardous, which has not been rendered harmless, the Contractor shall immediately stop Work in the area affected and report the condition to the Owner's Representative and the Architect in writing. The Work in the affected area shall not thereafter be resumed except by written agreement of the Owner's Representative and Contractor if in fact the material is asbestos or polychlorinated biphenyl (PCB) and has not been rendered harmless. The Work in the affected area shall be resumed in the absence of asbestos or polychlorinated biphenyl (PCB), or when it has been rendered harmless by written agreement of the Owner's Representative and the Contractor. “Rendered Harmless” shall mean that levels of such materials are less than any applicable exposure standards, including but limited to OSHA regulations.

B. SAFETY OF PERSONS AND PROPERTY

1. The Contractor shall take reasonable precautions for safety of, and shall provide protection to prevent damage, injury, or loss to:

   a. clients, staff, the public, construction personnel, and other persons who may be affected thereby;
   b. the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor or the Contractor's Subcontractors of any tier; and
   c. other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

2. The Contractor shall give notices and comply with applicable laws, standards, codes, ordinances, rules, regulations, and lawful orders of public authorities bearing on safety of persons or property or their protection from damage, injury, or loss.
3. The Contractor shall erect and maintain, as required by existing conditions and performance of the Contract, safeguards for safety and protection, including, but not limited to, posting danger signs and other warnings against hazards, promulgating safety regulations, and notifying owners and users of adjacent sites and utilities.
4. When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise the highest degree of care and carry on such activities under supervision of properly qualified personnel.
5. The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in this Section caused in whole or in part by the Contractor, a Subcontractor of any tier, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable, and for which the Contractor is responsible under this Section, except damage or loss attributable solely to acts or omissions of Owner or the Architect or anyone directly or indirectly employed by either of them, or by anyone for

whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's other obligations stated elsewhere in the Contract.

6. The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents, and the maintaining, enforcing and supervising of safety precautions and programs. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner's Representative and Architect. The Contractor shall hold regularly scheduled safety meetings to instruct Contractor personnel on safety practices, accident avoidance and prevention, and the Project Safety Program. The Contractor shall furnish safety equipment and enforce the use of such equipment by its employees and its subcontractors of any tier.
7. The Contractor shall not load or permit any part of the construction or site to be loaded so as to endanger its safety.
8. The Contractor shall promptly report in writing to the Owner all accidents arising out of or in connection with the Work which cause death, lost time injury, personal injury, or property damage, giving full details and statements of any witnesses. In addition, if death, serious personal injuries, or serious property damages are caused, the accident shall be reported immediately.
9. The Contractor shall promptly notify in writing to the Owner of any claims for injury or damage to personal property related to the work, either by or against the Contractor.
10. The Owner assumes no responsibility or liability for the physical condition or safety of the Work site or any improvements located on the Work site. The Contractor shall be solely responsible for providing a safe place for the performance of the Work. The Owner shall not be required to make any adjustment in either the Contract Sum or Contract Time concerning any failure by the Contractor or any Subcontractor to comply with the requirements of this Paragraph.
11. In no event shall the Owner have control over, charge of, or any responsibility for construction means, methods, techniques, sequences or procedures or for safety precautions and programs in connection with the Work, notwithstanding any of the rights and authority granted the Owner in the Contract Documents.
12. The Contractor shall maintain at his own cost and expense, adequate, safe and sufficient walkways, platforms, scaffolds, ladders, hoists and all necessary, proper, and adequate equipment, apparatus, and appliances useful in carrying on the Work and which are necessary to make the place of Work safe and free from avoidable danger for clients, staff, the public and construction personnel, and as may be required by safety provisions of applicable laws, ordinances, rules regulations and building and construction codes.

END OF SECTION 013513.28

SECTION 015000 – CONSTRUCTION FACILITIES AND TEMPORARY CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes requirements for construction facilities and temporary controls including temporary utilities, support facilities, security, and protection.

B. Temporary utilities include, but are not limited to, the following:

1. Water service and distribution
2. Temporary electric power and light
3. Temporary heat
4. Ventilation
5. Telephone service
6. Sanitary facilities, including drinking water
7. Storm and sanitary sewer

C. Support facilities include, but are not limited to, the following:

1. Field offices and storage sheds
2. Temporary roads and paving
3. Dewatering facilities and drains
4. Temporary enclosures
5. Hoists and temporary elevator use
6. Temporary project identification signs and bulletin boards
7. Waste disposal services
8. Rodent and pest control
9. Construction aids and miscellaneous services and facilities

D. Security and protection facilities include, but are not limited to, to following:

1. Temporary fire protection
2. Barricades, warning signs, and lights
3. Sidewalk bridge or enclosure fence for the site
4. Environmental protection

1.3 SUBMITTALS

A. Temporary Utilities: Submit reports of tests, inspections, meter readings, and similar procedures performed on temporary utilities.

B. Implementation and Termination Schedule: Within (15) days of the date established for commencement of the Work, submit a schedule indicating implementation and termination of each temporary utility.

1.4 QUALITY ASSURANCE

A. Regulations: Comply with industry standards and applicable laws and regulations including, but not limited to, the following:

1. Building code requirements
2. Health and safety regulations
3. Utility company regulations
4. Police, fire department, and rescue squad rules
5. Environmental protection regulations

B. Standards: Comply with NFPA 241 “Standard for Safeguarding Construction, Alterations, and Demolition Operations”. ANSI A10 Series standards for “Safety Requirements for Construction and Demolition”, and NECA Electrical Design Library “Temporary Electrical Facilities”.

1. Electrical Service: Comply with NEMA, NECA, and UL standards and regulations for temporary electric service. Install service in compliance with NFPA 70 “National Electric Code”.

C. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

1.5 PROJECT CONDITIONS

A. Temporary Utilities: Prepare a schedule indicating dates for implementation and termination of each temporary utility. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use of permanent service.

B. Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Relocate temporary services and facilities as the Work progresses. Do not overload facilities or permit them to interfere with progress. Take necessary fire-prevention measures. Do not allow hazardous, dangerous, or unsanitary conditions, or public nuisances to develop or persist onsite.

PART 2 - PRODUCTS

2.1 MATERIALS

A. General: Provide new materials. If acceptable to the Designer, the Contractor may use undamaged, previously used materials in serviceable condition. Provide materials suitable for use intended.

B. Lumber and Plywood: Comply with requirements in Division 6 Section "Rough Carpentry".

1. For job-built temporary office, shops, and sheds within the construction area, provide UL-labeled, fire-treated lumber and plywood for framing, sheathing, and siding.

2. For signs and directory boards, provide exterior-type, Grade B-B high-density concrete form overlay plywood of sized and thicknesses indicated.

3. For fences and vision barriers, provide minimum 3/9" (9.5mm) thick exterior plywood.

4. For safety barriers, sidewalk bridges, and similar uses, provide minimum 5/8" (16mm) thick exterior plywood.

C. Gypsum Wallboard: Provide gypsum wallboard on interior walls of temporary offices.

D. Roofing Materials: Provide UL Class A standard-weight asphalt shingles or UL Class C mineral-surfaced roll roofing on roofs of job-built temporary office, shops, and shed.

E. Paint: Comply with requirements of Division 9 Section "Painting".

1. For job-built temporary offices, shops, sheds, fences, and other exposed lumber and plywood, provide exterior-grade acrylic-latex emulsion over exterior primer.

2. For sign panels and applying graphics, provide exterior-grade alkyd gloss enamel over exterior primer.

3. For interior walls of temporary offices, provide two (2) quarts interior latex-flat wall paint.

F. Tarpaulins: Provide waterproof, fire-resistant, UL-labeled tarpaulins with flame-spread rating of (15) or less. For temporary enclosures, provide translucent, nylon-reinforced laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.

G. Water: Provide potable water approved by local health authorities.

H. Open-Mesh Fencing: Provide 0.120" (3mm) thick, galvanized 2" (50mm) chainlink fabric fencing 6' (2m) high with galvanized steel pipe posts, 1½" (38mm) ID for line posts and 2½" (64mm) ID for corner posts.

2.2 EQUIPMENT

A. General: Provide new equipment. If acceptable to the Designer, the Contractor may use undamaged, previously used equipment in serviceable condition. Provide equipment suitable for use intended.

B. Water Hoses: Provide 3/4" (19mm), heavy-duty, abrasion-resistant, flexible rubber hoses 100’ (30m) long, with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.

C. Electrical Outlets: Provide properly configured, NEMA-polarized outlets to prevent insertion of 110 to 120V plugs into higher voltage outlets. Provide receptacle outlets equipped with ground-fault circuit interrupters, reset button, and pilot light for connection of power tools and equipment.

D. Electrical Power Cords: Provide grounded extension cords. Use hard-service cords where exposed to abrasion and traffic. Provide waterproof connectors to connect separate lengths of electric cords if single lengths will not reach areas where construction activities are in progress. Do not exceed safe length-voltage rating.

E. Lamps and Light Fixtures: Provide general service incandescent lamps of wattage required for adequate illumination. Provide guard cages or tempered-glass enclosures where exposed to breakage. Provide exterior fixture where exposed to moisture.

F. Heating Units: Provide temporary heating units that have been tested and labeled by UL, FM, or another recognized trade association related to the type of fuel being consumed.

G. Temporary Offices: Provide prefabricated or mobile units or similar job-built construction with lockable entrances, operable windows, and serviceable finishes. Provide heated and air-conditioned units on foundations adequate for normal loading.

H. Temporary Toilet Units: Provide self-contained, single-occupant toilet units of the chemical, aerated re-circulation, or combustion type. Provide units properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material.

I. Fire Extinguishers: Provide hand-carried, portable, UL-rated, Class A fire extinguishers for temporary offices and similar spaces. In other locations, provide hand-carried, portable, UL-rated, Class ABC, dry-chemical extinguishers, or a combination of extinguishers of NFPA-recommended classes for the exposures.

1. Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.

B. Provide each Facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

A. General: Engage the appropriate local utility company to install temporary service or connect to existing service. Where company provides only part of the service, provide the remainder with matching, compatible materials and equipment. Comply with company recommendations.

1. Arrange with company and existing users for a time when service can be interrupted, if necessary, to make connections for temporary services.
2. Provide adequate capacity at each stage of construction. Prior to temporary utility availability, provide trucked-in services.
3. Obtain easements to bring temporary utilities to the site where the Owner's easements cannot be used for that purpose.
4. Use Charges: Cost or use charges for temporary facilities are not chargeable to the Owner or Designer. Neither the Owner nor Designer will accept cost or use charges as a basis of claims for Change Order.

B. Temporary Water Service: Install water service and distribution piping of sizes and pressures adequate for construction until permanent water service is in use.

1. Sterilization: Sterilize temporary water piping prior to use.

C. Temporary Water Service: The Owner will provide water for construction purposes from the existing building system. All required temporary extensions shall be provided and removed by the Contractor. Connection points and methods of connection shall be designated and approved by the Construction Representative.

D. Temporary Electric Power Service: Provide weatherproof, grounded electric power service and distribution system of sufficient size, capacity, and power characteristics during construction period. Include meters, transformers, overload-protected disconnects, automatic ground-fault interrupters, and main distribution switch gear.

1. Install electric power service underground, except where overhead service must be used.
2. Power Distribution System: Install wiring overhead and rise vertically where least exposed to damage. Where permitted, wiring circuits not exceeding 125V, AC 20ampere rating, and lighting circuits may be nonmetallic sheathed cable where overhead and exposed for surveillance.

E. Temporary Electric Power Service: The Owner will provide electric power for construction lighting and power tools. Contractors using such services shall pay all costs of temporary services, circuits, outlet, extensions, etc.

F. Temporary Lighting: When overhead floor or roof deck has been installed, provide temporary lighting with local switching.

1. Install and operate temporary lighting that will fulfill security and protection requirements without operating the entire system. Provide temporary lighting that will provide adequate illumination for construction operations and traffic conditions.

G. Temporary Heating: Provide temporary heat required by construction activities for curing or drying of completed installations or for protection of installed construction from adverse effects of low temperatures or high humidity. Select safe equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce the ambient condition required and minimize consumption of energy.

1. Heating Facilities: Except where the Owner authorizes use of the permanent system, provide vented, self-contained, LP gas or fuel-oil heaters with individual space thermostatic control.

2. Use of gasoline-burning space heaters, open flame, or salamander heating units is prohibited.

H. Temporary Heating and Cooling: The normal heating and/or cooling system of the building shall be maintained in operation during the construction. Should the Contractor find it necessary to interrupt the normal HVAC service to spaces, which have not been vacated for construction, such interruptions shall be pre-scheduled with the Construction Representative.

I. Temporary Telephones: Provide temporary telephone service throughout the construction period for all personnel engaged in construction activities.

1. Telephone Lines: Provide telephone lines for the following:

a. Where an office has more than two (2) occupants, install a telephone for each additional occupant or pair of occupants.

b. Provide a dedicated telephone for a fax machine in the field office.

c. Provide a separate line for the Owner’s use.

2. At each telephone, post a list of important telephone numbers.

J. Temporary Toilets: Install self-contained toilet units. Use of pit-type privies will not be permitted. Comply with regulations and health codes for the type, number, location, operation, and maintenance of fixtures and facilities. Install where facilities will best serve the Project’s needs.

1. Shield toilets to ensure privacy.

2. Provide separate facilities for male and female personnel.

3. Provide toilet tissue materials for each facility.

K. Temporary Toilets: Use of the Owner's existing toilet facilities will be permitted while operational, so long as facilities are cleaned and maintained in a condition acceptable to the Owner. All construction personnel will be allowed access only to those specific facilities designed by the Construction Representative.

L. Wash Facilities: Install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a health and sanitary condition. Dispose of drainage properly. Supply cleaning compounds appropriate for each condition.

1. Provide paper towels or similar disposable materials for each facility.

2. Provide covered waste containers for used material.

3. Provide safety showers, eyewash fountains, and similar facilities for convenience, safety, and sanitation of personnel.

M. Wash Facilities: The Owner will provide wash facilities within the building while operational. All construction personnel will be allowed access only to those specific facilities designated by the Construction Representative.

N. Drinking-Water Facilities: Provide drinking-water fountains where indicated, including paper cup supply.

O. Drinking-Water Facilities: Provide containerized, tap-dispenser, bottled-water drinking-water units, including paper supply.

1. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45°F to 55°F (7°C to 13°C).

P. Drinking-Water Facilities: The Owner will provide drinking water facilities within the building while operational. All construction personnel will be allowed access only to those specific facilities designated by the Construction Representative.

Q. Provide earthen embankments and similar barriers in and around excavations and subgrade construction, sufficient to prevent flooding by runoff of storm water from heavy rains.

3.3 SUPPORT FACILITIES INSTALLATION

A. General: Locate field offices, storage sheds, and other temporary construction and support facilities for easy access.

1. Maintain support facilities until near Substantial Completion. Remove prior to Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to the Owner.

B. Storage Facilities: The Owner will provide storage onsite as designated by the Facility Representative or the Construction Representative. Areas for use by the Contractor for storage will be identified at the Pre-Bid Meeting.

C. Temporary Paving: Construct and maintain temporary roads and paving to support the indicated loading adequately and to withstand exposure to traffic during the construction period. Locate temporary paving for roads, storage areas, and parking where the same permanent facilities will be located. Review proposed modifications to permanent paving with the Designer.

1. Paving: Comply with Division 2 Section "Hot-Mixed Asphalt Paving" for construction and maintenance of temporary paving.

2. Coordinate temporary paving development with subgrade grading, compaction, installation and stabilization of subbase, and installation of base and finish courses of permanent paving.

3. Install temporary paving to minimize the need to rework the installations and to result in permanent roads and paved areas without damage or deterioration when occupied by the Owner.

4. Delay installation of the final course of permanent asphalt concrete paving until immediately before Substantial Completion. Coordinate with weather conditions to avoid unsatisfactory results.

5. Extend temporary paving in and around the construction area as necessary to accommodate delivery and storage of materials, equipment usage, administration, and supervision.

D. Construction Parking: Parking at the site will be provided in the areas designated at the Pre-Construction Meeting.

E. Construction Parking: Contractors must be prepared to discuss their storage and parking needs at the Pre-Bid Meeting. Parking for construction personnel cannot be provided onsite. All parking will be offsite. The Contractor will have to park on the street, in city-owned lots, or in commercial lots. Under no circumstances will any vehicle be parked in a fire lane. Parking on lawns shall be prohibited.

F. Dewatering Facilities and Drains: For temporary drainage and dewatering facilities and operations not directly associated with construction activities included under individual Sections, comply with dewatering requirements of applicable Division 2 Sections. Where feasible, utilize the same facilities. Maintain the site, excavations, and construction free of water.

G. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities.

1. Where heat is needed and the permanent building enclosure is not complete, provide temporary enclosures where there is no other provision for containment of heat. Coordinate enclosure with ventilating and materials drying or curing requirements to avoid dangerous conditions and effects.

2. Install tarpaulins securely with incombustible wood framing and other materials. Close openings of 25SqFt (2.3SqM) or less with plywood or similar materials.

3. Close openings through floor or roof decks and horizontal surfaces with load-bearing, wood-framed construction.

4. Where temporary wood or plywood enclosure exceeds 100SqFt (9.2SqM) in area, use UL-labeled, fire-retardant-treated material for framing and main sheathing.

H. Project Identification and Temporary Signs: Prepare project identification and other signs of size indicated. Install signs where indicated to inform the public and persons seeking entrance to the Project. Support on posts or framing of preservative-treated wood or steel. Do not permit installation of unauthorized signs.

1. Project Identification Signs: Engage an experienced sign painter to apply graphics. Comply with details indicated.

2. Temporary Signs: Prepare signs to provide directional information to construction personnel and visitors.

I. Temporary Exterior Lighting: Install exterior yard and sign lights so signs are visible when Work is being performed.

J. Collection and Disposal of Waste: Collect waste from construction areas and elsewhere daily. Comply with requirements of NFPA 241 for removal of combustible waste material and debris. Enforce requirements strictly. Do not hold materials more than seven (7) days during normal weather or three (3) days when the temperature is expected to rise above 80°F (27°C). Handle hazardous, dangerous, or unsanitary waste materials separately from other waste by containerizing properly. Dispose of material lawfully.

K. Rodent Pest Control: Before deep foundation work has been completed, retain a local exterminator or pest control company to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests. Employ this service to perform extermination and control procedures are regular intervals so the Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using environmentally safe materials.

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Except for use of permanent fire protection as soon as available, do not change over from use of temporary security and protection facilities to permanent facilities until Substantial Completion, or longer, as requested by the Designer.

B. Temporary Fire Protection: Until fire-protection needs are supplied by permanent facilities, install and maintain temporary fire-protection facilities of the types needed to protect against reasonable predictable and controllable fire losses. Comply with NFPA 10 “Standard for Portable Fire Extinguishers” and NFPA 241 “Standard for Safeguarding Construction, Alterations, and Demolition Operations”.

1. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one (1) extinguisher on each floor at or near each usable stairwell.

2. Store combustible materials in containers in fire-safe locations.

3. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire-protection facilities, stairways, and other access routes for fighting fires. Prohibit smoking in hazardous fire-exposure areas.

4. Provide supervision of welding operations, combustion-type temporary heating units, and similar sources of fire ignition.

C. Permanent Fire Protection: At the earliest feasible date in each area of the Project complete installation of the permanent fire-protection facility including connected services and place into operation and use. Instruct key personnel on use of facilities.

D. Barricades, Warning Signs, and Lights: Comply with standards and code requirements for erection of structurally adequate barricades. Paint with appropriate colors, graphics, and warning signs to inform personnel and the public of the hazard being protected against. Where appropriate and needed, provide lighting including flashing red or amber lights.

E. Security Enclosure and Lockup: Install substantial temporary enclosure of partially completed areas of construction. Provide locking entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security.

1. Storage: Where materials and equipment must be stored and are of value or attractive for theft, provide a secure lockup. Enforce discipline in connection with the installation and release of material to minimize the opportunity for theft and vandalism.

F. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations and minimize the possibility that air, waterways, and subsoil might be contaminated or polluted or that other undesirable effects might result. Avoid use of tools and equipment that produce harmful noise. Restrict use of noisemaking tools and equipment to hours that will minimize complaints from persons or firms near the site.

3.5 OPERATION, TERMINATION AND REMOVAL

A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.

B. Maintenance: Maintain facilities in good operating condition until removal. Protect from damage by freezing temperatures and similar elements.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

2. Protection: Prevent water-filled piping from freezing. Maintain markers for underground lines. Protect from damage during excavation operations.

C. Termination and Removal: Unless the Designer requests that it be maintained longer, remove each temporary facility when the need has ended, when replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of

interference with the temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are the Contractor's property. The Owner reserves the right to take possession of project identification signs.

2. Remove temporary paving not intended for or acceptable for integration into permanent paving. Where the area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil in the area. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at the temporary entrances as required by the governing authority.

3. At Substantial Completion, clean and renovate permanent facilities used during the construction period including, but not limited to, the following:

    a. Replace air filters and clean inside of ductwork and housing.

    b. Replace significantly worn parts and parts subject to unusual operating conditions.

    c. Replace lamps burned out or noticeably dimmed by hours of use.

END OF SECTION 015000

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 017100 – CLEANING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract including General and Supplementary Conditions, Bid Form, and other Division 1 Specification Sections apply to this Section.

1.2 SUMMARY

A. This Section includes administrative and procedural requirements for cleaning during the Project.

B. Environmental Requirements: Conduct cleaning and waste-disposal operations in compliance with local laws and ordinances. Comply fully with federal and local environmental and anti-pollution regulations.

1. Do not dispose of volatile wastes such as mineral spirits, oil, or paint thinner in storm or sanitary drains.
2. Burning or burying of debris, rubbish, or other waste material on the premises is not permitted.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Cleaning Agents: Use cleaning materials and agents recommended by the manufacturer or fabricator for the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 PROGRESS CLEANING

A. General

1. Retain all stored items in an orderly arrangement allowing maximum access, not impending drainage or traffic, and providing the required protection of materials.
2. Do not allow the accumulation of scrap, debris, waste material, and other items not required for construction of this Work.

3. At least once each month, and more often if necessary, completely remove all scrap, debris, and waste material from the jobsite.
4. Provide adequate storage for all items awaiting removal from the jobsite, observing all requirements for fire protection and protection of the ecology.

B. Site

1. Daily, inspect the site and pick up all scrap, debris, and waste material. Remove all such items to the place designated for their storage.
2. Weekly, inspect all arrangements of materials stored onsite. Re-stack, tidy, or otherwise service all material arrangements.
3. Maintain the site in a neat and orderly condition at all times.

C. Structures

1. Daily, inspect the structures and pick up all scrap, debris, and waste material. Remove all such items to the place designated for their storage.
2. Weekly, sweep all interior spaces clean. "Clean" for the purposes of this paragraph, shall be interpreted as meaning free from dust and other material capable of being removed by use of reasonable effort and handheld broom.
3. In preparation for installation of succeeding materials, clean the structures or pertinent portions thereof to the degree of cleanliness recommended by the manufacturer of the succeeding material, using all equipment and materials required to achieve the required cleanliness.
4. Following the installation of finish floor materials, clean the finish floor daily while work is being performed in the space in which finish materials have been installed. "Clean" for the purposes of this subparagraph, shall be interpreted as meaning free from all foreign material which, in the opinion of the Construction Representative, may be injurious to the finish of the finish floor material.

3.2 FINAL CLEANING

A. General: Provide final cleaning operations when indicated. Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit of Work to the condition expected from a commercial building cleaning and maintenance program. Comply with manufacturer's instructions.

B. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for the entire Project or a portion of the Project.

1. Clean the Project Site, yard and grounds, in areas disturbed by construction activities including landscape development areas, of rubbish, waste material, litter, and foreign substances.
2. Sweep paved areas broom clean. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
3. Remove petrochemical spills, stains, and other foreign deposits.
4. Remove tools, construction equipment, machinery, and surplus material from the site.
5. Remove snow and ice to provide safe access to the building.

6. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
7. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
8. Broom clean concrete floors in unoccupied spaces.
9. Vacuum clean carpet and similar soft surfaces removing debris and excess nap. Shampoo, if required.
10. Clean transparent material, including mirrors and glass in doors and windows. Remove glazing compounds and other substances that are noticeable vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
11. Remove labels that are not permanent labels.
12. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.

    a. Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.

13. Wipe surfaces of mechanical and electrical equipment, elevator equipment, and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
14. Clean plumbing fixtures to a sanitary condition free of stains, including stains resulting from water exposure.
15. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
16. Clean ducts, blowers, and coils if units were operated without filters during construction
17. Clean food-service equipment to a sanitary condition, ready and acceptable for its intended use.
18. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs and defective and noisy starters in fluorescent and mercury vapor fixtures.
19. Leave the Project clean and ready for occupancy.

C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid the Project of rodents, insects, and other pests. Comply with regulations of local authorities.

D. Removal of Protection: Remove temporary protection and facilities installed during construction to protect previously completed installations during the remainder of the construction period.

E. Compliances: Comply with governing regulations and safety standards for cleaning operations. Remove waste materials from the site and dispose of lawfully.

1. Where extra materials of value remain after Final Acceptance by the Owner, they become the Owner's property.

SECTION 017900 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:

1. Demonstration of operation of systems, subsystems, and equipment.
2. Training in operation and maintenance of systems, subsystems, and equipment.
3. Demonstration and training video recordings.

1.3 INFORMATIONAL SUBMITTALS

A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.

B. Attendance Record: For each training module, submit list of participants and length of instruction time.

C. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.4 CLOSEOUT SUBMITTALS

A. Demonstration and Training Video Recordings: Submit two copies within seven days of end of each training module.

1. Identification: On each copy, provide an applied label with the following information:

a. Name of Project.
b. Name and address of videographer.
c. Name of Architect.
d. Name of Construction Manager.
e. Name of Contractor.
f. Date of video recording.

2. Transcript: Prepared in PDF electronic format. Include a cover sheet with same label information as the corresponding video recording and a table of contents with links to corresponding training components. Include name of Project and date of video recording on each page.
3. At completion of training, submit complete training manual(s) for Owner's use in PDF electronic file format on compact disc.

1.5 QUALITY ASSURANCE

A. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.

B. Instructor Qualifications: A factory-authorized service representative experienced in operation and maintenance procedures and training.

C. Preinstruction Conference: Conduct conference at Project site to comply with requirements in Section 013100 "Coordination". Review methods and procedures related to demonstration and training including, but not limited to, the following:

1. Inspect and discuss locations and other facilities required for instruction.
2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
3. Review required content of instruction.
4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.6 COORDINATION

A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.

B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

C. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by Architect.

PART 2 - PRODUCTS

2.1 INSTRUCTION PROGRAM

A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by individual Specification Sections.

B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:

    a. System, subsystem, and equipment descriptions.
    b. Performance and design criteria if Contractor is delegated design responsibility.
    c. Operating standards.
    d. Regulatory requirements.
    e. Equipment function.
    f. Operating characteristics.
    g. Limiting conditions.
    h. Performance curves.

2. Documentation: Review the following items in detail:

    a. Emergency manuals.
    b. Operations manuals.
    c. Maintenance manuals.
    d. Project record documents.
    e. Identification systems.
    f. Warranties and bonds.
    g. Maintenance service agreements and similar continuing commitments.

3. Emergencies: Include the following, as applicable:

    a. Instructions on meaning of warnings, trouble indications, and error messages.
    b. Instructions on stopping.
    c. Shutdown instructions for each type of emergency.
    d. Operating instructions for conditions outside of normal operating limits.
    e. Sequences for electric or electronic systems.
    f. Special operating instructions and procedures.

4. Operations: Include the following, as applicable:

    a. Startup procedures.
    b. Equipment or system break-in procedures.
    c. Routine and normal operating instructions.
    d. Regulation and control procedures.

e. Control sequences.
f. Safety procedures.
g. Instructions on stopping.
h. Normal shutdown instructions.
i. Operating procedures for emergencies.
j. Operating procedures for system, subsystem, or equipment failure.
k. Seasonal and weekend operating instructions.
l. Required sequences for electric or electronic systems.
m. Special operating instructions and procedures.

5. Adjustments: Include the following:

a. Alignments.
b. Checking adjustments.
c. Noise and vibration adjustments.
d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:

a. Diagnostic instructions.
b. Test and inspection procedures.

7. Maintenance: Include the following:

a. Inspection procedures.
b. Types of cleaning agents to be used and methods of cleaning.
c. List of cleaning agents and methods of cleaning detrimental to product.
d. Procedures for routine cleaning
e. Procedures for preventive maintenance.
f. Procedures for routine maintenance.
g. Instruction on use of special tools.

8. Repairs: Include the following:

a. Diagnosis instructions.
b. Repair instructions.
c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
d. Instructions for identifying parts and components.
e. Review of spare parts needed for operation and maintenance.

PART 3 - EXECUTION

3.1 PREPARATION

A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Section 007213 "General Conditions".

B. Set up instructional equipment at instruction location.

3.2 INSTRUCTION

A. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1. Architect will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
2. Owner will furnish an instructor to describe Owner's operational philosophy.
3. Owner will furnish Contractor with names and positions of participants.

B. Scheduling: Provide instruction at mutually agreed on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.

1. Schedule training with Owner with at least seven days' advance notice.

C. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.

D. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

3.3 DEMONSTRATION AND TRAINING VIDEO RECORDINGS

A. General: Engage a qualified commercial videographer to record demonstration and training video recordings. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.

1. At beginning of each training module, record each chart containing learning objective and lesson outline.

B. Video: Provide minimum 640 x 480 video resolution converted to format file type acceptable to Owner, on electronic media.

1. Electronic Media: Read-only format compact disc acceptable to Owner, with commercial-grade graphic label.
2. File Hierarchy: Organize folder structure and file locations according to project manual table of contents. Provide complete screen-based menu.
3. File Names: Utilize file names based upon name of equipment generally described in video segment, as identified in Project specifications.
4. Contractor and Installer Contact File: Using appropriate software, create a file for inclusion on the Equipment Demonstration and Training DVD that describes the following for each Contractor involved on the Project, arranged according to Project table of contents:

a. Name of Contractor/Installer.
b. Business address.
c. Business phone number.
d. Point of contact.
e. E-mail address.

C. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to adequately cover area of demonstration and training. Display continuous running time.

1. Film training session(s) in segments not to exceed 15 minutes.

a. Produce segments to present a single significant piece of equipment per segment.
b. Organize segments with multiple pieces of equipment to follow order of Project Manual table of contents.
c. Where a training session on a particular piece of equipment exceeds 15 minutes, stop filming and pause training session. Begin training session again upon commencement of new filming segment.

D. Light Levels: Verify light levels are adequate to properly light equipment. Verify equipment markings are clearly visible prior to recording.

1. Furnish additional portable lighting as required.

E. Narration: Describe scenes on video recording by audio narration by microphone while video recording is recorded. Include description of items being viewed.

F. Transcript: Provide a transcript of the narration. Display images and running time captured from videotape opposite the corresponding narration segment.

G. Preproduced Video Recordings: Provide video recordings used as a component of training modules in same format as recordings of live training.

END OF SECTION 017900

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

A. The Work of this Section Includes:

1. Demolition and removal of selected portions of exterior or interior of building or structure and site elements.
2. Removal and salvage of existing items for delivery to Owner and removal of existing items for reinstallation.

B. Related Requirements:

1. Section 011000 "Summary" for restrictions on use of the premises, Owner-occupancy requirements, and phasing requirements.
2. Section 017400 “Cleaning”.

1.2 DEFINITIONS

A. Remove: Detach items from existing construction and legally dispose of off-site unless indicated to be removed and salvaged or removed and reinstalled.

B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner as indicated.

C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage; prepare for reuse; and reinstall where indicated.

D. Existing to Remain: Existing items of construction that are not to be removed.

1.3 MATERIALS OWNERSHIP

A. Unless otherwise indicated, demolition waste becomes property of Contractor.

B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.

1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.4 COORDINATION

A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

1.5 PREINSTALLATION MEETINGS

A. Predemolition Conference: Conduct conference at Project Site.

1. Inspect and discuss condition of construction to be selectively demolished.
2. Review structural load limitations of existing structure.
3. Review and finalize selective demolition schedule and verify availability of demolition personnel, equipment, and facilities needed to make progress and avoid delays.
4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
5. Review areas where existing construction is to remain and requires protection.
6. Review and finalize protection requirements.
7. Review procedures for noise control and dust control.
8. Review storage, protection, and accounting for items to be removed for salvage or reinstallation.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Statements: For refrigerant recovery technician.

B. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property, for dust control and for noise control. Indicate proposed locations and construction of barriers.

C. Schedule of Selective Demolition Activities: Indicate the following:

1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
2. Temporary interruption of utility services. Indicate how long utility services will be interrupted.
3. Coordination for shutoff, capping, and continuation of utility services.
4. Use of elevator and stairs.
5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.

D. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed in accordance with EPA regulations. Include name and address of technician and date refrigerant was recovered.

E. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.7 CLOSEOUT SUBMITTALS

A. Inventory: Submit a list of items that have been removed and salvaged.

1.8 QUALITY ASSURANCE

A. Refrigerant Recovery Technician Qualifications: Universal certified by an EPA-approved certification program.

1.9 FIELD CONDITIONS

A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.

B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.

1. Before selective demolition, Owner will remove the following items:

a. Hazardous materials
b. Trash
c. Non-functioning equipment, materials

C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

D. Hazardous Materials:

1. Hazardous materials will be removed by Owner before start of the Work.

a. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.

2. Hazardous materials are present in buildings and structures to be selectively demolished. A report on the presence of hazardous materials is on file for review and use. Examine report to become aware of locations where hazardous materials are present.

a. Hazardous material remediation is specified in Section 028213 Abatement.
b. Do not disturb hazardous materials or items suspected of containing hazardous materials. Notify Architect and Owner immediately.

E. On-site sale of removed items or materials is not permitted.

1.10 WARRANTY

A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so

as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:

1. Roof Warranty, see Appendix

B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.

B. Standards: Comply with ANSI/ASSP A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that utilities have been disconnected and capped before starting selective demolition operations.

B. Steel Tendons: Locate tensioned steel tendons and include recommendations for de-tensioning.

C. Verify that hazardous materials have been remediated before proceeding with building demolition operations.

D. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video**,** and or measured drawings.

1. Inventory and record the condition of items to be removed for salvage or reinstallation. Photograph or video conditions that might be misconstrued as damage caused by removal.
2. Photograph or video existing conditions of adjoining construction including finish surfaces, that might be misconstrued as damage caused by selective demolition operations or removal of items for salvage or reinstallation.

3.2 PREPARATION

A. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and

finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.

1. Strengthen or add new supports when required during progress of selective demolition.

B. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people, damage to adjacent buildings and facilities to remain, and for dust and debris control.

1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
4. Cover and protect furniture, furnishings, and equipment that have not been removed.
5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls." Contractor shall provide temporary barricades for safety and dust mitigation during phased construction. Coordinate with owner's rep for specific requirements. At a minimum, wood framed temporary partitions and plastic sheathing shall be used to separate occupied areas from construction areas.

C. Refrigerant: Before starting demolition, remove refrigerant from mechanical equipment in accordance with 40 CFR 82 and regulations of authorities having jurisdiction.

3.3 UTILITY SERVICES AND BUILDING SYSTEMS

A. Existing Services/Systems to Remain: Maintain utilities and building systems and equipment to remain and protect against damage during selective demolition operations.

B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utilities and building systems serving areas to be selectively demolished.

1. Arrange to shut off utilities with utility companies.
2. If disconnection of utilities and building systems will affect adjacent occupied parts of the building, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to those parts of the building.
3. Demolish and remove existing building systems, equipment, and components indicated on Drawings to be removed.

    a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
    b. Ducts to Be Removed: Remove portion of ducts indicated to be removed.
    c. Equipment to Be Removed: Disconnect and cap services and remove equipment and components.

4. Abandon existing building systems, equipment, and components indicated on Drawings to be abandoned in place.

    a. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.

5. Remove and reinstall/salvage existing building systems, equipment, and components indicated on drawings to be removed and reinstalled or removed and salvaged:

    a. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment and components; when appropriate, reinstall, reconnect, and make equipment operational.
    b. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and components and deliver to Owner.

3.4 SALVAGE/REINSTALL

A. Removed and Salvaged Items:

1. Clean salvaged items.
2. Pack or crate items after cleaning. Identify contents of containers with label indicating elements, date of removal, quantity, and location where removed.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

B. Removed and Reinstalled Items:

1. Clean and repair items to functional condition adequate for intended reuse.
2. Pack or crate items after cleaning and repairing. Identify contents of containers.
3. Protect items from damage during transport and storage.
4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

3.5 SELECTIVE DEMOLITION, GENERAL

A. General: Demolish and remove existing construction only to extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:

1. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
2. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.

3. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
4. Maintain fire watch during and for at least 30 minutes after flame-cutting operations.
5. Maintain adequate ventilation when using cutting torches.
6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
7. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
8. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.

B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

1. Do not close or obstruct streets, walks, walkways, or other adjacent occupied or used facilities without permission from Owner and authorities having jurisdiction. Provide alternate routes around closed or obstructed trafficways if required by authorities having jurisdiction.
2. Use water mist and other suitable methods to limit spread of dust and dirt. Comply with governing environmental-protection regulations. Do not use water when it may damage adjacent construction or create hazardous or objectionable conditions, such as ice, flooding, and pollution.

3.6 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

A. Concrete:

1. Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch (19 mm) at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.
2. Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, and then remove concrete between saw cuts.

B. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.

C. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished and then break up and remove.

D. Resilient Floor Coverings: Remove floor coverings and adhesive in accordance with recommendations in RFCI's "Recommended Work Practices for the Removal of Resilient Floor Coverings." Do not use methods requiring solvent-based adhesive strippers.

E. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight. See Section 075423 Thermoplastic-Polyolefin (TPO) Roofing for new roofing requirements.

1. Remove existing roof membrane, flashings, copings, and roof accessories as required for installation of new roof mounted equipment.

3.7 DISPOSAL OF DEMOLISHED MATERIALS

A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.

1. Do not allow demolished materials to accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

B. Burning: Do not burn demolished materials.

3.8 CLEANING

A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 028213 - ABATEMENT

PART 1 - GENERAL

1.1 PROJECT/WORK IDENTIFICATION

A. General: The abatement of asbestos containing materials (ACMs) specified herein shall be performed by certified and registered persons who are knowledgeable, qualified and trained in the abatement, handling, and disposal of asbestos containing material, and subsequent cleaning of the affected environment. Additionally, various components are present within the work area which were determined to be coated with lead-based paint. Removal and encapsulation of the components impacted by renovations, as specified below, shall be performed in accordance with Environmental Protection Agency's Renovation, Repair and Painting (RRP) Program.

B. The contractor shall supply all labor, materials, equipment, testing, services, permits, notifications, insurance, and incidentals which are necessary and/or required to perform the work in accordance with applicable local, state, and federal regulations; as may be necessary for the abatement of asbestos containing materials and for other work as specified in this section or as indicated in associated drawings, sketches, or details of the work.

C. Scope of Work:

- Abate/remove 9,000 square feet of asbestos-containing 9-inch by 9-inch tan floor tile with brown streaks with black mastic from Rooms 101, 103, 105, 107, 108, 109, 111, 113, the Office and Hallways.
- Abate/remove 500 square feet of asbestos-containing 9-inch by 9-inch beige and green feather floor tile with black mastic from Rooms 102 and 104.
- Abate/remove 1,500 square feet of asbestos-containing 9-inch by 9-inch brown floor tile with white feather, black with white feather, and yellow mottled floor tiles with black mastic from Various Patch Points in Classrooms and Hallways.
- Abate/remove 15 square feet of asbestos-containing black mastic from under the 9-inch by 9-inch tan floor tile and mastic mentioned above and under 9-inch by 9-inch red feathered floor tile in Room 107.
- Abate/remove 1.450 square feet of asbestos-containing 9-inch by 9-inch green and white feathered floor tile in Room 110.
- Abate/remove 315 square feet of asbestos-containing 9-inch by 9-inch green floor tile with white and dark green streaks in the Storage Rooms attached to Room 110.
- Remove blue wood lead-bearing baseboards in the basement.
- Remove white and black wood lead-bearing fascia on the exterior.
- Encapsulate blue metal lead-bearing handrail and riser in the basement.

- Encapsulate black metal lead-bearing support beam in the kitchen.
- Encapsulate gray metal lead-bearing handrail and silver metal fence on the exterior.

D. All asbestos abatement work areas must pass visual inspection as well as final clearance air-monitoring (air-monitoring that is required by St. Louis County, shall be conducted by the asbestos contractor. TPAM is the responsibility of the asbestos abatement contractor, with reports provided to the Architect).

E. Construction Administration: Regina Raineri, CASCO.

1.2 LIST OF MATERIALS CONTAINING ASBESTOS (TO BE ABATED)

Material Location	Material Description	Asbestos Content	Total Quantity
Rooms 101, 103, 105, 107, 108, 109, 111, 113, Office, and Hallways	9' by 9' Tan Floor Tile with Brown Streaks (With Black Mastic, On Concrete)	5-10% Chrysotile Detected in Floor Tile and Mastic	9,000 sf
Rooms 102 and 104	9" by9" Beige and Green Feather Floor Tile (With Black Mastic, On Concrete)	5-10% Chrysotile Detected in Floor Tile and Mastic	1,500 sf
Various Patch Points in Classrooms and Hallways	9" by 9" Brown with White Feather, Black with White Feather, and Yellow Mottled Floor Tiles (With Black Mastic, On Concrete, With 2ABC)	5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile or Tan Mastic	500 sf
Room 107	9" by 9" Red Feathered Floor Tile (With Black Mastic, On Concrete, With 2ABC)	5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile	15 sf
Room 110	9" by 9" Green and White Feathered Floor Tile (With Brown Mastic, On Concrete)	5-10% Chrysotile Detected in Floor Tile; None Detected in Mastic	1,450 sf
Storage Rooms Attached to Room 110	9" by 9" Green Floor Tile with White and Dark Green Streaks (With Brown Mastic, On Concrete)	5-10% Chrysotile Detected in Floor Tile; None Detected in Mastic	315 sf

1.3 LIST OF MATERIALS CONTAINING LEAD-BASED PAINT (TO BE REMOVED/ENCPSULATED)

Sample Location	Sample Description	Remove/Encapsulate
Basement	Blue Metal Handrail and Riser	Encapsulate
Basement – Side A	Blue Wood Baseboard	Remove
Kitchen	Black Metal Support Beam	Encapsulate
Exterior – Side D	White and Black Wood Fascia	Remove

Exterior – Side C	Gray Metal Handrail and Silver Metal Fence	Encapsulate

Contractor is responsible for verifying all materials and quantities identified above prior to submitting their bid. The *Asbestos and Lead-Based Paint Survey Activities* report is included as an appendix to the specifications.

1.4 SUMMARY OF REQUIREMENTS:

A. All work performed on this project shall be done in the strictest accordance with applicable federal, state and local regulations, standards and codes governing asbestos abatement and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among requirements or these specifications exists, the most stringent requirements shall be utilized.

C. Because asbestos exposure is a serious health hazard, construction work involving any asbestos-containing materials is regulated by the Occupational Safety and Health Administration Regulations. Compliance with OSHA regulations in the completion of this project is the sole responsibility of the contractor. OSHA regulations include, but are not limited to, conducting appropriate negative exposure assessments and/or daily personnel air monitoring. However, the following requirements will apply regardless of the removal methods to be employed:

1. Regardless of the removal methods employed, the contractor shall immediately stop work in the event of any of the following:

   a. Visible Emissions (as defined in this document), or
   b. Sanding, grinding, cutting abrading, removal by open flame, or
   c. Breathing Zone air samples exceed the PEL or Excursion Limit; furthermore, the contractor shall implement corrective work practices, make re-notification to all regulatory agencies of the changes in work practices and material conditions, and comply with all referenced regulations in this document and the applicable sections of this specification as noted.

2. If any of the conditions above are observed by the Owner's Construction Representative, then this party has the right to issue a directive to stop work. The Contractor shall be obligated to implement corrective action. The contractor shall not be entitled to additional compensation.

D. NON-FRIABLE ACM. The floor tile and mastic are considered non-friable Category I materials. All applicable federal, state, and local requirements, including notifications, should be followed.

1. Make notifications in compliance with Section 3.1 of this specification.

2. Remove and dispose of asbestos containing materials in compliance with the federal and state regulations as listed, but not necessarily limited to, those under section 1.1 of this specification.

A. Contractor shall coordinate and schedule all phases of the work of the contract documents under his control with the Construction Administrator, Facility Representative, any subcontractors, materials suppliers, and other parties involved as necessary to ensure the smooth and orderly transition of separate phases, timely placement of items and materials, cooperation between parties, and proper execution of the work.

B. All coordination necessary with the facility will be made through the Facility Representative (name and phone number shown in Special Conditions) or their designated representative. The Construction Administrator and Facility Representative prior to the start of any work will approve scheduling and access to the work areas.

C. Normal working hours of the facility will be observed in performing the work unless the Facility Representative and Construction Administrator approve the modification as addressed in the Special Conditions.

D. Contractor shall coordinate any news media inquiries or releases with the Facilities Management Design and Construction Division at (573) 751-3339.

E. The contractor, project superintendent, subcontractors, and other appropriate parties shall attend meetings as scheduled and as otherwise necessary to accomplish the work in a timely and efficient manner. Meetings shall include but are not limited to the following:

1. Pre-Construction Meeting: The Construction Administrator will schedule the pre-construction meeting after the Notice of Award has been issued. The Construction Administrator will determine the date, time, and exact place of this meeting and all necessary parties will be notified. During the meeting, discussions will be held in regard to construction procedures, scheduling requirements, general conditions, special conditions, channels of communication, responsible persons, requirements for submittals, documentation requirements, payment applications, and other pertinent information necessary for completing the work. Specific requirements of the facility in regard to security, safety, utilities, access to buildings, and related matters will also be discussed.

2. Progress Meetings: Within one month after work has commenced and once a month thereafter, when applicable, a monthly progress meeting will be held. At this meeting, previous meeting minutes will be reviewed; progress of the work in comparison to the approved schedule, planned progress, payment applications, proposed changes, and problems and corrective measures will be discussed. The contractor shall be required to submit a revised schedule to reflect actual conditions as per Article 15 of the General Conditions at this meeting.

3. If, in the opinion of the Construction Administrator, additional meetings are required to maintain progress or scheduling requirements on the work, additional meetings will be scheduled.

F. All fees required for notifications, re-notifications, and/or inspections by the Department of Natural Resources shall be paid by the contractor. If necessary, bulk samples analysis information required in conjunction with the notification to the Missouri Department of Natural Resources, U. S. Environmental Protection Agency or city having jurisdiction shall be provided by the contractor unless provided within this specification.

1.6 TERMINOLOGY/DEFINITIONS/ABBREVIATIONS

A. Definitions:

1. Abatement: The Encapsulation, Enclosure and/or Removal of Asbestos Containing Materials (ACM). For Category I Non-friable ACM which will remain non-friable throughout disposal, abatement procedures will be modified and simplified as found within these and other applicable regulations.

2. Adequately Wet: To sufficiently mix or penetrate with liquid to prevent the release of particulates.

3. AHERA: Asbestos Hazard Emergency Response Act of 1966 (P.L. 99-519).

4. Aggressive Air Sampling: Sweeping of floors, ceilings and walls and other surfaces with the exhaust of a minimum of one (1) horsepower leaf blower or equivalent immediately prior to air monitoring.

5. Air Sampling Professional: An individual, certified by the State of Missouri, who supervises air sampling activities during asbestos abatement projects.

6. Air Sampling Technician: An individual, under the supervision of an Air Sampling Professional, who performs air sampling during asbestos abatement projects.

7. Asbestos: The asbestiform varieties of serpentinite (chrysotile, antigorite), riebeckite (crocidolite), cummintonite-grumerite (amosite), anthophyllite, and actinolite-tremolite. For purposes of determining respiratory and worker protection both the asbestiform and non-asbestiform varieties of the above materials and any of these materials that have been chemically treated and/or altered shall be considered as asbestos.

8. Asbestos Abatement Project Designer: An individual, certified by the State of Missouri, who prepares plans and specifications for asbestos abatement projects.

9. Asbestos Abatement Supervisor: An individual, certified by the State of Missouri, who directs, controls, and/or supervises workers during an asbestos abatement project.

10. Asbestos Abatement Worker: An individual, certified by the State of Missouri, who performs asbestos abatement.

11. Asbestos-Containing Material (ACM): Any material or product which contains more than 1 percent asbestos by weight as determined by using the Polarized Light Microscopy method.

12. Asbestos-Containing Building Material (ACBM): Surfacing ACM, thermal system insulation ACM, or miscellaneous ACM that is found in or on building components.

13. Asbestos Containing Building Material (ACBM) Repair: The restoration of ACBM to an undamaged condition or to an intact state so as to prevent fiber release.

14. Asbestos-Containing Waste Material (ACWM): Any material to be removed from a work area for disposal that is an asbestos containing material (ACM) or is suspected of being contaminated with ACM.

15. Barrier: Any surface that seals off the work area to inhibit the movement of asbestos fibers.

16. Breathing Zone: A hemisphere forward of the shoulders with a radius of approximately 6 to 9 inches.

17. Category I Non-friable ACM: Asbestos-containing packings, gaskets, resilient floor covering and asphalt roofing products containing more than one percent (1%) asbestos as determined using the method specified in 40 CFR part 763, subpart F, Appendix A, section 1, Polarized Light Microscopy.

18. Category II Non-friable ACM: Any material, excluding category I non-friable ACM, containing more than one percent (1%) asbestos as determined using the methods specified in 40 CFR part 768, subpart F, Appendix A, section 1, Polarized Light Microscopy that, when dry, cannot be crumbled, pulverized or reduced to powder by hand pressure.

19. Certified Industrial Hygienist (C.I.H.): An industrial hygienist, certified in Comprehensive Practice by the American Board of Industrial Hygiene.

20. Competent Person: An individual, capable of identifying existing asbestos hazards in the workplace and who has authority to take prompt corrective measures to eliminate them. His duties include: establishing the negative-pressure enclosure, ensuring its integrity, and controlling entry to and exit from the enclosure; supervising any employee exposure monitoring; ensuring that all employees working within such an enclosure wear the appropriate personal protective equipment, are trained in the use of appropriate methods of exposure control, and in the use of hygiene facilities and decontamination procedures; and ensuring that engineering controls in use are in proper operating condition and are functioning properly. An individual who has been certified by the State of Missouri as an Asbestos Abatement Supervisor is considered a “Competent Person”.

21. Owner’s Construction Representative: An employee of the Division of Design and Construction representing the Director during the construction phase of the contract commencing at Notice of Award.

22. Containment: Area where asbestos abatement project is conducted. Area must be enclosed either by a glove bag or plastic sheeting barriers.

23. Critical Barrier: Plastic sheeting or other material to be placed over Work Area openings (i.e., windows, HVAC supply and return vents, doors, electrical fixtures, etc.).

24. Decontamination Facility: The serial arrangement of rooms or spaces for the purpose of separating the work site from the building environment upon entering the Work Area and for the cleaning of persons, equipment and contained waste prior to returning to the clean environment.

25. Disposal Bag: A properly labeled 6 mil. thick leak-tight clear plastic bag used for transporting asbestos waste from work site and to the disposal site.

26. Encapsulant (Sealant): A liquid material which can be applied to asbestos-containing material and which prevents the release of asbestos fibers from the ACM either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the ACM and binding its components together (penetrating encapsulant) or is specifically designed to minimize fiber release during removal of ACM (removal encapsulant).

27. Encapsulation: Treatment of asbestos-containing materials with an encapsulant.

28. Enclosure: The construction of an airtight, impact resistant barrier to isolate a surface coated with ACM.

29. Friable: Any material which when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

30. Glove Bag: A manufactured or fabricated device, typically constructed of six mil transparent polyethylene or polyvinyl chloride plastic. This device consists of two inward projecting long sleeves, an internal tool pouch and an attached, labeled receptacle for asbestos waste.

31. Initial Exposure Assessment: Is a required assessment to be performed by the Contractor's Competent Person (Asbestos Abatement Supervisor) concerning the exposure potential of a specific asbestos projects, or series of similar asbestos projects. If it is concluded that the employee exposures during the project are likely to be consistently below the Permissible Exposure Limit, the Contractor establishes a Negative Initial Exposure Assessment.

32. Outside Air: Air outside containment.

33. Permissible Exposure Limit (PEL): Eight-hour time weighted average of 0.1 fibers/cubic centimeter.

34. Personal Monitoring: Sampling of the asbestos fiber concentrations within the Breathing Zone.

35. Regulated Asbestos-Containing Material (RACM): Friable asbestos material; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading; or Category II non-friable ACM that has a high

probability of becoming or has become crumbled, pulverized or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations.

36. Removal: To take out or eliminate ACM from building components, materials, substrates.

37. Third Party Air Monitor (TPAM): The Air Sampling Professional who conducts air monitoring in who is not under the direct control of the abatement contractor and who has been selected by the owner.

38. Visible Emission: Any discharge of an air contaminant into the atmosphere that is visually detectable without the aid of instruments.

39. Work Area: A specific room or physically isolated portion of a room, other than the space enclosed within a glove bag, in which friable asbestos-containing material is required to be handled in accordance with current federal and state regulations. The area is designated as a work area from the time that the room, or portion of it, is secured and access restrictions are in place. The area remains designated as a work area until the time that it has been cleaned in accordance with any requirements applicable to the operations conducted.

B. Abbreviations:

1. AIA: American Institute of Architects

2. AIHA: American Industrial Hygiene Association

3. MoDNR: Missouri Department of Natural Resources

4. DEQ: Division of Environmental Quality, MoDNR

5. DOT: U. S. Department of Transportation

6. EPA: U. S. Environmental Protection Agency

7. MDH: Missouri Department of Health

8. NIOSH: National Institute for Occupational Safety and Health

9. NVLAP: National Voluntary Laboratory Accreditation Program

10. OSHA: Occupational Safety and Health Administration, U. S. Department of Labor.

1.7 CODES AND REGULATIONS

A. This section sets forth governmental regulations and industry standards which are included and incorporated herein by reference and made a part of this specification.

B. Requirements include adherence to work practices and procedures set forth in applicable

codes, regulations and standards.

C. General Applicability of Codes, Regulations and Standards: Except to the extent that more explicit or more stringent requirements are written directly into the contract documents, all applicable codes, regulations standards, statutes, laws and rules have the same force and effect (and are made a part of the contract documents by reference) as if copied directly into the contract documents, or as if published copies are bound herewith. In the event of conflicting applicable codes, regulations, standards, statutes, laws, or rules, the more stringent shall apply to these specifications.

D. Contractor Responsibility: The contractor shall assume full responsibility and liability for compliance with all applicable federal, state, and local regulations pertaining to work practices, hauling, disposal and protection of workers, visitors to the site, and persons occupying areas adjacent to the site. The contractor is responsible for providing medical examinations and maintaining medical records of personnel as required by the applicable federal, state, and local regulations. The contractor shall hold the owner harmless for failure to comply with any applicable work, hauling, disposal, safety, health, record keeping or other regulation on the part of himself, his employees, or his subcontractors.

E. Requirements which govern asbestos abatement work or hauling and disposal of asbestos waste materials include but are not limited to the following:

1. U. S. Department of Labor, Occupational Safety and Health Administration (OSHA) including but not limited to:

    a. Title 20, Part 1910, Section 1001 and Part 1926, Section 58 of the Code of Federal Regulations.
    b. Respiratory Protection, Title 29, Part 1910, Section 134 of the Code of Federal Regulations.
    c. Construction Industry, Title 29, Part 1926, of the Code of Federal Regulations.
    d. Access to Employee Exposure and Medical Records, Title, 29, Part 1910, Section 2 of the Code of Federal Regulations.
    e. Hazard Communication, Title 29, Part 1910, Section 1200 of the Code of Federal Regulations.
    f. Specifications for Accident prevention Signs and Tags, Title 29, Part 1910, Section 145 of the Code of Federal Regulations.

2. U. S. Environmental Protection Agency (EPA) including but not limited to:

    a. National Emission Standards for Hazardous Air Pollutants (NESHAPS) Title 40, Part 61, Subpart M of the Code of Federal Regulations.
    b. Asbestos Hazard Emergency Response Act (AHERA), Public Law (99-519) applicable only on schools.
    c. Asbestos-Containing Materials in Schools: Title 40, Part 763 of the Code of Federal Regulations, applicable only on schools.

3. U. S. Department of Transportation (DOT)

    a. Title 49, Part 172, Section 101 of the Code of Federal Regulations.

4. State of Missouri

   a. H.B. 77, 85th General Assembly.
   b. Missouri Air Conservation Law, Chapter 643.
   c. Due to a recent court decision, the following Code of State Regulations do not apply to this specification:

      1. 10 CSR 10-6.020, Definitions
      2. 10 CSR 10-6.080, Emission Standards for Hazardous Air Pollutants.
      3. 10 CSR 10-6.230, Administrative Penalties
      4. 10 CSR 10-6.240, Asbestos Abatement Projects-Registration, Notification and Performance Requirements.
      5. 10 CSR 10-6.250, Asbestos Abatement Projects - Certification, Accreditation, and Business Exemption Requirements.

PART 2 - ADDITIONAL INFORMATION/REQUIREMENTS

A. Paint within the work area was identified as lead-based paint which will be impacted by renovation activities. Wooden components which were identified as lead-bearing which will be impacted by renovation will be removed. Metal components which will be impacted by renovations activities and were identified as lead-bearing will be encapsulated. This work must be performed by individuals who have been trained in accordance with the EPAs RRP Program. The Contractor is required to be Renovation, Repair and Painting Program (RRP)-certified.

B. The work areas will have power and light available. The contractor will be responsible for providing additional lighting/power, as needed.

C. The Construction Administration will be provided the preferred route for the load out of the materials.

D. **All signage, equipment and material shall be kept within the work area. No signs shall be placed in public areas.**

PART 3 - EXECUTION

3.1 NOTIFICATIONS

A. If material being removed amounts to more than 16 LF, 10 SF or if abatement is being done prior to a demolition, Notification shall be completed and sent by the contractor not less than ten (10) days before the intended starting date of the project. For amounts less than the above, contractor shall send a courtesy Notification. Use EPA form “Notification of Demolition and Renovation”, and the SLCDOH form “Asbestos Project Notification”, to the following:

   1. SLCDOH
      111 S. Meramec
      Clayton, MO 63105

2. Provide copies of these notifications to the state's independent oversight consultant, the Construction Administrator.

B. A Post-Notification report shall be completed and sent by the Contractor to the agencies listed in 3.1A above within 45 days of the completion of the project.

3.2 SUBMITTALS

A. The following submittals will be required of the contractor prior to commencement of work and are subject to approval by the Owner's Construction Representative. The contractor shall send one copy of the submittals for approval and then send approved copies of the submittals to the distribution list as discussed at the Pre-Construction Conference.

1. Copy of Material Safety Data Sheets (MSDS) for each product to be used by the contractor in the performance of his work. Contractor will also maintain copies of the MSDS on site, per OSHA.

2. A copy of the notifications to regulatory agencies as required in Section 2.1 of this specification.

3. Current training certificates and MoDNR licenses for project superintendent, asbestos abatement supervisor(s), and asbestos workers. Superintendent shall meet the qualifications established in Section 2.8 of these specifications.

4. Name, address, and contact person's name of testing laboratory or laboratories to be utilized by the contractor (this is <u>not</u> the TPAM) in analyzing samples for bulk analysis or air monitoring from taking personal air samples. Required by OSHA.

5. Provide a detailed work schedule with milestones for the completion of the project within the established timeframe.

6. Provide a disposal plan to detail the types of disposal containers to be used, the methods of transportation to the disposal site, the waste hauler, and disposal site. Copies of notifications required as part of the emergency notification plan in Section 3.6 of this specification.

B. Upon completion of the work and prior to final payment, the following information must be submitted to the Construction Administrator.

1. Waste disposal receipts and waste shipment record on all asbestos waste removed from the project. The enclosed Waste Shipment Record and Receipt form (or something similar) must be used for every load brought to the waste disposal site. The disposal and/or shipment record <u>must</u> include the following information:

a. Work site name and address
b. Project Number
c. Owner's name and telephone
d. Operator's (Contractor's) name, address and telephone

e. Waste Disposal Site name, address and telephone
f. Name and address of responsible agency
g. Type of materials and quantity in cubic yards
h. Name, address and phone number of transporter, and date of transport
i. Name, address and phone number of Waste Disposal Site representative and date material was received.

2. Written certification from the TPAM as required in Section 3.7 of this specification. (Applies only to materials considered RACM.)

3. "Asbestos Post Notification" form, within 45 days of the completion of the project.

4. Any other specific requirements spelled out in the General Conditions.

3.3 TESTING LABORATORY

A. Testing laboratories utilized by the contractor for OSHA required sample analysis during the project shall meet the following minimum requirements.

B. For bulk sample analysis the laboratory must be accredited by the National Voluntary Laboratory Accreditation Program for asbestos fiber analysis.

C. For air samples analyzed by Phase Contrast Microscopy, the laboratory must be accredited by the American Industrial Hygiene Association.

D. For air samples analyzed by Transmission Electron Microscopy, the laboratory must be accredited by the National Voluntary Laboratory Accreditation Program.

E. On-site analysis by Phase Contrast Microscopy, when applicable, shall be by an Air Sampling Technician or Air Sampling Professional.

F. Neither the contractor, nor any of his principals, officers, or directors may have any financial or business interests in any laboratory utilized on this contract.

3.4 LOCAL AREA PROTECTION/SITE SECURITY

A. The contractor shall be responsible for all areas of the building used by him and/or subcontractors in the performance of the work. He shall exert full control over the actions of all employees and other persons with respect to the use and preservation of the existing building, except such controls as may be specifically reserved to the owner by these specifications.

B. The contractor has the right to exclude from the work area all persons who have no purpose related to the work or its inspection, and shall require all persons in the work area to observe the same regulations as he requires his employees.

C. The contractor shall have control of site security during abatement operations in order to protect his work and equipment. He will have the owner's assistance in notifying building occupants of impending activity and enforcement of restricted access by owner's employees.

D. The contractor shall keep, as a minimum, two 10 lbs. type ABC fire extinguishers on site at all times. One extinguisher will be maintained outside the work area and one inside the work area. The contractor's employees shall be trained in the use and operation of the extinguishers. (Applies only to interior work.)

E. As a minimum requirement, barriers must be constructed of regulatory specified layers of poly and ½-inch plywood and 2-inch by 4-inch framing 16 inches on center, with lockable door, to isolate any areas from employees, clients, and the public. (For outside work, where such barriers are impractical, other regulatory compliant poly containment methods can be considered/accepted on a case-by-case basis. Use of barrier tape on non-RACM roof projects can be considered/accepted on a case-by-case basis.)

F. The contractor shall use as small an area as necessary for storage of supplies and equipment and shall keep in a neat and orderly fashion. Trash must be removed daily and will not be allowed to accumulate.

G. The contractor shall maintain the work area free from rubbish, debris, and dirt and keep a clean safe work area. The contractor shall take measures to keep surfaces free from contamination or shall clean and lock down surfaces after work is done, protect with plastic sheeting and/or plywood during work, or remove from the work area.

H. Contractor is responsible for all damage to the structure other than that required for the removal of the ACMs. At the conclusion of the project, the contractor must repair such incidental damage including tape and glue residue, paint coatings and damage to surfaces, finishes and building components.

3.5 WORKER PROTECTION/TRAINING (AS NOTED)

A. The contractor shall be responsible for providing his employees with proper respiratory protection, respiratory training, a written respirator program, medical examinations, protective clothing and equipment and for maintaining medical records to comply with OSHA requirements.

B. The contractor shall be responsible for all testing and costs incurred for complying with requirements OSHA regulations for Personal Monitoring.

C. All workers are to be trained in the dangers inherent in handling asbestos and breathing asbestos dust and in proper work procedures and personal and protective measures.

3.6 EMERGENCY PROTECTION PLAN

A. The contractor shall be responsible for developing a written site-specific Emergency Protection Plan and shall maintain this plan on site. The plan shall include considerations for asbestos leakage from site, fire, explosion, toxic atmospheres, electrical hazards, slips, falls, and heat related injury. All employees shall be instructed and trained in the procedures.

B. Emergency protection planning shall also include written notification of police, fire, and medical personnel of the planned abatement activities, work schedule, and the layout of the work area, particularly barriers that may affect response capabilities.

3.7 THIRD PARTY AIR MONITORING (TPAM)

A. The Owner will contract with an Air Sampling Professional to perform the following minimum duties:

1. Review Contractor's submittals and work plan and provide recommendations.

2. As a minimum, during abatement operations, at least three samples daily shall be collected outside the work area at locations of barriers separating the work areas from other portions of the building. One sample shall be required at the decontamination entrance to the area. Samples shall be analyzed by PCM. Any result above the action level or OSHA PEL of 0.1 f/cc (8 hr TWA), or EL of 1.0 f/cc (30 min TWA) must be immediately reported to the Construction Administrator and cause operations to cease and corrective measures be taken.

3. Provide Construction Administrator with reports describing amount and type of work done, regulatory concerns, notable air monitoring reports, etc.

4. A visual clearance of the work area will be conducted prior to clearance.

5. Clearance air samples will be collected from within the work area as discussed in Section 3.9.

6. Certify that the contractor's procedures, methods, and practices were in full compliance with current federal or state regulations, using the Appendix A form "TPAM Statement of Compliance".

B. The TPAM shall be independent from the abatement contractor.

3.8 SUPERINTENDENCE OF ABATEMENT

A. The contractor shall designate an abatement superintendent, subject to approval of the contractor's representative, who will serve as the contractor's representative on the project and will ensure that all work is performed in compliance with all applicable regulations and following minimum requirements:

1. The Abatement Superintendent must be certified as an Asbestos Abatement Supervisor, and must have at least one year full time experience in asbestos abatement work.

2. Shall be on site whenever work is going on.

3. Maintain a daily log documenting project events, visitations/inspections, problems, and accidents.

4. Implement first aid, safety training, respiratory protection, and ensure workers are trained in emergency procedures.

5. Conduct visual inspection of the work area prior to TPAM's final clearance inspection. This inspection shall be documented on the form "Contractor's

Superintendent Visual Inspection Report", Appendix B of specification 13240A Asbestos Abatement Forms.

6. Supervise activities of any subcontractors of the contractor to ensure compliance with contract documents.

7. Duties shall include those for the "Competent Person" as defined in this specification.

3.9 FINAL CLEARANCE REQUIREMENTS

A. All critical barriers and/or containment must remain in place until work area is cleared by TPAM and Construction Manager in accordance with this section.

B. Following the completion of the abatement work, the abatement superintendent shall notify the Construction Administrator. The superintendent shall then perform a visual inspection of the work area. If satisfactory, he shall contact the TPAM. The TPAM shall perform a visual inspection and final air monitoring for clearance if he/she feels the abatement has been completed.

C. Aggressive air sampling shall be performed by the TPAM.

D. All clearance samples will be analyzed, at a minimum, by the PCM (NIOSH 7400) method, unless specifically stated elsewhere within this specification. The TPAM shall take a minimum of 5 samples inside each affected work space (or one per room whichever is greater), 1 field blank and 1 sealed blank. The abatement shall be considered complete when the result of each of 5 inside clearance samples indicate airborne fiber (> 0.25 um dia. X 5 um L) concentrations are no greater than the PCM limit of quantitation of 0.01 f/cc of air. Test results should be made available to the contractor within 24 hours.

If the NIOSH 7400 PCM clearance sampling method fails, then the TEM method 7402 may be utilized to further evaluate the air sample(s) that exceed 0.01 f/cc. The TPAM will be responsible for determining if a failing PCM sample will be analyzed by TEM 7402.

E. Any work areas failing to meet the clearance requirements of this section shall be re-cleaned and re-tested at the contractor's expense until satisfactory levels are obtained. The owner will not reimburse the contractor for re-cleaning the work area. The TPAM will separate their costs for the re-testing from their already agreed upon services. The owner will deduct, by contract change, the cost of the TPAM's re-testing activities including any lab fees, travel and re-inspection and/or air monitoring fees from the contractor's contract amount.

3.10 RE-ESTABLISHMENT OF THE WORK AREA AND SYSTEMS

A. Re-establishment of the work area shall only occur after the contractor has complied with the clearance requirements of Section 2.9. Upon clearance, and prior to the removal of barriers, an encapsulant shall be applied by the contractor. All barriers, signs, trash, and equipment shall then be removed from the site. All electrical and HVAC systems shall be re-established.

B. All damage to finishes, equipment, and/or the area affected by the abatement shall be repaired by the contractor to equal or better condition as was prior to the work, at no cost

to the owner.

3.11 WASTE DISPOSAL

A. All ACWM shall be disposed of in compliance with current federal and state regulations.

B. RACM and category II nonfriable ACM that is disposed of in Missouri shall be disposed of in a sanitary landfill having a state permit to operate. ACM shall be disposed of in a demolition landfill or a sanitary landfill having a state permit to operate. The landfill shall handle all ACWM so that it does not become friable. Demolition landfills shall cover category I nonfriable ACM with at least six (6) inches of soil or non-asbestos waste at the end of each operating day.

C. A chain of custody letter/waste shipment record and disposal receipts shall be provided to the owner for all materials disposed of. The attached Waste Shipment Record and Receipt form (or something similar) may be used.

D. The waste shipment record shall be originated and signed by the waste generator and shall be used to track and substantiate the disposition of ACWM.

3.12 LISTING OF ASBESTOS CONTAINING MATERIALS (ACMs)

See the Asbestos and Lead-Based Paint Survey Activities prepared by SCI Engineering, Inc. and dated February 5, 2026. This report identifies the ACM's type/color/friability and percent asbestos content, location, and approximate quantity. These tables are meant to assist the abatement contractor, by providing a listing of all available info used to develop the asbestos abatement specification, drawing(s), and SOW. It is the responsibility of the Contractor to field verify all ACM locations, conditions, and quantities.

END OF SECTION 028213

APPENDIX A

CONTRACTOR/SUPERVISOR'S ASBESTOS ABATEMENT COMPLETION CERTIFICATION FORM

PROJ NUMBER/TITLE: _____

_____

SITE/BLDG NAME: _____

_____

WORK AREA(S): _____

_____

ABATEMENT CONTRACTOR: _____

TPAM CONSULTANT: _____

I_____, hereby certify that all asbestos abatement work has been
(Print abatement Contractor/Supervisor representative name)
completed in accordance with the project's contract documents; applicable Federal, State, and Local asbestos regulations; and I affirm that I have inspected and found the abatement work area to be free of visible dust and debris, and ready for subsequent TPAM final clearance.

_____ _____
Signature of Contractor/Supervisor Date and Time

APPENDIX B

THIRD PARTY AIR MONITORING (TPAM) REPRESENTATIVE'S FINAL CLEARANCE CERTIFICATION FORM

PROJ NUMBER/TITLE: _____

_____

SITE/BLDG NAME: _____

_____

WORK AREA(S): _____

_____

ABATEMENT CONTRACTOR: _____

TPAM CONSULTANT: _____

I_____certify that I have monitored the abatement contractor's work; and have
(Print TPAM representative's name)
inspected and found the abatement contractor's work to be 100% complete, free of visible dust/debris, ready for final clearance air monitoring; and affirm that the completed project has achieved passing Final Clearance Air Monitoring, and that the affected area is safe for reoccupancy and operational use.

_____ _____
Signature of TPAM representative Date and Time

SECTION 033000 – CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Concrete standards.
2. Concrete materials.
3. Admixtures.
4. Curing materials.
5. Accessories.
6. Repair materials.
7. Concrete mixture materials.
8. Concrete mixture class types.
9. Concrete mixing.

1.2 DEFINITIONS

A. Cementitious Materials: Portland cement or blended hydraulic cement alone or in combination with one or more of the following:

1. Fly ash, slag cement, other pozzolans, and silica fume; materials subject to compliance with requirements.

B. Water/Cementitious Materials (w/cm) Ratio: The ratio by weight of mixing water to cementitious materials.

1. Special concrete finish Subcontractor.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Portland cement.
2. Blended hydraulic cement.
3. Performance-based hydraulic cement.
4. Fly ash.
5. Slag cement.
6. Silica fume.
7. Natural or other pozzolans.
8. Aggregates.

9. Ground calcium carbonate and aggregate mineral fillers.
10. Admixtures:

    a. Include limitations of use. Admixtures that do not comply with reference ASTM International requirements must be submitted with test data for approval.

11. Curing materials.
12. Joint fillers.
13. Repair materials.

B. Design Mixtures: For each concrete mixture, include the following:

1. Mixture identification.
2. Compressive strength at 28 days or other age as specified.
3. Compressive strength required at stages of construction.
4. Durability exposure classes for Exposure Categories F, S, W, and C.
5. Maximum w/cm ratio.
6. Slump or slump flow limit.
7. Air content.
8. Nominal maximum aggregate size.
9. Submit adjustments to design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant changes.

C. Shop Drawings:

1. Construction Joint Layout: Indicate proposed construction joints required to construct the structure.

    a. Location of construction joints is subject to approval of the Architect.

D. Concrete Schedule: For each location of each class of concrete indicated in "Concrete Mixture Class Types" Article, including the following:

1. Concrete class designation.
2. Location within Project.
3. Exposure class designation.
4. Formed surface finish designation and final finish.
5. Final finish for floors.

1.4 INFORMATIONAL SUBMITTALS

A. Testing Agency: Include documentation indicating compliance with ASTM E329 or ASTM C1077 and copies of applicable ACI certificates for testing technicians or ACI Concrete Construction Special Inspector - MH, ASCC.

B. Material Test Reports: For the following:

1. Portland cement.

2. Fly ash.
3. Slag cement.
4. Silica fume.
5. Natural or other pozzolans.
6. Aggregates.
7. Admixtures.

C. Field quality-control reports.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: A qualified Installer who employs Project personnel qualified as an ACI-certified Concrete Flatwork Associate and Concrete Flatwork Finisher and a supervisor who is a certified ACI Advanced Concrete Flatwork Finisher/Technician or an ACI Concrete Flatwork Finisher with experience installing and finishing concrete.

B. Ready-Mixed Concrete Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C94/C94M requirements for production facilities and equipment.

C. Laboratory Testing Agency Qualifications: A testing agency qualified in accordance with ASTM C1077 and ASTM E329 for testing that performs duties on behalf of the Architect/Engineer.

1. Personnel performing laboratory tests to be an ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician, Level 1. Testing agency laboratory supervisor tests to be an ACI-certified Concrete Laboratory Testing Technician, Level 2.

D. Field Quality-Control Testing Agency Qualifications: An independent agency qualified in accordance with ASTM C1077 and ASTM E329 for testing indicated.

1. Personnel conducting field tests on plastic concrete properties are to be qualified as an ACI Concrete Field Testing Technician, Grade 1, in accordance with policies from ACI CPP 610.1 or an equivalent certification program.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Comply with ASTM C94/C94M and ACI 301 (ACI 301M).

1.7 FIELD CONDITIONS

A. Cold-Weather Placement: Comply with ACI 301 (ACI 301M) as follows:

1. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.

2. When air temperature has fallen to, or is expected to fall below 40 deg F (4.4 deg C) during the protection period, maintain delivered concrete mixture temperature within the temperature range required by ACI 301 (ACI 301M).
3. Do not use frozen materials or materials containing ice or snow.
4. Do not place concrete in contact with surfaces less than 35 deg F (1.7 deg C), other than reinforcing steel.

B. Hot-Weather Placement: Comply with ACI 301 (ACI 301M) and ACI 305.1 (ACI 305.1M), and as follows:

1. Maintain concrete temperature at time of discharge to not exceed 95 deg F (35 deg C).
2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

1.8 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to furnish replacement sheet vapor retarder/termite barrier material and accessories for sheet vapor retarder/ termite barrier and accessories that do not comply with requirements or that fail to resist penetration by termites within specified warranty period.

1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 CONCRETE STANDARDS

A. ACI Publications: Comply with ACI 301 (ACI 301M) unless modified by requirements in the Contract Documents.

2.2 CONCRETE MATERIALS

A. Cementitious Materials:

1. Portland Cement: ASTM C150/C150M, Type I or Type II.
2. Blended Hydraulic Cement: ASTM C595/C595M, Type IL, Portland-limestone cement.
3. Pozzolans: ASTM C618, Class C, F, or N.
4. Slag Cement: ASTM C989/C989M, Grade 100 or 120.
5. Ground Glass Pozzolan: ASTM C1866/C1866M, Type GS or GE.

B. Normal-Weight Aggregates:

1. Coarse Aggregate: ASTM C33/C33M,
2. Maximum Coarse-Aggregate Size: 3/4 inch (19 mm).
3. Fine Aggregate: ASTM C33/C33M.

4. Recycled Aggregate: Provide documentation of characteristics of recycled aggregate and mechanical properties and durability of proposed concrete, which incorporates recycled aggregate to conform to appliable requirements for the class of concrete.

2.3 ADMIXTURES

A. Air-Entraining Admixture: ASTM C260/C260M.

B. Chemical Admixtures: Do not use calcium chloride or admixtures containing calcium chloride in steel-reinforced concrete.

1. Water-Reducing Admixture: ASTM C494/C494M, Type A.
2. Retarding Admixture: ASTM C494/C494M, Type B.
3. Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type D.
4. High-Range, Water-Reducing Admixture: ASTM C494/C494M, Type F.
5. High-Range, Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type G.
6. Admixtures with special properties, with documentation of claimed performance enhancement, ASTM C494/C494M, Type S.

C. Mixing Water for Concrete Mixtures and Water Used to Make Ice: ASTM C1602/C1602M. Include documentation of compliance with limits for alkalis, sulfates, chlorides, or solids content of mixing water from Table 2 in ASTM C1602/C1602M.

2.4 VAPOR RETARDERS

A. Sheet Vapor Retarder, Class C: ASTM E1745, Class C not less than 10 mils (0.25 mm) thick. Include manufacturer's recommended adhesive or pressure-sensitive joint tape.

1. Puncture Resistance: 140 lbf (662 N) when tested in accordance with ASTM E154/E154M.

2.5 CURING MATERIALS

A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.

B. Absorptive Cover: AASHTO M 182, Class 2, burlap cloth made from jute or kenaf, weighing approximately 9 oz./sq. yd. (305 g/sq. m) when dry.

C. Moisture-Retaining Cover: ASTM C171, polyethylene film burlap-polyethylene sheet.

D. Curing Paper: 8 ft. (2438 mm) wide paper, consisting of two layers of fibered kraft paper laminated with double coating of asphalt.

E. Water: Potable water that does not cause staining of the surface.

F. Clear, Waterborne, Membrane-Forming, Dissipating Curing Compound: ASTM C309, Type 1, Class B.

2.6 ACCESSORIES

A. Expansion- and Isolation-Joint-Filler Strips: ASTM D1751, asphalt-saturated cellulosic fiber.

B. Semirigid Joint Filler: Two-component, semirigid, 100 percent solids, epoxy resin with a Type A shore durometer hardness of 80 or aromatic polyurea with a Type A shore durometer hardness range of 90 to 95 in accordance with ASTM D2240.

C. Bonding Agent: ASTM C1059/C1059M, Type II, non-redispersible, acrylic emulsion or styrene butadiene.

D. Epoxy Bonding Adhesive: ASTM C881/C881M, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade and class to suit requirements, and as follows:

2.7 CONCRETE MIXTURE MATERIALS

A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, in accordance with ACI 301 (ACI 301M).

1. Use a qualified testing agency for preparing and reporting proposed mixture designs, based on laboratory trial mixtures.

B. Admixtures: Use admixtures in accordance with manufacturer's written instructions.

2.8 CONCRETE MIXTURE CLASS TYPES

A. Class A: Normal-weight concrete used for footings, and floor slab.

1. Exposure Class: ACI 318 (ACI 318M)
2. Minimum Compressive Strength: 4000 psi (27.6 MPa
3. Air Content:

    a. Exposure Class F1: [5.0 percent, plus or minus 1.5 percent at point of delivery for concrete containing 3/4-inch (19-mm) nominal maximum aggregate size

4. Compressive strength or alternative methods of estimating in-place strength of concrete by maturity or other nondestructive testing with acceptable correlation between test results and concrete compressive strength 4,000 psi at 28 days.

2.9 CONCRETE MIXING

A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete in accordance with ASTM C94/C94M and furnish delivery ticket.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:

1. Before placing concrete, verify that installation of concrete forms, accessories, reinforcement, and embedded items is complete and that required inspections have been performed.
2. Do not proceed until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Provide reasonable auxiliary services to accommodate field testing and inspections, acceptable to testing agency, including the following:

1. Daily access to the Work.
2. Incidental labor and facilities necessary to facilitate tests and inspections.
3. Secure space for storage, initial curing, and field curing of test samples, including source of water and continuous electrical power at Project site during site curing period for test samples.
4. Security and protection for test samples and for testing and inspection equipment at Project site.

3.3 TOLERANCES

A. Comply with ACI 117 (ACI 117M).

3.4 INSTALLATION OF EMBEDDED ITEMS

A. Place and secure anchorage devices and other embedded items required for adjoining Work that is attached to or supported by cast-in-place concrete.

1. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

3.5 INSTALLATION OF VAPOR RETARDERS

A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder in accordance with ASTM E1643 and manufacturer's written instructions.

1. Install vapor retarder with longest dimension parallel with direction of concrete pour.
2. Face laps away from exposed direction of concrete pour.
3. Lap joints 6 inches (150 mm) and seal with manufacturer's recommended tape.
4. Seal penetrations in accordance with vapor retarder manufacturer's instructions.
5. Protect vapor retarder during placement of reinforcement and concrete.

    a. Repair damaged areas by patching with vapor retarder material, overlapping damages area by 6 inches (150 mm) on all sides and sealing to vapor retarder.

3.6 INSTALLATION OF CAST-IN-PLACE CONCRETE

A. Before placing concrete, verify that installation of formwork, reinforcement, embedded items, and vapor retarder is complete and that required inspections are completed.

1. Immediately prior to concrete placement, inspect vapor retarder for damage and deficient installation, and repair defective areas.
2. Provide continuous inspection of vapor retarder during concrete placement and make necessary repairs to damaged areas as Work progresses.

B. Notify Architect and testing and inspection agencies 24 hours prior to commencement of concrete placement.

C. Water addition in transit or at the Project site must be in accordance with ASTM C94/C94M and must not exceed the permitted amount indicated on the concrete delivery ticket.

D. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness.

1. If a section cannot be placed continuously, provide construction joints as indicated.
2. Deposit concrete to avoid segregation.
3. Deposit concrete in horizontal layers of depth not to exceed formwork design pressures and in a manner to avoid inclined construction joints.
4. Consolidate placed concrete with mechanical vibrating equipment in accordance with ACI 301 (ACI 301M).

E. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.

1. Do not place concrete floors and slabs in a checkerboard sequence.
2. Consolidate concrete during placement operations, so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
3. Maintain reinforcement in position on chairs during concrete placement.
4. Screed slab surfaces with a straightedge and strike off to correct elevations.

5. Level concrete, cut high areas, and fill low areas.
6. Slope surfaces uniformly to drains where required.
7. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface.
8. Do not further disturb slab surfaces before starting finishing operations.

3.7 INSTALLATION OF JOINTS

A. Construct joints true to line, with faces perpendicular to surface plane of concrete.

1. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
2. Use epoxy-bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
3. Sawed Joints: Form control joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch (3-mm-) wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random cracks.

B. Isolation Joints in Slabs-on-Ground: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.

1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated on Drawings.
2. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.

C. Doweled Joints:

1. Install dowel bars and support assemblies at joints where indicated on Drawings.

D. Dowel Plates: Install dowel plates at joints where indicated on Drawings.

3.8 APPLICATION OF FINISHING FLOORS AND SLABS

A. Trowel Finish:

1. After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel.
2. Continue troweling passes and re-straighten until surface is free of trowel marks and uniform in texture and appearance.
3. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
4. Do not add water to concrete surface. Use of an approved finishing aid is acceptable.
5. Do not apply troweled finish to concrete, which has a total air content greater than 3 percent.

6. Apply a trowel finish to interior slab surfaces.
7. Finish surfaces to the following tolerances, in accordance with ASTM E1155 (ASTM E1155M), for a randomly trafficked floor surface:

    a. Slabs on Ground:

3.9 INSTALLATION OF MISCELLANEOUS CONCRETE ITEMS

A. Filling in:

1. Fill in holes and openings left in concrete structures after Work of other trades is in place unless otherwise indicated.
2. Mix, place, and cure concrete, as specified, to match color and texture with in-place construction exposed to view.
3. Provide other miscellaneous concrete filling indicated or required to complete the Work.

B. Equipment Bases and Foundations:

1. Coordinate sizes and locations of concrete bases with actual equipment provided.
2. Construct concrete bases 4 inches (100 mm)
3. Minimum Compressive Strength: 4000 psi (27.6 MPa)at 28 days.
4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 24-inch (600-mm) centers around the full perimeter of concrete base or as shown on the construction drawings.
5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete substrate.
6. Prior to pouring concrete, place and secure anchorage devices.

    a. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
    b. Cast anchor-bolt insert into bases.
    c. Install anchor bolts to elevations required for proper attachment to supported equipment.

3.10 APPLICATION OF CONCRETE CURING

A. Protect freshly placed concrete from premature drying and excessive cold or hot temperatures.

1. Comply with ACI 301 (ACI 301M) for cold weather protection during curing.
2. Comply with ACI 301 (ACI 301M) and ACI 305.1 (ACI 305.1M) for hot-weather protection during curing.

B. Curing Formed Surfaces: Comply with ACI 308.1 (ACI 308.1M) as follows:

1. Membrane-Forming Curing Compound: Apply uniformly in continuous operation by power spray or roller in accordance with manufacturer's written instructions.

a. Recoat areas subject to heavy rainfall within three hours after initial application.
b. Maintain continuity of coating and repair damage during curing period.

C. Curing Unformed Surfaces: Comply with ACI 308.1 (ACI 308.1M) as follows:

1. Begin curing after finishing concrete.
2. Interior Concrete Floors:

a. Floors to Receive Floor Coverings Specified in Other Sections: Contractor has option of the following:

1) Absorptive Cover: As soon as concrete has sufficient set to permit application without marring concrete surface, install prewetted absorptive cover over entire area of floor.

a) Lap edges and ends of absorptive cover not less than 12 inches (300 mm).
b) Maintain absorptive cover water saturated, and in place, for duration of curing period, but not less than seven days.

2) Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches (300 mm), and sealed by waterproof tape or adhesive.

a) Immediately repair any holes or tears during curing period, using cover material and waterproof tape.
b) Cure for not less than seven days.

3) Ponding or Continuous Sprinkling of Water: Maintain concrete surfaces continuously wet for not less than seven days, utilizing one, or a combination of, the following not in cold weather:

a) Water.
b) Continuous water-fog spray.

b. Floors To Receive Curing and Sealing Compound:

1) Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller in accordance with manufacturer's written instructions.
2) Recoat areas subjected to heavy rainfall within three hours after initial application.
3) Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.11 APPLICATION OF LIQUID FLOOR TREATMENTS

A. Penetrating Liquid Floor Treatment: Prepare, apply, and finish penetrating liquid floor treatment in accordance with manufacturer's written instructions. Applied to the new basement floor foundation pads.

B. Product: Concrete surface densifier/hardener Lithium Silicate product or equal.

C. Application

1. Remove curing compounds, sealers, oil, dirt, laitance, and other contaminants and complete surface repairs.
2. Do not apply to concrete that is less than 28 days' old.
3. Apply liquid until surface is saturated, scrubbing into surface until a gel forms; rewet; and repeat brooming or scrubbing.
4. Rinse with water; remove excess material until surface is dry.
5. Apply a second coat in a similar manner if surface has received a float finish or abrasive surface preparation.

D. Sealing Coat: Uniformly apply a continuous sealing coat of curing and sealing compound to hardened concrete by power spray or roller in accordance with manufacturer's written instructions.

3.12 INSTALLATION OF JOINT FILLING

A. Prepare, clean, and install joint filler in accordance with manufacturer's written instructions.

B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joints clean and dry.

C. Install semirigid joint filler full depth in saw-cut joints and at least 2 inches (50 mm) deep in formed joints.

D. Overfill joint, and trim joint filler flush with top of joint after hardening.

3.13 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a special inspector to perform field tests and inspections and prepare testing and inspection reports.

B. Testing Agency: a qualified testing and inspecting agency to perform tests and inspections and to submit reports.

1. Testing agency to be responsible for providing curing facility for initial curing of strength test specimens on-site and verifying that test specimens are cured in accordance with standard curing requirements in ASTM C31/C31M.

2. Testing agency to immediately report to Architect, Contractor, and concrete manufacturer any failure of Work to comply with Contract Documents.
3. Testing agency to report results of tests and inspections, in writing, to Owner, Architect, Contractor, and concrete manufacturer within 48 hours of inspections and tests.

    a. Test reports to include reporting requirements of ASTM C31/C31M, ASTM C39/C39M, and ACI 301 (ACI 301M), including the following as applicable to each test and inspection:

        1) Project name.
        2) Name of testing agency.
        3) Names and certification numbers of field and laboratory technicians performing inspections and testing.
        4) Name of concrete manufacturer.
        5) Date and time of inspection, sampling, and field testing.
        6) Date and time of concrete placement.
        7) Location in Work of concrete represented by samples.
        8) Date and time sample was obtained.
        9) Truck and batch ticket numbers.
        10) Design compressive strength at 28 days.
        11) Concrete mixture designation, proportions, and materials.
        12) Field test results of fresh concrete, including slump or slump flow, air content, temperature and density.
        13) Information on storage and curing of samples at the Project site, including curing method and maximum and minimum temperatures during initial curing period.
        14) Type of fracture and compressive break strengths at seven days and 28 days.

4. Provide a space and source of power or other resources for curing and access to test specimens by the testing agency.

C. Delivery Tickets: comply with ASTM C94/C94M.

D. Inspections:

1. Headed bolts and studs.
2. Verification of use of required design mixture.
3. Concrete placement, including conveying and depositing.
4. Curing procedures and maintenance of curing temperature.
5. Verification of concrete strength before removal of shores and forms from beams and slabs.

E. Concrete Tests: Testing of composite samples of fresh concrete obtained in accordance with ASTM C 172/C 172M to be performed in accordance with the following requirements:

1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd. (4 cu. m), but less than 25 cu. yd. (19 cu. m).

a. When frequency of testing provides fewer than five compressive-strength tests for each concrete mixture, testing is to be conducted from at least five randomly selected batches or from each batch if fewer than five are used.

2. Slump: ASTM C143/C143M:

a. One test at point of delivery for each composite sample, but not less than one test for each day's pour of each concrete mixture.
b. Perform additional tests as needed.

3. Slump Flow: ASTM C1611/C1611M:

a. One test at point of delivery for each composite sample when strength test specimens are cast, but not less than one test for each day's pour of each concrete mixture.
b. Perform additional tests as needed.

4. Compressive-Strength Tests: ASTM C39/C39M.

a. Test one set of three standard cured specimens at seven days and one set of two specimens at 28 days.
b. A compressive-strength test to be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.

5. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests of standard cured cylinders equals or exceeds specified compressive strength, and no compressive-strength test value falls below specified compressive strength by more than 500 psi (3.4 MPa)
6. Additional Tests:

a. Testing and inspecting agency to make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect.
b. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C42/C42M or by other methods as directed by Architect.

1) Acceptance criteria for concrete strength to be in accordance with ACI 301 (ACI 301M), Section 1.7.6.3.

7. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
8. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

3.14 PROTECTION

A. Protect concrete surfaces as follows:

1. Protect from petroleum stains.
2. Diaper hydraulic equipment used over concrete surfaces.
3. Prohibit vehicles from interior concrete slabs.
4. Prohibit use of pipe-cutting machinery over concrete surfaces.
5. Prohibit placement of steel items on concrete surfaces.
6. Prohibit use of acids or acidic detergents over concrete surfaces.
7. Protect liquid floor treatment from damage and wear during the remainder of construction period. Use protective methods and materials, including temporary covering, recommended in writing by liquid floor treatments installer.
8. Protect concrete surfaces scheduled to receive surface hardener or polished concrete finish using floor slab protective covering.

END OF SECTION 033000

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 042200 - CONCRETE UNIT MASONRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specifications Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Concrete masonry units.
2. Mortar and grout materials.
3. Reinforcement.
4. Masonry-joint reinforcement.

B. Related Requirements:

1. Section 033000 “Cast-in-Place Concrete” for installation of new concrete slab infill.

1.3 DEFINITIONS

A. CMU(s): Concrete masonry unit(s).

B. Reinforced Masonry: Masonry containing reinforcing steel in grouted cells.

1.4 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

B. Shop Drawings: For the following:

1. Masonry Units: Show sizes, profiles, coursing, and locations of special shapes.
2. Reinforcing Steel: Detail bending, lap lengths, and placement of unit masonry reinforcing bars. Comply with ACI 315. Reference drawings for locations.
3. Lintel design and types required.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For testing agency.

B. Material Certificates: For each type and size of the following:

1. Masonry units.

a. Include both data on material properties and material test reports substantiating compliance with requirements.

2. Integral water repellent used in CMUs, if not surface treated.
3. Cementitious materials. Include name of manufacturer, brand name, and type.
4. Mortar admixtures.
5. Preblended, dry mortar mixes. Include description of type and proportions of ingredients.
6. Grout mixes. Include description of type and proportions of ingredients.
7. Reinforcing bars.

C. Mix Designs: For each type of mortar and grout. Include description of type and proportions of ingredients.

1. Include test reports for mortar mixes required to comply with property specification. Test in accordance with ASTM C109/C109M for compressive strength, ASTM C1506 for water retention, and ASTM C91/C91M for air content.

D. Statement of Compressive Strength of Masonry: For each combination of masonry unit type and mortar type, provide statement of average net-area compressive strength of masonry units, mortar type, and resulting net-area compressive strength of masonry determined in accordance with TMS 402/602.

E. Weather Procedures:

1. Hot-Weather Procedures: Detailed description of methods, materials, and equipment to be used to comply with requirements.

1.6 QUALITY ASSURANCE

A. Testing Agency Qualifications: Qualified in accordance with ASTM C1093 for testing indicated.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store masonry units on elevated platforms in a dry location. If units are not stored in an enclosed location, cover tops and sides of stacks with waterproof sheeting, securely tied. If units become wet, do not install until they are dry.

B. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.

C. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.

D. Deliver preblended, dry mortar mix in moisture-resistant containers. Store preblended, dry mortar mix in delivery containers on elevated platforms in a dry location or in covered weatherproof dispensing silos.

E. Store masonry accessories, including metal items, to prevent corrosion and accumulation of dirt and oil.

1.8 FIELD CONDITIONS

A. Do not apply uniform floor or roof loads for at least 12 hours and concentrated loads for at least three days after building masonry walls.

B. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry to be left exposed or painted. Immediately remove grout, mortar, and soil that come in contact with such masonry.

1. Protect base of walls from rain-splashed mud and from mortar splatter by spreading coverings on ground and over wall surface.
2. Protect sills, ledges, and projections from mortar droppings.
3. Protect surfaces of window and door frames, as well as similar products with painted and integral finishes, from mortar droppings.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Source Limitations for Masonry Units: Obtain exposed masonry units of a uniform texture and color, or a uniform blend within the ranges accepted for these characteristics, from single source from single manufacturer for each product required.

B. Source Limitations for Mortar Materials: Obtain mortar ingredients of a uniform quality, including color for exposed masonry, from single manufacturer for each cementitious component and from single source or producer for each aggregate.

C. Source Limitations for Integral Water Repellent: Obtain integral water-repellent units from CMU and mortar manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Provide unit masonry that develops indicated net-area compressive strengths at 28 days.

1. Determine net-area compressive strength of masonry from average net-area compressive strengths of masonry units and mortar types (unit-strength method) in accordance with Tables 1 and 2 in TMS 402/602.
2. Determine net-area compressive strength of masonry by testing masonry prisms accordance with ASTM C1314.

B. Regulatory Requirements: Comply with the provisions of the following codes, specifications, and standards, except as otherwise shown or specified:

1. TMS 402/602:

a. Maintain one copy of the standard in Project field office at all times during construction. Contractor's supervisory personnel are to be thoroughly familiar with this material as it applies to Project.

2.3 CONCRETE UNIT MASONRY, GENERAL

A. Masonry Standard: Comply with TMS 402/602 except as modified by requirements in the Contract Documents.

B. Defective Units: Referenced masonry unit standards may allow a certain percentage of units to contain chips, cracks, or other defects exceeding limits stated. Do not use units where such defects are exposed in the completed Work.

C. Shapes: Provide shapes indicated and as follows, with exposed surfaces matching exposed faces of adjacent units unless otherwise indicated.

1. Provide special shapes for lintels, corners, jambs, sashes, movement joints, headers, bonding, and other special conditions.

D. Building Lintels:

1. Masonry Lintels: Prefabricated or built-in-place masonry lintels made from bond beam CMUs matching adjacent CMUs in color, texture, and density classification, with reinforcing bars placed as indicated and filled with coarse grout.

a. Knockout blocks will not be acceptable.

2.4 CONCRETE MASONRY UNITS

A. Standard CMUs: Non-load-bearing ASTM C129.

1. Unit Compressive Strength: Provide units with minimum average net-area compressive strength of 2150 psi (14.8 MPa).
2. Density Classification: Normal weight, unless otherwise indicated.
3. Size (Width): Manufactured to dimensions 3/8 inch (10 mm) less-than-nominal dimensions.
4. Exposed Faces: Provide color and texture matching the range as indicated in the construction drawings.

2.5 MORTAR AND GROUT MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce mortar color indicated.

1. Alkali content is not more than 0.1 percent when tested in accordance with ASTM C114.

B. Hydrated Lime: ASTM C207, Type S.

C. Portland Cement-Lime Mix: Packaged blend of Portland cement and hydrated lime containing no other ingredients.

D. Masonry Cement: ASTM C91/C91M.

E. Mortar Cement: ASTM C1329/C1329M.

F. Aggregate for Mortar: ASTM C144.

1. For mortar that is exposed to view, use washed aggregate consisting of natural sand or crushed stone.

G. Aggregate for Grout: ASTM C404.

H. Water-Repellent Mortar Admixture: Liquid water-repellent admixture added to mortar, intended for use with CMUs containing integral water repellent from same manufacturer.

I. Water: Potable.

2.6 REINFORCEMENT

A. Uncoated-Steel Reinforcing Bars: ASTM A615/A615M or ASTM A996/A996M, Grade 60

B. Reinforcing Bar Positioners: Wire units designed to fit into mortar bed joints spanning masonry unit cells and to hold reinforcing bars in center of cells. Units are formed from 0.12-inch, 11 ga wire (3.77-mm) steel wire, hot-dip galvanized after fabrication. Provide units designed for number of bars indicated.

C. Masonry-Joint Reinforcement, General: Ladder type complying with ASTM A951/A951M.

1. Exterior and Interior Walls: Hot-dip galvanized carbon steel.
2. Wire Size for Side Rods: 0.12-inch, 11 ga. (3.77-mm) diameter.
3. Wire Size for Cross Rods: 0.12-inch, 11 ga. (3.77-mm) diameter.
4. Spacing of Cross Rods: Not more than 16 inches (406 mm) o.c.
5. Provide in lengths of not less than 8 ft. (3 m). 24" laps.

2.7 MISCELLANEOUS MASONRY ACCESSORIES

A. Masonry Cleaners:

1. Proprietary Acidic Masonry Cleaner: Manufacturer's standard-strength, general-purpose cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from masonry surfaces of type indicated below without discoloring or damaging masonry surfaces; expressly approved for intended use by manufacturer of masonry units being cleaned.

2.8 MORTAR AND GROUT MIXES

A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.

1. Do not use calcium chloride in mortar or grout.
2. Use Portland cement-lime mortar unless otherwise indicated.
3. For reinforced masonry, use Portland cement-lime mortar.
4. Add cold-weather admixture (if used) at same rate for all mortar that will be exposed to view, regardless of weather conditions, to ensure that mortar color is consistent.

B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.

C. Mortar for Unit Masonry: Comply with ASTM C270, Property Specification. Provide the following types of mortar for applications stated unless another type is indicated.

1. For masonry below grade or in contact with earth, use Type S (wet application).
2. For reinforced masonry, use Type S (wet application).
3. For mortar parge coats, use Type S (wet application).
4. For interior non-load-bearing partitions, Type S (wet application).

D. Grout for Unit Masonry: Comply with ASTM C476.

1. Use grout of type indicated or, if not otherwise indicated, of type (fine or coarse) that will comply with TMS 402/602 for dimensions of grout spaces and pour height.
2. Proportion grout in accordance with ASTM C476, Table 1.
3. Provide grout with a slump of 8 to 11 inches (200 to 280 mm) as measured in accordance with ASTM C143/C143M.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. For the record, prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.
2. Verify that foundations are within tolerances specified.
3. Verify that reinforcing dowels are properly placed.
4. Verify that substrates are free of substances that would impair mortar bond.

B. Before installation, examine rough-in and built-in construction for piping systems to verify actual locations of piping.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Build chases and recesses to accommodate items specified in this and other Sections.

B. Leave openings for equipment to be installed before completing masonry. After installing equipment, complete masonry to match construction immediately adjacent to opening.

C. Use full-size units without cutting if possible. If cutting is required to provide a continuous pattern or to fit adjoining construction, cut units with motor-driven saws; provide clean, sharp, unchipped edges. Allow units to dry before laying unless wetting of units is specified. Install cut units with cut surfaces and, where possible, cut edges concealed.

D. Where existing masonry occurs, match coursing, bonding, color, and texture of existing masonry.

3.3 TOLERANCES

A. Dimensions and Locations of Elements:

1. For dimensions in cross section or elevation, do not vary by more than plus 1/2 inch (13 mm) or minus 1/4 inch (6 mm).
2. For location of elements in plan, do not vary from that indicated by more than plus or minus 1/2 inch (13 mm).
3. For location of elements in elevation, do not vary from that indicated by more than plus or minus 1/4 inch (6 mm) in a story height or 1/2 inch (13 mm) total.

B. Lines and Levels:

1. For bed joints and top surfaces of bearing walls, do not vary from level by more than 1/4 inch in 10 ft. (6 mm in 3 m). Place level on interior floor slab.

C. Joints:

1. For bed joints, do not vary from thickness indicated by more than plus or minus 1/8 inch (3 mm), with a maximum thickness limited to 1/2 inch (13 mm).

3.4 LAYING MASONRY WALLS

A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint thicknesses and for accurate location of openings, movement-type joints, returns, and offsets. Avoid using less-than-half-size units, particularly at corners, jambs, and, where possible, at other locations.

B. Bond Pattern for Exposed Masonry: Unless otherwise indicated, lay exposed masonry in running bond; do not use units with less-than-nominal 4-inch (100-mm) horizontal face dimensions at corners or jambs.

C. Stopping and Resuming Work: Stop work by stepping back units in each course from those in course below; do not tooth. When resuming work, clean masonry surfaces that are to receive mortar, remove loose masonry units and mortar, and wet brick if required before laying fresh masonry.

3.5 MORTAR BEDDING AND JOINTING

A. Lay hollow CMUs as follows:

1. Bed face shells in mortar and make head joints of depth equal to bed joints.
2. Bed webs in mortar in all courses of piers, columns, and pilasters.
3. Bed webs in mortar in grouted masonry, including starting course on footings.
4. Fully bed entire units, including areas under cells, at starting course on footings where cells are not grouted.

B. Lay solid CMUs with completely filled bed and head joints; butter ends with sufficient mortar to fill head joints and shove into place. Do not deeply furrow bed joints or slush head joints.

C. Where applicable, set masonry trim units in full bed of mortar with full vertical joints. Fill dowel, anchor, and similar holes.

1. Clean soiled surfaces with fiber brush and soap powder and rinse thoroughly with clear water.
2. Wet joint surfaces thoroughly before applying mortar.
3. Rake out mortar joints for pointing with sealant.

D. Tool exposed joints slightly concave when thumbprint hard, using a jointer larger than joint thickness unless otherwise indicated.

E. Cut joints flush for masonry walls to receive plaster or other direct-applied finishes (other than paint) unless otherwise indicated.

F. Cut joints flush where indicated to receive waterproofing unless otherwise indicated.

3.6 ANCHORING MASONRY TO CONCRETE

A. Anchor masonry to concrete, where masonry abuts or faces concrete, to comply with the following:

1. Anchor masonry with anchors embedded in masonry joints and attached to structure.
2. Space anchors as indicated, but not more than 24 inches (610 mm) o.c. vertically.

3.7 LINTELS

A. Install lintels over openings as indicated.

B. Provide masonry lintels where shown and where openings of more than 24 inches (610 mm) for block-size units are shown without structural steel or other supporting lintels. Provide minimum bearing of 8 inches (200 mm) at each jamb unless otherwise indicated.

C. Provide minimum bearing of 8 inches (200 mm) at each jamb unless otherwise indicated.

3.8 REINFORCED UNIT MASONRY

A. Temporary Formwork and Shores: Construct formwork and shores as needed to support reinforced masonry elements during construction.

1. Construct formwork to provide shape, line, and dimensions of completed masonry as indicated. Make forms sufficiently tight to prevent leakage of mortar and grout. Brace, tie, and support forms to maintain position and shape during construction and curing of reinforced masonry.
2. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and other loads that may be placed on them during construction.

B. Placing Reinforcement: Comply with requirements in TMS 402/602.

C. Grouting: Do not place grout until entire height of masonry to be grouted has attained enough strength to resist grout pressure.

1. Comply with requirements in TMS 402/602 for cleanouts and for grout placement, including minimum grout space and maximum pour height.

3.9 REPAIRING, POINTING, AND CLEANING

A. Remove and replace masonry units that are loose, chipped, broken, stained, or otherwise damaged or that do not match adjoining units. Install new units to match adjoining units; install in fresh mortar, pointed to eliminate evidence of replacement.

B. Pointing: During the tooling of joints, enlarge voids and holes, except weep holes, and completely fill with mortar. Point up joints, including corners, openings, and adjacent construction, to provide a neat, uniform appearance. Prepare joints for sealant application, where indicated.

C. In-Progress Cleaning: Clean unit masonry as Work progresses by dry brushing to remove mortar fins and smears before tooling joints.

D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:

1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
2. Test cleaning methods on sample wall panel; leave one-half of panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of masonry.
3. Protect adjacent stone and non-masonry surfaces from contact with cleaner by covering them with liquid-strippable masking agent or polyethylene film and waterproof masking tape.
4. Wet wall surfaces with water before applying cleaners; remove cleaners promptly by rinsing surfaces thoroughly with clear water.
5. Clean concrete masonry by applicable cleaning methods indicated in NCMA TEK 08-04A.

3.10 MASONRY WASTE DISPOSAL

A. Salvageable Materials: Unless otherwise indicated, excess masonry materials are Contractor's property. At completion of unit masonry work, remove from Project site.

B. Waste Disposal as Fill Material: Dispose of clean masonry waste, including excess or soil-contaminated sand, waste mortar, and broken masonry units, by crushing and mixing with fill material as fill is placed.

1. Crush masonry waste to less than 4 inches (100 mm) in each dimension.
2. Mix masonry waste with at least 2 parts of specified fill material for each part of masonry waste. Fill material is specified in Section 312000 "Earth Moving."
3. Do not dispose of masonry waste as fill within 18 inches (450 mm) of finished grade.

C. Masonry Waste Recycling: Return broken CMUs not used as fill to manufacturer for recycling.

D. Excess Masonry Waste: Remove excess clean masonry waste that cannot be used as fill, as described above or recycled, and other masonry waste, and legally dispose of off Owner's property.

END OF SECTION 042200

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 051200 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Structural steel.
2. Field-installed shear connectors.
3. Grout.

B. Related Requirements:

1. 099123 "Interior Painting" for surface-preparation and priming requirements.

1.3 DEFINITIONS

A. Structural Steel: Elements of the structural frame indicated on Drawings and as described in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

B. Heavy Sections: Rolled and built-up sections as follows:

1. Shapes included in ASTM A 6 with flanges thicker than 1-1/2 inches.
2. Welded built-up members with plates thicker than 2 inches.
3. Column base plates thicker than 2 inches.

1.4 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show fabrication of structural-steel components.

1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.
2. Include embedment Drawings.
3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld. Show backing bars that are to be removed and supplemental fillet welds where backing bars are to remain.
4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical, high-strength bolted connections.

C. Welding Procedure Specifications (WPSs) and Procedure Qualification Records (PQRs): Provide according to AWS D1.1/D1.1M, "Structural Welding Code - Steel," for each welded joint whether prequalified or qualified by testing, including the following:

1. Power source (constant current or constant voltage).
2. Electrode manufacturer and trade name, for demand critical welds.

D. Delegated-Design Submittal: For structural-steel connections indicated to comply with design loads, include analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer, fabricator, shop-painting applicators, professional engineer, testing agency.

B. Welding certificates.

C. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

D. Mill test reports for structural steel, including chemical and physical properties.

E. Product Test Reports: For the following:

1. Bolts, nuts, and washers including mechanical properties and chemical analysis.
2. Shear stud connectors.
3. Shop primers.
4. Nonshrink grout.

F. Survey of existing conditions.

G. Source quality-control reports.

H. Field quality-control and special inspection reports.

1.7 QUALITY ASSURANCE

A. Fabricator Qualifications: A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category STD.

B. Installer Qualifications: A qualified installer who participates in the AISC Quality Certification Program and is designated an AISC-Certified Erector.

C. Shop-Painting Applicators: Qualified according to AISC's Sophisticated Paint or to SSPC-QP 3, "Standard Procedure for Evaluating Qualifications of Shop Painting Applicators."

D. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code - Steel."

1. Welders and welding operators performing work on bottom-flange, demand-critical welds shall pass the supplemental welder qualification testing, as required by AWS D1.8. FCAW-S and FCAW-G shall be considered separate processes for welding personnel qualification.

E. Comply with applicable provisions of the following specifications and documents:

1. AISC 303.
2. AISC 360.
3. RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

1.8 DELIVERY, STORAGE, AND HANDLING

A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.

1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.

B. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.

1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
2. Clean and relubricate bolts and nuts that become dry or rusty before use.
3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F 1852 fasteners and for retesting fasteners after lubrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Connections: Provide details of simple shear connections required by the Contract Documents to be selected or completed by structural-steel fabricator to withstand loads indicated and comply with other information and restrictions indicated.

1. Select and complete connections using schematic details indicated and AISC 360.
2. Use Allowable Stress Design; data are given at service-load level.

2.2 STRUCTURAL-STEEL MATERIALS

A. W-Shapes: ASTM A 992.

B. Channels, Angles: ASTM A 36.

C. Plate and Bar: ASTM A 36.

D. Cold-Formed Hollow Structural Sections: ASTM A 500 Grade B, structural tubing.

E. Steel Pipe: ASTM A 53, Type E or Type S, Grade B.

1. Weight Class: Standard.

F. Welding Electrodes: Comply with AWS requirements.

2.3 BOLTS, CONNECTORS, AND ANCHORS

A. High-Strength Bolts, Nuts, and Washers: ASTM A 325, Type 1, heavy-hex steel structural bolts; ASTM A 563, Grade C, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers; all with plain finish.

B. Zinc-Coated High-Strength Bolts, Nuts, and Washers: ASTM A 325, Type 1, heavy-hex steel structural bolts; ASTM A 563, Grade DH heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers.

1. Finish: Hot-dip zinc coating.

C. Shear Connectors: ASTM A 108, Grades 1015 through 1020, headed-stud type, cold-finished carbon steel; AWS D1.1, Type B.

D. Unheaded Anchor Rods: ASTM F 1554, Grade 36.

1. Configuration: Straight.
2. Nuts: ASTM A 563 heavy-hex carbon steel.

3. Plate Washers: ASTM A 36/A 36M carbon steel.
4. Washers: ASTM F 436, Type 1, hardened carbon steel.
5. Finish: Plain.

E. Headed Anchor Rods: ASTM F 1554, Grade 36, straight.

1. Nuts: ASTM A 563 heavy-hex carbon steel.
2. Plate Washers: ASTM A 36 carbon steel.
3. Washers: ASTM F 436, Type 1, hardened carbon steel.
4. Finish: Plain.

F. Threaded Rods: ASTM F 1554, Grade 55.

1. Nuts: ASTM A 563 hex carbon steel.
2. Washers: ASTM F 436, Type 1, hardened carbon steel.
3. Finish: Plain.

2.4 PRIMER

A. Primer: Comply with Section 099123 "Interior Painting."

B. Primer: Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer complying with MPI#79 and compatible with topcoat.

C. Galvanizing Repair Paint: MPI#18.

2.5 GROUT

A. Metallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, metallic aggregate grout, mixed with water to consistency suitable for application and a 30-minute working time.

B. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.6 FABRICATION

A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," and to AISC 360.

1. Camber structural-steel members where indicated.
2. Fabricate beams with rolling camber up.
3. Identify high-strength structural steel according to ASTM A 6 and maintain markings until structural steel has been erected.
4. Mark and match-mark materials for field assembly.

5. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.

B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.

1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1.

C. Bolt Holes: Cut, drill, or punch standard bolt holes perpendicular to metal surfaces.

D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.

E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 3, "Power Tool Cleaning."

F. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1 and manufacturer's written instructions.

G. Holes: Provide holes required for securing other work to structural steel and for other work to pass through steel members.

1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
2. Baseplate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.7 SHOP CONNECTIONS

A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.

1. Joint Type: Snug tightened.

B. Weld Connections: Comply with AWS D1.1 for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303 for mill material.

2.8 SHOP PRIMING

A. Shop prime steel surfaces except the following:

1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
2. Surfaces to be field welded.
3. Surfaces of high-strength bolted, slip-critical connections.
4. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).
5. Galvanized surfaces.
6. Surfaces enclosed in interior construction.

B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to the following specifications and standards:

1. SSPC-SP 2, "Hand Tool Cleaning."
2. SSPC-SP 3, "Power Tool Cleaning."
3. SSPC-SP 7/NACE No. 4, "Brush-off Blast Cleaning."
4. SSPC-SP 11, "Power Tool Cleaning to Bare Metal."
5. SSPC-SP 14/NACE No. 8, "Industrial Blast Cleaning."
6. SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
7. SSPC-SP 10/NACE No. 2, "Near-White Blast Cleaning."
8. SSPC-SP 5/NACE No. 1, "White Metal Blast Cleaning."
9. SSPC-SP 8, "Pickling."

C. Priming: Immediately after surface preparation, apply primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.

1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

D. Painting: Prepare steel and apply a one-coat, nonasphaltic primer complying with SSPC-PS Guide 7.00, "Painting System Guide 7.00: Guide for Selecting One-Coat Shop Painting Systems," to provide a dry film thickness of not less than 1.5 mils.

2.9 GALVANIZING

A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123.

1. Fill vent and drain holes that are exposed in the finished Work unless they function as weep holes, by plugging with zinc solder and filing off smooth.
2. Galvanize lintels and shelf angles attached to structural-steel frame and located in exterior walls.

2.10 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform shop tests and inspections.

1. Provide testing agency with access to places where structural-steel work is being fabricated or produced to perform tests and inspections.

B. Bolted Connections: Inspect shop-bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

C. Welded Connections: Visually inspect shop-welded connections according to AWS D1.1 and the following inspection procedures, at testing agency's option:

1. Liquid Penetrant Inspection: ASTM E 165.
2. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
3. Ultrasonic Inspection: ASTM E 164.
4. Radiographic Inspection: ASTM E 94.

D. In addition to visual inspection, test and inspect shop-welded shear connectors according to requirements in AWS D1.1 for stud welding and as follows:

1. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
2. Conduct tests according to requirements in AWS D1.1 on additional shear connectors if weld fracture occurs on shear connectors already tested.

E. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify, with certified steel erector present, elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.

1. Prepare a certified survey of existing conditions. Include bearing surfaces, anchor rods, bearing plates, and other embedments showing dimensions, locations, angles, and elevations.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

3.3 ERECTION

A. Set structural steel accurately in locations and to elevations indicated and according to AISC 303 and AISC 360.

B. Baseplates and Bearing Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.

1. Set plates for structural members on wedges, shims, or setting nuts as required.
2. Weld plate washers to top of baseplate.
3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with grout.
4. Promptly pack grout solidly between bearing surfaces and plates so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for shrinkage-resistant grouts.

C. Maintain erection tolerances of structural steel within AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

D. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that are in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.

1. Level and plumb individual members of structure.
2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.

E. Splice members only where indicated.

F. Do not use thermal cutting during erection.

G. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

H. Shear Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1 and manufacturer's written instructions.

3.4 FIELD CONNECTIONS

A. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.

1. Joint Type: Snug tightened.

B. Weld Connections: Comply with AWS D1.1 for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Comply with AISC 303 and AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
2. Remove backing bars or runoff tabs where indicated, back gouge, and grind steel smooth.
3. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in AISC 303, "Code of Standard Practice for Steel Buildings and Bridges," for mill material.

3.5 FIELD QUALITY CONTROL

A. Special Inspections: Engage a qualified special inspector to perform the following special inspections:

1. Verify structural-steel materials and inspect steel frame joint details.
2. Verify weld materials and inspect welds.
3. Verify connection materials and inspect high-strength bolted connections.

B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

C. Bolted Connections: Inspect bolted connections according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts."

D. Welded Connections: Visually inspect field welds according to AWS D1.1.

1. In addition to visual inspection, test and inspect field welds according to AWS D1.1 and the following inspection procedures, at testing agency's option:

a. Liquid Penetrant Inspection: ASTM E 165.
b. Magnetic Particle Inspection: ASTM E 709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
c. Ultrasonic Inspection: ASTM E 164.
d. Radiographic Inspection: ASTM E 94.

E. In addition to visual inspection, test and inspect field-welded shear connectors according to requirements in AWS D1.1 for stud welding and as follows:

1. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
2. Conduct tests according to requirements in AWS D1.1 on additional shear connectors if weld fracture occurs on shear connectors already tested.

3.6 REPAIRS AND PROTECTION

A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and repair galvanizing to comply with ASTM A 780.

B. Touchup Painting: Immediately after erection, clean exposed areas where primer is damaged or missing and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

1. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.

C. Touchup Painting: Cleaning and touchup painting are specified in 099123 "Interior Painting."

END OF SECTION 051200

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 054000 - COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior non-load-bearing wall framing exceeding height limitations of standard, nonstructural metal framing.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Include layout, spacings, sizes, thicknesses, and types of cold-formed steel framing; fabrication; and fastening and anchorage details, including mechanical fasteners.
2. Indicate reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.

1.4 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Product certificates.

C. Product test reports.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: Qualified according to ASTM E 329 for testing indicated.

B. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

C. Comply with AISI S230 "Standard for Cold-Formed Steel Framing - Prescriptive Method for One and Two Family Dwellings."

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. AllSteel & Gypsum Products, Inc.
2. ClarkDietrich Building Systems.
3. Consolidated Fabricators Corp.; Building Products Division.
4. Custom Stud Inc.
5. Nuconsteel, A Nucor Company.
6. Southeastern Stud & Components, Inc.
7. Steel Network, Inc. (The).
8. United Metal Products, Inc.
9. United Steel Deck, Inc.

2.2 PERFORMANCE REQUIREMENTS

A. Cold-Formed Steel Framing Standards: Unless more stringent requirements are indicated, framing shall comply with AISI S100, AISI S200, and the following:

1. Wall Studs: AISI S211.
2. Headers: AISI S212.
3. Lateral Design: AISI S213.

B. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

2.3 COLD-FORMED STEEL FRAMING MATERIALS

A. Steel Sheet: ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated, of grade and coating designation as follows:

1. Grade: As required by structural performance.
2. Coating: G60, A60, AZ50, or GF30.

B. Steel Sheet for Vertical Deflection Clips: ASTM A 653/A 653M, structural steel, zinc coated, of grade and coating as follows:

1. Grade: As required by structural performance.
2. Coating: G60.

2.4 INTERIOR NON-LOAD-BEARING WALL FRAMING

A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0329 inch.
2. Flange Width: 1-5/8 inches.

B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and matching minimum base-metal thickness of steel studs.

C. Vertical Deflection Clips: Manufacturer's standard bypass clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. AllSteel & Gypsum Products, Inc.
b. ClarkDietrich Building Systems.
c. MarinoWARE.
d. SCAFCO Corporation.
e. Simpson Strong-Tie Co., Inc.
f. Steel Network, Inc. (The).
g. Steeler, Inc.

D. Single Deflection Track: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal loads and transfer them to the primary structure.

E. Double Deflection Tracks: Manufacturer's double, deep-leg, U-shaped steel tracks, consisting of nested inner and outer tracks; unpunched, with unstiffened flanges.

F. Drift Clips: Manufacturer's standard bypass or head clips, capable of isolating wall stud from upward and downward vertical displacement and lateral drift of primary structure through positive mechanical attachment to stud web and structure.

2.5 FRAMING ACCESSORIES

A. Fabricate steel-framing accessories from ASTM A 1003/A 1003M, Structural Grade, Type H, metallic coated steel sheet, of same grade and coating designation used for framing members.

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated.

2.6 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A 36/A 36M, zinc coated by hot-dip process according to ASTM A 123/A 123M.

B. Post-Installed Anchors: Fastener systems with bolts of same basic metal as fastened metal, if visible, unless otherwise indicated; with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01 ICC-ES AC193 ICC-ES AC58 or ICC-ES AC308 as appropriate for the substrate.

1. Uses: Securing cold-formed steel framing to structure.
2. Type: adhesive anchor.
3. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, unless otherwise indicated.

C. Power-Actuated Anchors: Fastener systems with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

D. Mechanical Fasteners: ASTM C 1513, corrosion-resistant-coated, self-drilling, self-tapping, steel drill screws.

1. Head Type: Low-profile head beneath sheathing; manufacturer's standard elsewhere.

2.7 MISCELLANEOUS MATERIALS

A. Galvanizing Repair Paint: SSPC-Paint 20.

B. Nonmetallic, Nonshrink Grout: Factory-packaged, nonmetallic, noncorrosive, nonstaining grout, complying with ASTM C 1107/C 1107M, and with a fluid consistency and 30-minute working time.

C. Shims: Load-bearing, high-density, multimonomer, nonleaching plastic; or cold-formed steel of same grade and metallic coating as framing members supported by shims.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before sprayed fire-resistive materials are applied, attach continuous angles, supplementary framing, or tracks to structural members indicated to receive sprayed fire-resistive materials.

B. After applying sprayed fire-resistive materials, remove only as much of these materials as needed to complete installation of cold-formed framing without reducing thickness of fire-resistive materials below that required to obtain fire-resistance ratings indicated. Protect remaining fire-resistive materials from damage.

C. Install load-bearing shims or grout between the underside of load-bearing wall bottom track and the top of foundation wall or slab at locations with a gap larger than 1/4 inch to ensure a uniform bearing surface on supporting concrete or masonry construction.

D. Install sealer gaskets at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

3.2 INSTALLATION, GENERAL

A. Cold-formed steel framing may be shop or field fabricated for installation, or it may be field assembled.

B. Install cold-formed steel framing according to AISI S200, AISI S202, and manufacturer's written instructions unless more stringent requirements are indicated.

C. Install cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened.

D. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.

E. Install temporary bracing and supports to secure framing and support loads equal to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

F. Do not bridge building expansion joints with cold-formed steel framing. Independently frame both sides of joints.

G. Fasten hole-reinforcing plate over web penetrations that exceed size of manufacturer's approved or standard punched openings.

3.3 INTERIOR NON-LOAD-BEARING WALL INSTALLATION

A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure.

B. Fasten both flanges of studs to top and bottom track unless otherwise indicated. Space studs as follows:

1. Stud Spacing: 16 inches or as otherwise indicated on Drawings.

C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.

D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.

1. Install single deep-leg deflection tracks and anchor to building structure.
2. Install double deep-leg deflection tracks and anchor outer track to building structure.
3. Connect vertical deflection clips to studs and anchor to building structure.
4. Connect drift clips to cold-formed steel metal framing and anchor to building structure.

E. Install horizontal bridging in wall studs, spaced vertically in rows indicated on Shop Drawings but not more than 48 inches apart. Fasten at each stud intersection.

1. Channel Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
2. Strap Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
3. Bar Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.

F. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 12 inches of single deflection track. Install a combination of bridging and stud or stud-track solid blocking of width and thickness matching studs, secured to stud webs or flanges.

1. Install solid blocking at 96-inch centers.

G. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.4 ERECTION TOLERANCES

A. Install cold-formed steel framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet and as follows:

1. Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.5 FIELD QUALITY CONTROL

A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.

B. Field and shop welds will be subject to testing and inspecting.

C. Testing agency will report test results promptly and in writing to Contractor and Architect.

D. Cold-formed steel framing will be considered defective if it does not pass tests and inspections.

E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.6 REPAIRS AND PROTECTION

A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed steel framing with galvanized repair paint according to ASTM A 780/A 780M and manufacturer's written instructions.

END OF SECTION 054000

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Miscellaneous framing and supports.

B. Related Requirements:

1. Section 042200 "Concrete Masonry Units" for installing loose lintels, anchor bolts, and other items built into unit masonry.
2. Section 051200 "Structural Steel Framing" for steel framing, supports, elevator machine beams, hoist beams, divider beams, door frames, and other steel items attached to the structural-steel framing.

1.2 COORDINATION

A. Coordinate installation of metal fabrications that are anchored to or that receive other work. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Nonslip aggregates and nonslip-aggregate surface finishes.
2. Fasteners.
3. Shop primers.
4. Shrinkage-resisting grout.

B. Shop Drawings: Show fabrication and installation details. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items. Provide Shop Drawings for the following:

1. Miscellaneous framing and supports for applications where framing and supports are not specified in other Sections.

1.4 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

C. Research Reports: For post-installed anchors.

1.5 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel in accordance with the following welding codes:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."
3. AWS D1.6/D1.6M, "Structural Welding Code - Stainless Steel."

1.6 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of walls, floor slabs, decks, and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 METALS

A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

B. Steel Plates, Shapes, and Bars: ASTM A36/A36M.

C. Steel Tubing: ASTM A500/A500M, cold-formed steel tubing.

D. Slotted Channel Framing: Cold-formed metal box channels (struts) complying with MFMA-4.

1. Size of Channels: 1-5/8 by 1-5/8 inches or as indicated on drawings.
2. Galvanized Steel: ASTM A653/A653M, structural steel, Grade 33 minimum (Grade 230) 12 gage nominal thickness.
3. Cold-Rolled Steel: ASTM A1008/A1008M, structural steel, Grade 33 (Grade 230) 12 gage nominal thickness.

E. Steel Bolts and Nuts: Regular hexagon-head bolts, ASTM A307, Grade A (ISO 898-1, Property Class 4.6); with hex nuts, ASTM A563 (ASTM A563M); and, where indicated, flat washers.

F. High-Strength Bolts, Nuts, and Washers: ASTM F3125/F3125M, Grade A325 (Grade A325M), Type 3, heavy-hex steel structural bolts; ASTM A563, Grade DH3, (ASTM A563M, Class 10S3) heavy-hex carbon-steel nuts; and where indicated, flat washers.

G. Post-Installed Anchors: Torque-controlled expansion anchors or chemical anchors.

1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, unless otherwise indicated.

2.2 MISCELLANEOUS MATERIALS

A. Shop Primers: Provide primers that comply with Section 099123 "Interior Painting."

B. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.

1. Use primer that contains pigments that make it easily distinguishable from zinc-rich primer.

C. Water-Based Primer: Emulsion type, anticorrosive primer for mildly corrosive environments that is resistant to flash rusting when applied to cleaned steel, complying with MPI#107 and compatible with topcoat.

D. Epoxy Zinc-Rich Primer: Complying with MPI#20 and compatible with topcoat.

E. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.

F. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.

G. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.

H. Shrinkage-Resistant Grout: Factory-packaged, nonmetallic, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

2.3 FABRICATION, GENERAL

A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.

B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch (1 mm) unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.

C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.

D. Form exposed work with accurate angles and surfaces and straight edges.

E. Weld corners and seams continuously to comply with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.

G. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.

H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.

I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.

J. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches (3.2 by 38 mm), with a minimum 6-inch (150-mm) embedment and 2-inch (50-mm) hook, not less than 8 inches (200 mm) from ends and corners of units and 24 inches (600 mm) o.c., unless otherwise indicated.

2.4 MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.

B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.

1. Fabricate units from slotted channel framing where indicated.
2. Furnish inserts for units installed after concrete is placed.

C. Fabricate steel pipe columns for supporting wood frame construction from steel pipe with steel baseplates and top plates as indicated. Drill or punch baseplates and top plates for anchor and

connection bolts and weld to pipe with fillet welds all around. Make welds the same size as pipe wall thickness unless otherwise indicated.

1. Unless otherwise indicated, fabricate from Schedule 40 steel pipe.
2. Unless otherwise indicated, provide 1/2-inch (12.7-mm) baseplates with four 5/8-inch (16-mm) anchor bolts and 1/4-inch (6.4-mm) top plates..

D. Galvanize miscellaneous framing and supports where indicated.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.

B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.

C. Field Welding: Comply with the following requirements:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.

E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

F. Corrosion Protection: Coat concealed surfaces of aluminum that come into contact with grout, concrete, masonry, wood, or dissimilar metals with the following:

1. Cast Aluminum: Heavy coat of bituminous paint.
2. Extruded Aluminum: Two coats of clear lacquer.

3.2 INSTALLATION OF MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.

B. Anchor shelf angles securely to existing construction as indicated on drawings.

3.3 REPAIRS

A. Touchup Painting:

1. Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

    a. Apply by brush or spray to provide a minimum 2.0-mil (0.05-mm) dry film thickness.

2. Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Section 099123 "Interior Painting."

B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A780/A780M.

END OF SECTION 055000

SECTION 061000 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wood products.
2. Fire-retardant-treated lumber.
3. Dimension lumber framing.
4. Miscellaneous lumber.
5. Plywood backing panels.

1.2 DEFINITIONS

A. Boards or Strips: Lumber of less than 2 inches nominal (38 mm actual) size in least dimension.

B. Dimension Lumber: Lumber of 2 inches nominal (38 mm actual) size or greater but less than 5 inches nominal (114 mm actual) size in least dimension.

1. NeLMA: Northeastern Lumber Manufacturers' Association.
2. NLGA: National Lumber Grades Authority.
3. SPIB: The Southern Pine Inspection Bureau.
4. WCLIB: West Coast Lumber Inspection Bureau.
5. WWPA: Western Wood Products Association.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
2. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency in accordance with ASTM D5664.
3. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.

1.4 INFORMATIONAL SUBMITTALS

A. Material Certificates:

1. For dimension lumber specified to comply with minimum allowable unit stresses. Indicate species and grade selected for each use and design values approved by the ALSC Board of Review.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS

A. Lumber: Comply with DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.

1. Factory mark each piece of lumber with grade stamp of grading agency.
2. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry wood products.
3. Dress lumber, S4S, unless otherwise indicated.

B. Maximum Moisture Content:

1. Boards: 15 percent.
2. Dimension Lumber: 15 percent for 2-inch nominal (38-mm actual) thickness or less; 19 percent for more than 2-inch nominal (38-mm actual) thickness unless otherwise indicated.

2.2 FIRE-RETARDANT-TREATED LUMBER

A. General: Where fire-retardant-treated materials are indicated, materials are to comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested in accordance with ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with

the flame front not extending more than 10.5 feet (3.2 m) beyond the centerline of the burners at any time during the test.

1. Treatment is not to promote corrosion of metal fasteners.
2. Exterior Type: Treated materials are to comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering in accordance with ASTM D2898. Use for exterior locations and where indicated.
3. Interior Type A: Treated materials are to have a moisture content of 28 percent or less when tested in accordance with ASTM D3201/D3201M at 92 percent relative humidity. Use where exterior type is not indicated.
4. Design Value Adjustment Factors: Treated lumber is to be tested according to ASTM D5664 and design value adjustment factors are to be calculated according to ASTM D6841

C. Kiln-dry lumber after treatment to maximum moisture content of 19 percent.

D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency and other information required by authorities having jurisdiction.

E. Application: Treat all rough carpentry unless otherwise indicated.

1. Concealed blocking.
2. Wood cants, nailers, curbs, equipment support bases, blocking, and similar members in connection with roofing.
3. Plywood backing panels.

2.3 MISCELLANEOUS LUMBER

A. Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:

1. Blocking.
2. Nailers.
3. Rooftop equipment bases and support curbs.
4. Cants.
5. Furring.
6. Grounds.
7. Utility shelving.

B. Dimension Lumber Items: Construction or No. 2 grade lumber of any species.

C. Utility Shelving: Lumber with 15 percent maximum moisture content of any of the following species and grades:

1. Eastern white pine, Idaho white, lodgepole, ponderosa, or sugar pine; No. 2 Common Standard or No. 3 Common grade; NeLMA, NLGA, WCLIB, or WWPA.
2. Mixed southern pine or southern pine; No. 2 grade; SPIB.

3. Hem-fir or hem-fir (north); Construction or No. 2 Common grade; NLGA, WCLIB, or WWPA.
4. Spruce-pine-fir (south) or spruce-pine-fir; Construction or No. 2 Common grade; NeLMA, NLGA, WCLIB, or WWPA.

D. Concealed Boards: 15 percent maximum moisture content and any of the following species and grades:

1. Mixed southern pine or southern pine; No. 2 grade; SPIB.
2. Hem-fir or hem-fir (north); Construction or No. 2 Common grade; NLGA, WCLIB, or WWPA.
3. Spruce-pine-fir (south) or spruce-pine-fir; Construction or No. 2 Common grade; NeLMA, NLGA, WCLIB, or WWPA.

E. Roofing Nailers: Structural- or No. 2-grade lumber or better; kiln-dried Douglas fir, southern pine, or wood having similar decay-resistant properties.

F. For blocking not used for attachment of other construction, Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.

G. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.

2.4 PLYWOOD BACKING PANELS

A. Equipment Backing Panels: Plywood, DOC PS 1, fire-retardant treated, in thickness indicated or, if not indicated, not less than 3/4-inch (19-mm) nominal thickness.

2.5 FASTENERS

A. General: Fasteners are to be of size and type indicated and comply with requirements specified in this article for material and manufacture. Provide nails or screws, in sufficient length, to penetrate not less than 1-1/2 inches (38 mm) into wood substrate.

1. For redwood, use stainless steel or hot-dip galvanized-steel fasteners.

B. Nails, Brads, and Staples: ASTM F1667.

C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

2.6 MISCELLANEOUS MATERIALS

A. Adhesives for Gluing Furring and Sleepers to Concrete or Masonry: Formulation complying with ASTM D3498 that is approved for use indicated by adhesive manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.

B. Set work to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry accurately to other construction. Locate furring, nailers, blocking, and similar supports to comply with requirements for attaching other construction.

C. Install plywood backing panels by fastening to studs; coordinate locations with utilities requiring backing panels.[Install fire-retardant-treated plywood backing panels with classification marking of testing agency exposed to view**.**

D. Install metal framing anchors to comply with manufacturer's written instructions. Install fasteners through each fastener hole.

E. Install sill sealer gasket to form continuous seal between sill plates and foundation walls.

F. Install sill sealer gasket/termite barrier in accordance with manufacturer's written instructions at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

G. Do not splice structural members between supports unless otherwise indicated.

H. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.

1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches (406 mm) o.c.

I. Provide fire blocking in furred spaces, stud spaces, and other concealed cavities as indicated and as follows:

1. Fire block furred spaces of walls, at each floor level, at ceiling, and at not more than 96 inches (2438 mm) o.c. with solid wood blocking or noncombustible materials accurately fitted to close furred spaces.
2. Fire block concealed spaces of wood-framed walls and partitions at each floor level, at ceiling line of top story, and at not more than 96 inches (2438 mm) o.c. Where fire blocking is not inherent in framing system used, provide closely fitted solid wood blocks of same width as framing members and 2-inch nominal (38-mm actual) thickness.
3. Fire block concealed spaces between floor sleepers with same material as sleepers to limit concealed spaces to not more than 100 sq. ft. (9.3 sq. m) and to solidly fill space below partitions.

J. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with

function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.

K. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:

1. Table 2304.10.1, "Fastening Schedule," in ICC's International Building Code (IBC).
2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in ICC's International Residential Code for One- and Two-Family Dwellings.
3. ICC-ES evaluation report for fastener.

L. Securely attach roofing nailers to substrates by anchoring and fastening to withstand bending, shear, or other stresses imparted by Project wind loads and fastener-resistance loads as designed in accordance with ASCE/SEI 7.

M. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILERS

A. Install where indicated and where required for[**screeding or**] attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.

B. Attach wood blocking to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

C. Attach wood roofing nailers securely to substrate to resist the designed outward and upward wind loads indicated on Drawings and in accordance with ANSI/SPRI ED-1, Tables A6 and A7.

3.3 INSTALLATION OF WOOD FURRING

A. Install level and plumb with closure strips at edges and openings. Shim with wood as required for tolerance of finish work.

B. Furring to Receive Plywood or Hardboard Paneling: Install 1-by-3-inch nominal- (19-by-63-mm actual-) size furring horizontally at [24 inches (610 mm)] [600 mm] o.c.

C. Furring to Receive Gypsum Board or Plaster Lath: Install 1-by-2-inch nominal size furring spaced vertically as indicated in drawings.

3.4 PROTECTION

A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061000

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 061600 - SHEATHING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Wall sheathing.

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for plywood backing panels.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Wall sheathing.

Product Data Submittals: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

2. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated plywood complies with requirements. Indicate type of preservative used and net amount of preservative retained.
3. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated plywood complies with requirements. Include physical properties of treated materials.
4. For fire-retardant treatments, include physical properties of treated plywood both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency in accordance with ASTM D5516.
5. For products receiving waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.
6. Include details of interfaces with other materials that form part of air barrier.

1.3 INFORMATIONAL SUBMITTALS

A. Evaluation Reports: For the following, from ICC-ES:

1. Wood-preservative-treated plywood.
2. Fire-retardant-treated plywood.

B. Field quality-control reports.

1.4 QUALITY ASSURANCE

A. Testing Agency Qualifications:

1. For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Stack panels flat with spacers beneath and between each bundle to provide air circulation. Protect sheathing from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Resistance Ratings: As tested in accordance with ASTM E119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Fire-Resistance Ratings: Indicated by design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.

2.2 PRESERVATIVE-TREATED PLYWOOD

A. Preservative Treatment by Pressure Process: AWPA U1; Use Category UC2 for interior construction not in contact with ground, Use Category UC3b for exterior construction not in contact with ground, and Use Category UC4a for items in contact with ground.

1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.

B. Mark plywood with appropriate classification marking of an inspection agency acceptable to authorities having jurisdiction.

C. Application: Treat items as indicated on Drawings

2.3 FIRE-RETARDANT-TREATED PLYWOOD

A. General: Where fire-retardant-treated materials are indicated, use materials complying with requirements in this article that are acceptable to authorities having jurisdiction and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested in accordance with ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet (3.2 m) beyond the centerline of the burners at any time during the test.

1. Use treatment that does not promote corrosion of metal fasteners.
2. Interior Type A: Treated materials are to have a moisture content of 28 percent or less when tested in accordance with ASTM D3201/D3201M at 92 percent relative humidity. Use where exterior type is not indicated.
3. Design Value Adjustment Factors: Treated lumber plywood is to be tested in accordance with ASTM D5516 and design value adjustment factors are to be calculated in accordance with ASTM D6305. Span ratings after treatment are to be not less than span ratings specified.

C. Kiln-dry material after treatment to a maximum moisture content of 15 percent. Do not use material that is warped or does not comply with requirements for untreated material.

D. Identify fire-retardant-treated plywood with appropriate classification marking of qualified testing agency.

E. Application: Treat plywood as indicated on Drawings, and the following.

1. Wall sheathing within 48 inches (1220 mm) of fire walls.

2.4 WALL SHEATHING

A. Plywood Sheathing, Walls: DOC PS 1 sheathing.

1. Nominal Thickness: Not less than 11/32 inch (8.7 mm) or 3/8 inch (9.5 mm), as indicated on drawings.

B. Paper-Surfaced Gypsum Sheathing: ASTM C1396/C1396M, gypsum sheathing; with water-resistant-treated core and with water-repellent paper bonded to core's face, back, and long edges.

1. Type and Thickness: Type X, 5/8 inch (15.9 mm) thick.
2. Size: 48 by 96 inches (1219 by 2438 mm) for vertical and 48 by 108 inches (1219 by 2743 mm) for vertical installation.

C. Cementitious Backer Units, Walls: ASTM C1325, Type A.

1. Thickness: As indicated on drawings.
2. Flame Propagation Test: Materials and construction are to be tested in accordance with NFPA 285.

2.5 FASTENERS

A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.

1. For wall sheathing, provide fasteners with hot-dip zinc coating complying with ASTM A153/A153M or of Type 304 stainless steel.
2. For wall sheathing, provide fasteners with organic-polymer or other corrosion-protective coating having a salt-spray resistance of more than 800 hours in accordance with ASTM B117.

B. Nails, Brads, and Staples: ASTM F1667.

C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

D. Screws for Fastening Sheathing to Wood Framing: ASTM C1002.

E. Screws for Fastening Wood Structural Panels to Cold-Formed Metal Framing: ASTM C954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.

F. Screws for Fastening Gypsum Sheathing to Cold-Formed Metal Framing: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing to be attached.

1. For steel framing less than 0.0329 inch (0.835 mm) thick, use screws that comply with ASTM C1002.

2.6 MISCELLANEOUS MATERIALS

A. Adhesives for Field Gluing Panels to Wood Framing: Formulation complying with **APA AFG-01** that is approved for use with type of construction panel indicated by manufacturers of both adhesives and panels.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Do not use materials with defects that impair quality of sheathing or pieces that are too small to use with minimum number of joints or optimum joint arrangement. Arrange joints so that pieces do not span between fewer than three support members.

B. Cut panels at penetrations, edges, and other obstructions of work; fit tightly against abutting construction unless otherwise indicated.

C. Securely attach to substrate by fastening as indicated, complying with the following:

1. Table 2304.10.1, "Fastening Schedule," in the ICC's International Building Code.

2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in the ICC's International Residential Code for One- and Two-Family Dwellings.
3. ICC-ES evaluation report for fastener.

D. Use common wire nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections. Install fasteners without splitting wood.

E. Coordinate wall sheathing installation with flashing and joint-sealant installation so these materials are installed in sequence and manner that prevent exterior moisture from passing through completed assembly.

F. Do not bridge building expansion joints; cut and space edges of panels to match spacing of structural support elements.

G. Coordinate sheathing installation with installation of materials installed over sheathing so sheathing is not exposed to precipitation or left exposed at end of the workday when rain is forecast.

3.2 INSTALLATION OF WOOD STRUCTURAL PANEL

A. General: Comply with applicable recommendations in APA Form No. E30, "Engineered Wood Construction Guide," for types of structural-use panels and applications indicated.

B. Fastening Methods: Fasten panels as indicated below:

1. Wall Sheathing:

a. Nail to wood framing. Apply a continuous bead of glue to framing members at edges of wall sheathing panels.
b. Screw to cold-formed metal framing.
c. Space panels 1/8 inch (3 mm) apart at edges and ends.

3.3 INSTALLATION OF GYPSUM SHEATHING

A. Comply with GA-253 and with manufacturer's written instructions.

1. Fasten gypsum sheathing to cold-formed metal framing with screws.
2. Install panels with a 3/8-inch (9.5-mm) gap where non-load-bearing construction abuts structural elements.
3. Install panels with a 1/4-inch (6.4-mm) gap where they abut masonry or similar materials that might retain moisture, to prevent wicking.

B. Apply fasteners so heads bear tightly against face of sheathing, but do not cut into facing.

C. Vertical Installation: Install vertical edges centered over studs. Abut ends and edges with those of adjacent panels. Attach at perimeter and within field of panel to each stud.

1. Space fasteners approximately 8 inches (200 mm) o.c. and set back a minimum of 3/8 inch (9.5 mm) from edges and ends of panels.
2. For sheathing under stucco cladding, panels may be initially tacked in place with screws if overlying self-furring metal lath is screw-attached through sheathing to studs immediately after sheathing is installed.

D. Seal sheathing joints in accordance with sheathing manufacturer's written instructions.

1. Connect and seal sheathing material continuously to air barriers specified under other Sections as well as to roofing-membrane air barrier, concrete below-grade structures, floor-to-floor construction, exterior glazing and window systems, glazed curtain-wall systems, storefront systems, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.
2. Apply joint sealants forming part of air-barrier assembly within manufacturer's recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
3. Wall Openings: Prime concealed, perimeter frame surfaces of windows, curtain walls, storefronts, and doors. Apply transition strip or preformed silicone extrusion, so that a minimum of 3 inches (75 mm) of coverage is achieved over each substrate. Maintain 3 inches (75 mm) of full contact over firm bearing to perimeter frames, with not less than 1 inch (25 mm) of full contact.

    a. Transition Strip: Roll firmly to enhance adhesion.
    b. Preformed Silicone Extrusion: Set in full bed of silicone sealant applied to walls, frame, and air-barrier material.

4. Fill gaps in perimeter frame surfaces of windows, curtain walls, storefronts, doors, and miscellaneous penetrations of sheathing material with foam sealant.
5. Seal strips and transition strips around masonry reinforcing or ties and penetrations with termination mastic.
6. Seal top of through-wall flashings to sheathing with an additional 6-inch- (150-mm-) wide, transition strip.
7. Seal exposed edges of strips at seams, cuts, penetrations, and terminations not concealed by metal counterflashings or ending in reglets with termination mastic.
8. Repair punctures, voids, and deficient lapped seams in strips and transition strips extending 6 inches (150 mm) beyond repaired areas in strip direction.

3.4 INSTALLATION OF CEMENTITIOUS BACKER UNITS

A. Install panels and treat joints in accordance with ANSI A108.11 and manufacturer's written instructions for type of application indicated.

3.5 INSTALLATION OF FIBERBOARD SHEATHING

A. Comply with ASTM C846 and with manufacturer's written instructions.

B. Fasten fiberboard sheathing panels to intermediate supports and then at edges and ends. Use galvanized roofing nails; comply with manufacturer's recommended spacing and referenced

fastening schedule. Drive fasteners flush with surface of sheathing and locate perimeter fasteners at least 3/8 inch (9.5 mm) from edges and ends.

C. Install sheathing vertically with long edges parallel to, and centered over, studs. Install solid wood blocking where end joints do not occur over framing. Allow 1/8-inch (3-mm) open space between edges and ends of adjacent units. Stagger horizontal joints if any.

D. Cover sheathing as soon as practical after installation to prevent deterioration from wetting.

3.6 INSTALLATION OF FOAM-PLASTIC SHEATHING

A. Comply with manufacturer's written instructions.

B. Foam-Plastic Wall Sheathing: Install vapor-relief strips or equivalent for permitting escape of moisture vapor that otherwise would be trapped in stud cavity behind sheathing.

C. Apply sheathing tape to joints between foam-plastic sheathing panels and at items penetrating sheathing. Apply at upstanding flashing to overlap both flashing and sheathing.

END OF SECTION 061600

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Extruded polystyrene foam-plastic board insulation.
2. Glass-fiber blanket insulation.

1.2 ACTION SUBMITTALS

A. Product Data: For the following:

1. Extruded polystyrene foam-plastic board insulation.
2. Glass-fiber blanket insulation.

1.3 INFORMATIONAL SUBMITTALS

A. Installer's Certification: Listing type, manufacturer, and R-value of insulation installed in each element of the building thermal envelope.

1. Sign, date, and post the certification in a conspicuous location on Project site.

B. Product test reports.

C. Research reports.

PART 2 - PRODUCTS

2.1 EXTRUDED POLYSTYRENE FOAM-PLASTIC BOARD INSULATION

A. Extruded Polystyrene Board Insulation, Type X, ASTM C578, Type X, 15-psi (104-kPa) minimum compressive strength; unfaced.
1. Flame-Spread Index: Not more than 25 when tested in accordance with ASTM E84.
2. Smoke-Developed Index: Not more than 450 when tested in accordance with ASTM E84.
3. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
4. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches (305 mm) and wider in width.

2.2 GLASS-FIBER BLANKET INSULATION

A. Glass-Fiber Blanket Insulation, Unfaced, ASTM C665, Type I; passing ASTM E136 for combustion characteristics.
   1. Flame-Spread Index: Not more than 25 when tested in accordance with ASTM E84.
   2. Smoke-Developed Index: Not more than 50 when tested in accordance with ASTM E84.
   3. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches (305 mm) and wider in width.

B. Glass-Fiber Blanket Insulation, Polypropylene-Scrim-Kraft Faced, ASTM C665, Type II (nonreflective faced), Class A (faced surface with a flame-spread index of 25 or less); Category 1 (membrane is a vapor barrier).
   1. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches (305 mm) and wider in width.

C. Glass-Fiber Blanket Insulation, Kraft Faced, ASTM C665, Type II (nonreflective faced), Class C (faced surface not rated for flame propagation); Category 1 (membrane is a vapor barrier).
   1. Labeling: Provide identification of mark indicating R-value of each piece of insulation 12 inches (305 mm) and wider in width.

2.3 ACCESSORIES

A. Insulation for Miscellaneous Voids:

   1. Glass-Fiber Insulation: ASTM C764, Type II, loose fill; with maximum flame-spread and smoke-developed indexes of 5, per ASTM E84.

B. Insulation Anchors, Spindles, and Standoffs: As recommended by manufacturer.

C. Adhesive for Bonding Insulation: Product compatible with insulation and air and water barrier materials, and with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Comply with insulation manufacturer's written instructions applicable to products and applications.

B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.

C. Install insulation with manufacturer's R-value label exposed after insulation is installed.

D. Extend insulation to envelop entire area to be insulated. Fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.

E. Provide sizes to fit applications and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units unless multiple layers are otherwise shown or required to make up total thickness or to achieve R-value.

3.2 INSTALLATION OF FOUNDATION WALL INSULATION

A. Butt panels together for tight fit.

B. Anchor Installation: Install board insulation on concrete substrates by adhesively attached, spindle-type insulation anchors.

C. Adhesive Installation: Install with adhesive or press into tacky waterproofing or dampproofing according to manufacturer's written instructions.

3.3 INSTALLATION OF CAVITY-WALL INSULATION

A. Foam-Plastic Board Insulation: Install pads of adhesive spaced approximately 24 inches (610 mm) o.c. both ways on inside face and as recommended by manufacturer.

1. Fit courses of insulation between wall ties and other obstructions, with edges butted tightly in both directions, and with faces flush.
2. Press units firmly against inside substrates.

3.4 INSTALLATION OF INSULATION IN FRAMED CONSTRUCTION

A. Blanket Insulation: Install in cavities formed by framing members according to the following requirements:

1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
3. Maintain 3-inch (76-mm) clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
4. Attics: Install eave ventilation troughs between roof framing members in insulated attic spaces at vented eaves.
5. For metal-framed wall cavities where cavity heights exceed 96 inches (2438 mm), support unfaced blankets mechanically and support faced blankets by taping flanges of insulation to flanges of metal studs.
6. For wood-framed construction, install blankets according to ASTM C1320 and as follows:

a. With faced blankets having stapling flanges, lap blanket flange over flange of adjacent blanket to maintain continuity of vapor retarder once finish material is installed over it.

7. Vapor-Retarder-Faced Blankets: Tape joints and ruptures in vapor-retarder facings, and seal each continuous area of insulation to ensure airtight installation.

B. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:

1. Glass-Fiber Insulation: Compact to approximately 40 percent of normal maximum volume equaling a density of approximately 2.5 lb/cu. ft. (40 kg/cu. m).
2. Spray Polyurethane Insulation: Apply according to manufacturer's written instructions.

END OF SECTION 072100

SECTION 074293 – SOFFIT PANELS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal soffit panels.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Metal soffit panels.

B. Product Data Submittals:

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel and accessory.

C. Shop Drawings:

1. Include fabrication and installation layouts of metal panels; details of edge conditions, joints, panel profiles, corners, anchorages, attachment system, trim, flashings, closures, and accessories; and special details.
2. Accessories: Include details of flashing, trim, and anchorage systems, at a scale of not less than 1-1/2 inches per 12 inches (1:10).

D. Samples for Initial Selection: For each type of metal panel indicated with factory-applied color finishes.

1. Include similar Samples of trim and accessories involving color selection.

E. Samples for Verification: For each type of exposed finish required, prepared on Samples of size indicated below:

1. Metal Panels: 12 inches (305 mm) long by actual panel width. Include fasteners, closures, and other metal panel accessories.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For each product, tests performed by a qualified testing agency.

C. Sample Warranties: For special warranties.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For metal panels to include in maintenance manuals.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

B. UL-Certified, Portable Roll-Forming Equipment: UL-certified, portable roll-forming equipment capable of producing metal panels warranted by manufacturer to be the same as factory-formed products. Maintain UL certification of portable roll-forming equipment for duration of work.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Deliver components, metal panels, and other manufactured items so as not to be damaged or deformed. Package metal panels for protection during transportation and handling.

B. Unload, store, and erect metal panels in a manner to prevent bending, warping, twisting, and surface damage.

C. Stack metal panels horizontally on platforms or pallets, covered with suitable weathertight and ventilated covering. Store metal panels to ensure dryness, with positive slope for drainage of water. Do not store metal panels in contact with other materials that might cause staining, denting, or other surface damage.

D. Retain strippable protective covering on metal panels during installation.

E. Copper Panels: Wear gloves when handling to prevent fingerprints and soiling of surface.

1.7 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of metal panels to be performed according to manufacturers' written instructions and warranty requirements.

1.8 COORDINATION

A. Coordinate metal panel installation with rain drainage work, flashing, trim, construction of walls, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.9 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of metal panel systems that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including rupturing, cracking, or puncturing.
b. Deterioration of metals and other materials beyond normal weathering.

2. Warranty Period: Two years from date of Substantial Completion.

B. Special Warranty on Panel Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Structural Performance: Provide metal panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E1592:

1. Wind Loads: As indicated on Drawings.
2. Deflection Limits: For wind loads, no greater than 1/240 of the span.

B. Air Infiltration: Air leakage of not more than 0.06 cfm/sq. ft. (0.3 L/s per sq. m) tested according to ASTM E283 at the following test-pressure difference:

1. Test-Pressure Difference: 1.57 lbf/sq. ft. (75 Pa)

C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E331 at the following test-pressure difference:

1. Test-Pressure Difference: 2.86 lbf/sq. ft. (137 Pa)

D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joint

sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 180 deg F (100 deg C), material surfaces

2.2 METAL SOFFIT PANELS

A. Provide metal soffit panels designed to be installed by lapping and interconnecting side edges of adjacent panels and mechanically attaching through panel to supports using concealed fasteners in side laps. Include accessories required for weathertight installation.

B. Metal Soffit Panels: Match profile as shown on drawings.

1. Finish: As indicated on Drawings
2. Sealant: Factory applied within interlocking joint.

C. Flush-Profile Metal Soffit Panels Solid panels formed with vertical panel edges and intermediate stiffening ribs symmetrically spaced between panel edges; with flush joint between panels.

1. Aluminum Sheet: Coil-coated sheet, ASTM B209 (ASTM B209M), alloy as standard with manufacturer, with temper as required to suit forming operations and structural performance required.

a. Thickness: 0.040 inch (1.02 mm).
b. Surface: Smooth, flat finish.
c. Exterior Finish: Two-coat fluoropolymer
d. Color: As selected by Architect from manufacturer's full range

D. Reveal-Joint-Profile Metal Soffit Panels Solid panels formed with vertical panel edges and intermediate stiffening ribs symmetrically spaced between panel edges; with recessed reveal joint between panels.

2.3 MISCELLANEOUS MATERIALS

A. Miscellaneous Metal Subframing and Furring: ASTM C645, cold-formed, metallic-coated steel sheet, ASTM A653/A653M, G90 (Z275) hot-dip galvanized coating designation or ASTM A792/A792M, Class AZ50 (Class AZM150) aluminum-zinc-alloy coating designation unless otherwise indicated. Provide manufacturer's standard sections as required for support and alignment of metal panel system.

B. Panel Accessories: Provide components required for a complete, weathertight panel system including trim, clips, flashings, sealants, gaskets, fillers, closure strips, and similar items. Match material and finish of metal panels unless otherwise indicated.

1. Closure Strips: Closed-cell, expanded, cellular, rubber or crosslinked, polyolefin-foam or closed-cell laminated polyethylene; minimum 1-inch- (25-mm-) thick, flexible closure

strips; cut or premolded to match metal panel profile. Provide closure strips where indicated or necessary to ensure weathertight construction.

C. Flashing and Trim: Provide flashing and trim formed from same material as metal panels as required to seal against weather and to provide finished appearance. Finish flashing and trim with same finish system as adjacent metal panels.

D. Panel Fasteners: Self-tapping screws designed to withstand design loads. Provide exposed fasteners with heads matching color of metal panels by means of plastic caps or factory-applied coating. Provide EPDM or PVC sealing washers for exposed fasteners.

E. Panel Sealants: Provide sealant types recommended by manufacturer that are compatible with panel materials, are nonstaining, and do not damage panel finish.

1. Sealant Tape: Pressure-sensitive, 100 percent solids, gray polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch (13 mm) wide and 1/8 inch (3 mm) thick.
2. Joint Sealant: ASTM C920; elastomeric polyurethane or silicone sealant; of type, grade, class, and use classifications required to seal joints in metal panels and remain weathertight; and as recommended in writing by metal panel manufacturer.
3. Butyl-Rubber-Based, Solvent-Release Sealant: ASTM C1311.

2.4 FABRICATION

A. Fabricate and finish metal panels and accessories at the factory, by manufacturer's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with indicated profiles and with dimensional and structural requirements.

B. On-Site Fabrication: Subject to compliance with requirements of this Section, metal panels may be fabricated on-site using UL-certified, portable roll-forming equipment if panels are of same profile and warranted by manufacturer to be equal to factory-formed panels. Fabricate according to equipment manufacturer's written instructions and to comply with details shown.

C. Provide panel profile, including major ribs and intermediate stiffening ribs, if any, for full length of panel.

D. Fabricate metal panel joints with factory-installed captive gaskets or separator strips that provide a weathertight seal and prevent metal-to-metal contact, and that minimize noise from movements.

E. Sheet Metal Flashing and Trim: Fabricate flashing and trim to comply with manufacturer's recommendations and recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, metal, and other characteristics of item indicated.

1. Form exposed sheet metal accessories that are without excessive oil canning, buckling, and tool marks and that are true to line and levels indicated, with exposed edges folded back to form hems.

2. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints for additional strength.
3. Seams for Other Than Aluminum: Fabricate nonmoving seams in accessories with flat-lock seams. Tin edges to be seamed, form seams, and solder.
4. Sealed Joints: Form nonexpansion, but movable, joints in metal to accommodate sealant and to comply with SMACNA standards.
5. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces of accessories exposed to view.
6. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal recommended in writing by metal panel manufacturer.

    a. Size: As recommended by SMACNA's "Architectural Sheet Metal Manual" or metal soffit panel manufacturer for application but not less than thickness of metal being secured.

2.5 FINISHES

A. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

C. Steel Panels and Accessories:

1. Two-Coat Fluoropolymer: AAMA 621. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
2. Concealed Finish: Apply pretreatment and manufacturer's standard white or light-colored acrylic or polyester backer finish consisting of prime coat and wash coat with a minimum total dry film thickness of 0.5 mil (0.013 mm).

D. Aluminum Panels and Accessories:

1. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, metal panel supports, and other conditions affecting performance of the Work.

1. Examine framing to verify that girts, angles, channels, studs, and other structural panel support members and anchorage have been installed within alignment tolerances required by metal panel manufacturer.
2. Examine sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by metal panel manufacturer.

    a. Verify that air- or water-resistive barriers been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Examine roughing-in for components and systems penetrating metal panels to verify actual locations of penetrations relative to seam locations of metal panels before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Miscellaneous Supports: Install subframing, furring, and other miscellaneous panel support members and anchorages according to ASTM C754 and metal panel manufacturer's written recommendations.

1. Soffit Framing: Wire tie or clip furring channels to supports, as required to comply with requirements for assemblies indicated.

3.3 INSTALLATION OF METAL SOFFIT PANELS

A. Install metal panels according to manufacturer's written instructions in orientation, sizes, and locations indicated. Install panels perpendicular to supports unless otherwise indicated. Anchor metal panels and other components of the Work securely in place, with provisions for thermal and structural movement.

1. Shim or otherwise plumb substrates receiving metal panels.
2. Flash and seal metal panels at perimeter of all openings. Fasten with self-tapping screws. Do not begin installation until air- or water-resistive barriers and flashings that will be concealed by metal panels are installed.
3. Install screw fasteners in predrilled holes.
4. Locate and space fastenings in uniform vertical and horizontal alignment.
5. Install flashing and trim as metal panel work proceeds.

6. Locate panel splices over, but not attached to, structural supports. Stagger panel splices and end laps to avoid a four-panel lap splice condition.
7. Provide weathertight escutcheons for pipe- and conduit-penetrating panels.

B. Fasteners:

1. Steel Panels: Use stainless steel fasteners for surfaces exposed to the exterior; use galvanized-steel fasteners for surfaces exposed to the interior.
2. Aluminum Panels: Use aluminum or stainless steel fasteners for surfaces exposed to the exterior; use aluminum or galvanized-steel fasteners for surfaces exposed to the interior.
3. Copper Panels: Use copper, stainless steel, or hardware-bronze fasteners.
4. Stainless Steel Panels: Use stainless steel fasteners.

C. Metal Protection: Where dissimilar metals contact each other or corrosive substrates, protect against galvanic action as recommended in writing by metal panel manufacturer.

D. Lap-Seam Metal Panels: Fasten metal panels to supports with fasteners at each lapped joint at location and spacing recommended by manufacturer.

1. Apply panels and associated items true to line for neat and weathertight enclosure.
2. Provide metal-backed washers under heads of exposed fasteners bearing on weather side of metal panels.
3. Locate and space exposed fasteners in uniform vertical and horizontal alignment. Use proper tools to obtain controlled uniform compression for positive seal without rupture of washer.
4. Install screw fasteners with power tools having controlled torque adjusted to compress washer tightly without damage to washer, screw threads, or panels. Install screws in predrilled holes.

E. Watertight Installation:

1. Apply a continuous ribbon of sealant or tape to seal lapped joints of metal panels, using sealant or tape as recommend by manufacturer on side laps of nesting-type panels and elsewhere as needed to make panels watertight.
2. Provide sealant or tape between panels and protruding equipment, vents, and accessories.
3. At panel splices, nest panels with minimum 6-inch (152-mm) end lap, sealed with sealant and fastened together by interlocking clamping plates.

F. Accessory Installation: Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion. Coordinate installation with flashings and other components.

1. Install components required for a complete metal panel system including trim, corners, seam covers, flashings, sealants, gaskets, fillers, closure strips, and similar items. Provide types indicated by metal panel manufacturer; or, if not indicated, provide types recommended by metal panel manufacturer.

G. Flashing and Trim: Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners

where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that are permanently watertight.

1. Install exposed flashing and trim that is without buckling, and tool marks, and that is true to line and levels indicated, with exposed edges folded back to form hems. Install sheet metal flashing and trim to fit substrates and to achieve waterproof performance.
2. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 feet (3 m) with no joints allowed within 24 inches (610 mm) of corner or intersection. Where lapped expansion provisions cannot be used or would not be waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with mastic sealant (concealed within joints).

3.4 CLEANING AND PROTECTION

A. Remove temporary protective coverings and strippable films, if any, as metal panels are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of metal panel installation, clean finished surfaces as recommended by metal panel manufacturer. Maintain in a clean condition during construction.

B. After metal panel installation, clear weep holes and drainage channels of obstructions, dirt, and sealant.

C. Replace metal panels that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 074293

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:
   1. Formed low-slope roof sheet metal fabrications.

B. Related Requirements:

   1. Section 061000 "Rough Carpentry" for wood nailers, curbs, and blocking.

1.3 COORDINATION

A. Coordinate sheet metal flashing and trim layout and seams with sizes and locations of penetrations to be flashed, and joints and seams in adjacent materials.

B. Coordinate sheet metal flashing and trim installation with adjoining roofing and wall materials, joints, and seams to provide leakproof, secure, and noncorrosive installation.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

   1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each manufactured product and accessory.

B. Shop Drawings: For sheet metal flashing and trim.

   1. Include plans, elevations, sections, and attachment details.
   2. Detail fabrication and installation layouts, expansion-joint locations, and keyed details. Distinguish between shop- and field-assembled work.
   3. Include identification of material, thickness, weight, and finish for each item and location in Project.
   4. Include details for forming, including profiles, shapes, seams, and dimensions.
   5. Include details for joining, supporting, and securing, including layout and spacing of fasteners, cleats, clips, and other attachments. Include pattern of seams.
   6. Include details of termination points and assemblies.
   7. Include details of roof-penetration flashing.

8. Include details of edge conditions, including eaves, ridges, valleys, rakes, crickets, and counterflashings as applicable.
9. Include details of special conditions.
10. Include details of connections to adjoining work.

C. Samples for Initial Selection: For each type of sheet metal and accessory indicated with factory-applied finishes.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

B. Product Test Reports: For each product, for tests performed by a qualified testing agency.

C. Sample Warranty: For special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For sheet metal flashing and trim, and its accessories, to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage. Store sheet metal flashing and trim materials away from uncured concrete and masonry.

B. Protect strippable protective covering on sheet metal flashing and trim from exposure to sunlight and high humidity, except to extent necessary for period of sheet metal flashing and trim installation.

1.9 WARRANTY

A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.

b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 30 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General: Sheet metal flashing and trim assemblies shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.

B. Sheet Metal Standard for Flashing and Trim: Comply with **NRCA's "The NRCA Roofing Manual"** requirements for dimensions and profiles shown unless more stringent requirements are indicated.

C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

2.2 SHEET METALS

A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.

B. Aluminum Sheet: ASTM B 209, alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required; with smooth, flat surface.
1. Color Anodic Finish, Coil Coated: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.
a. Color: As approved by Architect from full range of industry colors and color densities.
b. Color Range: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.3 UNDERLAYMENT MATERIALS

A. Felt: ASTM D 226/D 226M, Type II (No. 30), asphalt-saturated organic felt; nonperforated.

2.4 MISCELLANEOUS MATERIALS

A. General: Provide materials and types of fasteners, protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal unless otherwise indicated.

B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal.

1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.

    a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.
    b. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
2. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.

C. Elastomeric Sealant: ASTM C 920, elastomeric silicone polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.

D. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.

2.5 FABRICATION, GENERAL

A. General: Custom fabricate sheet metal flashing and trim to comply with details shown and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required. Fabricate sheet metal flashing and trim in shop to greatest extent possible.

1. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
2. Obtain field measurements for accurate fit before shop fabrication.
3. Form sheet metal flashing and trim to fit substrates without excessive oil canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
4. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.

B. Fabrication Tolerances: Fabricate sheet metal flashing and trim that is capable of installation to a tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

C. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.

1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with butyl sealant concealed within joints.
2. Use lapped expansion joints only where indicated on Drawings.

D. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal to provide for proper installation of elastomeric sealant according to cited sheet metal standard.

E. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.

F. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer.

G. Do not use graphite pencils to mark metal surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, substrate, and other conditions affecting performance of the Work.

1. Verify compliance with requirements for installation tolerances of substrates.
2. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
3. Verify that air- or water-resistant barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.

1. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
3. Space cleats not more than 12 inches apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
4. Install exposed sheet metal flashing and trim with limited oil canning, and free of buckling and tool marks.
5. Torch cutting of sheet metal flashing and trim is not permitted.

6. Do not use graphite pencils to mark metal surfaces.

B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.

1. Coat concealed side of uncoated-aluminum and stainless-steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.
2. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.

C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at maximum of 10 feet with no joints within 24 inches of corner or intersection.

D. Fasteners: Use fastener sizes that penetrate wood blocking or sheathing not less than 1-1/4 inches for nails and not less than 3/4 inch for wood screws.

E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.

3.3 CLEANING AND PROTECTION

A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.

B. Clean and neutralize flux materials. Clean off excess solder.

C. Clean off excess sealants.

D. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of sheet metal flashing and trim installation, remove unused materials and clean finished surfaces as recommended by sheet metal flashing and trim manufacturer. Maintain sheet metal flashing and trim in clean condition during construction.

E. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 076200

SECTION 078413 - PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Penetration firestopping systems.
2. Penetrations in fire-resistance-rated walls.
3. Penetrations in horizontal assemblies.
4. Penetrations in smoke barriers.
5. Exposed penetration firestopping systems.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for non-fire-resistance-rated joint sealants.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Unlisted Firestopping Systems: Obtain an Engineering Judgment (EJ) from firestopping manufacturer where no UL, FM Approvals, or other listed assembly is available for particular firestop configuration. Follow International Firestop Council (IFC) recommended guidelines for evaluating firestopping systems in EJs.

C. Product Schedule: For each penetration firestopping system. Include location, illustration of firestopping system, and design designation of qualified testing and inspecting agency.

1. Engineering Judgments: Where Project conditions require modification to a qualified testing and inspecting agency's illustration for a particular penetration firestopping system, submit illustration, with modifications marked, approved by penetration firestopping system manufacturer's fire-protection engineer as an engineering judgment or equivalent fire-resistance-rated assembly developed in accordance with current International Firestop Council (IFC) guidelines. Obtain approval of authorities having jurisdiction prior to submittal.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Listed System Designs: For each penetration firestopping system, for tests performed by a qualified testing agency.

1.4 CLOSEOUT SUBMITTALS

A. Installer Certificates: From Installer indicating that penetration firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Entity that has been approved by FM Approvals in accordance with FM Approvals 4991 or been evaluated by UL and found to comply with UL's "UL Solutions Qualified Firestop Contractor Program."

B. Manufacturer Qualifications: Entity that has received UL's "Firestop Movement Certification," which demonstrates that manufacturer's firestopping products designated with M-Ratings are based on exposure to cyclic movement and UL 1479 fire test evaluation when tested in accordance with ASTM E3037.

1.6 MOCKUPS

A. Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Build mockup of each penetration firestopping system type required for Project, including supporting construction substrates, attachments, and accessories.
2. Where one penetration firestopping system type may be used for different penetrating items or in different wall or floor constructions, install one assembly for each different combination.
3. Obtain approval of mockups from authorities having jurisdiction before proceeding.
4. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Owner specifically approves such deviations by Change Order.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not install penetration firestopping systems when ambient or substrate temperatures are outside limits permitted by penetration firestopping system manufacturers or when substrates are wet because of rain, frost, condensation, or other causes.

B. Install and cure penetration firestopping system materials in accordance with manufacturer's written instructions using natural means of ventilations or, where this is inadequate, forced-air circulation.

1.8 COORDINATION

A. Coordinate construction of openings and penetrating items to ensure that penetration firestopping systems can be accessed and installed in accordance with specified firestopping system design.

B. Coordinate sizing of sleeves, openings, core-drilled holes, or cut openings to accommodate penetration firestopping systems.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain penetration firestopping systems for each type of opening indicated from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics:

1. A qualified testing agency, acceptable to authorities having jurisdiction, will perform penetration firestopping system tests.
2. Test in accordance with testing standards referenced in "Penetration Firestopping Systems" Article. Provide rated systems complying with the following requirements:

a. Penetration firestopping systems installed with products bearing the classification marking of a qualified testing agency.

1) UL in its online directory "Product iQ."
2) Intertek Group in its "Directory of Building Products."
3) FM Approvals in its "Approval Guide."

B. Provide components for each penetration firestopping system that, upon curing, do not re-emulsify, dissolve, leach, break down, or otherwise deteriorate over time from exposure to atmospheric moisture, sweating pipes, ponding water, or other forms of moisture characteristic during and after construction.

C. Provide components for each penetration firestopping system that do not contain ethylene glycol.

D. Provide components for each penetration firestopping system that are sufficiently flexible to accommodate movement, such as pipe vibration, water hammer, thermal expansion, and other normal building movement without damage.

E. Provide components for each penetration firestopping system that are appropriately tested for the thickness and type of insulation utilized.

2.3 PENETRATION FIRESTOPPING SYSTEMS

A. Penetration Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated. Penetration firestopping systems must be compatible with one another, with the substrates forming openings, and with penetrating items if any.

B. Penetrations in Fire-Resistance-Rated Walls: Penetration firestopping systems with ratings determined in accordance with ASTM E814 or UL 1479.

1. F-Rating: Not less than the fire-resistance rating of the wall penetrated.
2. Membrane Penetrations: Install recessed fixtures such that the required fire resistance will not be reduced.
3. M-Rating: Provide penetration firestopping systems meeting specified F-Rating after being tested in accordance with ASTM E3037.

C. Penetrations in Horizontal Assemblies: Penetration firestopping systems with ratings determined in accordance with ASTM E814 or UL 1479.

1. F-Rating: At least one hour, but not less than the fire-resistance rating of the floor penetrated.
2. T-Rating: At least one hour, but not less than the fire-resistance rating of the floor. The following floor penetrations do not require a T-rating:

    a. Those within the cavity of a wall.
    b. Floor, tub, or shower drains within a concealed space.
    c. 4-inch (200-mm) or smaller metal conduit penetrating directly into metal-enclosed electrical switchgear.

3. W-Rating: Provide penetration firestopping systems with a Class 1 W-rating in accordance with UL 1479.
4. M-Rating: Provide penetration firestopping systems meeting specified F-Rating, T-Rating, and W-Rating after being tested in accordance with ASTM E3037.

D. Penetrations in Smoke Barriers: Penetration firestopping systems with ratings determined in accordance with UL 1479.

1. L-Rating: Not exceeding 5.0 cfm/sq. ft. (0.025 cu. m/s per sq. m) of penetration opening and no more than 50-cfm (0.024-cu. m/s) cumulative total for any 100 sq. ft. (9.3 sq. m) at both ambient and elevated temperatures.
2. M-Rating: Provide penetration firestopping systems meeting specified L-Rating after being tested in accordance with ASTM E3037.

E. Exposed Penetration Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, when tested in accordance with ASTM E84 or UL 723.

2.4 ACCESSORIES

A. Provide components for each penetration firestopping system that are needed to install fill materials and to maintain ratings required. Use only those components specified by penetration firestopping system manufacturer and approved by qualified testing and inspecting agency for conditions indicated, including but not limited to:

1. Permanent forming/damming/backing materials.
2. Substrate primers.
3. Collars.
4. Steel sleeves.

2.5 FILL MATERIALS

A. Cast-in-Place Firestopping Devices: Factory-assembled devices for use in cast-in-place concrete floors and consisting of an outer sleeve lined with an intumescent strip, a flange attached to one end of the sleeve for fastening to concrete formwork, and a neoprene gasket.

B. Latex Sealants: Single-component latex formulations that do not re-emulsify after cure during exposure to moisture.

C. Firestopping Devices: Factory-assembled collars formed from galvanized steel and lined with intumescent material sized to fit specific diameter of penetrant.

D. Intumescent Composite Sheets: Rigid panels consisting of aluminum-foil-faced intumescent elastomeric sheet bonded to galvanized-steel sheet.

E. Intumescent Putties: Nonhardening, water-resistant, intumescent putties containing no solvents or inorganic fibers.

F. Intumescent Wrap Strips: Single-component intumescent elastomeric strips for use around combustible penetrants.

G. Mortars: Prepackaged dry mixes consisting of a blend of inorganic binders, hydraulic cement, fillers and lightweight aggregate formulated for mixing with water at Project site to form a nonshrinking, homogeneous mortar.

H. Pillows/Bags: Compressible, removable, and reusable intumescent pillows encased in fire-retardant polyester or glass-fiber cloth. Where exposed, and when required by a listed system, cover openings with steel-reinforcing wire mesh to protect pillows/bags from being easily removed or dislodged.

I. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

J. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants.

K. Thermal and Endothermic Wraps: Flexible, insulating, and fire-resistant protective wraps tested and listed for up to 2-hour fire ratings in accordance with ASTM E814 or UL 1479; for protecting membrane penetrations of utility boxes, critical electrical circuits, communications lines, and fuel lines, and for thermal barrier and circuit integrity protection in accordance with ASTM E1725 or UL 1724.

L. Fire-Rated Cable Sleeve Kits: Complete kits designed for new or existing cable penetrations through walls which accept standard accessories.

M. Fire-Rated Cable Pathways: Single or gangable device modules composed of a steel raceway with integral intumescent material and requiring no additional action in the form of plugs, twisting closure, putty, pillows, sealant, or otherwise to achieve fire and air-leakage ratings.

1. Fire-rated cable pathway devices are the preferred product for data, video, and communications cable penetrations. Install these devices in locations where frequent cable moves, add-ons, and changes will occur. Such devices must be:

a. Capable of retrofit around existing cables.
b. Designed so that two or more devices can be ganged together.
c. Maintenance-free so no action is required to activate the smoke- and fire-sealing mechanism.

2. Where fire-rated cable pathway devices are not practical, openings within walls and floors designed to accommodate data, video, and communications cabling must be provided with re-enterable products specifically designed for retrofit, such as retrofit devices for cable bundles, firestopping putty, plugs, or pillows.

N. Retrofit Device for Cable Bundles: Factory-made, intumescent, collar-like device for firestopping existing over-filled cable sleeves and capable of being installed around projecting sleeves and cable bundles.

O. Wall-Opening Protective Materials: Intumescent, non-curing putty pads or self-adhesive inserts for protection of electrical switch and receptacle boxes.

P. Fire-Rated HVAC Retaining Angles: Steel angle system with integral intumescent firestopping gasket for use around rectangular steel HVAC ducts without fire dampers.

Q. Firestopping Plugs: Flexible, re-enterable, intumescent, foam-rubber plug for use in blank round openings and cable sleeves.

R. Fire-Rated Cable Grommet: Molded two-piece grommet made of plenum-grade polymer and foam inner core for sealing small cable penetrations in gypsum walls up to 1/2 inch (13 mm) in diameter.

S. Closet Flange Gasket: Molded, single-component, flexible, intumescent gasket for use beneath a water closet (toilet) flange in floor applications.

2.6 MIXING

A. Penetration Firestopping Materials: For those products requiring mixing before application, comply with penetration firestopping system manufacturer's written instructions for accurate proportioning of materials, water (if required), type of mixing equipment, selection of mixer speeds, mixing containers, mixing time, and other items or procedures needed to produce products of uniform quality with optimum performance characteristics for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning: Before installing penetration firestopping systems, clean out openings in accordance with manufacturer's written instructions and with the following requirements:

1. Remove foreign materials from substrate surfaces that could interfere with adhesion of penetration firestopping materials.
2. Clean opening substrates and penetrating items to produce clean, sound surfaces capable of developing optimum bond with penetration firestopping materials. Remove loose particles remaining from cleaning operation.
3. Remove laitance and form-release agents from concrete.

B. Prime substrates in accordance with penetration firestopping system manufacturer's written installation instructions, using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

3.3 INSTALLATION

A. General: Install penetration firestopping systems in accordance with manufacturer's written installation instructions and published drawings for products and applications.

B. Install forming materials and other accessories of types required to support fill materials during their application and in the position needed to produce cross-sectional shapes and depths required to achieve fire ratings indicated.

1. After installing fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not forming permanent components of firestopping.

C. Install fill materials by proven techniques to produce the following results:

1. Fill voids and cavities formed by openings, forming materials, accessories, and penetrating items to achieve required fire-resistance ratings.
2. Apply materials so they contact and adhere to substrates formed by openings and penetrating items.
3. For fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 IDENTIFICATION

A. Wall Identification: Permanently label walls containing penetration firestopping systems with the words "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," using lettering not less than 3 inches (76 mm) high and with minimum 0.375-inch (9.5-mm) strokes.

1. Locate in accessible concealed floor, floor-ceiling, or attic space at 15 ft. (4.57 m) from end of wall and at intervals not exceeding 30 ft. (9.14 m).

B. Penetration Identification: Identify each penetration firestopping system with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches (150 mm)

of penetration firestopping system edge so labels are visible to anyone seeking to remove penetrating items or firestopping systems. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:

1. The words "Warning - Penetration Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
2. Contractor's name, address, and phone number.
3. Designation of applicable testing and inspecting agency.
4. Date of installation.
5. Manufacturer's name.
6. Installer's name.

3.5 CLEANING AND PROTECTION

A. Clean off excess fill materials adjacent to openings as the Work progresses by methods and with cleaning materials that are approved in writing by penetration firestopping system manufacturers and that do not damage materials in which openings occur.

B. Provide final protection and maintain conditions during and after installation that ensure that penetration firestopping systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, immediately cut out and remove damaged or deteriorated penetration firestopping material and install new materials to produce systems complying with specified requirements.

C.

END OF SECTION 078413

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Nonstaining silicone joint sealants.
2. Urethane joint sealants.
3. Silane-modified polymer joint sealants.
4. Mildew-resistant joint sealants.
5. Polysulfide joint sealants.
6. Butyl joint sealants.
7. Latex joint sealants.

1.2 ACTION SUBMITTALS

A. Product Data for:

1. Silicone joint sealants.
2. Nonstaining silicone joint sealants.
3. Urethane joint sealants.
4. Silane-modified polymer joint sealants.
5. Mildew-resistant joint sealants.
6. Polysulfide joint sealants.
7. Butyl joint sealants.
8. Latex joint sealants.

B. Samples for Initial Selection: Manufacturer's standard color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

C. Samples for Verification: For each type and color of joint sealant required, provide Samples with joint sealants in 1/2-inch (13-mm) wide joints formed between two 6-inch (150-mm) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.

D. Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.3 INFORMATIONAL SUBMITTALS

A. Preconstruction Laboratory Test Schedule: Include the following information for each joint sealant and substrate material to be tested:

1. Joint-sealant location and designation.
2. Manufacturer and product name.
3. Type of substrate material.
4. Proposed test.
5. Number of samples required.

B. Preconstruction Laboratory Test Reports: For each joint sealant and substrate material to be tested from sealant manufacturer, indicating the following:

1. Materials forming joint substrates and joint-sealant backings have been tested for compatibility and adhesion with joint sealants.
2. Interpretation of test results and written recommendations for primers and substrate preparation are needed for adhesion.

C. Preconstruction Field-Adhesion-Test Reports: Indicate which sealants and joint preparation methods resulted in optimum adhesion to joint substrates based on testing specified in "Preconstruction Testing" Article.

D. Field Quality-Control Reports: For field-adhesion-test reports, for each sealant application tested.

E. Sample warranties.

1.4 CLOSEOUT SUBMITTALS

A. Manufacturers' special warranties.

B. Installer's special warranties.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Authorized representative who is trained and approved by manufacturer.

B. Testing Agency Qualifications: Qualified in accordance with ASTM C1021 to conduct the testing indicated.

1.6 FIELD CONDITIONS

A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F (5 deg C).

2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.7 WARRANTY

A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:

1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
2. Disintegration of joint substrates from causes exceeding design specifications.
3. Mechanical damage caused by individuals, tools, or other outside agents.
4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain joint sealants from single manufacturer for each sealant type.

2.2 JOINT SEALANTS, GENERAL

A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.

B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.3 NONSTAINING SILICONE JOINT SEALANTS

A. Nonstaining Joint Sealants: No staining of substrates when tested in accordance with ASTM C1248.

B. Silicone, Nonstaining, S, NS, 100/50, NT: Nonstaining, single-component, nonsag, plus 100 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 100/50, Use NT.

C. Silicone, Nonstaining, S, NS, 50, NT: Nonstaining, single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 50, Use NT.

D. Silicone, Nonstaining, S, NS, 100/50, T, NT: Nonstaining, single-component, nonsag, plus 100 percent and minus 50 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 100/50, Uses T and NT.

E. Silicone, Nonstaining, M, NS, 50, NT: Nonstaining, multicomponent, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type M, Grade NS, Class 50, Use NT.

2.4 URETHANE JOINT SEALANTS

A. Urethane, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, urethane joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.

B. Urethane, S, NS, 100/50, T, NT: Single-component, nonsag, plus 100 percent and minus 50 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type S, Grade NS, Class 100/50, Uses T and NT.

C. Urethane, S, NS, 25, T, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type S, Grade NS, Class 25, Uses T and NT.

D. Urethane, S, P, 35, T, NT: Single-component, pourable, plus 35 percent and minus 35 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type S, Grade P, Class 35, Uses T and NT.

E. Urethane, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type S, Grade P, Class 25, Uses T and NT.

F. Urethane, M, NS, 50, NT: Multicomponent, nonsag, plus 50 percent and minus 50 percent movement capability nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade NS, Class 50, Use NT.

G. Urethane, M, NS, 25, NT: Multicomponent, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade NS, Class 25, Use NT.

H. Urethane, M, NS, 50, T, NT: Multicomponent, nonsag, plus 50 percent and minus 50 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade NS, Class 50, Uses T and NT.

I. Urethane, M, NS, 25, T, NT: Multicomponent, nonsag, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade NS, Class 25, Uses T and NT.

J. Urethane, M, P, 50, T, NT: Multicomponent, pourable, plus 50 percent and minus 50 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade P, Class 50, Uses T and NT.

K. Urethane, M, P, 25, T, NT: Multicomponent, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, urethane joint sealant; ASTM C920, Type M, Grade P, Class 25, Uses T and NT.

2.5 SILANE-MODIFIED POLYMER JOINT SEALANTS

A. Silane-Modified Polymer, S, NS, 50, NT: Single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 50, Use NT.

B. Silane-Modified Polymer, S, NS, 35, NT: Single-component, nonsag, plus 35 percent and minus 35 percent movement capability, nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 35, Use NT.

C. Silane-Modified Polymer, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.

D. Silane-Modified Polymer, S, NS, 100/50, T, NT: Single-component, nonsag, plus 100 percent and minus 50 percent movement capability, traffic- and nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 100, Uses T and NT.

E. Silane-Modified Polymer, S, NS, 50, T, NT: Single-component, nonsag, plus 50 percent and minus 50 percent movement capability, traffic- and nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 50, Uses T and NT.

F. Silane-Modified Polymer, S, NS, 35, T, NT: Single-component, nonsag, plus 35 percent and minus 35 percent movement capability, traffic- and nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 35, Uses T and NT.

G. Silane-Modified Polymer, S, NS, 25, T, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, silyl-terminated polyether,

silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 25, Uses T and NT.

H. Silane-Modified Polymer, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade P, Class 25, Uses T and NT.

2.6 MILDEW-RESISTANT JOINT SEALANTS

A. Mildew-Resistant Joint Sealants: Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.

B. Silicone, Mildew Resistant, Acid Curing, S, NS, 25, NT: Mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, acid-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.

C. Silane-Modified Polymer, Mildew Resistant, S, NS, 50, NT: Mildew-resistant, single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, silyl-terminated polyether, silyl-terminated polyurethane, or polyurea joint sealant; ASTM C920, Type S, Grade NS, Class 50, Use NT.

2.7 POLYSULFIDE JOINT SEALANTS

A. Polysulfide, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, polysulfide joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.

B. Polysulfide, M, NS, 25, T, NT: Multicomponent, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, polysulfide joint sealant; ASTM C920, Type M, Grade NS, Class 25, Use NT.

C. Polysulfide, M, P, 25, T, NT: Multicomponent, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, polysulfide joint sealant; ASTM C920, Type M, Grade P, Class 25, Uses T and NT.

2.8 BUTYL JOINT SEALANTS

A. Butyl-Rubber-Based Joint Sealants: ASTM C1311.

2.9 LATEX JOINT SEALANTS

A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C834, Type OP, Grade NF.

2.10 JOINT-SEALANT BACKING

A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.

C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.11 MISCELLANEOUS MATERIALS

A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.

C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:

1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.

2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:

    a. Concrete.
    b. Masonry.
    c. Unglazed surfaces of ceramic tile.
    d. Exterior insulation and finish systems.

3. Remove laitance and form-release agents from concrete.
4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:

    a. Metal.
    b. Glass.
    c. Porcelain enamel.
    d. Glazed surfaces of ceramic tile.

B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.

B. Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.

C. Install sealant backings of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.
3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.

D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.

E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:

1. Place sealants so they directly contact and fully wet joint substrates.
2. Completely fill recesses in each joint configuration.
3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.

F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants in accordance with requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.

1. Remove excess sealant from surfaces adjacent to joints.
2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
3. Provide concave joint profile in accordance with Figure 8A in ASTM C1193 unless otherwise indicated.
4. Provide flush joint profile at locations indicated on Drawings in accordance with Figure 8B in ASTM C1193.
5. Provide recessed joint configuration of recess depth and at locations indicated on Drawings in accordance with Figure 8C in ASTM C1193.

    a. Use masking tape to protect surfaces adjacent to recessed tooled joints.

3.4 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Field-Adhesion Testing: Field test joint-sealant adhesion to joint substrates as follows:

    a. Extent of Testing: Test completed and cured sealant joints as follows:

        1) Perform one test for each 1000 ft. (300 m) of joint length thereafter or one test per each floor per elevation.

    b. Test Method: Test joint sealants in accordance with Method A, Tail Procedure, in ASTM C1521.

        1) For joints with dissimilar substrates, verify adhesion to each substrate separately; extend cut along one side, verifying adhesion to opposite side. Repeat procedure for opposite side.

    c. Inspect tested joints and report on the following:

        1) Whether sealants filled joint cavities and are free of voids.
        2) Whether sealant dimensions and configurations comply with specified requirements.
        3) Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test

each kind of product and joint substrate. Compare these results to determine if adhesion complies with sealant manufacturer's field-adhesion hand-pull test criteria.

d. Record test results in a field-adhesion-test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant material, sealant configuration, and sealant dimensions.

e. Repair sealants pulled from test area by applying new sealants following same procedures used originally to seal joints. Ensure that original sealant surfaces are clean and that new sealant contacts original sealant.

2. Evaluation of Field-Adhesion-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

B. Prepare test and inspection reports.

3.5 CLEANING

A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.6 PROTECTION

A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

END OF SECTION 079200

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior standard steel doors and frames.
2. Exterior standard steel doors and frames.

B. Related Requirements:

1. Section 087100 "Door Hardware for door hardware for hollow-metal doors.

1.2 DEFINITIONS

A. Minimum Thickness: Minimum thickness of base metal without coatings in accordance with NAAMM-HMMA 803 or ANSI/SDI A250.8.

1.3 COORDINATION

A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.4 ACTION SUBMITTALS

A. Product Data:

1. Interior standard steel doors and frames.
2. Exterior standard steel doors and frames.

B. Product Data Submittals: For each product.

1. Include construction details, material descriptions, core descriptions, fire-resistance ratings**,** and finishes.

C. Shop Drawings: Include the following:

1. Elevations of each door type.

2. Details of doors, including vertical- and horizontal-edge details and metal thicknesses.
3. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
4. Locations of reinforcement and preparations for hardware.
5. Details of each different wall opening condition.
6. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
7. Details of anchorages, joints, field splices, and connections.
8. Details of accessories.
9. Details of moldings, removable stops, and glazing.

D. Product Schedule: For hollow-metal doors and frames, prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final door hardware schedule.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For door inspector.

1. Fire-Rated Door Inspector: Submit documentation of compliance with NFPA 80, Section 5.2.3.1.
2. Egress Door Inspector: Submit documentation of compliance with NFPA 101, Section 7.2.1.15.4.
3. Submit copy of DHI Fire and Egress Door Assembly Inspector (FDAI) certificate.

B. Product Test Reports: For each type of fire-rated hollow-metal door and frame assembly for tests performed by a qualified testing agency indicating compliance with performance requirements.

C. Oversize Construction Certification: For assemblies required to be fire-rated and exceeding limitations of labeled assemblies.

D. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.7 QUALITY ASSURANCE

A. Fire-Rated Door Inspector Qualifications: Inspector for field quality-control inspections of fire-rated door assemblies is to meet the qualifications set forth in NFPA 80, Section 5.2.3.1 and the following:

1. Door and Hardware Institute Fire and Egress Door Assembly Inspector (FDAI) certification.

B. Egress Door Inspector Qualifications: Inspector for field quality-control inspections of egress door assemblies is to meet the qualifications set forth in NFPA 101, Section 7.2.1.15.4 and the following:

1. Door and Hardware Institute Fire and Egress Door Assembly Inspector (FDAI) certification.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver hollow-metal doors and frames palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.

1. Provide additional protection to prevent damage to factory-finished units.

B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.

C. Store hollow-metal doors and frames vertically under cover at Project site with head up. Place on minimum 4-inch- (102-mm-) high wood blocking. Provide minimum 1/4-inch (6-mm) space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 HOLLOW METAL DOORS AND FRAMES

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Rated Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure in accordance with NFPA 252 or UL 10C.

1. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing in accordance with UL 1784 and installed in compliance with NFPA 105.

2.3 INTERIOR STANDARD STEEL DOORS AND FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Standard-Duty Doors and Frames: ANSI/SDI A250.8, Level 1; ANSI/SDI A250.4, Level C. At locations indicated in the Door and Frame Schedule on Drawings.

1. Doors:

a. Type: As indicated in the Door and Frame Schedule on Drawings.
b. Thickness: 1-3/4 inches (44.5 mm)
c. Revise "Face" Subparagraph below if embossed or textured faces are required.
d. Face: Uncoated steel sheet, minimum thickness of 0.032 inch (0.8 mm).
e. Edge Construction: Model 1, Full Flush.
f. Edge Bevel: Provide manufacturer's standard beveled or square edges.
g. Core: Manufacturer's standard
h. Fire-Rated Core: Manufacturer's standard vertical steel stiffener core for fire-rated and temperature-rise-rated doors.

2. Frames:

a. Materials: Uncoated steel sheet, minimum thickness of 0.042 inch (1.0 mm).
b. Construction: Face welded

3. Exposed Finish: factory prime

2.4 EXTERIOR STANDARD STEEL DOORS AND FRAMES

A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 2; ANSI/SDI A250.4, Level B. At locations indicated in the Door and Frame Schedule on Drawings.

1. Doors:

a. Type: As indicated in the Door and Frame Schedule on Drawings.
b. Thickness: 1-3/4 inches (44.5 mm).
c. Face: Metallic-coated steel sheet, minimum thickness of 0.042 inch (1.0 mm), with minimum A60 (ZF180)] coating.
d. Edge Construction: Model 1, Full Flush
e. Edge Bevel: Provide manufacturer's standard beveled or square edges.
f. Top Edge Closures: Close top edges of doors with flush closures of same material as face sheets. Seal joints against water penetration.
g. Bottom Edges: Close bottom edges of doors[where required for attachment of weather stripping with end closures or channels of same material as face sheets. Provide weep-hole openings in bottoms of exterior doors to permit moisture to escape.
h. Core: Vertical steel stiffener.
i. Fire-Rated Core: Manufacturer's standard vertical steel stiffener with insulation core for fire-rated doors.

2. Frames:

a. Materials: Metallic-coated steel sheet, minimum thickness of 0.053 inch (1.3 mm), with minimum A60 (ZF180)] coating.
b. Construction: full profile welded.

3. Exposed Finish: Prime

2.5 HOLLOW-METAL PANELS

A. Provide hollow-metal panels of same materials, construction, and finish as adjacent door assemblies.

2.6 FRAME ANCHORS

A. Jamb Anchors:

1. Type: Anchors of minimum size and type required by applicable door and frame standard, and suitable for performance level indicated.
2. Quantity: Minimum of three anchors per jamb, with one additional anchor for frames with no floor anchor. Provide one additional anchor for each 24 inches (610 mm) of frame height above 7 feet (2.1 m).
3. Postinstalled Expansion Anchor: Minimum 3/8-inch- (9.5-mm-) diameter bolts with expansion shields or inserts, with manufacturer's standard pipe spacer.

B. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor.

C. Floor Anchors for Concrete Slabs with Underlayment: Adjustable-type anchors with extension clips, allowing not less than 2-inch (51-mm) height adjustment. Terminate bottom of frames at top of underlayment.

D. Material: ASTM A879/A879M, Commercial Steel (CS), 04Z (12G) coating designation; mill phosphatized.

1. For anchors built into exterior walls, steel sheet complying with ASTM A1008/A1008M or ASTM A1011/A1011M; hot-dip galvanized in accordance with ASTM A153/A153M, Class B.

2.7 MATERIALS

A. Hot-Rolled Steel Sheet: ASTM A1011/A1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.

B. Metallic-Coated Steel Sheet: ASTM A653/A653M, Commercial Steel (CS), Type B.

C. Inserts, Bolts, and Fasteners: Hot-dip galvanized in accordance with ASTM A153/A153M.

D. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.

E. Mineral-Fiber Insulation: ASTM C665, Type I (blankets without membrane facing); consisting of fibers manufactured from slag or rock wool; with maximum flame-spread and smoke-

developed indexes of 25 and 50, respectively; passing ASTM E136 for combustion characteristics.

2.8 FABRICATION

A. Hollow-Metal Frames: Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames.

1. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.

    a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
    b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.

B. Hardware Preparation: Factory prepare hollow-metal doors and frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping in accordance with ANSI/SDI A250.6, the Door Hardware Schedule on Drawings, and templates.

1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
2. Comply with BHMA A156.115 for preparing hollow-metal doors and frames for hardware.

2.9 STEEL FINISHES

A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.

1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with ANSI/SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

B. Factory Finish: Clean, pretreat, and apply manufacturer's standard two-coat, baked-on finish consisting of prime coat and thermosetting topcoat, complying with ANSI/SDI A250.3.

2.10 LOUVERS

A. Provide louvers for interior doors, where indicated, which comply with SDI 111, with blades or baffles formed of 0.020-inch- (0.5-mm-) thick, cold-rolled steel sheet set into 0.032-inch- (0.8-mm-) thick steel frame.

1. Sightproof Louver: Stationary louvers constructed with inverted-V or inverted-Y blades.
2. Lightproof Louver: Stationary louvers constructed with baffles to prevent light from passing from one side to the other.
3. Fire-Rated Automatic Louvers: Louvers constructed with movable blades closed by actuating fusible link, and listed and labeled for use in fire-rated door assemblies of type

and fire-resistance rating indicated by same qualified testing and inspecting agency that established fire-resistance rating of door assembly.

B. Form corners of moldings with hairline joints. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames.

PART 3 - EXECUTION

3.1 PREPARATION

A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces. Touch up factory-applied finishes where spreaders are removed.

B. Drill and tap doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.

3.2 INSTALLATION

A. Install hollow-metal doors and frames plumb, rigid, properly aligned, and securely fastened in place. Comply with approved Shop Drawings and with manufacturer's written instructions.

B. Hollow-Metal Frames: Comply with ANSI/SDI A250.11 or NAAMM-HMMA 840.

1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces without damage to completed Work.

    a. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces. Touch-up finishes.
    b. Install frames with removable stops located on secure side of opening.

2. Fire-Rated Openings: Install frames in accordance with NFPA 80.
3. Floor Anchors: Secure with postinstalled expansion anchors.

    a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.

4. Solidly pack mineral-fiber insulation inside frames.
5. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout or mortar.
6. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
7. Installation Tolerances: Adjust hollow-metal frames to the following tolerances:

a. Squareness: Plus or minus 1/16 inch (1.6 mm), measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
b. Alignment: Plus or minus 1/16 inch (1.6 mm), measured at jambs on a horizontal line parallel to plane of wall.
c. Twist: Plus or minus 1/16 inch (1.6 mm), measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
d. Plumbness: Plus or minus 1/16 inch (1.6 mm), measured at jambs at floor.

C. Hollow-Metal Doors: Fit and adjust hollow-metal doors accurately in frames, within clearances specified below.

1. Non-Fire-Rated Steel Doors: Comply with ANSI/SDI A250.8 or NAAMM-HMMA 841 and NAAMM-HMMA guide specification indicated.
2. Fire-Rated Doors: Install doors with clearances in accordance with NFPA 80.
3. Smoke-Control Doors: Install doors in accordance with NFPA 105.

3.3 FIELD QUALITY CONTROL

A. Inspection Agency: Contractor will engage a qualified inspector to perform inspections and to furnish reports to Architect.

B. Inspections:

1. Fire-Rated Door Inspections: Inspect each fire-rated door in accordance with NFPA 80, Section 5.2.
2. Egress Door Inspections: Inspect each door equipped with panic hardware, each door equipped with fire exit hardware, each door located in an exit enclosure, each electrically controlled egress door, and each door equipped with special locking arrangements in accordance with NFPA 101, Section 7.2.1.15.

C. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.

D. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80 and NFPA 101.

3.4 REPAIR

A. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.

B. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint in accordance with manufacturer's written instructions.

C. Factory-Finish Touchup: Clean abraded areas and repair with same material used for factory finish in accordance with manufacturer's written instructions.

D. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid-core five-ply flush wood veneer-faced doors for transparent finish.
2. Fire-rated wood door frames.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Solid-core five-ply flush wood veneer-faced doors and transom panels for transparent finish.

B. Product Data Submittals: For each product, including the following:

1. Door core materials and construction.
2. Door edge construction
3. Door face type and characteristics.
4. Factory-finishing specifications.

C. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:

1. Door schedule indicating door location, type, size, fire protection rating, and swing.
2. Door elevations, dimension and locations of hardware, lite and louver cutouts, and glazing thicknesses.
3. Details of frame for each frame type, including dimensions and profile.
4. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
5. Dimensions and locations of blocking for hardware attachment.
6. Dimensions and locations of mortises and holes for hardware.
7. Clearances and undercuts.
8. Requirements for veneer matching.
9. Doors to be factory finished and application requirements.
10. Apply AWI Quality Certification Program label to Shop Drawings.

D. Samples for Initial Selection: For factory-finished doors.

E. Samples for Verification:

1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches (200 by 250 mm), for each material and finish. For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.
2. Polymer edging, in manufacturer's standard colors.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For door inspector.

1. Fire-Rated Door Inspector: Submit documentation of compliance with NFPA 80, Section 5.2.3.1.
2. Egress Door Inspector: Submit documentation of compliance with NFPA 101, Section 7.2.1.15.4.
3. Submit copy of DHI's Fire and Egress Door Assembly Inspector (FDAI) certificate.

B. Field quality-control reports.

C. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Special warranties.

B. Quality Standard Compliance Certificates: AWI Quality Certification Program certificates.

C. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.5 QUALITY ASSURANCE

A. Manufacturer's Certification: Licensed participant in AWI's Quality Certification Program

B. Fire-Rated Door Inspector Qualifications: Inspector for field quality-control inspections of fire-rated door assemblies complies with qualifications set forth in NFPA 80, Section 5.2.3.1 and the following:

1. DHI's Fire and Egress Door Assembly Inspector (FDAI) certification.

C. Egress Door Inspector Qualifications: Inspector for field quality-control inspections of egress door assemblies complies with qualifications set forth in NFPA 101, Section 7.2.1.15.4 and the following:

1. DHI's Fire and Egress Door Assembly Inspector (FDAI) certification.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Comply with requirements of referenced standard and manufacturer's written instructions.

B. Mark each door on top and bottom rail with opening number used on Shop Drawings.

1.7 FIELD CONDITIONS

A. Environmental Limitations:

1. Do not deliver or install doors until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and HVAC system is operating and maintaining temperature and relative humidity at levels designed for building occupants for the remainder of construction period.

2. Do not deliver or install doors until building is enclosed and weathertight, wet work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F (16 and 32 deg C) and relative humidity between 25 and 55 percent during remainder of construction period.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Delamination of veneer.
b. Warping (bow, cup, or twist) more than 1/4 inch (6.4 mm) in a 42-by-84-inch (1067-by-2134-mm) section.
c. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch (0.25 mm in a 76.2-mm) span.

2. Warranty also includes installation and finishing that may be required due to repair or replacement of defective doors.

3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain flush wood doors indicated to be blueprint matched with **paneling** from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Rated Wood Door and Frame Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction, for fire-protection ratings and temperature-rise limits indicated on Drawings, based on testing at positive pressure in accordance with UL 10C or NFPA 252.

2.3 FLUSH WOOD DOORS, GENERAL

A. Quality Standard: In addition to requirements specified, comply with AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. Provide labels and certificates from **AWI** certification program indicating that doors comply with requirements of grades specified.

    a. Contractor registers the Work under this Section with the AWI Quality Certification Program at www.awiqcp.org or by calling 855-345-0991.

2. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with the Contract Documents in addition to those of the referenced quality standard.

2.4 SOLID-CORE FIVE-PLY FLUSH WOOD VENEER-FACED DOORS FOR TRANSPARENT FINISH

A. Solid-Core Five-Ply Veneer-Faced

1. ANSI/WDMA I.S. 1A Quality Grade: Premium.
2. Architectural Woodwork Standards Quality Grade: Premium.
3. Faces: Single-ply wood veneer not less than 1/50 inch (0.508 mm) thick.

    a. Species: Select white birch
    b. Cut: Plain sliced
    c. Match between Veneer Leaves: Book match.
    d. Assembly of Veneer Leaves on Door Faces: Center-balance match.

4. Core:

    a. ANSI A208.1, Grade LD-1 particleboard.
    b. Glued wood stave.
    c. WDMA I.S. 10 structural composite lumber.

        1) Screw Withdrawal, Door Face: 475 lb (2110 N).
        2) Screw Withdrawal, Vertical Door Edge: 475 lb (2110 N).

    d. Either glued wood stave or WDMA I.S. 10 structural composite lumber.

5. Construction: Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before veneering.

6. Adhesives: Type I in accordance with WDMA T.M. 6.
7. Performance Grade: ANSI/WDMA I.S. 1A Heavy Duty.
8. ANSI/WDMA I.S. 1A Quality Grade: Premium.
9. Architectural Woodwork Standards Quality Grade: Premium.
10. Faces: Single-ply wood veneer not less than 1/50 inch (0.508 mm) thick.

    a. Species: Select white birch.
    b. Cut: Plain sliced.
    c. Match between Veneer Leaves: Book match.
    d. Assembly of Veneer Leaves on Door Faces: Center-balance match.
    e. Pair and Set Match: Provide for doors hung in same opening or separated only by mullions.

        1) Match door faces within each separate room or area of building. Corridor-door faces do not need to match where they are separated by 10 feet (3 m) or more.
        2) Provide door faces of compatible color and grain within each separate room or area of building.

11. Exposed Vertical and Top Edges: Same species as faces or a compatible species - Architectural Woodwork Standards edge.

    a. Fire-Rated Single Doors: Provide edge construction with intumescent seals concealed by outer stile. Comply with specified requirements for exposed vertical edges.
    b. Fire-Rated Pairs of Doors:

        1) Provide formed-steel edges and astragals with intumescent seals.

            a) Finish steel edges and astragals with baked enamel same color as doors.

    c. Mineral-Core Doors: At hinge stiles, provide laminated-edge construction with improved screw-holding capability and split resistance. Comply with specified requirements for exposed edges.

        1) Screw-Holding Capability: 475 lbf (2110 N) in accordance with WDMA T.M. 10.

12. Core for Non-Fire-Rated Doors:

    a. ANSI A208.1, Grade LD-1 particleboard.

        1) Blocking: Provide wood blocking in particleboard-core doors as follows:

            a) 5-inch (125-mm) top-rail blocking, in doors indicated to have closers.
            b) 5-inch (125-mm) midrail blocking, in doors indicated to have exit devices.

2) Provide doors with WDMA I.S. 10 structural-composite-lumber cores instead of particleboard cores for doors scheduled to receive exit devices in Section 087100 "Door Hardware".

3) Glued wood stave.

b. WDMA I.S. 10 structural composite lumber.

1) Screw Withdrawal, Door Face: 475 lbf (2110 N).
2) Screw Withdrawal, Vertical Door Edge: 475 lbf (2110 N).

c. Either glued wood stave or WDMA I.S. 10 structural composite lumber.

13. Core for Fire-Rated Doors: As required to achieve fire-protection rating indicated on Drawings.

a. Blocking for Mineral-Core Doors: Provide composite blocking with improved screw-holding capability approved for use in doors of fire-protection ratings indicated on Drawings as needed to as follows:

1) 5-inch (125-mm) top-rail blocking.
2) 5-inch (125-mm) bottom-rail blocking, in doors indicated to have protection plates.
3) 5-inch (125-mm) midrail blocking, in doors indicated to have armor plates.
4) 4-1/2-by-10-inch (114-by-250-mm) lock blocks, in doors indicated to have exit devices.

14. Construction: Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before veneering.

2.5 FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated.

1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.
2. Comply with NFPA 80 requirements for fire-rated doors.

B. Factory machine doors for hardware that is not surface applied.

1. Locate hardware to comply with DHI-WDHS-3.
2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.
3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.
4. For doors scheduled to receive electrified locksets, provide factory-installed raceway and wiring to accommodate specified hardware.

2.6 FACTORY FINISHING

A. Comply with referenced quality standard for factory finishing.

1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
2. Finish faces, all four edges, edges of cutouts, and mortises.
3. Stains and fillers may be omitted on top and bottom edges, edges of cutouts, and mortises.

B. Factory finish doors.

C. Factory finish doors that are indicated on Drawings to receive transparent finish.

1. Architectural Woodwork Standards Grade: Premium.

a. System-11, Polyurethane, Catalyzed.

2. ANSI/WDMA I.S. 1A Grade: Premium.

a. TR-8 UV Cured Acrylated Polyester/Urethane.

3. Staining**:** Match Architect's sample
4. Sheen: Semigloss.
5. Architectural Woodwork Standards Grade: Premium.

a. System-11, Polyurethane, Catalyzed.

6. ANSI/WDMA I.S. 1A Grade: Premium

a. OP-6 Catalyzed Polyurethane.

7. Color: Match Architect's sample
8. Sheen: Semigloss.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and installed door frames, with Installer present, before hanging doors.

1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
2. Reject doors with defects.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Hardware: For installation, see Section 087100 "Door Hardware."

B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.

C. Install frames level, plumb, true, and straight.

1. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches (3.2 mm in 2400 mm).
2. Anchor frames to anchors or blocking built in or directly attached to substrates.

    a. Secure with countersunk, concealed fasteners and blind nailing.
    b. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.

        1) For factory-finished items, use filler matching finish of items being installed.

3. Install fire-rated doors and frames in accordance with NFPA 80.
4. Install smoke- and draft-control doors in accordance with NFPA 105.

D. Job-Fitted Doors:

1. Align and fit doors in frames with uniform clearances and bevels as indicated below.

    a. Do not trim stiles and rails in excess of limits set by manufacturer or permitted for fire-rated doors.

2. Machine doors for hardware.
3. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
4. Clearances:

    a. Provide 1/8 inch (3.2 mm) at heads, jambs, and between pairs of doors.
    b. Provide 1/8 inch (3.2 mm) from bottom of door to top of decorative floor finish or covering unless otherwise indicated on Drawings.
    c. Where threshold is shown or scheduled, provide 1/4 inch (6.4 mm) from bottom of door to top of threshold unless otherwise indicated.
    d. Comply with NFPA 80 for fire-rated doors.

5. Bevel non-fire-rated doors 1/8 inch in 2 inches (3-1/2 degrees) at lock and hinge edges.
6. Bevel fire-rated doors 1/8 inch in 2 inches (3-1/2 degrees) at lock edge; trim stiles and rails only to extent permitted by labeling agency.

E. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.

F. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 FIELD QUALITY CONTROL

A. Inspection Agency: engage a qualified inspector to perform inspections and to furnish reports to Architect.

B. Inspections:

1. Provide inspection of installed Work through AWI's Quality Certification Program certifying that wood doors and frames, including installation, comply with requirements of AWI/AWMCA/WI's "Architectural Woodwork Standards" for the specified grade.
2. Fire-Rated Door Inspections: Inspect each fire-rated door in accordance with NFPA 80, Section 5.2.
3. Egress Door Inspections: Inspect each door equipped with panic hardware, each door equipped with fire exit hardware, each door located in an exit enclosure, each electrically controlled egress door, and each door equipped with special locking arrangements in accordance with NFPA 101, Section 7.2.1.15.

C. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.

D. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80 and NFPA 101.

3.4 ADJUSTING

A. Operation: Rehang or replace doors that do not swing or operate freely.

B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 083113 - ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Access doors and frames.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details**,** material descriptions, dimensions of individual components and profiles, and finishes.

B. Samples: For each type of access door and frame and for each finish specified, complete assembly minimum 6 by 6 inches (150 by 150 mm) in size.

C. Product Schedule: For access doors and frames. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: For testing and inspecting agency.

1. Fire-Rated Door Inspector: Submit documentation of compliance with NFPA 80, Section 5.2.3.1.
2. Submit copy of DHI Fire and Egress Door Assembly Inspector (FDAI) certificate.

1.4 CLOSEOUT SUBMITTALS

A. Record Documents: For fire-rated doors, list of applicable room name and number in which access door is located.

1.5 QUALITY ASSURANCE

A. Fire-Rated Door Inspector Qualifications: Inspector for field quality control inspections of fire-rated door assemblies meets the qualifications set forth in NFPA 80, Section 5.2.3.1 and the following:

1. Door and Hardware Institute Fire and Egress Door Assembly Inspector (FDAI) certification.

PART 2 - PRODUCTS

2.1 ACCESS DOORS AND FRAMES

A. Flush Access Doors with Exposed Flanges

1. Description: Face of door flush with frame, with recessed flange and concealed hinge.
2. Optional Features: as indicated on drawings
3. Locations: Wall and ceiling, as indicated on drawings.
4. Door Size: as indicated on drawings.
5. Uncoated Steel Sheet for Door: Nominal 0.060 inch (1.52 mm), 16 gage, factory primed
6. Frame Material: Same material, thickness, and finish as door
7. Latch and Lock: Cam latch, screwdriver operated

2.2 MATERIALS

A. Steel Sheet: Uncoated or electrolytic zinc coated, ASTM A879/A879M, with cold-rolled steel sheet substrate complying with ASTM A1008/A1008M, Commercial Steel (CS), exposed.

B. Frame Anchors: Same material as door face.

C. Inserts, Bolts, and Anchor Fasteners: Hot-dip galvanized steel according to ASTM A153/A153M or ASTM F2329.

2.3 FABRICATION

A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.

B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.

2.4 FINISHES

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

D. Painted Finishes: Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

1. Factory Primed: Apply manufacturer's standard, lead- and chromate-free, universal primer immediately after surface preparation and pretreatment.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Comply with manufacturer's written instructions for installing access doors and frames.

3.3 FIELD QUALITY CONTROL

A. Inspection Agency: Engage a qualified inspector to perform inspections and to furnish reports to Architect.

B. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.

C. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

3.4 ADJUSTING

A. Adjust doors and hardware, after installation, for proper operation.

END OF SECTION 083113

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 084213 - ALUMINUM-FRAMED ENTRANCES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum-framed entrances.

B. Related Requirements:

1. Section 085113 “Aluminum Windows” for glazing information.
2. Section 087100 “Door Hardware”

1.2 ACTION SUBMITTALS

A. Product Data:

1. Aluminum-framed entrance.

B. Product Data Submittals: For each product.

1. Construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Operating characteristics, electrical characteristics, and furnished accessories.

C. Shop Drawings:

1. Plans, elevations, sections, full-size details, and attachments to other work.
2. Details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
3. Full-size isometric details of each type of vertical-to-horizontal intersection of aluminum-framed entrance and storefront systems, showing the following:

    a. Joinery, including concealed welds.
    b. Anchorage.
    c. Expansion provisions.
    d. Glazing.
    e. Flashing and drainage.

4. Connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
5. Point-to-point wiring diagrams showing the following:

    a. Power requirements for each electrically operated door hardware.

b. Location and types of switches, signal device, conduit sizes, and number and size of wires.

6. Signed and sealed by the qualified professional engineer responsible for their preparation.

D. Samples:
   a. Clear glazing – 12”x12”
   b. Spandrel glazing – 12”x12”
   c. Anodized Aluminum – 2”x4”

E. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams. Coordinate final entrance door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of entrance door hardware.

1.3 INFORMATIONAL SUBMITTAL

A. Energy Performance Certificates: For aluminum-framed entrance and storefront systems, accessories, and components, from manufacturer.

1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed entrance and storefront system.

B. Product Test Reports: For aluminum-framed entrance and storefront systems, for tests performed by a qualified testing agency or manufacturer and witnessed by a qualified testing agency.

C. Source Quality-Control Reports: For aluminum-framed entrance and storefront systems.

D. Field Quality-Control Reports: For aluminum-framed entrance and storefront systems.

E. Qualification Statements:

1. For Installer and egress door inspector.

F. Sample Warranties: For aluminum-framed entrance and storefront systems.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For aluminum-framed entrance and storefront systems.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Entity that employs installers and supervisors who are trained and approved by manufacturer.

B. Egress Door Inspector Qualifications:

1. Inspector for field quality-control inspections of egress door assemblies to comply with qualifications set forth in NFPA 101, Ch. 7 "Means of Egress," Section "Means of Egress Components," Article "Inspection of Door Openings."

C. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.

1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

1.6 WARRANTY

A. Special Warranty: Manufacturer and Installer agree to repair or replace components of aluminum-framed entrance and storefront systems that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures
b. Faulty operation of doors
c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and or use.

2. Warranty Period**:** Five years from date of Substantial Completion.

B. Special Finish Warranty, Anodized Finishes: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of anodized finishes within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested in accordance with ASTM D 2244.
b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D 4214.
c. Cracking, peeling, or chipping.

2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain all components of aluminum-framed entrance system, including framing and accessories, from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrance and storefront systems representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.

In addition to requirements shown or specified, comply with applicable provisions of with AAMA SFM-1 "Aluminum Storefront and Entrance Manual" for design, materials, fabrication and installation of component parts and UFC 4-010-01.

1. Aluminum-framed entrance and storefront systems to withstand movements of supporting structure, including, but not limited to, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
2. Failure also includes the following:
    a. Thermal stresses transferring to building structure.
    b. Glass breakage.
    c. Noise or vibration created by wind and thermal and structural movements.
    d. Loosening or weakening of fasteners, attachments, and other components.
    e. Failure of operating units.

B. Water Penetration under Static Pressure: Test in accordance with ASTM E331 as follows:

1. No evidence of water penetration through fixed glazing and framing areas, including entrance doors, when tested in accordance with a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 6.24 lbf/sq. ft. (300 Pa).

C. Water Penetration under Dynamic Pressure: Test in accordance with AAMA 501.1 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested at dynamic pressure equal to 20 percent of positive wind-load design pressure, but not less than 6.24 lbf/sq. ft. (300 Pa).
2. Maximum Water Leakage: In accordance with AAMA 501.1 Water leakage does not include water controlled by flashing and gutters, or water that is drained to exterior.

D. Seismic Performance: Aluminum-framed entrance and storefront systems to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

1. Seismic Drift Causing Glass Fallout: Complying with criteria for passing based on building occupancy type when tested in accordance with AAMA 501.6 at design displacement and 1.5 times the design displacement.

E. Energy Performance: Certified and labeled by manufacturer for energy performance as follows:

1. Thermal Transmittance (U-factor):

   a. Fixed Glazing and Framing Areas: U-factor for the system of not more than 0.65 or as determined in accordance with NFRC 100.
   b. Entrance Doors: U-factor of not more than 0.65 or as determined in accordance with NFRC 100.

2. Solar Heat-Gain Coefficient (SHGC):

   a. Fixed Glazing and Framing Areas: SHGC for the system of not more than 0.7 or as determined in accordance with NFRC 200.
   b. Entrance Doors: SHGC of not more than 0.7 or as determined in accordance with NFRC 200.

3. Air Leakage: Test in accordance with ASTM E283.

   a. Fixed Glazing and Framing Areas: Air leakage for the system of not more than 0.06 cfm/sq. ft. (0.30 L/s per sq. m) at a static-air-pressure differential of 1.57 lbf/sq. ft. (75 Pa)] [6.24 lbf/sq. ft. (300 Pa) when tested in accordance with ASTM E283.
   b. Entrance Doors: Air leakage of not more than 1.0 cfm/sq. ft. (5.08 L/s per sq. m) at a static-air-pressure differential of 1.57 lbf/sq. ft. (75 Pa).

4. Condensation Resistance Factor (CRF):

   a. Fixed Glazing and Framing Areas: CRF for the system of not less than 55 as determined in accordance with AAMA 1503.
   b. Entrance Doors: CRF of not less than 57 as determined in accordance with AAMA 1503.

F. Noise Reduction: Test in accordance with ASTM E90, with ratings determined by ASTM E1332, as follows.

1. Outdoor-Indoor Transmission Class: Minimum 34.

G. Blast Resistance:

1. Hazard Rating: No Break in accordance with ASTM F2912, tested in accordance with ASTM F1642/F1642M.
2. Performance Condition: 1 in accordance with GSA-TS01.
3. UFC 4-010-01 Unified Facilities Criteria (UFC) – Department of Defense Minimum Antiterrorism Standards for Buildings.

H. Ballistic Resistance, UL 752: Level 3 when tested in accordance with UL 752.

I. Windborne-Debris Impact Resistance: Passes ASTM E1886 missile-impact and cyclic-pressure tests in accordance with ASTM E1996 for Wind Zone 2 basic protection.

1. Large-Missile Test: For glazing located within 30 feet (9.1 m) of grade.
2. Small-Missile Test: For glazing located between 30 feet (9.1 m) and 60 feet (18.3 m) above grade.

J. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes.

1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.3 ALUMINUM-FRAMED ENTRANCE SYSTEMS

A. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.

1. Exterior Framing Construction: Thermally broken
2. Interior Vestibule Framing Construction: Nonthermal
3. Glazing System: Retained mechanically with gaskets on four sides
4. Glazing Plane: Front
5. Finish: Clear anodic finish
6. Fabrication Method: Field-fabricated stick system.
7. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
8. Steel Reinforcement: As required by manufacturer.

B. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.

C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.

D. Insulated Spandrel Panels:

2.4 GLAZING

A. Glazing: Comply with Section 085113 “Aluminum Windows”

B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.

C. Glazing Sealants: As recommended by manufacturer.

2.5 FABRICATION

A. Form or extrude aluminum shapes before finishing.

Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.

B. Fabricate components that, when assembled, have the following characteristics:

1. Profiles that are sharp, straight, and free of defects or deformations.
2. Accurately fitted joints with ends coped or mitered.
3. Physical and thermal isolation of glazing from framing members.
4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
5. Provisions for field replacement of glazing from exterior and interior.
6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.

C. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.

D. Storefront Framing: Fabricate components for assembly using shear-block system.

E. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.

1. At interior and exterior doors, provide compression weather stripping at fixed stops.

F. Entrance Doors: Reinforce doors as required for installing entrance door hardware.

1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
2. At exterior doors, provide weather sweeps applied to door bottoms.

G. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.

H. After fabrication, clearly mark components to identify their locations in Project in accordance with Shop Drawings.

2.6 ALUMINUM FINISHES

A. Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker. Color as indicated in drawings.

B. Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.70 mm or thicker. Color as indicated in drawings.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF ALUMINUM-FRAMED ENTRANCE AND STOREFRONT SYSTEMS

A. Comply with manufacturer's written instructions.

B. Do not install damaged components.

C. Fit joints to produce hairline joints free of burrs and distortion.

D. Rigidly secure nonmovement joints.

E. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.

F. Seal perimeter and other joints watertight unless otherwise indicated.

G. Metal Protection:

1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.

H. Set continuous sill members and flashing in full sealant bed, as specified in Section 079200 "Joint Sealants," to produce weathertight installation.

I. Install joint filler behind sealant as recommended by sealant manufacturer.

J. Install components plumb and true in alignment with established lines and grades.

K. Install entrance doors to produce smooth operation and tight fit at contact points.

1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware in accordance with entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

3.3 ERECTION TOLERANCES

A. Install aluminum-framed entrance and storefront systems to comply with the following maximum tolerances:

1. Plumb: 1/8 inch in 10 feet (3.2 mm in 3 m)
2. Level: 1/8 inch in 20 feet (3.2 mm in 6 m)
3. Alignment:

    a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch (12.7 mm) wide, limit offset from true alignment to 1/16 inch (1.6 mm).
    b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch (12.7 to 25.4 mm) wide, limit offset from true alignment to 1/8 inch (3.2 mm).
    c. Where surfaces are separated by reveal or protruding element of 1 inch (25.4 mm) wide or more, limit offset from true alignment to 1/4 inch (6 mm).

4. Location: Limit variation from plane to 1/8 inch in 12 feet (3.2 mm in 3.6 m); 1/2 inch (12.7 mm) over total length.

3.4 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests.

B. Tests: Perform the following tests on representative areas of aluminum-framed entrance and storefront system.

1. Water-Spray Test: Before installation of interior finishes has begun, areas designated by Architect to be tested in accordance with AAMA 501.2 and to not evidence water penetration.

    a. Perform a minimum of two tests in areas as directed by Architect.

2. Air Leakage: ASTM E783 at 1.5 times the rate specified for laboratory testing in "Performance Requirements" Article but not more than 0.09 cfm/sq. ft. (0.45 L/s per sq. m) at a static-air-pressure differential of 1.57 lbf/sq. ft. (75 Pa).

    a. Perform a minimum of two tests in areas as directed by Architect.

3. Water Penetration: ASTM E1105 at a minimum uniform static-air-pressure differential of 0.67 times the static-air-pressure differential specified for laboratory testing in "Performance Requirements" Article, but not less than 6.24 lbf/sq. ft. (300 Pa), and to not evidence water penetration.

4. Egress Door Inspections: Inspect each aluminum-framed entrance door equipped with panic hardware, located in an exit enclosure, electrically controlled, and equipped with special locking arrangements, in accordance with NFPA 101, Ch. 7 "Means of Egress," Section "Means of Egress Components," Article "Inspection of Door Openings."

C. Aluminum-framed entrance and storefront systems will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

3.5 MAINTENANCE SERVICE

A. Entrance Door Hardware Maintenance:

1. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of entrance door hardware.
2. Initial Maintenance Service: Beginning at Substantial Completion, provide six months full maintenance by skilled employees of entrance door hardware Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper entrance door hardware operation at rated speed and capacity. Use parts and supplies that are the same as those used in the manufacture and installation of original equipment.

3.6 ENTRANCE DOOR HARDWARE SETS

A. See section 087100 Door Hardware.

END OF SECTION 084213

SECTION 085113 – ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermally broken, aluminum-framed windows
2. Blast-resistant aluminum-frames windows
3. Window accessories and perimeter sealants.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for perimeter sealants.
2. Section 088000 "Glazing" for glazing materials and glazing installation requirements.
3. Section 076200 "Sheet Metal Flashing and Trim" for exposed flashing.

1.2 DEFINITIONS

B. Blast-Resistant System: Framing and glazing assembly designed to resist blast loads and comply with specified hazard rating criteria.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's descriptive literature, performance data, finishes, and installation instructions.

B. Shop Drawings: For aluminum-framed security storefront systems.

1. Include plans, elevations, sections, full-size details, and attachments to adjacent construction.
2. Indicate glazing requirements, frame dimensions, reinforcement, anchorage, and relationship to adjoining work.

C. Samples for Initial Selection: Manufacturer's color charts showing full range of available finishes.

D. Samples for Verification:

1. 12-inch- (300-mm-) long samples of each exposed framing member.
2. Corner samples illustrating fabrication, joinery, and finish.
3. Glazing samples showing tint and construction.

1.4 INFORMATIONAL SUBMITTALS

A. Certificates:

1. Certificate of Compliance indicating installed systems comply with specified performance requirements.
2. Certification that blast-resistant systems comply with ASTM F1642, where applicable. UFC-4-010-01 Standard 10

B. Test Reports:

1. Structural performance testing.
2. Air infiltration testing.
3. Water penetration testing.
4. Blast testing, where applicable.

C. Warranty Documentation.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Installer with minimum two years' documented experience in installation of security storefront systems similar to those required for Project.

B. Mockups: If requested by Architect, provide mockup of typical storefront assembly for evaluation of appearance and workmanship.

1.6 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to repair or replace components of aluminum-framed window systems that fail in materials or workmanship within one year from Date of Substantial Completion.

PART 2 – PRODUCTS

2.1 MANUFACTURERS

A. Basis-of-Design Manufacturer:

1. Winco Windows, Dietz Architectural Products, Joe Dietz 314-974-5717 joedietz@sincowindow.com

B. Comparable Manufacturers:

1. Armortex. (armortex.com)
2. Insulgard Security Products. (insulgard.com)
3. North American Bullet Proof (NABP). (nabulletproof.com)

C. Source Limitations: Obtain aluminum-framed security window systems from a single manufacturer.

D. Substitutions: Products by listed comparable manufacturers complying with specified requirements may be submitted in accordance with Division 01 substitution procedures.

2.2 PERFORMANCE REQUIREMENTS

A. Structural Performance:

1. Design aluminum window system to withstand wind loads indicated on Drawings without failure, damage, or permanent deformation.
2. Provide for thermal movement resulting from ambient and surface temperature changes without buckling, opening of joints, overstressing of components, failure of joint sealants, or other detrimental effects.
3. Test uniform structural loading in accordance with ASTM E330/E330M at 1.5 times design pressure.

C. Blast Resistance:

1. Provide blast-resistant system designed to comply with ASTM F1642.
2. Hazard Rating: Very Low Hazard
3. Peak Pressure: UFC 4-010-01 Standard 10
4. Positive Phase Impulse: UFC4-010-01 standard 10

D. Water Penetration:

1. No uncontrolled water leakage when tested in accordance with ASTM E331 at static air pressure differential of 10.0 lbf/sq. ft. (479 Pa).

E. Air Infiltration:

1. Maximum air leakage through fixed glazing and framing areas of 0.4 cfm/sq. ft. of fixed wall area when tested in accordance with NFRC 400.

F. Thermal Performance:

1. Thermal Transmittance (U-Factor): Fixed glazing and framing areas shall have U-factor not greater than the following when tested in accordance with NFRC 100:

   a. Climate Zone 4 u = 0.68.

G. Solar Heat Gain Coefficient (SHGC):

1. Maximum SHGC in accordance with NFRC 200 as follows:

   Climate Zone 4: SHGC = 0.36.

2.3 ALUMINUM-FRAMED SECURITY STOREFRONT SYSTEMS

A. General: Flush-glazed, thermally broken, extruded aluminum-framed storefront system designed to accommodate ballistic-resistant glazing.

B. Basis-of-Design Product:

1. Model: USAW-400 or equivalent.

C. Framing:

1. Nominal Frame Size: 2-1/2 by 4-1/2 inches (64 by 114 mm).
2. Glazing Thickness Capacity: 1 inch to 2-3/8 inches (25 mm to 60 mm).
3. Provide mechanically retained glazing with gaskets on four sides.
4. Provide steel reinforcement where required to meet specified ballistic level.

2.4 BALLISTIC-RESISTANT GLAZING

A. General:

1. Provide glazing thicknesses required to comply with specified ballistic performance.
2. Comply with safety glazing requirements.

B. Glazing Types:

1. Laminated glass complying with ASTM C1172.
2. Glass-clad polycarbonate complying with ASTM C1349.
3. Polycarbonate sheet.
4. Laminated polycarbonate.

2.5 MATERIALS

A. Aluminum:

1. Alloy and temper recommended by manufacturer for application and finish.
2. Extrusions: ASTM B221.
3. Sheet: ASTM B209.

B. Steel Reinforcement:

1. Provide manufacturer's standard galvanized or zinc-rich primed reinforcement.
2. Structural Shapes, Plates, and Bars: ASTM A36/A36M.

3. Cold-Rolled Sheet and Strip: ASTM A1008/A1008M.

4. Provide steel reinforcement for UL 752 Levels 4 through 8.

2.6 ACCESSORIES

A. Glazing Accessories: As specified in Section 08 80 00.

B. Anchors: Type 316 stainless steel.

C. Concrete and Masonry Inserts:

1. Hot-dip galvanized cast iron, malleable iron, or steel inserts complying with ASTM A123/A123M or ASTM A153/A153M.

D. Exposed Flashing:

1. Aluminum sheet matching framing finish.

2. Comply with Section 076200.

E. Concealed Flashing:

1. Dead-soft stainless steel, 0.018 inch (0.46 mm) thick, complying with ASTM A240.

F. Framing Sealants: Manufacturer's standard.

G. Joint Sealants: As specified in Section 079200.

2.7 FABRICATION

A. Fabricate framing in profiles and sizes indicated.

B. Fabricate components to allow for drainage, ventilation, thermal movement, and glazing replacement without dismantling framing.

C. Accurately fit and secure joints.

D. Shop assemble components to greatest extent practical.

2.8 FINISHES

A. Anodized Finish:

1. AAMA 611, Architectural Class I anodized finish.

2. Color: As indicated in drawings.

PART 3 – EXECUTION

3.1 EXAMINATION

A. Examine substrates, openings, and conditions for compliance with requirements affecting performance of work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install storefront systems in accordance with manufacturer's written instructions, approved Shop Drawings, and Section 08 80 00.

B. Set framing members plumb, level, square, and true to line.

C. Anchor securely to supporting structure.

D. Install glazing and sealants to maintain weather-tight and security-resistant installation.

E. Provide separation of aluminum surfaces from incompatible materials.

3.3 INSTALLATION TOLERANCES

A. Maximum variation in diagonal measurements of framing: 1/8 inch (3 mm).

B. Offset between adjacent framing members: 1/16 inch (1.5 mm).

C. Variation from plumb: 1/8 inch in 12 feet (3 mm in 3.6 m).

D. Alignment between adjacent members: Plus or minus 1/16 inch (1.5 mm).

END OF SECTION 085113

SECTION 087100 - DOOR HARDWARE

PART 1 -GENERAL

1.01 SUMMARY

A. Section includes:

1. Mechanical and electrified door hardware
2. Electronic access control system components

B. Section excludes:

1. Windows
2. Cabinets (casework), including locks in cabinets
3. Signage
4. Toilet accessories
5. Overhead doors

C. Related Sections:

1. Division 01 "General Requirements" sections for Allowances, Alternates, Owner Furnished Contractor Installed, Project Management and Coordination.
2. Division 06 Section "Rough Carpentry"
3. Division 06 Section "Finish Carpentry"
4. Division 07 Section "Joint Sealants" for sealant requirements applicable to threshold installation specified in this section.
5. Division 08 Sections:
   a. "Metal Doors and Frames"
   b. "Flush Wood Doors"
   c. "Stile and Rail Wood Doors"
   d. "Interior Aluminum Doors and Frames"
   e. "Aluminum-Framed Entrances and Storefronts"
   f. "Stainless Steel Doors and Frames"
   g. "Special Function Doors"
   h. "Entrances"
6. Division 26 "Electrical" sections for connections to electrical power system and for low-voltage wiring.
7. Division 28 "Electronic Safety and Security" sections for coordination with other components of electronic access control system and fire alarm system.

1.02 REFERENCES

A. UL LLC

1. UL 10B - Fire Test of Door Assemblies
2. UL 10C - Positive Pressure Test of Fire Door Assemblies

3. UL 1784 - Air Leakage Tests of Door Assemblies
4. UL 305 - Panic Hardware

B. DHI - Door and Hardware Institute

1. Sequence and Format for the Hardware Schedule
2. Recommended Locations for Builders Hardware
3. Keying Systems and Nomenclature
4. Installation Guide for Doors and Hardware

C. NFPA – National Fire Protection Association

1. NFPA 70 – National Electric Code
2. NFPA 80 – Standard for Fire Doors and Other Opening Protectives
3. NFPA 101 – Life Safety Code
4. NFPA 105 – Smoke and Draft Control Door Assemblies
5. NFPA 252 – Fire Tests of Door Assemblies

D. ANSI - American National Standards Institute

1. ANSI A117.1 – 2017 Edition – Accessible and Usable Buildings and Facilities
2. ANSI/BHMA A156.1 - A156.29, and ANSI/BHMA A156.31 - Standards for Hardware and Specialties
3. ANSI/BHMA A156.28 - Recommended Practices for Keying Systems
4. ANSI/WDMA I.S. 1A - Interior Architectural Wood Flush Doors
5. ANSI/SDI A250.8 - Standard Steel Doors and Frames

1.03 SUBMITTALS

A. General:

1. Submit in accordance with Conditions of Contract and Division 01 Submittal Procedures.
2. Prior to forwarding submittal:
   a. Review drawings and Sections from related trades to verify compatibility with specified hardware.
   b. Highlight, encircle, or otherwise specifically identify on submittals: deviations from Contract Documents, issues of incompatibility or other issues which may detrimentally affect the Work.

B. Action Submittals:

1. Product Data: Submit technical product data for each item of door hardware, installation instructions, maintenance of operating parts and finish, and other information necessary to show compliance with requirements.
2. Riser and Wiring Diagrams: After final approval of hardware schedule, submit details of electrified door hardware, indicating:
   a. Wiring Diagrams: For power, signal, and control wiring and including:
      1) Details of interface of electrified door hardware and building safety and security systems.
      2) Schematic diagram of systems that interface with electrified door hardware.

3) Point-to-point wiring.
4) Risers.

3. Samples for Verification: If requested by Architect, submit production sample of requested door hardware unit in finish indicated and tagged with full description for coordination with schedule.
   a. Samples will be returned to supplier. Units that are acceptable to Architect may, after final check of operations, be incorporated into Work, within limitations of key coordination requirements.

4. Door Hardware Schedule:
   a. Submit concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate fabrication of other work critical in Project construction schedule.
   b. Submit under direct supervision of a Door Hardware Institute (DHI) certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) with hardware sets in vertical format as illustrated by Sequence of Format for the Hardware Schedule published by DHI.
   c. Indicate complete designations of each item required for each opening, include:
      1) Door Index: door number, heading number, and Architect's hardware set number.
      2) Quantity, type, style, function, size, and finish of each hardware item.
      3) Name and manufacturer of each item.
      4) Fastenings and other pertinent information.
      5) Location of each hardware set cross-referenced to indications on Drawings.
      6) Explanation of all abbreviations, symbols, and codes contained in schedule.
      7) Mounting locations for hardware.
      8) Door and frame sizes and materials.
      9) Degree of door swing and handing.
      10) Operational Description of openings with electrified hardware covering egress, ingress (access), and fire/smoke alarm connections.

5. Key Schedule:
   a. After Keying Conference, provide keying schedule that includes levels of keying, explanations of key system's function, key symbols used, and door numbers controlled.
   b. Use ANSI/BHMA A156.28 "Recommended Practices for Keying Systems" as guideline for nomenclature, definitions, and approach for selecting optimal keying system.
   c. Provide 3 copies of keying schedule for review prepared and detailed in accordance with referenced DHI publication. Include schematic keying diagram and index each key to unique door designations.
   d. Index keying schedule by door number, keyset, hardware heading number, cross keying instructions, and special key stamping instructions.
   e. Provide one complete bitting list of key cuts and one key system schematic illustrating system usage and expansion. Forward bitting list, key cuts and key system schematic directly to Owner, by means as directed by Owner.
   f. Prepare key schedule by or under supervision of supplier, detailing Owner's final keying instructions for locks.

C. Informational Submittals:

1. Provide Qualification Data for Supplier, Installer and Architectural Hardware Consultant.
2. Provide Product Data:
   a. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.
   b. Include warranties for specified door hardware.

D. Closeout Submittals:

1. Operations and Maintenance Data: Provide in accordance with Division 01 and include:
   a. Complete information on care, maintenance, and adjustment; data on repair and replacement parts, and information on preservation of finishes.
   b. Catalog pages for each product.
   c. Final approved hardware schedule edited to reflect conditions as installed.
   d. Final keying schedule
   e. Copy of warranties including appropriate reference numbers for manufacturers to identify project.
   f. As-installed wiring diagrams for each opening connected to power, both low voltage and 110 volts.

E. Inspection and Testing:

1. Submit written reports to the Owner and Authority Having Jurisdiction (AHJ) of the results of functional testing and inspection for:
   a. Fire door assemblies, in compliance with NFPA 80.
   b. Required egress door assemblies, in compliance with NFPA 101.

1.04 QUALITY ASSURANCE

A. Qualifications and Responsibilities:

1. Supplier: Recognized architectural hardware supplier with a minimum of 5 years documented experience supplying both mechanical and electromechanical door hardware similar in quantity, type, and quality to that indicated for this Project. Supplier to be recognized as a factory direct distributor by the manufacturer of the primary materials with a warehousing facility in the Project's vicinity. Supplier to have on staff, a certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) available to Owner, Architect, and Contractor, at reasonable times during the Work for consultation.
2. Installer: Qualified tradesperson skilled in the application of commercial grade hardware with experience installing door hardware similar in quantity, type, and quality as indicated for this Project.
3. Architectural Hardware Consultant: Person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project and meets these requirements:
   a. For door hardware: DHI certified AHC or DHC.
   b. Can provide installation and technical data to Architect and other related subcontractors.

c. Can inspect and verify components are in working order upon completion of installation.
d. Capable of producing wiring diagram and coordinating installation of electrified hardware with Architect and electrical engineers.

4. Single Source Responsibility: Obtain each type of door hardware from single manufacturer.

B. Certifications:

1. Fire-Rated Door Openings:
   a. Provide door hardware for fire-rated openings that complies with NFPA 80 and requirements of authorities having jurisdiction.
   b. Provide only items of door hardware that are listed products tested by UL LLC, Intertek Testing Services, or other testing and inspecting organizations acceptable to authorities having jurisdiction for use on types and sizes of doors indicated, based on testing at positive pressure and according to NFPA 252 or UL 10C and in compliance with requirements of fire-rated door and door frame labels.

2. Smoke and Draft Control Door Assemblies:
   a. Provide door hardware that meets requirements of assemblies tested according to UL 1784 and installed in compliance with NFPA 105
   b. Comply with the maximum air leakage of 0.3 cfm/sq. ft. (3 cu. m per minute/sq. m) at tested pressure differential of 0.3-inch wg (75 Pa) of water.

3. Electrified Door Hardware
   a. Listed and labeled as defined in NFPA 70, Article 100, by testing agency acceptable to authorities having jurisdiction.

4. Accessibility Requirements:
   a. Comply with governing accessibility regulations cited in "REFERENCES" article 087100, 1.02.D3 herein for door hardware on doors in an accessible route. This project must comply with all Federal Americans with Disability Act regulations and all Local Accessibility Regulations.

C. Pre-Installation Meetings

1. Keying Conference
   a. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including:
      1) Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
      2) Preliminary key system schematic diagram.
      3) Requirements for key control system.
      4) Requirements for access control.
      5) Address for delivery of keys.

2. Pre-installation Conference

a. Not more than 2 weeks prior to beginning door, frame and hardware installation, installing contractor shall meet with the door hardware manufacturer to review installation and adjustment procedures, as well as UL and NFPA compliance, for all major types (locks, closers and exit devices).
b. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
c. Inspect and discuss preparatory work performed by other trades.
d. Inspect and discuss electrical roughing-in for electrified door hardware.
e. Review sequence of operation for each type of electrified door hardware.
f. Review required testing, inspecting, and certifying procedures.
g. Review questions or concerns related to proper installation and adjustment of door hardware.

3. Electrified Hardware Coordination Conference:
   a. Prior to ordering electrified hardware, schedule and hold meeting to coordinate door hardware with security, electrical, doors and frames, and other related suppliers.

1.05 DELIVERY, STORAGE, AND HANDLING

A. Inventory door hardware on receipt and provide secure lock-up for hardware delivered to Project site. Promptly replace products damaged during shipping

B. Tag each item or package separately with identification coordinated with final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package. Deliver each article of hardware in manufacturer's original packaging.

C. Maintain manufacturer-recommended environmental conditions throughout storage and installation periods.

D. Provide secure lock-up for door hardware delivered to Project. Control handling and installation of hardware items so that completion of Work will not be delayed by hardware losses both before and after installation.

E. Handle hardware in manner to avoid damage, marring, or scratching. Correct, replace or repair products damaged during Work. Protect products against malfunction due to paint, solvent, cleanser, or any chemical agent.

F. Deliver keys to manufacturer of key control system for subsequent delivery to Owner.

1.06 COORDINATION

A. Coordinate layout and installation of floor-recessed door hardware with floor construction. Cast anchoring inserts into concrete.

B. Installation Templates: Distribute for doors, frames, and other work specified to be factory or shop prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.

D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.07 WARRANTY

A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within published warranty period.

1. Warranty does not cover damage or faulty operation due to improper installation, improper use or abuse.
2. Warranty Period: Beginning from date of Substantial Completion, for durations indicated in manufacturer's published listings.
    a. Mechanical Warranty
        1) Locks
            a) Falcon: 10 years
        2) Exit Devices
            a) Falcon: 10 years
        3) Closers
            a) Falcon SC Series: 10 years
    b. Electrical Warranty
        1) Exit Devices
            a) Falcon: 1 Year

1.08 MAINTENANCE

A. Furnish complete set of special tools required for maintenance and adjustment of hardware, including changing of cylinders.

B. Turn over unused materials to Owner for maintenance purposes.

PART 2 -PRODUCTS

2.01 MANUFACTURERS

A. The Owner requires use of certain products for their unique characteristics and project suitability to ensure continuity of existing and future performance and maintenance standards. After investigating available product offerings, the Awarding Authority has elected to prepare proprietary specifications. These products are specified with the notation: "No Substitute."

1. Where "No Substitute" is noted, submittals and substitution requests for other products will not be considered.

B. Approval of alternate manufacturers and/or products other than those listed as "Scheduled Manufacturer" or "Acceptable Manufacturers" in the individual article for the product category are only to be considered by official substitution request in accordance with section 01 25 00.

C. Approval of products from manufacturers indicated in "Acceptable Manufacturers" is contingent upon those products providing all functions and features and meeting all requirements of scheduled manufacturer's product.

D. Where specified hardware is not adaptable to finished shape or size of members requiring hardware, furnish suitable types having same operation and quality as type specified, subject to Architect's approval.

2.02 MATERIALS

A. Fabrication

1. Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. provide screws according to manufacturer’s recognized installation standards for application intended.
2. Finish exposed screws to match hardware finish, or, if exposed in surfaces of other work, to match finish of this other work including prepared for paint surfaces to receive painted finish.
3. Provide concealed fasteners wherever possible for hardware units exposed when door is closed. Coordinate with “Metal Doors and Frames”, “Flush Wood Doors”, “Stile and Rail Wood Doors” to ensure proper reinforcements. Advise the Architect where visible fasteners, such as thru bolts, are required.

B. Provide screws, bolts, expansion shields, drop plates and other devices necessary for hardware installation.

1. Where fasteners are exposed to view: Finish to match adjacent door hardware material.

C. Cable and Connectors:

1. Where scheduled in the hardware sets, provide each item of electrified hardware and wire harnesses with number and gage of wires enough to accommodate electric function of specified hardware.
2. Provide Molex connectors that plug directly into connectors from harnesses, electric locking and power transfer devices.
3. Provide through-door wire harness for each electrified locking device installed in a door and wire harness for each electrified hinge, electrified continuous hinge, electrified pivot, and electric power transfer for connection to power supplies.

2.03 HINGES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

a. Ives 5BB series

2. Acceptable Manufacturers:
   a. Hager BB1191/1279 series
   b. McKinney TB series
   c. Best FBB series

B. Requirements:

1. Provide hinges conforming to ANSI/BHMA A156.1.
2. Provide five knuckle, ball bearing hinges.
3. 1-3/4 inch (44 mm) thick doors, up to and including 36 inches (914 mm) wide:
   a. Exterior: Standard weight, bronze or stainless steel, 4-1/2 inches (114 mm) high
   b. Interior: Standard weight, steel, 4-1/2 inches (114 mm) high
4. 1-3/4 inch (44 mm) thick doors over 36 inches (914 mm) wide:
   a. Exterior: Heavy weight, bronze/stainless steel, 5 inches (127 mm) high
   b. Interior: Heavy weight, steel, 5 inches (127 mm) high
5. 2 inches or thicker doors:
   a. Exterior: Heavy weight, bronze or stainless steel, 5 inches (127 mm) high
   b. Interior: Heavy weight, steel, 5 inches (127 mm) high
6. Adjust hinge width for door, frame, and wall conditions to allow proper degree of opening.
7. Provide three hinges per door leaf for doors 90 inches (2286 mm) or less in height, and one additional hinge for each 30 inches (762 mm) of additional door height.
8. Hinge Pins: Except as otherwise indicated, provide hinge pins as follows:
   a. Steel Hinges: Steel pins
   b. Non-Ferrous Hinges: Stainless steel pins
   c. Out-Swinging Exterior Doors: Non-removable pins
   d. Out-Swinging Interior Lockable Doors: Non-removable pins
   e. Interior Non-lockable Doors: Non-rising pins
9. Provide hinges with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware. Locate electric hinge at second hinge from bottom or nearest to electrified locking component. Provide mortar guard for each electrified hinge specified.

2.04 CONTINUOUS HINGES

A. Manufacturers:

1. Scheduled Manufacturer:
   a. Ives
2. Acceptable Manufacturers:
   a. Best
   b. Roton
   c. Hager

B. Requirements:

1. Provide aluminum geared continuous hinges conforming to ANSI/BHMA A156.26, Grade 1.
2. Provide aluminum geared continuous hinges, where specified in the hardware sets, fabricated from 6063-T6 aluminum.
3. Provide split nylon bearings at each hinge knuckle for quiet, smooth, self-lubricating operation.
4. Provide hinges capable of supporting door weights up to 450 pounds, and successfully tested for 1,500,000 cycles.
5. On fire-rated doors, provide aluminum geared continuous hinges classified for use on rated doors by testing agency acceptable to authority having jurisdiction.
6. Provide aluminum geared continuous hinges with electrified option scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware.
7. Provide hinges 1 inch (25 mm) shorter in length than nominal height of door, unless otherwise noted or door details require shorter length and with symmetrical hole pattern.

2.05 DOOR CORDS

A. Manufacturers:

1. Scheduled Manufacturer and Product:
   a. Schlage 788/798 Series

2. Acceptable Manufacturers and Products:
   a. Camden CM Series
   b. RCI 9508/9507
   c. Locknetics DC Series

B. Requirements:

1. Provide door cords with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware.
2. Locate electric power transfer per manufacturer's template and UL requirements, unless interference with operation of door or other hardware items.

2.06 CYLINDRICAL LOCKS – GRADE 1

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:
   a. Falcon TM series

2. Acceptable Manufacturers and Products:
   a. Best 9K series

B. Requirements:

1. Provide cylindrical locks conforming to ANSI/BHMA A156.2 Series 4000, Grade 1, and UL Listed for 3-hour fire doors.
2. Cylinders: Refer to "KEYING" article, herein.
3. Provide locks with standard 2-3/4 inches (70 mm) backset, unless noted otherwise, with 1/2-inch latch throw. Provide proper latch throw for UL listing at pairs.
4. Provide locksets with separate anti-rotation thru-bolts, and no exposed screws.
5. Provide independently operating levers with two external return spring cassettes mounted under roses to prevent lever sag.
6. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim.
7. Provide electrified options as scheduled in the hardware sets.
8. Lever Trim: Solid cast levers without plastic inserts and wrought roses on both sides.
   a. Lever Design: DANE.

2.07 DEADBOLTS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:
   a. Falcon D200 Series

2. Acceptable Manufacturers and Products:
   a. Schlage B500 Series
   b. Sargent 470 Series

B. Requirements:

1. Provide grade 2 deadbolt series conforming to ANSI/BHMA A156.
2. Cylinders: Refer to "KEYING" article, herein.
3. Provide deadbolts with standard 2-3/4 inches (70 mm) backset. Provide 2-3/8 inches (60 mm) where noted or if door or frame detail requires. Provide deadbolt with full 1-inch (25 mm) throw, constructed of steel alloy.
4. Provide manufacturer's standard strike.

2.08 EXIT DEVICES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:
   a. Falcon 24/25 series

2. Acceptable Manufacturers and Products:
   a. Sargent 19-43-GL-80 series
   b. Precision Apex series
   c. Von Duprin 78/75 series

B. Requirements:

1. Provide exit devices tested to ANSI/BHMA A156.3 Grade 1 and UL listed for Panic Exit or Fire Exit Hardware.

2. Cylinders: Refer to "KEYING" article, herein.
3. Provide touchpad type exit devices, fabricated of brass, bronze, stainless steel, or aluminum, plated to standard architectural finishes to match balance of door hardware.
4. Touchpad must extend a minimum of one half of door width. No plastic inserts are allowed in touchpads.
5. Provide exit devices with deadlatching feature for security and for future addition of alarm kits and/or other electrified requirements.
6. Provide flush end caps for exit devices.
7. Provide exit devices with manufacturer's approved strikes.
8. Install exit devices at height recommended by exit device manufacturer, allowable by governing building codes, and approved by Architect.
9. Mount mechanism case flush on face of doors or provide spacers to fill gaps behind devices. Where glass trim or molding projects off face of door, provide glass bead kits.
10. Provide cylinder or hex-key dogging as specified at non fire-rated openings.
11. Removable Mullions: 2 inches (51 mm) x 3 inches (76 mm) steel tube. Where scheduled as keyed removable mullion, provide type that can be removed by use of a keyed cylinder, which is self-locking when re-installed.
12. Provide factory drilled weep holes for exit devices used in full exterior application, highly corrosive areas, and where noted in hardware sets.
13. Provide electrified options as scheduled.
14. Provide exit devices with optional trim designs to match other lever and pull designs used on the project.

2.09 CYLINDERS

A. Manufacturers:

1. Scheduled Manufacturer and Product:
   a. BEST 7-pin SFIC

2. Acceptable Manufacturers and Products:
   a. No Substitute

B. Requirements:

1. Provide cylinders/cores to match Owner’s existing key system, compliant with ANSI/BHMA A156.5; latest revision; cylinder face finished to match lockset, manufacturer’s series as indicated. Refer to “KEYING” article, herein.

2.10 KEYING

A. Scheduled System:

1. Existing factory registered system:
   a. Provide cylinders/cores keyed into Owner’s existing factory registered keying system. Comply with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference.

B. Requirements:

1. Construction Keying:
    1) or Owner's Representative will void operation of temporary construction keys.
    b. Replaceable Construction Cores.
        1) Provide temporary construction cores replaceable by permanent cores, furnished in accordance with the following requirements.
            a) 3 construction control keys
            b) 12 construction change (day) keys.
        2) Owner or Owner's Representative will replace temporary construction cores with permanent cores.

2. Permanent Keying:
    a. Provide permanent cylinders/cores keyed by the manufacturer according to the following key system.
        1) Master Keying system as directed by the Owner.
    b. Forward bitting list and keys separately from cylinders, by means as directed by Owner. Failure to comply with forwarding requirements will be cause for replacement of cylinders/cores involved at no additional cost to Owner.
    c. Provide keys with the following features:
        1) Material: Nickel silver; minimum thickness of .107-inch (2.3mm)
        2) Patent Protection: Keys and blanks protected by one or more utility patent(s).
        3) Geographically Exclusive: Where High Security or Security cylinders/cores are indicated, provide nationwide, geographically exclusive key system complying with the following restrictions.
    d. Identification:
        1) Mark permanent cylinders/cores and keys with applicable blind code for identification. Do not provide blind code marks with actual key cuts.
        2) Identification stamping provisions must be approved by the Architect and Owner.
        3) Stamp cylinders/cores and keys with Owner's unique key system facility code as established by the manufacturer; key symbol and embossed or stamped with "DO NOT DUPLICATE" along with the "PATENTED" or patent number to enforce the patent protection.
        4) Failure to comply with stamping requirements will be cause for replacement of keys involved at no additional cost to Owner.
        5) Forward permanent cylinders/cores to Owner, separately from keys, by means as directed by Owner.
    e. Quantity: Furnish in the following quantities.
        1) Permanent Control Keys: 3.
        2) Master Keys: 6.
        3) Change (Day) Keys: 3 per cylinder/core that is keyed differently
        4) Key Blanks: Quantity as determined in the keying meeting.

C. Manufacturers:

1. Scheduled Manufacturer:
    a. Telkee

2. Acceptable Manufacturers:
    a. HPC
    b. Lund

D. Requirements:

1. Provide key control system, including envelopes, labels, tags with self-locking key clips, receipt forms, 3-way visible card index, temporary markers, permanent markers, and standard metal cabinet, all as recommended by system manufacturer, with capacity for 150% of number of locks required for Project.
   a. Provide complete cross index system set up by hardware supplier, and place keys on markers and hooks in cabinet as determined by final key schedule.
   b. Provide hinged-panel type cabinet for wall mounting.

2.11 DOOR CLOSERS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:
   a. Falcon SC70A series

2. Acceptable Manufacturers and Products:
   a. LCN 4050 series
   b. Norton 7500 series
   c. Sargent 351 series

B. Requirements:

1. Provide door closers conforming to ANSI/BHMA A156.4 Grade 1 requirements by BHMA certified independent testing laboratory. ISO 9000 certify closers. Stamp units with date of manufacture code.
2. Provide door closers with fully hydraulic, full rack and pinion action with aluminum cylinder.
3. Closer Body: 1-1/2-inch (38 mm) diameter with 5/8-inch (16 mm) diameter heat-treated pinion journal.
4. Hydraulic Fluid: Fireproof, passing requirements of UL10C, and requiring no seasonal closer adjustment for temperatures ranging from 120 degrees F to -30 degrees F.
5. Spring Power: Continuously adjustable over full range of closer sizes, and providing reduced opening force as required by accessibility codes and standards.
6. Hydraulic Regulation: By tamper-proof, non-critical valves, with separate adjustment for latch speed, general speed, and backcheck.
7. Pressure Relief Valve (PRV) Technology: Not permitted.
8. Provide special templates, drop plates, mounting brackets, or adapters for arms as required for details, overhead stops, and other door hardware items interfering with closer mounting.

2.12 MAGNETIC HOLD-OPENS

A. Manufacturers:

1. Scheduled Manufacturer:
   a. LCN SEM7800 Series

2. Acceptable Manufacturers:
   a. Norton
   b. Rixson

B. Requirements:

1. Provide wall or floor mounted electromagnetic door release as specified with minimum of 25 pounds of holding force. Coordinate projection of holder and armature with other hardware and wall conditions to ensure that door sits parallel to wall when fully open. Connect magnetic holders on fire-rated doors into the fire control panel for fail-safe operation

2.13 DOOR TRIM

A. Manufacturers:

1. Scheduled Manufacturer:
   a. Ives

2. Acceptable Manufacturers:
   a. Elmes
   b. Trimco
   c. Rockwood

B. Requirements:

1. Provide push plates, push bars, pull plates, pulls, and hands-free reversible door pulls with diameter and length as scheduled.

2.14 PROTECTION PLATES

A. Manufacturers:

1. Scheduled Manufacturer:
   a. Ives

2. Acceptable Manufacturers:
   a. Burns
   b. Trimco
   c. Rockwood

B. Requirements:

1. Provide protection plates with a minimum of 0.050 inch (1 mm) thick, beveled four edges as scheduled. Furnish with sheet metal or wood screws, finished to match plates.
2. Sizes plates 2 inches (51 mm) less width of door on single doors, pairs of doors with a mullion, and doors with edge guards. Size plates 1 inch (25 mm) less width of door on pairs without a mullion or edge guards.
3. At fire rated doors, provide protection plates over 16 inches high with UL label.

2.15 OVERHEAD STOPS AND OVERHEAD STOP/HOLDERS

A. Manufacturers:

1. Scheduled Manufacturers:
   a. Glynn-Johnson

2. Acceptable Manufacturers:
   a. Rixson
   b. ABH

B. Requirements:

1. Provide overhead stop at any door where conditions do not allow for a wall stop or floor stop presents tripping hazard.

2.16 DOOR STOPS AND HOLDERS

A. Manufacturers:

1. Scheduled Manufacturer:
   a. Ives

2. Acceptable Manufacturers:
   a. Burns
   b. Trimco
   c. Rockwood

B. Provide door stops at each door leaf:

1. Provide wall stops wherever possible. Provide concave type where lockset has a push button of thumbturn.
2. Where a wall stop cannot be used, provide universal floor stops.
3. Where wall or floor stop cannot be used, provide overhead stop.
4. Provide roller bumper where doors open into each other and overhead stop cannot be used.

2.17 SILENCERS

A. Manufacturers:

1. Scheduled Manufacturer:
   a. Ives

2. Acceptable Manufacturers:
   a. Burns
   b. Rockwood
   c. Trimco

B. Requirements:

1. Provide "push-in" type silencers for hollow metal or wood frames.
2. Provide one silencer per 30 inches (762 mm) of height on each single frame, and two for each pair frame.
3. Omit where gasketing is specified.

2.18 THRESHOLDS, SEALS, DOOR SWEEPS, AUTOMATIC DOOR BOTTOMS, AND GASKETING

A. Scheduled Manufacturer:

1. Zero International

B. Acceptable Manufacturers:

1. National Guard
2. Reese

C. Seals and Gasketing: Provide continuous gasketing on exterior openings, to the head and jambs, forming a continuous seal between the door and the frame. Provide smoke, light, or sound gasketing on interior doors where indicated.

1. Provide self-tapping fasteners for aluminum extruded gasketing being applied to hollow metal frames.
   a. Provide non-corrosive fasteners for all exterior applications.
   b. Provide security fasteners where indicated.

2. Provide neoprene, EPDM, silicone, or nylon brush inserts as specified in hardware sets. Provide non brush inserts of solid or sponge cell, as specified in hardware sets. Vinyl inserts are not allowed except where specified in hardware sets.

D. Smoke Labeled Gasketing: At all smoke labeled openings, provide smoke listed perimeter gasketing assemblies complying with NFPA 105 listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction for smoke control ratings indicated based on testing according to UL 1784.

E. Fire Listed Gasketing: Assemblies complying with NFPA 80 that are listed by a testing and inspecting agency acceptable to authorities having jurisdiction for fire ratings indicated based on testing according to UL-10C.

1. Where frame-applied intumescent seals are required by the manufacturer, provide gaskets that comply with UL10C Standard for Positive Pressure Fire Tests of Door Assemblies and UBC 7-2, Fire Tests of Door Assemblies.

F. Sound-Rated Gasketing: Provide acoustic gasketing to meet Sound Transmission Class (STC) rating required.

G. Meeting-Stile Gasketing: Provide meeting-stile gasketing that fastens to the meeting stiles forming a continuous seal when doors are closed.

H. Door Sweeps or Shoes: Apply to the bottom of the door to close the gap between the door bottom and finished floor or saddle threshold.

1. Provide solid neoprene, EPDM, silicone, or nylon brush type of seal as specified in hardware sets. Vinyl inserts are not allowed except where specified in hardware sets.

I. Automatic Door Bottoms:

1. Provide closed cell sponge, bulb neoprene. or EPDM type of seal as specified in hardware sets.
2. Door bottom to be mortised, semi mortised, or surface mount as with a minimum thickness as specified in hardware sets.

J. Rain Drips:

1. Provide overhead rain drips for out-swinging hollow metal doors that are not covered against 45 degree blowing rain. Aluminum extrusion to be a minimum of .088 inches thick and extend 2.50 inches from the face of the frame, in anodized finish to match door.
2. Door sweeps or shoes with integral rain drip must meet ADA requirements

K. Thresholds: Provide threshold units not less than 4 inches wide, formed to accommodate change in floor elevation where indicated, and fabricated to accommodate door hardware and fit door frames.

1. Threshold extrusion to be a minimum thickness as specified in hardware sets.

2.19 MAGNETIC HOLDERS

A. Manufacturers:

1. Scheduled Manufacturer:
   a. LCN

2. Acceptable Manufacturers:
   a. Rixson
   b. Sargent

B. Requirements:

1. Provide wall or floor mounted electromagnetic door release as specified with minimum of 25 pounds of holding force. Coordinate projection of holder and armature with other hardware and wall conditions to ensure that door sits parallel to wall when fully open. Connect magnetic holders on fire-rated doors into the fire control panel for fail-safe operation.

2.20 DOOR POSITION SWITCHES

A. Manufacturers:

1. Scheduled Manufacturer:

a. Schlage

2. Acceptable Manufacturers:
   a. GE-Interlogix
   b. Sargent

B. Requirements:

1. Provide recessed or surface mounted type door position switches as specified.
2. Coordinate door and frame preparations with door and frame suppliers. If switches are being used with magnetic locking device, provide minimum of 4 inches (102 mm) between switch and magnetic locking device.

2.21 FINISHES

A. FINISH: BHMA 626/652 (US26D); EXCEPT:

1. Hinges at Exterior Doors: BHMA 630 (US32D)
2. Aluminum Geared Continuous Hinges: BHMA 628 (US28)
3. Push Plates, Pulls, and Push Bars: BHMA 630 (US32D)
4. Protection Plates: BHMA 630 (US32D)
5. Overhead Stops and Holders: BHMA 630 (US32D)
6. Door Closers: Powder Coat to Match
7. Wall Stops: BHMA 630 (US32D)
8. Latch Protectors: BHMA 630 (US32D)
9. Weatherstripping: Clear Anodized Aluminum
10. Thresholds: Mill Finish Aluminum

PART 3 -EXECUTION

3.01 EXAMINATION

A. Prior to installation of hardware, examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance. Verify doors, frames, and walls have been properly reinforced for hardware installation.

B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.

C. Submit a list of deficiencies in writing and proceed with installation only after unsatisfactory conditions have been corrected.

3.02 INSTALLATION

A. Mount door hardware units at heights to comply with the following, unless otherwise indicated or required to comply with governing regulations.

1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
2. Custom Steel Doors and Frames: HMMA 831.
3. Interior Architectural Wood Flush Doors: ANSI/WDMA I.S. 1A
4. Installation Guide for Doors and Hardware: DHI TDH-007-20

B. Install door hardware in accordance with NFPA 80, NFPA 101 and provide post-install inspection, testing as specified in section 1.03.E unless otherwise required to comply with governing regulations.

C. Install each hardware item in compliance with manufacturer's instructions and recommendations, using only fasteners provided by manufacturer.

D. Do not install surface mounted items until finishes have been completed on substrate. Protect all installed hardware during painting.

E. Set units level, plumb and true to line and location. Adjust and reinforce attachment substrate as necessary for proper installation and operation.

F. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

G. Install operating parts so they move freely and smoothly without binding, sticking, or excessive clearance.

H. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than quantity recommended by manufacturer for application indicated.

I. Lock Cylinders:

1. Install construction cores to secure building and areas during construction period.
2. Replace construction cores with permanent cores as indicated in keying section.
3. Furnish permanent cores to Owner for installation.

J. Wiring: Coordinate with Division 26, ELECTRICAL and Division 28 ELECTRONIC SAFETY AND SECURITY sections for:

1. Conduit, junction boxes and wire pulls.
2. Connections to and from power supplies to electrified hardware.
3. Connections to fire/smoke alarm system and smoke evacuation system.
4. Connection of wire to door position switches and wire runs to central room or area, as directed by Architect.
5. Connections to panel interface modules, controllers, and gateways.
6. Testing and labeling wires with Architect's opening number.

K. Key Control System: Tag keys and place them on markers and hooks in key control system cabinet, as determined by final keying schedule.

L. Continuous Hinges: Re-locate the door and frame fire rating labels where they will remain visible so that the hinge does not cover the label once installed.

M. Door Closers & Auto Operators: Mount closers/operators on room side of corridor doors, inside of exterior doors, and stair side of stairway doors from corridors. Mount closers/operators so they are not visible in corridors, lobbies and other public spaces unless approved by Architect.

N. Overhead Stops/Holders: Mount overhead stops/holders on room side of corridor doors, inside of exterior doors, and stair side of stairway doors.

O. Thresholds:

1. Set thresholds in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."
2. Aluminum thresholds to be cut-in, and scribed around mullions, frame members, and stops. Do not butt to thresholds. Provide a continuous surface across full width of opening from jamb to jamb.
3. Where aluminum panic-type (rabbeted) thresholds with neoprene inserts are specified, undercut doors as required to properly mate with seal in threshold.

P. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they may impede traffic or present tripping hazard.

Q. Perimeter Gasketing:

1. Apply to head and jamb, forming seal between door and frame.
2. Install gasketing in a manner eliminating need to cut any seal to install surface mounted hardware. Install compatible mounting bracket for surface mounted hardware unless minimum 1/4 inch thick solid aluminum seals are provided for mounting of surface applied hardware.

R. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.

S. Door Bottoms and Sweeps: Apply to bottom of door, forming seal with threshold when door is closed.

3.03 ADJUSTING

A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

B. Occupancy Adjustment: Approximately three to six months after date of Substantial Completion, examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors and door hardware.

3.04 CLEANING AND PROTECTION

A. Clean adjacent surfaces soiled by door hardware installation.

B. Clean operating items per manufacturer's instructions to restore proper function and finish.

C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.05 DOOR HARDWARE SCHEDULE

A. The intent of the hardware specification is to specify the hardware for interior and exterior doors, and to establish a type, continuity, and standard of quality. However, it is the door hardware supplier's responsibility to thoroughly review existing conditions, schedules, specifications, drawings, and other Contract Documents to verify the suitability of the hardware specified.

B. Discrepancies, conflicting hardware, and missing items are to be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application.

C. Hardware items are referenced in the following hardware schedule. Refer to the above specifications for special features, options, cylinders/keying, and other requirements.

D. Hardware Sets:

1. The hardware sets listed below represent design intent and direction of the owner and architect. They are a guideline only and should not be considered a detailed hardware schedule. Discrepancies, conflicting hardware and missing items should be brought to the attention of the architect with corrections made prior to the bidding process.

Legend:
Link to catalog cut sheet
Electrified Opening

Hardware Group No. 01

For use on Door #(s):
116 117

Provide each PR door(s) with the following:

QTY	DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1		EXISTING DOOR, FRAME AND HARDWARE TO REMAIN		

Hardware Group No. 02

For use on Door #(s):
114

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	STOREROOM LOCK	TM581BB7 DAN	626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE	626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE	626	BES

BALANCE OF EXISTING HARDWARE TO REMAIN.

OPERATIONAL DESCRIPTION
STOREROOM LOCK - OUTSIDE LEVER FIXED. ENTRANCE BY KEY ONLY. INSIDE LEVER ALWAYS UNLOCKED. INSIDE LEVER IS ALWAYS FREE FOR IMMEDIATE EGRESS.

Hardware Group No. 03

For use on Door #(s):
111

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
2	EA	DOOR CORD	788C-18 WITH 20 GAUGE WIRES	626	SCE
1	EA	PANIC HARDWARE	25-R-EO	626	FAL
1	EA	ELEC PANIC HARDWARE	RX-MEL-25-R-NL-OP-CON 24 VDC	626	FAL
1	EA	RIM HOUSING	AS REQ'D	626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE	626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE	626	BES
1	EA	MULTITECH READER	RCK15 12 VDC	BLK	SCE
2	EA	DOOR CONTACT	679-05HM OR WD AS REQ'D	BLK	SCE

BALANCE OF EXISTING HARDWARE TO REMAIN.

ACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY PULL AFTER RETRACTING LATCHBOLT WITH KEY. LATCHBOLT CAN BE RETRACTED ELECTRICALLY FOR EITHER MOMENTARY OR EXTENDED PERIODS OF TIME.

INACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. NO EXTERIOR TRIM. EXIT ONLY.

DOOR POSITION SWITCH(S) MONITOR WHETHER DOOR IS OPEN OR CLOSED.

Hardware Group No. 03A

For use on Door #(s):
110

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	PANIC HARDWARE	25-R-EO		626	FAL
1	EA	PANIC HARDWARE	25-R-NL-OP		626	FAL
1	EA	RIM HOUSING	AS REQ'D		626	FAL
1	EA	MORTISE CYLINDER	AS REQ'D		626	FAL
2	EA	SFIC CORE	SFIC CONSTRUCTION CORE		626	BES
2	EA	SFIC CORE	SFIC PERMANENT CORE		626	BES
2	EA	DOOR CONTACT	679-05HM OR WD AS REQ'D		BLK	SCE

OPERATIONAL DESCRIPTION
ACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY PULL AFTER RETRACTING LATCHBOLT WITH KEY.

INACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. NO EXTERIOR TRIM. EXIT ONLY.

DOOR POSITION SWITCH(S) MONITOR WHETHER DOOR IS OPEN OR CLOSED.

Hardware Group No. 03B

For use on Door #(s):
112 113

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	PANIC HARDWARE	25-R-EO		626	FAL
1	EA	PANIC HARDWARE	25-R-NL-OP		626	FAL
1	EA	RIM HOUSING	AS REQ'D		626	FAL
1	EA	MORTISE CYLINDER	AS REQ'D		626	FAL
2	EA	SFIC CORE	SFIC CONSTRUCTION CORE		626	BES
2	EA	SFIC CORE	SFIC PERMANENT CORE		626	BES

OPERATIONAL DESCRIPTION
ACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY PULL AFTER RETRACTING LATCHBOLT WITH KEY.
SELF CLOSING. SPRING LOADED STOP INCLUDED. PUSH SIDE MOUNTED.

INACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. NO EXTERIOR TRIM. EXIT ONLY.
SELF CLOSING. SPRING LOADED STOP INCLUDED. PUSH SIDE MOUNTED.

Hardware Group No. 04

For use on Door #(s):
101 108

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER			FINISH	MFR
3	EA	HINGE	5BB1HW 4.5 X 4.5			652	IVE
1	EA	FIRE EXIT HARDWARE	F-25-R-L-BE-DANE			626	FAL
1	EA	SURFACE CLOSER	SC71A RW/PA			689	FAL
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS			630	IVE
1	EA	MAGNET	SEM7850 12V/24V/120V		✓	689	LCN
1	EA	GASKETING	488SBK PSA			BK	ZER

FIRE RATED OPENING

OPERATIONAL DESCRIPTION
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY TURNING LEVER. LEVER ALWAYS FREE FOR ENTRY.
SELF CLOSING.
MAG HOLD OPENS TO RELEASE WITH ACTIVATION OF FIRE ALARM ALLOWING DOORS TO CLOSE.

Hardware Group No. 05

For use on Door #(s):
102 103 107

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1HW 4.5 X 4.5		652	IVE
1	EA	PUSH PLATE	8200 4" X 16"		630	IVE
1	EA	PULL PLATE	8303 10" 4" X 16"		630	IVE
1	EA	SURFACE CLOSER	SC71A RW/PA		689	FAL
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE
1	EA	WALL STOP	WS406/407CCV		630	IVE
1	EA	GASKETING	488SBK PSA		BK	ZER

OPERATIONAL DESCRIPTION
FREE EGRESS AND ENTRY AT ALL TIMES BY PUSH PLATE OR PULL. NON-LOCKING, NON-LATCHING.

Hardware Group No. 06

For use on Door #(s):
104 105

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1HW 4.5 X 4.5		652	IVE
1	EA	TURN I/S X OCC IND	D271		626	FAL
1	EA	PUSH PLATE	8200 4" X 16"		630	IVE
1	EA	PULL PLATE	8303 10" 4" X 16"		630	IVE
1	EA	SURFACE CLOSER	SC71A RW/PA		689	FAL
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE
1	EA	WALL STOP	WS406/407CCV		630	IVE
1	EA	GASKETING	488SBK PSA		BK	ZER

OPERATIONAL DESCRIPTION
FREE EGRESS AND ENTRY AT ALL TIMES BY PUSH PLATE OR PULL. NON-LOCKING, NON-LATCHING.

FACTORY PREP PUSH PULL PLATES FOR DEADBOLT CUT-OUT.

Hardware Group No. 07

For use on Door #(s):
106

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	ENTRANCE/OFFICE LOCK	TM501BB7 DAN		626	FAL
1	EA	WALL STOP	WS406/407CCV		630	IVE
3	EA	SILENCER	SR64		GRY	IVE

OPERATIONAL DESCRIPTION
ENTRANCE/OFFICE LOCK - LATCHBOLT RETRACTED BY LEVER FROM EITHER SIDE UNLESS OUTSIDE LEVER IS MADE INOPERATIVE BY KEY OR THUMBTURN. WHEN LOCKED, LATCHBOLT RETRACTED BY KEY OR INSIDE LEVER. EXTERIOR REMAINS LOCKED UNTIL UNLOCKED BY THUMBTURN OR KEY. INSIDE LEVER ALWAYS FREE FOR IMMEDIATE EGRESS.

Hardware Group No. 08

For use on Door #(s):
120

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	STOREROOM LOCK	TM581BB7 DAN		626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE		626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE		626	BES
1	EA	OH STOP & HOLDER	100F		630	GLY
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS		630	IVE
1	EA	GASKETING	488SBK PSA		BK	ZER

OPERATIONAL DESCRIPTION
STOREROOM LOCK - OUTSIDE LEVER FIXED. ENTRANCE BY KEY ONLY. INSIDE LEVER ALWAYS UNLOCKED. INSIDE LEVER IS ALWAYS FREE FOR IMMEDIATE EGRESS.
PULL SIDE MOUNTED OVERHEAD STOP

Hardware Group No. 09

For use on Door #(s):
100

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER			FINISH	MFR
2	EA	CONT. HINGE	112XY			US28	IVE
1	EA	PANIC HARDWARE	24-C-EO			626	FAL
1	EA	PANIC HARDWARE	24-C-NL			626	FAL
1	EA	MORTISE CYLINDER	AS REQ'D			626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE			626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE			626	BES
2	EA	SURFACE CLOSER	SC71A SS			689	FAL
1	SET	WEATHER STRIPPING	BY DOOR/FRAME MFR.				UNK
2	EA	DOOR SWEEP	39A			A	ZER
1	EA	THRESHOLD	655A-223			A	ZER
2	EA	DOOR CONTACT	7764		✓	628	SCE
	EA	CLOSER TEMPLATING, BRACKETS, SHOES, SPACERS, ETC	AS REQUIRED				

OPERATIONAL DESCRIPTION

ACTIVE LEAF
CONCEALED ROD EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY PULL AFTER RETRACTING LATCHBOLT WITH KEY.
SELF CLOSING. SPRING LOADED STOP INCLUDED. PUSH SIDE MOUNTED.

INACTIVE LEAF
CONCEALED ROD EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. NO EXTERIOR TRIM. EXIT ONLY.
SELF CLOSING. SPRING LOADED STOP INCLUDED. PUSH SIDE MOUNTED.

DOOR POSITION SWITCH(S) MONITOR WHETHER DOOR IS OPEN OR CLOSED.

Hardware Group No. 10

For use on Door #(s):
109

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
6	EA	HINGE	5BB1 4.5 X 4.5		652	IVE
1	EA	PANIC HARDWARE	25-V-EO-LBR		626	FAL
1	EA	PANIC HARDWARE	25-V-L-NL-LBR-DANE		626	FAL
1	EA	RIM HOUSING	AS REQ'D		626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE		626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE		626	BES
2	EA	SURFACE CLOSER	SC71A HW/PA		689	FAL
2	EA	KICK PLATE	8400 10" X 1" LDW B-CS		630	IVE
2	EA	WALL STOP	WS406/407CCV		630	IVE

OPERATIONAL DESCRIPTION

ACTIVE LEAF
SURFACE ROD EXIT DEVICE. LESS BOTTOM ROD. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. ENTRY BY LEVER AFTER RETRACTING LATCHBOLT WITH KEY. SELF CLOSING. HOLD OPEN ARM INCLUDED.

INACTIVE LEAF
SURFACE ROD EXIT DEVICE. LESS BOTTOM ROD. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR.
SELF CLOSING. HOLD OPEN ARM INCLUDED.

Hardware Group No. 11

For use on Door #(s):
115

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	REMOVABLE MULLION	KR4023		SP28	FAL
1	EA	PANIC HARDWARE	25-R-EO		626	FAL
1	EA	PANIC HARDWARE	25-R-NL-OP		626	FAL
1	EA	RIM HOUSING	AS REQ'D		626	FAL
1	EA	SFIC CORE	SFIC CONSTRUCTION CORE		626	BES
1	EA	SFIC CORE	SFIC PERMANENT CORE		626	BES

BALANCE OF EXISTING HARDWARE TO REMAIN.

OPERATIONAL DESCRIPTION
ACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSINB PUSHBAR. ENTRY BY PULL AFTER RETRACTING LATCHBOLT WITH KEY.

INACTIVE LEAF
RIM EXIT DEVICE. FREE EGRESS AT ALL TIMES BY PRESSING PUSHBAR. NO EXTERIOR TRIM. EXIT ONLY.

END OF SECTION 087100

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Glass products.
2. Laminated glass.
3. Insulating glass.
4. Glazing sealants.
5. Glazing tapes.
6. Miscellaneous glazing materials.

B. Related Requirements:

1. Section 085113 Aluminum Windows

1.2 DEFINITIONS

A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.

B. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.

C. IBC: International Building Code.

D. Interspace: Space between lites of an insulating-glass unit.

1.3 COORDINATION

A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project Site/

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.

2. Review temporary protection requirements for glazing during and after installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Glass Samples: For each type of the following products; 12 inches (300 mm) square.
1. Laminated glass.
2. Insulating glass.
3. Spandrel glass.

C. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer, manufacturers of fabricated glass units, glass testing agency, and sealant testing agency.

B. Product Certificates: For glass.

C. Product Test Reports: For fabricated glass and glazing sealants, for tests performed by a qualified testing agency.

1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.

D. Preconstruction adhesion and compatibility test report.

E. Sample Warranties: For special warranties.

1.7 QUALITY ASSURANCE

A. Fabricated-Glass Manufacturer Qualifications: A qualified manufacturer of fabricated glass units who is approved and certified by primary glass manufacturer.

B. Installer Qualifications: A qualified glazing contractor for this Project who is certified under the North American Contractor Certification Program (NACC) for Architectural Glass & Metal (AG&M) contractors and who employs glazing technicians certified under the Architectural Glass and Metal Technician (AGMT) certification program.

C. Glass Testing Agency Qualifications: A qualified independent testing agency accredited according to the NFRC CAP 1 Certification Agency Program.

D. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021 to conduct the testing indicated.

1.8 PRECONSTRUCTION TESTING

A. Preconstruction Adhesion and Compatibility Testing: Test each glass product, tape sealant, gasket, glazing accessory, and glass-framing member for adhesion to and compatibility with elastomeric glazing sealants.

1. Testing is not required if data are submitted based on previous testing of current sealant products and glazing materials matching those submitted.
2. Use ASTM C1087 to determine whether priming and other specific joint-preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to glass, tape sealants, gaskets, and glazing channel substrates.
3. Test no fewer than two Samples of each type of material, including joint substrates, shims, sealant backings, secondary seals, and miscellaneous materials.
4. Schedule enough time for testing and analyzing results to prevent delaying the Work.
5. For materials failing tests, submit sealant manufacturer's written instructions for corrective measures including use of specially formulated primers.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.

B. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

1.10 FIELD CONDITIONS

A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.

1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F (4.4 deg C).

1.11 WARRANTY

A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.

1. Warranty Period: 10 years from date of Substantial Completion.

B. Manufacturer's Special Warranty for Laminated Glass: Manufacturer agrees to replace laminated-glass units that deteriorate within specified warranty period. Deterioration of laminated glass is defined as defects developed from normal use that are not attributed to glass

breakage or to maintaining and cleaning laminated glass contrary to manufacturer's written instructions. Defects include edge separation, delamination materially obstructing vision through glass, and blemishes exceeding those allowed by referenced laminated-glass standard.

1. Warranty Period**:** Five (5) years from date of Substantial Completion.

C. Manufacturer's Special Warranty for Insulating Glass: Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is obstruction of vision by dust, moisture, or film on interior surfaces of glass.

1. Warranty Period: 10 years from date of Substantial Completion.

D. Manufacturer's Special Warranty for Heat-Soaked Tempered Glass: Manufacturer agrees to replace heat-soaked tempered glass units that spontaneously break due to nickel sulfide (NiS) inclusions at a rate exceeding 0.3 percent (3/1000) within specified warranty period. Coverage for any other cause is excluded.

1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Glass: Obtain tinted and coated glass from single source from single manufacturer.
1. Basis of Design: Guardian Glass, Vitro Solarban 60
2. Approved equivalents: AGC Glass Company, NSG/Pilkington Group

B. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

B. Structural Performance: Glazing shall withstand the following design loads within limits and under conditions indicated determined in accordance with the IBC and ASTM E1300:

1. Design Wind Pressures:

a. Wind Design Data: As indicated on Drawings.
b. Basic Wind Speed: 100 mph (44 m/s) to 110 mph (49 m/s)

c. Exposure Category: B.

2. Thermal Loads: Design glazing to resist thermal stress breakage induced by differential temperature conditions and limited air circulation within individual glass lites and insulated glazing units.

C. Windborne-Debris-Impact Resistance: Exterior glazing shall pass ASTM E1886 missile-impact and cyclic-pressure tests in accordance with ASTM E1996 for Wind Zone **1** for basic protection.

1. Large-Missile Test: For glazing located within 30 feet (9.1 m) of grade.

D. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II, and UFC 4-010-01 for Very Low Level of Protection – New and Existing Buildings.

E. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:

1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
2. For laminated-glass lites, properties are based on products of construction indicated.
3. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
4. U-Factors: Center-of-glazing values, in accordance with NFRC 100 and based on most current non-beta version of LBL's WINDOW computer program, expressed as Btu/sq. ft. x h x deg F (W/sq. m x K).
5. SHGC and Visible Transmittance: Center-of-glazing values, in accordance with NFRC 200 and based on most current non-beta version of LBL's WINDOW computer program.
6. Visible Reflectance: Center-of-glazing values, in accordance with NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.

NGA Publications: "Laminated Glazing Reference Manual" and "Glazing Manual."

1. AAMA Publications: AAMA GDSG-1, "Glass Design for Sloped Glazing," and AAMA TIR A7, "Sloped Glazing Guidelines."
2. IGMA Publication for Sloped Glazing: IGMA TB-3001, "Guidelines for Sloped Glazing."
3. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."

B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC or another certification agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.

C. Insulating-Glass Certification Program: Permanently marked either on spacers or on at least one component lite of units with appropriate certification label of the IGCC.

D. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than thickness indicated.
   1. Thickness of Tinted Glass: Provide same thickness for each tint color indicated throughout Project.

E. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

A. Clear Annealed Float Glass: ASTM C1036, Type I, Class 1 (clear), Quality-Q3.

B. Low-Iron Annealed Float Glass: ASTM C1036, Type I, Class I (clear), Quality-Q3; and with visible light transmission of not less than 91 percent[and SHGC of not less than 0.87].

C. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

   1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

D. Heat-Strengthened Float Glass: ASTM C1048, Kind HS (heat strengthened), Type I, Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

   1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

E. Pyrolytic-Coated, Low-Maintenance Glass: Clear float glass with coating on first surface having both photocatalytic and hydrophilic properties that act to loosen dirt and to cause water to sheet evenly over the glass instead of beading.

F. Reflective- and Low-E-Coated Vision Glass: ASTM C1376.

G. Ceramic-Coated Vision Glass: ASTM C1048, Condition C, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3; and complying with Specification No. 95-1-31 in NGA's "Engineering Standards Manual."

H. Ceramic-Coated Spandrel Glass: ASTM C1048, Type I, Condition B, Quality-Q3.

I. Reflective- and Low-E-Coated Spandrel Glass: ASTM C1376, Kind CS.

2.5 LAMINATED GLASS

A. Laminated Glass: ASTM C1172. Use materials that have a proven record of no tendency to bubble, discolor, or lose physical and mechanical properties after fabrication and installation.
   1. Construction: Laminate glass with polyvinyl butyral interlayer, ionoplast interlayer, or cast-in-place and cured-transparent-resin interlayer to comply with interlayer manufacturer's written instructions.
   2. Interlayer Thickness: Provide thickness not less than that indicated and as needed to comply with requirements.
   3. Interlayer Color: Clear unless otherwise indicated.

B. Windborne-Debris-Impact-Resistant Laminated Glass: Comply with requirements specified above for laminated glass except laminate glass with[**one of**] the following to comply with interlayer manufacturer's written instructions:
   1. Construction: Laminate glass with polyvinyl butyral interlayer reinforced with polyethylene terephthalate film, ionoplast interlayer, or cast-in-place and cured-transparent-resin interlayer reinforced with polyethylene terephthalate film to comply with interlayer manufacturer's written instructions.
   2. Interlayer Thickness: Provide thickness not less than that indicated and as needed to comply with requirements.
   3. Interlayer Color: Clear unless otherwise indicated.

2.6 INSULATING GLASS

A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified in accordance with ASTM E2190.
   1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.
   2. Perimeter Spacer: Manufacturer's standard spacer material and construction.
   3. Desiccant: Molecular sieve or silica gel, or a blend of both.

2.7 GLAZING SEALANTS

A. General:

   1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
   2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.

2.8 GLAZING TAPES

A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:

1. AAMA 804.3 tape, where indicated.
2. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.
3. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.

B. Expanded Cellular Glazing Tapes: Closed-cell, PVC foam tapes; factory coated with adhesive on both surfaces; and complying with AAMA 800 for the following types:

1. AAMA 810.1, Type 1, for glazing applications in which tape acts as primary sealant.
2. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

2.9 MISCELLANEOUS GLAZING MATERIALS

A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.

B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.

C. Setting Blocks:

1. Silicone with Shore A durometer hardness of 85, plus or minus 5.
2. Type recommended in writing by sealant or glass manufacturer.

D. Spacers:

1. Neoprene blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
2. Type recommended in writing by sealant or glass manufacturer.

E. Edge Blocks:

1. Silicone with Shore A durometer hardness per manufacturer's written instructions.
2. Type recommended in writing by sealant or glass manufacturer.

F. Cylindrical Glazing Sealant Backing: ASTM C1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.10 FABRICATION OF GLAZING UNITS

A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.

1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.

    a. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:

1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
2. Presence and functioning of weep systems.
3. Minimum required face and edge clearances.
4. Effective sealing between joints of glass-framing members.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.

B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.

C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.

D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Provide spacers for glass lites where length plus width is larger than 50 inches (1270 mm).

1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
2. Provide 1/8-inch- (3-mm-) minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.

G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and in accordance with requirements in referenced glazing publications.

H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.

I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.

J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.

K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended in writing by gasket manufacturer.

3.4 TAPE GLAZING

A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.

B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.

C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.

D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.

E. Do not remove release paper from tape until right before each glazing unit is installed.

F. Apply heel bead of elastomeric sealant.

G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.

H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.

B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.

C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.

E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.

B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.

C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.7 CLEANING AND PROTECTION

A. Immediately after installation, remove nonpermanent labels and clean surfaces.

B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.

1. If, despite such protection, contaminating substances do contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.

C. Remove and replace glass that is damaged during construction period.

D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

3.8 MONOLITHIC GLASS SCHEDULE

A. Clear Glass Type Heat strengthened or fully tempered float glass.
1. Minimum Thickness: 6 mm.
2. Safety glazing required as indicated in drawings

B. Low-Iron Glass Type Heat-strengthened or Fully tempered float glass.
1. Minimum Thickness: 6 mm
2. Safety glazing required as indicated in drawings

C. Pyrolytic-Coated, Low-Maintenance Glass Type as indicated in drawings: Clear heat-strengthened or fully tempered float glass.
1. Minimum Thickness: 6 mm
2. Safety glazing required.
3. Winter Nighttime U-Factor: 0.29 maximum.
4. Summer Daytime U-Factor: 0.29 maximum.
5. Visible Light Transmittance: 69
6. SHGC: 0.39 maximum.
7. Safety glazing required.

D. Ceramic-Coated Spandrel Glass Type, as indicated on drawing**,** fully tempered float glass.
1. Glass: Clear float glass.
2. Tint Color: Clear
3. Coating Color: Black
4. Minimum Thickness: 6 mm
5. Coating Location: Second surface.
6. Winter Nighttime U-Factor: 0.29 maximum.
7. Summer Daytime U-Factor: 0.29 maximum.
8. Visible Light Transmittance: 2
9. SHGC: 0.25 maximum.
10. Fallout Resistance: Passes fallout-resistance test in ASTM C1048 for an assembly of glass and adhered reinforcing material.

E. Silicone-Coated Spandrel Glass Type as indicated in drawings, fully tempered float glass.
1. Glass: Clear float glass.

2. Tint Color: Clear
3. Coating Color: Black
4. Minimum Thickness: 6 mm
5. Coating Location: Second surface.
6. Winter Nighttime U-Factor: 0.29 maximum.
7. Summer Daytime U-Factor: 0.29 maximum.
8. Visible Light Transmittance: 2
9. SHGC: 0.25 maximum.
10. Fallout Resistance: Passes fallout-resistance test in ASTM C1048 for an assembly of glass and adhered reinforcing material.

3.9 INSULATING GLASS SCHEDULE

A. Pyrolytic-Coated, Low-Maintenance Insulating Glass Type as indicated on drawings.
1. Overall Unit Thickness: 1 inch (25 mm.
2. Minimum Thickness of Each Glass Lite: 6 mm.
3. Outdoor Lite: Heat-strengthened or fully tempered float glass.
4. Interspace Content: Argon.
5. Indoor Lite: Fully tempered float glass.
6. Winter Nighttime U-Factor: 0.29 maximum.
7. Summer Daytime U-Factor: 0.29 maximum.
8. Safety glazing required as indicated in drawings

B. Low-E-Coated, Clear Insulating Glass Type as indicated on drawings.
1. Overall Unit Thickness: 1 inch (25 mm.
2. Minimum Thickness of Each Glass Lite: 6 mm.
3. Outdoor Lite: Heat-strengthened or fully tempered float glass.
4. Interspace Content: Argon.
5. Indoor Lite: Annealed or fully tempered float glass.
6. Winter Nighttime U-Factor: 0.29 maximum.
7. Summer Daytime U-Factor: 0.29 maximum.
8. Safety glazing required
9. Visible Light Transmittance: 69 percent minimum.
10. SGHC: 0.40 maximum.
11. Safety glazing required as indicated in drawings.

C. Pyrolytic-Coated, Low-Maintenance, Low-E-Coated, Clear Insulating Glass Type
1. Overall Unit Thickness: 1 inch (25 mm.
2. Minimum Thickness of Each Glass Lite: 6 mm.
3. Outdoor Lite: Heat-strengthened or fully tempered float glass.
4. Interspace Content: Argon.
5. Indoor Lite: Annealed or fully tempered float glass.
6. Winter Nighttime U-Factor: 0.29 maximum.
7. Summer Daytime U-Factor: 0.29 maximum.
8. Safety glazing required
9. Visible Light Transmittance: 69 percent minimum.
10. SGHC: 0.40 maximum.
11. Safety glazing required as indicated on drawings.

D. Ceramic-Coated, Low-E, Insulating Spandrel Glass Type as indicated on drawings.
1. Coating Color: Black
2. Overall Unit Thickness: 1 inch (25 mm.
3. Minimum Thickness of Each Glass Lite: 6 mm.
4. Outdoor Lite: Heat-strengthened or fully tempered float glass.
5. Interspace Content: Argon.
6. Indoor Lite: Annealed or fully tempered float glass.
7. Winter Nighttime U-Factor: 0.29 maximum.
8. Summer Daytime U-Factor: 0.29 maximum.
9. Safety glazing required.
10. Low-E Coating: Pyrolytic on second surface.

3.10 INSULATING-LAMINATED-GLASS SCHEDULE

A. Clear Insulating, Laminated Glass Type
1. Basis-of-Design Product: Winco or Approved Equivalents; FG Glass, Tecdur.
2. Overall Unit Thickness: 1.1 inches (28 mm)
3. Minimum Thickness of Outdoor Lite: .24 inches (6 mm)
4. Outdoor Lite: Clear fully tempered float glass.
5. Interspace Content: Argon.
6. Indoor Lite: Clear laminated glass with two plies of fully tempered float glass.
a. Minimum Thickness of Each Glass Ply: 4 mm
b. Interlayer Thickness: 0.030 inch (0.76 mm)
7. Winter Nighttime U-Factor: 0.29 maximum.
8. Summer Daytime U-Factor: 0.29 maximum.
9. SGHC: 0.40 maximum.
10. Safety glazing required.
11. Low-E Coating: Pyrolytic on second surface.

B. Ceramic-Coated, Laminated Glass Type
1. Basis-of-Design Product: Winco or Approved Equivalents; FG Glass, Tecdur.
2. Coating Color: Black

3. Overall Unit Thickness: 1.1 inches (28 mm)
4. Minimum Thickness of Outdoor Lite: .24 inches (6 mm)
5. Outdoor Lite: Clear fully tempered float glass.
6. Interspace Content: Argon.
7. Indoor Lite: Clear laminated glass with two plies of fully tempered float glass.
a. Minimum Thickness of Each Glass Ply: 4 mm
b. Interlayer Thickness: 0.030 inch (0.76 mm)
8. Winter Nighttime U-Factor: 0.29 maximum.
9. Summer Daytime U-Factor: 0.29 maximum.
10. SGHC: 0.40 maximum.
11. Safety glazing required.
12. Low-E Coating: Pyrolytic on second surface.

END OF SECTION 088000

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Framing systems.
2. Suspension systems.
3. Grid suspension systems.

B. Related Requirements:

1. Section 054000 "Cold-Formed Metal Framing" for exterior and interior load-bearing and exterior non-load-bearing wall studs; floor joists; and roof rafters and ceiling joists.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Framing systems.
2. Suspension systems.
3. Grid suspension systems.

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of code-compliance certification for studs and tracks.

B. Evaluation Reports: For high-strength steel studs and track, firestop tracks, post-installed anchors, and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

1.4 QUALITY ASSURANCE

A. Code-Compliance Certification of Studs and Tracks: Provide documentation that framing members are certified according to the product-certification program of the Certified Steel Stud Association, the Steel Framing Industry Association, the Steel Stud Manufacturers Association, or the Supreme Steel Framing System Association.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Notify manufacturer of damaged materials received prior to installation.

B. Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.

C. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling as required by AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, in accordance with ASTM E119 by an independent testing agency.

B. Horizontal Deflection: For composite wall assemblies, limited to 1/240 of the wall height based on horizontal loading of 5lbf/sq.ft (239 Pa).

C. Design framing systems in accordance with AISI S220, "North American Specification for the Design of Cold-Formed Steel Framing - Nonstructural Members," unless otherwise indicated.

D. Design Loads: As indicated on Drawings or minimum as required by the IBC.

E. Design framing systems to accommodate deflection of primary building structure and construction tolerances and to withstand design loads with a maximum deflection of 1/2"

2.2 FRAMING SYSTEMS

A. Studs and Track: ASTM C645.

1. Clark Dietrich, Marino Ware: Division of War Ind., Steel Network Inc. (The)
2. Minimum Base-Steel Thickness: as indicated on the drawings.
3. Depth: As indicated on Drawings.

B. Slip-Type Head Joints: Where indicated, provide one of the following:

1. Single Long-Leg Runner System: STM C645.
2. Double-Runner System: ASTM C645.
3. Deflection Track: Steel sheet top runner manufactured to prevent deflection of structure above.
4. Products: Subject to compliance with requirements, provide one of the following:

    a. ClarkDietrich; MaxTrak Slotted Deflection Track with 2½ inch leg.
    b. MarionWare; Slotted Track with 2½ inch leg.
    c. Steel Network, Inc (The); VertiClip SLD Series.

C. Proprietary Firestop Track: Top runner manufactured to allow partition heads to expand and contract with movement of the structure while maintaining continuity of fire-resistance-rated assembly indicated.

1. Product: Subject to compliance with requirements, provide one of the following:

a. Fire Trak Corp.: Fire Track attached to studs with Rediklip.
b. Metal-Lite, Inc.; The System.
c. ClarkDietrich; MaxTrak Slotted Deflection with 2½ inch leg.
d. MarinoWare; FAS Track 1000.

D. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.

E. Cold-Rolled Chanel Bridging: 0.0538-inch bare-steel thickness, with minimum ½ inch wide flanges.

F. Hat-Shaped, rigid Furring Chanels: ASTM C645, 7/8 inch deep.

G. Cold-Rolled Furring Channels: 0.0538-inch bare-steel thickness, with minimum ½ inch wide flanges.

H. Threaded Rod Hangers: ASTM A510, mild carbon steel, with Protective Coating per ASTM A153.

2.3 SUSPENSION SYSTEMS

A. Tie Wire: ASTM A641/A641M, Class 1 zinc coating.

B. Hanger Attachments to Concrete:

1. Anchors: Corrosion-resistant materials with loops for attaching wire hangers, Comply with ASTM E488.

C. Wire Hangers: ASTM A641, Class 1 zinc coating, soft temper, 0.162-inch diameter.

D. Flat Hangers: Steel sheet, in size indicated on Drawings.

E. Angle Hangers: ASTM A653M, G60 (Z180), hot-dip galvanized commercial steel sheet.

F. Rod Hangers: ASTM A510, mild carbon steel.

G. Carrying Channels: Cold-rolled, commercial-steel sheet.

H. Furring Channels (Furring Members):

1. Cold-Rolled Channels: 0.0538-inch bare-steel thickness, with minimum ½ inch wide flanges, ¾ inch deep.
2. Sheet Studs: ASTM C645. Minimum thickness as indicated on Drawings.
3. Hat-Shaped, Rigid Furring Channels: ASTM C645, 7/8 inch deep.

2.4 GRID SUSPENSION SYSTEMS (NOT USED)

2.5 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards.

1. Fasteners for Steel Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.

B. Isolation Strip at Exterior Walls: Provide one of the following:

1. Asphalt-Saturated Organic Felt: ASTM D226/D226M, Type I (No. 15 asphalt felt), nonperforated.
2. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch (3.2 mm) thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION (NOT USED)

3.3 INSTALLATION, GENERAL

A. Installation Standard: ASTM C754.

1. Gypsum Veneer Plaster Assemblies: Also comply with requirements in ASTM C844 that apply to framing installation.
2. Gypsum Board Assemblies: Also comply with requirements in ASTM C840 that apply to framing installation.

B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.

C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.

D. Install bracing at terminations in assemblies.

E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.4 INSTALLATION OF FRAMING SYSTEMS

A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.

C. Install studs so flanges within framing system point in same direction.

D. Install tracks at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.

1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install track section (for cripple studs) at head and secure to jamb studs.

    a. Install two studs at each jamb unless otherwise indicated.
    b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch (13-mm) clearance from jamb stud to allow for installation of control joint in finished assembly.
    c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.

3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.

    a. Firestop Track: Where indicated, install to maintain continuity of fire-resistance-rated assembly indicated.

E. Direct Furring:

1. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches (610 mm) o.c.

3.5 INSTALLATION OF SUSPENSION SYSTEMS

A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.

C. Suspend hangers from building structure as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.

    a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.

    a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.

3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
4. Flat Hangers: Secure to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices and fasteners that are secure and appropriate for structure and hanger, and in a manner that will not cause hangers to deteriorate or otherwise fail.
5. Do not connect or suspend steel framing from ducts, pipes, or conduit.

D. Fire-Resistance-Rated Assemblies: Wire tie furring channels to supports.

3.6 INSTALLATION OF GRID SUSPENSION SYSTEMS (NOT USED)

END OF SECTION 092216

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior gypsum board.
2. Tile backing panels.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for joint sealants installed in gypsum board assemblies.
2. Section 092216 "Non-Structural Metal Framing" for non-structural steel framing and suspension systems that support gypsum board panels.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show locations and installation of control and expansion joints, including plans, elevations, sections, details of components, and attachments to other work.

1.3 DELIVERY, STORAGE AND HANDLING

A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.4 FIELD CONDITIONS

A. Environmental Limitations: Comply with ASTM C840 requirements or gypsum board manufacturer's written instructions, whichever are more stringent.

B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.

C. Do not install panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated in accordance with ASTM E119 by an independent testing agency.

B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated in accordance with ASTM E90 and classified in accordance with ASTM E413 by an independent testing agency.

2.3 GYPSUM BOARD, GENERAL

A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.4 INTERIOR GYPSUM BOARD

A. Gypsum Wallboard: ASTM C1396/C1396M.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness: 5/8 inch (15.9 mm).
3. Long Edges: Tapered.

B. Gypsum Board, Type X: ASTM C1396/C1396M.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness: 5/8 inch (15.9 mm).
3. Long Edges: Tapered.

C. Gypsum Ceiling Board: ASTM C1396/C1396M.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness: 5/8 inch (15.9 mm).
3. Long Edges: Tapered.

D. Mold-Resistant Gypsum Board: ASTM C1396/C1396M. With moisture- and mold-resistant core and paper surfaces.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness : 5/8 inch (15.9 mm)
3. Long Edges: Tapered.
4. Mold Resistance: ASTM D3273, score of 10 as rated in accordance with ASTM D3274.

2.5 TILE BACKING PANELS

A. Cementitious Backer Units: ANSI A118.9 and ASTM C1288 or ASTM C1325, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness: 5/8 inch (15.9 mm).
3. Mold Resistance: ASTM D3273, score of 10 as rated in accordance with ASTM D3274.

B. Water-Resistant Gypsum Backing Board: ASTM C1396/C1396M, with manufacturer's standard edges.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

    a. American Gypsum
    b. CertainTeed Corporation
    c. Continental Building Products, LLC
    d. Georgia-Pacific Building Products
    e. National Gypsum Company
    f. PABCO Gypsum
    g. Temple-Inland Building Products by Georgia-Pacific
    h. USG Corporation

2. Thickness: 5/8 inch (15.9 mm)

2.6 TRIM ACCESSORIES

A. Interior Trim: ASTM C1047.

1. Material: Galvanized or aluminum-coated steel sheet, rolled zinc, plastic, or paper-faced galvanized-steel sheet, or Galvanized or aluminum-coated steel sheet or rolled zinc.
2. Shapes:

    a. Cornerbead.
    b. Bullnose bead.
    c. LC-Bead: J-shaped; exposed long flange receives joint compound.
    d. L-Bead: L-shaped; exposed long flange receives joint compound.
    e. U-Bead: J-shaped; exposed short flange does not receive joint compound.
    f. Expansion (control) joint.
    g. Curved-Edge Cornerbead: With notched or flexible flanges.

2.7 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C475/C475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.
2. Exterior Gypsum Soffit Board: Paper.
3. Glass-Mat Gypsum Sheathing Board: 10-by-10 glass mesh.
4. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints**,** rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use drying-type, all-purpose compound.

    a. Use setting-type compound for installing paper-faced metal trim accessories.

3. Fill Coat: For second coat, use drying-type, all-purpose compound.
4. Finish Coat: For third coat, use drying-type, all-purpose compound.

D. Joint Compound for Tile Backing Panels:

1. Glass-Mat, Water-Resistant Backing Panel: As recommended by backing panel manufacturer.
2. Cementitious Backer Units: As recommended by backer unit manufacturer.
3. Water-Resistant Gypsum Backing Board: Use setting-type taping compound and setting-type, sandable topping compound.

2.8 AUXILIARY MATERIALS

A. Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.

B. Acoustical Sealant: As specified in Section 079219 "Acoustical Joint Sealants."

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the work include, but are not limited to, the following:

a. Accumetric LLC
b. Franklin International
c. Grabber Construction Products
d. Hilti, Inc.
e. Pecora Corporation
f. Specified Technologies, Inc.
g. USG Corporation

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates including welded hollow-metal frames and support framing, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION AND FINISHING OF PANELS, GENERAL

A. Comply with ASTM C840.

B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.

C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch (1.5 mm) of open space between panels. Do not force into place.

D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.

E. Form control and expansion joints with space between edges of adjoining gypsum panels.

F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.

1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. (0.7 sq. m) in area.
2. Fit gypsum panels around ducts, pipes, and conduits.
3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- (6.4- to 9.5-mm-) wide joints to install sealant.

G. Wood Framing: Install gypsum panels over wood framing, with floating internal corner construction. Do not attach gypsum panels across the flat grain of wide-dimension lumber, including floor joists and headers. Float gypsum panels over these members or provide control joints to counteract wood shrinkage.

H. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C919 and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.

I. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 INSTALLATION OF INTERIOR GYPSUM BOARD

A. Install interior gypsum board in the following locations:

1. Wallboard Type: **As** indicated on Drawings.
2. Type X: As indicated on Drawings and where required for fire-resistance-rated assembly.
3. Ceiling Type: As indicated on Drawings.
4. Mold-Resistant Type: As indicated on Drawings, in moisture .

B. Single-Layer Application:

1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.

2. On partitions/walls, apply gypsum panels vertically (parallel to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.

    a. Stagger abutting end joints not less than one framing member in alternate courses of panels.

3. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

C. Laminating to Substrate: Where gypsum panels are indicated as directly adhered to a substrate (other than studs, joists, furring members, or base layer of gypsum board), comply with gypsum board manufacturer's written instructions and temporarily brace or fasten gypsum panels until fastening adhesive has set.

3.4 INSTALLATION OF TILE BACKING PANELS

A. Cementitious Backer Units: ANSI A108.11, at showers and locations indicated to receive tile.

B. Water-Resistant Backing Board: Install where indicated with 1/4-inch (6.4-mm) gap where panels abut other construction or penetrations.

C. Where tile backing panels abut other types of panels in same plane, shim surfaces to produce a uniform plane across panel surfaces.

3.5 INSTALLATION OF TRIM ACCESSORIES

A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.

B. Control Joints: Install control joints in accordance with ASTM C840 and in specific locations approved by Architect for visual effect.

C. Interior Trim: Install in the following locations:

1. Cornerbead: Use at outside corners.
2. LC-Bead: Use at exposed panel edges
3. U-Bead: Use at exposed panel edges.

3.6 FINISHING OF GYPSUM BOARD

A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.

B. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide 1/4- to 5/8-inch- (6.4- to 12.7-mm-) wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

C. Prefill open joints, rounded or beveled edges, and damaged surface areas.

D. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.

E. Gypsum Board Finish Levels: Finish panels to levels indicated below and in accordance with ASTM C840:

1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
2. Level 2: Panels that are substrate for tile.
3. Level 3: Where indicated on Drawings.
4. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.

a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."

F. Cementitious Backer Units: Finish according to manufacturer's written instructions.

3.7 PROTECTION

A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.

B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.

C. Remove and replace panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 095123 – ACOUSTICAL TILE CEILINGS

1.1 SUMMARY

A. Section Includes:

1. Acoustical tiles.
2. Metal suspension system.
3. Accessories.
4. Metal edge moldings and trim.

B. Products furnished, but not installed under this Section, include anchors, clips, and other ceiling attachment devices to be cast in concrete.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Ceiling suspension-system members.
2. Structural members to which suspension systems will be attached.
3. Method of attaching hangers to building structure.

    a. Furnish layouts for cast-in-place anchors, clips, and other ceiling attachment devices whose installation is specified in other Sections.

B. Qualification Data: For testing agency.

C. Product Test Reports: For each acoustical tile ceiling, for tests performed by manufacturer and witnessed by a qualified testing agency.

1.4 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Deliver acoustical tiles, suspension-system components, and accessories to Project site and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

1.6 FIELD CONDITIONS

A. Environmental Limitations: Do not install acoustical tile ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Suspended ceilings to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: Class A in accordance with ASTM E1264.
2. Smoke-Developed Index: 50 or less.

2.2 ACOUSTICAL TILES

A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc. or comparable product by one of the following:

1. Certainteed, Saint-Gobain Global
2. USG Corporation

B. Acoustical Tile Standard: Provide manufacturer's standard tiles of configuration indicated that comply with ASTM E1264 classifications as designated by type, form, pattern, acoustical rating, and light reflectance unless otherwise indicated.

C. Classification: Provide tiles as follows:

1. Type and Form, Type III: Mineral base with painted finish
2. Pattern: E (lightly textured).

D. Color: White

E. Light Reflectance (LR): Not less than 0.85.

F. Ceiling Attenuation Class (CAC): Not less than 35.

G. Noise Reduction Coefficient (NRC): Not less than 0.60.

H. Edge Profile: Angled Tegular.

I. Thickness: 3/4 inch (19 mm).

J. Modular Size: 12 by 48 inches (305 by 1220 mm).

K. Antimicrobial Treatment: Manufacturer's standard broad spectrum, antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested in accordance with ASTM D3273, ASTM D3274, or ASTM G21 and evaluated in accordance with ASTM D3274 or ASTM G21.

2.3 METAL SUSPENSION SYSTEM

A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc. or comparable product by one of the following:

1. Certainteed, Saint-Gobain Global
2. USG Corporation

B. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, fully concealed, metal suspension system and accessories of type, structural classification, and finish indicated that complies with applicable requirements in ASTM C635/C635M.

C. Direct-Hung, Double-Web Suspension System: Main and cross runners roll formed from and capped with cold-rolled steel sheet, prepainted, electrolytically zinc coated, or hot-dip galvanized, G30 (Z90) coating designation.

1. Structural Classification: Intermediate-duty system.
2. Access: Upward with initial access openings of size indicated below and located throughout ceiling within each module formed by main and cross runners, with additional access available by progressively removing remaining acoustical tiles.

    a. Initial Access Opening: In each module, as indicated on Drawings.

2.4 ACCESSORIES

A. Attachment Devices: Size for five times the design load indicated in ASTM C635/C635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.

1. Anchors in Concrete: Anchors of type and material indicated below, with holes or loops for attaching hangers of type indicated and with capability to sustain, without failure, a load equal to five times that imposed by ceiling construction, as determined by testing in accordance with ASTM E488/E488M or ASTM E1512 as applicable, conducted by a qualified testing and inspecting agency.

B. Wire Hangers, Braces, and Ties: Provide wires as follows:

1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, including structural framing and substrates to which acoustical tile ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine acoustical tiles before installation. Reject acoustical tiles that are wet, moisture damaged, or mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Measure each ceiling area and establish layout of acoustical tiles to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width tiles at borders unless otherwise indicated, and comply with layout shown on reflected ceiling plans.

B. Layout openings for penetrations centered on the penetrating items.

3.3 INSTALLATION OF SUSPENDED ACOUSTICAL TILE CEILINGS

A. Install suspended acoustical tile ceilings in accordance with ASTM C636/C636M, seismic design requirements, and manufacturer's written instructions.

B. Suspend ceiling hangers from building's structural members and as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
3. Space hangers not more than 48 inches (1200 mm) o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches (200 mm) from ends of each member.
4. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards.

C. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical tiles.

1. Do not use exposed fasteners, including pop rivets, on moldings and trim.

D. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.

E. Arrange directionally patterned acoustical tiles as indicated on the Drawings.

3.4 FIELD QUALITY CONTROL

A. Special Inspections: Engage a qualified special inspector to perform the following special inspections:

1. Periodic inspection during the installation of suspended ceiling grids in accordance with ASCE/SEI 7.

3.5 ADJUSTING

A. Clean exposed surfaces of acoustical tile ceilings, including trim and edge moldings. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.

B. Remove and replace tiles and other ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095123

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Thermoplastic-rubber base.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, not less than 12 inches (300 mm) long.

C. Samples for Initial Selection: For each type of product indicated.

D. Samples for Verification: For each type of product indicated and for each color, texture, and pattern required in manufacturer's standard-size Samples, but not less than 12 inches (300 mm) long.

E. Product Schedule: For resilient base and accessory products. Use same designations indicated on Drawings.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Furnish not less than 10 linear feet (3 linear m) for every 500 linear feet (150 linear m) or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F (10 deg C) or more than 90 deg F (32 deg C).

1.6 FIELD CONDITIONS

A. Store materials for not less than 48 hours prior to installation in area of installation at a temperature of 70 degrees F to achieve temperature stability. Thereafter, maintain conditions above 55 degrees F.

PART 2 - PRODUCTS

2.1 THERMOPLASTIC-RUBBER BASE

A. Basis-of-Design Product: Subject to compliance with requirements, provide Johnsonite (a Tarkett company), Duracove Thermoplastic Rubber (Type TP) or comparable by one of the following:

1. Roppe Corporation
2. Flexco Corporation

B. Product Standard: ASTM F1861, Type TP (rubber, thermoplastic).

1. Group: I (solid, homogeneous).
2. Style and Location:

    a. Style A, Straight: Provide in areas with carpet.
    b. Style B, Cove: Provide in areas with resilient floor coverings.

C. Thickness: 0.125 inch (3.2 mm).

D. Height: 6 inches (102 mm), As indicated on Drawings.

E. Lengths: 120’ (36.58 m) roll or in manufacturer’s standard roll length

F. Outside Corners: Job formed.

G. Inside Corners: Job formed.

H. Colors: As approved by Architect through the full array of options.

2.2 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Installation of resilient products indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.

B. Concrete Substrates for Resilient Stair Accessories: Prepare horizontal surfaces according to ASTM F710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.

C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

D. Do not install resilient products until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.

E. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.3 RESILIENT BASE INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient base.

B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.

C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.

D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.

E. Do not stretch resilient base during installation.

F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.

G. Job-Formed Corners:

1. Outside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches (76 mm) in length.

    a. Form without producing discoloration (whitening) at bends.

2. Inside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches (76 mm) in length.

    a. Miter corners to minimize open joints.

3.4 RESILIENT ACCESSORY INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient accessories.

B. Resilient Stair Accessories:

1. Use stair-tread-nose filler to fill nosing substrates that do not conform to tread contours.
2. Tightly adhere to substrates throughout length of each piece.
3. For treads installed as separate, equal-length units, install to produce a flush joint between units.

C. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.

B. Perform the following operations immediately after completing resilient-product installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum horizontal surfaces thoroughly.
3. Damp-mop horizontal surfaces to remove marks and soil.

C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 096723 – RESINOUS FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. This Section includes:

1. High-performance resinous flooring systems.

1.2 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Installer Certificates for Qualification: Signed by manufacturer stating that installers comply with specified requirements.

C. Material Certificates: For each resinous flooring component, from manufacturer.

D. Maintenance Data: For maintenance manuals.

E. Samples: Submit two 6” X 6” samples of each resinous flooring system applied to a rigid backing. Provide sample which is a true representation of proposed field applied finish. Provide sample color and texture for approval from Owner in writing or approved by General Contractor prior to installation.

F. Product Schedule: For resinous flooring.

1.3 QUALITY ASSURANCE

A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of flooring systems required for this Project.

1. Engage an installer who is approved in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.

2. Installer Letter of Qualification: Installer to provide letter stating that they have been in business for at least 5 years and listing 5 projects in the last 2 years of similar scope. For each project provide: project name, location, date of installation, contact information, size of project, and manufacturer of materials with system information.

B. Source Limitations: Obtain primary resinous flooring materials, including primers, resins, hardening agents, grouting coats, and topcoats, from single source from single manufacturer. Provide secondary materials, including patching and fill material, joint sealant, and repair materials, of type and from source recommended by manufacturer of primary materials.

C. Pre-installation Conference: Conduct conference at Project site before work and mockups begin.

D. Mockups: Apply mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution. Do not cover up mockup area.

1. Apply full-thickness mockups on 16 square foot floor area selected by Architect.

2. Finish surfaces for verification of products, color, texture, and sheen.

3. Simulate finished lighting conditions for Architect's review of mockups.

4. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

5. Mockup shall demonstrate desired slip resistance for review and approval by Owner’s representative in writing.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Deliver materials in original packages and containers, with seals unbroken, bearing manufacturer's labels indicating brand name and directions for storage and mixing with other components.

1. Maintain containers in clean condition, free of foreign materials and residue.

2. Remove rags and waste from storage areas daily.

1.5 PROJECT CONDITIONS

A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring application.

B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.

C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application unless manufacturer recommends a longer period.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Basis of Design:

1. The Sherwin Williams Company, Cleveland, OH. swflooring@sherwin.com Resulflor Deco Flake BC

B. Approved equivalents:

1. Torginol DecoFlake

2. SikaScreed DecoFlake

3. Or as approved by Architect and Owner

C. Resuflor Deco Flake BC, 20-30 mils nominal thickness.

1. Primer: Resuflor MPE at 200-300 sq. ft. per gallon.

2. Body Coat: Resuflor MPE at 200-300 sq. ft. per gallon.

3. Broadcast: Decorative Flakes 6750 or 6755 to excess at 100-200 lbs. per 1,000 sq. ft.

4. Grout Coat: Resuflor UVE at 160-250 sq. ft. per gallon.

5. Seal Coat: Resutile HTS 100 at 250-400 sq. ft. per gallon.

2.2 MATERIALS

A. VOC Content of Resinous Flooring: Provide resinous flooring systems, for use inside the weatherproofing system, that comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24)].

1. Resinous Flooring: 100 g/L.

2.3 HIGH-PERFORMANCE RESINOUS FLOORING

A. Resinous Flooring: Abrasion-, impact- and chemical-resistant, high-performance, resin-based, monolithic floor surfacing designed to produce a seamless floor.

B. System Characteristics:

1. Color and Pattern: As indicated from manufacturers listed above.

2. Slip Resistance: Coefficient of Friction-COF, James Friction Tester, ASTM D2047, 0.63

PART 3 - EXECUTION

3.1 PREPARATION

A. Inspection: Prior to commencing Work, thoroughly examine all underlying and adjoining work, surfaces and conditions upon which Work is in any way dependent for perfect results. Report all conditions which affect Work. No "waiver of responsibility" for incomplete, inadequate or defective underlaying and adjoining work, surfaces and conditions will be considered, unless notice of such unsatisfactory conditions has been filed and agreed to in writing before Work begins. Commencement of Work constitutes acceptance of surfaces.

B. Surface Preparation: Remove all surface contamination, loose or weakly adherent particles, laitance, grease, oil, curing compounds, paint, dust and debris by blast track method or approved mechanical means (acid etch not allowed). If surface is questionable, try a test patch. Create a minimum surface profile for the system specified in accordance with the methods described in ICRI No. 03732 to achieve profile numbers as follows:

1.	Thin film, to 10 mils	CSP-1 to CSP-3
2.	Thin and medium films, 10 to 40 mils	CSP-3 to CSP-5
3.	Self-leveling mortars, to 3/16”	CSP-4 to CSP-6
4.	Mortars and laminates, to 1/4” or more	CSP-5 to CSP-10

C. Verify that concrete substrates are dry and moisture-vapor emissions are within acceptable levels according to manufacturer's written instructions.

1. Moisture Testing: Perform tests indicated below.

a. Calcium Chloride Test: Perform anhydrous calcium chloride test per ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lbs. of water/1000 sq. ft. in 24 hours. Perform tests so that each test area does not exceed 1000 sq. ft. and perform 3 tests for the first 1000 sq. ft. and one additional test for every additional 1000 sq ft.

b. In-Situ Probe Test: Perform relative-humidity test using in-situ probes per ASTM F 2170. Proceed with installation only after substrates have a maximum 75 percent relative-humidity-level measurement.

3.2 ENVIRONMENTAL CONDITIONS

A. All applicators and all other personnel in the area of the RF installation shall take all required and necessary safety precautions. All manufacturers’ installation instructions shall be implicitly instructions shall be implicitly followed.

B. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written instructions.

C. Alkalinity and Adhesion Testing: Verify that concrete substrates have pH within acceptable range. Perform tests recommended by manufacturer. Proceed with application only after substrates pass testing.

D. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.

E. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.

F. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written instructions.

3.3 APPLICATIONS

A. Install resinous floor over properly prepared concrete surface in strict accordance with the manufacturer's directions.

1. Install the primer and/or base coats over thoroughly cleaned and prepared concrete.

2. Install topcoat over flooring after excess aggregate has been removed.

3. Maintain a slab temperature of 60°F to 80°F for 24 hours minimum before applying floor topping, or as instructed by manufacturer.

B. Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.

1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.

2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.

3. At substrate expansion and isolation joints, comply with resinous flooring manufacturer's written instructions.

C. Sealant: Saw cut resinous floor topping at expansion joints in concrete slab. Fill sawcuts with sealant prior to final seal coat application. Follow manufacturer’s written recommendations.

D. Apply primer over prepared substrate at manufacturer's recommended spreading rate.

E. Slip Resistant Finish: Provide grit for slip resistance.

F. Apply topcoats in number indicated for flooring system and at spreading rates recommended in writing by manufacturer.

3.4 COMPLETED WORK

A. Cleaning: Upon completion of the Work, clean up and remove from the premises surplus materials, tools, appliances, empty cans, cartons and rubbish resulting from the Work. Clean off all spattering and drippings, and all resulting stains.

B. Protection: Protect Work in accordance with manufacturer's directions from damage and wear during the remainder of the construction period. Use protective methods and materials, including temporary covering, recommended in writing by resinous flooring manufacturer.

C. Contractor shall insure that coating is protected from any traffic until it is fully cured to the satisfaction of the coating manufacturer.

END OF SECTION 096723

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Primers.
2. Water-based finish coatings.
3. Solvent-based finish coatings.
4. Floor sealers and paints.

B. Related Requirements:

1. Section 022813 “Abatement”.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product. Include preparation requirements and application instructions.

1. Include preparation requirements and application instructions.
2. Indicate VOC content.

B. Samples for Verification: For each type of paint system and each color and gloss of topcoat.

1. Submit Samples on rigid backing, 8 inches (200 mm) square.
2. Apply coats on Samples in steps to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

C. Product Schedule: Use same designations indicated on Drawings and in the Interior Painting Schedule to cross-reference paint systems specified in this Section. Include color designations.

D. Lead Encapsulation System:
Submit manufacturer's written documentation that primer and finish coats constitute a tested encapsulation system for application over existing lead-based painted ferrous metal.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Paint Products: 5 percent, but not less than 1 gal. (3.8 L) of each material and color applied.

1.5 QUALITY ASSURANCE

A. Mockups: Apply mockups of each paint system indicated and each color and finish selected to verify preliminary selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Architect will select one surface to represent surfaces and conditions for application of each paint system.

a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft. (9 sq. m).
b. Other Items: Architect will designate items or areas required.

2. Final approval of color selections will be based on mockups.

a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.

3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F (7 deg C).

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.7 FIELD CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F (10 and 35 deg C).

B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures of less than 5 deg F (3 deg C) above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain each paint product from single source from single manufacturer.

2.2 PAINT PRODUCTS, GENERAL

A. Material Compatibility:

1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.

2.3 PRIMERS

A. Interior/Exterior Latex Block Filler: Water-based, high-solids, emulsion coating formulated to bridge and fill porous surfaces of exterior concrete masonry units in preparation for specified subsequent coatings.

B. Alkali-Resistant, Water-Based Primer: Water-based primer formulated for use on alkaline surfaces, such as plaster, vertical concrete, and masonry.

C. Interior Latex Primer Sealer: Water-based latex sealer used on new interior plaster, concrete, and gypsum wallboard surfaces.

D. Interior, Institutional Low-Odor/VOC Primer Sealer: Water-based primer sealer with low-odor characteristics and a VOC of less than 10 grams per liter for use on new interior plaster, concrete, and gypsum wallboard surfaces that are subsequently to be painted with latex finish coats.

E. Interior Latex Primer for Wood: Waterborne-emulsion primer formulated for resistance to extractive bleeding, mold, and microbials; for hiding stains; and for use on interior wood subject to extractive bleeding.

F. Interior Alkyd Primer Sealer: Solvent-based, alkyd-type, primer/sealer for new interior wood, plaster, and porous surfaces,

G. Water-Based Rust-Inhibitive Primer: Corrosion-resistant, water-based-emulsion primer formulated for resistance to flash rusting when applied to cleaned, interior ferrous metals subject to mildly corrosive environments.

H. Alkyd Quick-Dry Primer for Metal: Corrosion-resistant, solvent-based, modified-alkyd primer; lead and chromate free; formulated for quick-drying capabilities and for use on cleaned, interior steel surfaces.

I. Anti-Corrosive Epoxy Primer: Corrosion-resistant, solvent-based, two-component epoxy primer formulated for use on prepared, interior ferrous- and galvanized-metal surfaces.

J. Surface-Tolerant Metal Primer: Corrosion-resistant, solvent-based metal primer formulated for use on structural steel and metal fabrications that have been minimally prepared.

K. Cementitious Galvanized Primer: Solvent-based primer composed of linseed oil/alkyd resin and portland cement for cleaned galvanized metal prior to finish coating.

L. Water-Based Galvanized-Metal Primer: Corrosion-resistant, acrylic primer; formulated for use on cleaned/etched, exterior, galvanized metal to prepare it for subsequent water-based coatings.

M. Vinyl Wash Primer: Two-component, vinyl butyral/phosphoric acid, wash primer formulated for use over cleaned metal surfaces and zinc-rich primers as a tie coat for subsequent corrosion-resistant primers or finish coatings.

N. Water-Based Bonding Primer: Water-based-emulsion primer formulated to promote adhesion of subsequent specified coatings.

O. Solvent-Based Bonding Primer: Solvent-based primer formulated to seal substrates and promote adhesion of specified subsequent coatings.

P. Elastomeric Lead Encapsulating Primer:

1. Water-based, high-build acrylic elastomeric primer specifically formulated and tested for encapsulation of intact lead-based paint on ferrous metal substrates.

2. Comply with EPA and applicable local regulations for lead-based paint encapsulation.

3. Capable of use as part of a manufacturer-tested encapsulation system including compatible intermediate and finish coats.

4. Minimum dry film thickness as recommended by manufacturer for lead encapsulation service.

2.4 WATER-BASED FINISH COATS

A. Interior, Latex, Low Sheen: Pigmented, water-based paint for use on primed/sealed interior plaster and gypsum board, and on primed wood and metals.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish

B. Interior, Latex, Eggshell: Pigmented, water-based paint for use on primed/sealed interior plaster and gypsum board, and on primed wood and metals.

1. Gloss and Sheen Level: Manufacturer's standard eggshell finish

C. Interior, Latex, Satin: Pigmented, water-based paint for use on primed/sealed interior plaster and gypsum board, and on primed wood and metals.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish

D. Interior, Latex, Semigloss: Pigmented, water-based paint for use on primed/sealed interior plaster and gypsum board, and on primed wood and metals.

1. Gloss Level: Manufacturer's standard semigloss finish.

E. Interior, Latex, Gloss: Pigmented, water-based paint for use on primed/sealed interior plaster and gypsum board, and on primed wood and metals.

1. Gloss Level: Manufacturer's standard gloss finish.

F. Interior, Latex, Institutional Low Odor/VOC, Flat: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss and Sheen Level: Manufacturer's standard flat finish.

G. Interior, Latex, Institutional Low Odor/VOC, Low Sheen: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish

H. Interior, Latex, Institutional Low Odor/VOC, Eggshell: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss and Sheen Level: Manufacturer's standard eggshell finish

I. Interior, Latex, Institutional Low Odor/VOC, Satin: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish.

J. Interior, Latex, Institutional Low Odor/VOC, Semigloss: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss Level: Manufacturer's standard semigloss finish.

K. Interior, Latex, Institutional Low-Odor/VOC, Gloss: White or colored latex paint with low-odor characteristics and a VOC of less than 10 grams per liter, for use in areas, such as hospitals and

other occupied buildings, where the odor and VOC levels of conventional latex products would preclude their use.

1. Gloss Level: Manufacturer's standard gloss finish.

L. Interior, Water-Based Light-Industrial Coating, Eggshell: Pigmented, water-based emulsion coating for interior primed wood and metal surfaces (e.g., walls, doors, frames, trim, and sash), providing resistance to moderate abrasion and mild chemical exposure and corrosive conditions.

1. Gloss and Sheen Level: Manufacturer's standard eggshell finish.

M. Interior, Water-Based Light-Industrial Coating, Semigloss: Pigmented, water-based emulsion coating for interior primed wood and metal surfaces (e.g., walls, doors, frames, trim, and sash), providing resistance to moderate abrasion and mild chemical exposure and corrosive conditions.

1. Gloss Level: Manufacturer's standard semigloss finish.

N. Interior, Water-Based Light-Industrial Coating, Gloss: Pigmented, water-based emulsion coating for interior primed wood and metal surfaces (e.g., walls, doors, frames, trim, and sash), providing resistance to moderate abrasion and mild chemical exposure and corrosive conditions.

1. Gloss Level: Manufacturer's standard gloss finish.

O. Interior, Latex, High-Performance Architectural Coating, Low Sheen: High-performance architectural latex coating providing a significantly higher level of performance than conventional latex paints in the areas of scrub resistance, burnish resistance, and ease of stain removal.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish.

P. Interior, Latex, High-Performance Architectural Coating, Eggshell: High-performance architectural latex coating providing a significantly higher level of performance than conventional latex paints in the areas of scrub resistance, burnish resistance, and ease of stain removal.

1. Gloss and Sheen Level: Manufacturer's standard eggshell finish.

Q. Interior, Latex, High-Performance Architectural Coating, Satin: High-performance architectural latex coating providing a significantly higher level of performance than conventional latex paints in the areas of scrub resistance, burnish resistance, and ease of stain removal.

1. Gloss and Sheen Level: Manufacturer's standard low-sheen finish.

R. Interior, Latex, High-Performance Architectural Coating, Semigloss: High-performance architectural latex coating providing a significantly higher level of performance than conventional latex paints in the areas of scrub resistance, burnish resistance, and ease of stain removal.

1. Gloss Level: Manufacturer's standard semigloss finish.

S. Textured Latex Coating, Flat: Pigmented, water-based coating, containing a coarse or medium-sized sand or other hard aggregate, for use on exterior masonry, concrete, and concrete block.

1. Gloss and Sheen Level: Manufacturer's standard flat finish.
2. Aggregate Size: Coarse.

2.5 SOLVENT-BASED FINISH COATS

A. Interior, Alkyd, Flat: Pigmented, solvent-based alkyd paint for use on primed/sealed interior plaster, gypsum, wood, and metal walls primarily in residential and moderate traffic commercial environments.

1. Gloss and Sheen Level: Manufacturer's standard flat finish.

B. Interior, Alkyd, Eggshell: Pigmented, solvent-based alkyd paint for use on primed/sealed interior plaster, gypsum, wood, and metal walls primarily in residential and moderate traffic commercial environments.

1. Gloss and Sheen Level: Manufacturer's standard eggshell finish.

C. Interior, Alkyd, Semigloss: Pigmented, solvent-based alkyd paint for use on primed/sealed interior plaster, gypsum, wood, and metal walls primarily in residential and moderate traffic commercial environments.

1. Gloss Level: Manufacturer's standard semigloss finish.

D. Interior, Alkyd, Gloss: Pigmented, solvent-based alkyd paint for use on primed/sealed interior plaster, gypsum, wood, and metal walls primarily in residential and moderate traffic commercial environments.

1. Gloss Level: Manufacturer's standard gloss finish.

2.6 FLOOR SEALERS AND PAINTS

A. Interior Concrete Stain: Penetrating semitransparent stain specifically manufactured for interior and exterior concrete horizontal and vertical surfaces.

B. Latex Floor Paint, Low Gloss: Water-based, pigmented coating formulated to hide stains, for alkali and incidental water resistance, and for use on concrete and primed-wood surfaces subject to low to medium foot traffic.

1. Gloss and Sheen Level: Manufacturer's standard low-gloss finish.
2. Slip-Resistant Aggregate: Manufacturer's standard additive.

C. Alkyd Floor Enamel, Gloss: Solvent-based, alkyd enamel; self-priming where applied to bare wood; formulated to hide stains, for durability, for microbial and abrasion resistance, and for use on wood-board, traffic surfaces.

1. Slip-Resistant Aggregate: Manufacturer's standard additive.

D. Water-Based Concrete Floor Sealer: Clear, water-based, acrylic-copolymer-emulsion sealer formulated for oil, gasoline, alkali, and water resistance and for use on concrete traffic surfaces.

E. Solvent-Based Concrete Floor Sealer: Clear, acrylic, solvent-based sealer formulated for oil, gasoline, alkali, and water resistance and for use on concrete traffic surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:

1. Concrete: 12 percent.
2. Fiber-Cement Board: 12 percent.
3. Masonry (Clay and CMUs): 12 percent.
4. Wood: 15 percent.
5. Gypsum Board: 12 percent.
6. Plaster: 12 percent.

C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.

D. Plaster Substrates: Verify that plaster is fully cured.

E. Spray-Textured Ceiling Substrates: Verify that surfaces are dry.

F. Verify suitability of substrates, including surface conditions and compatibility, with existing finishes and primers.

G. Proceed with coating application only after unsatisfactory conditions have been corrected.

1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Comply with manufacturer's written instructions and recommendations applicable to substrates and paint systems indicated.

B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.

1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.

C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.

1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

D. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be painted exceeds that permitted in manufacturer's written instructions.

E. Masonry Substrates: Remove efflorescence and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces or mortar joints exceeds that permitted in manufacturer's written instructions.

F. Steel Substrates: Remove rust, loose mill scale, and shop primer, if any. Clean using methods recommended in writing by paint manufacturer, but not less than the following.

1. SSPC-SP 2.
2. SSPC-SP 11.

G. Existing Lead-Based Painted Ferrous Metal:

1. Do not remove existing lead-based paint except where loose, peeling, blistered, rusted, or otherwise unsound.

2. Perform all preparation in accordance with applicable federal, state, and local regulations governing disturbance of lead-containing coatings.

3. Remove loose paint and corrosion using methods that minimize lead dust generation.

4. Feather edges of remaining sound coatings.

5. Spot-prime exposed bare metal with rust-inhibitive primer recommended by the encapsulating coating manufacturer.

6. Apply encapsulating primer and finish coats only over clean, dry, sound, tightly adhered existing coatings.

H. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.

I. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.

J. Wood Substrates:

1. Scrape and clean knots, and apply coat of knot sealer before applying primer.

2. Sand surfaces that will be exposed to view, and dust off.
3. Prime edges, ends, faces, undersides, and backsides of wood.
4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

K. Cotton or Canvas Insulation Covering Substrates: Remove dust, dirt, and other foreign material that might impair bond of paints to substrates.

3.3 INSTALLATION

A. Apply paints according to manufacturer's written instructions.

1. Use applicators and techniques suited for paint and substrate indicated.
2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.

B. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

3.4 FIELD QUALITY CONTROL

A. Dry-Film Thickness Testing: Owner may engage the services of a qualified testing and inspecting agency to inspect and test paint for dry-film thickness.

1. Contractor shall touch up and restore painted surfaces damaged by testing.
2. If test results show that dry-film thickness of applied paint does not comply with paint manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry-film thickness that complies with paint manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.

1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
3. Allow empty paint cans to dry before disposal.
4. Collect waste paint by type and deliver to recycling or collection facility.

B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.

D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 INTERIOR PAINTING SCHEDULE

A. Concrete Substrates, Nontraffic Surfaces:

1. Latex System:

   a. Prime Coat: Acrylic, water-based primer.
   b. Intermediate Coat: Matching topcoat.
   c. Topcoat: Interior waterborne, eggshell or as indicated in drawings.

2. Latex over Latex Aggregate System:

   a. Prime Coat: Textured latex coating, flat.
   b. Intermediate Coat: Matching topcoat.
   c. Topcoat: Interior latex paint, flat

3. Latex Aggregate System:

   a. Prime Coat: As recommended in writing by topcoat manufacturer.
   b. Intermediate Coat: As recommended in writing by topcoat manufacturer.
   c. Topcoat: Textured latex coating, flat

4. Institutional Low-Odor/VOC Latex System:

   a. Prime Coat: Acrylic, water-based primer.
   b. Intermediate Coat: Matching topcoat.
   c. Topcoat: Interior waterborne, institutional low odor/VOC, flat, eggshell, or semi-gloss.

5. High-Performance Architectural Latex System:

a. Prime Coat: Acrylic, water-based primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior latex, high-performance architectural coating, low sheen, eggshell, semigloss.

6. Water-Based Light-Industrial Coating System:

a. Prime Coat: Acrylic, water-based primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, water-based, light-industrial coating, eggshell or semigloss.

7. Alkyd System:

a. Prime Coat: Alkali-resistant, water-based primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior alkyd, flat, eggshell, semigloss.

B. Concrete Substrates, Traffic Surfaces:

1. Alkyd Floor Enamel System:

a. Prime Coat: Matching topcoat.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Alkyd floor enamel, eggshell.

2. Water-Based Concrete Floor Sealer System:

a. First Coat: Matching topcoat.
b. Topcoat: Fast-dry, waterborne floor sealer.

C. Cement Board Substrates:

1. Latex System:

a. Prime Coat: Acrylic, water-based primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, waterborne, flat.

2. Institutional Low-Odor/VOC Latex System:

a. Prime Coat: Interior/Exterior, acrylic latex, institutional low-odor/VOC primer sealer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, acrylic, institutional low odor/VOC, flat.

3. High-Performance Architectural Latex System:

a. Prime Coat: Interior/Exterior, acrylic latex primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, high-performance architectural coating, flat.

4. Water-Based Light-Industrial Coating System:

    a. Prime Coat: Interior/Exterior, acrylic latex primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, water-based, light-industrial coating, eggshell.

5. Alkyd System:

    a. Prime Coat: Alkali-resistant, water-based primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, alkyd, flat.

D. Clay Masonry Substrates:

1. Latex System:

    a. Prime Coat: Interior/Exterior, acrylic latex primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, eggshell.

2. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Interior, institutional low-odor/VOC primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, eggshell.

3. High-Performance Architectural Latex System:

    a. Prime Coat: Alkali-resistant, water-based primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, high-performance architectural coating, eggshell.

4. Water-Based Light-Industrial Coating System:

    a. Prime Coat: Alkali-resistant, water-based primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, water-based, light-industrial coating, eggshell.

5. Alkyd System:

    a. Prime Coat: Alkali-resistant, water-based primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, alkyd, semigloss.

E. CMU Substrates:

1. Latex System:

    a. Block Filler: Interior/exterior latex block filler.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, flat, eggshell.

2. Institutional Low-Odor/VOC Latex System:

    a. Block Filler: Interior/exterior latex block filler.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, flat, eggshell.

3. High-Performance Architectural Latex System:

    a. Block Filler: Interior/exterior latex block filler.
    b. Prime Coat: Alkali-resistant, water-based primer.
    c. Intermediate Coat: Matching topcoat.
    d. Topcoat: Interior, latex, high-performance architectural coating, eggshell.

4. Water-Based Light-Industrial Coating System:

    a. Block Filler: Interior/exterior latex block filler.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, water-based, light-industrial coating, eggshell.

5. Alkyd System:

    a. Block Filler: Interior/exterior latex block filler.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, alkyd, flat. semigloss.

F. Steel Substrates:

1. Latex System, Alkyd Primer:

    a. Prime Coat: Alkyd quick-dry primer for metal, alkyd anticorrosive primer, or shop primer specified in Section where substrate is specified.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, satin.

2. Latex over Shop-Applied Quick-Drying Shop Primer System:

    a. Prime Coat: Quick-dry primer for shop application.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, satin.

3. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Water-based rust-inhibitive primer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, satin.

4. High-Performance Architectural Latex System:

    a. Prime Coat: Alkyd quick-dry primer for metal, alkyd anticorrosive primer, or shop primer specified in Section where substrate is specified.

b. Intermediate Coat: Matching topcoat.
c. Topcoat: Topcoat: Interior, latex, high-performance architectural coating, satin.

5. Water-Based Light-Industrial Coating System:

a. Prime Coat: Primer, rust-inhibitive, water based.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, water-based, light-industrial coating, semigloss.

6. Water-Based Light-Industrial Coating System over Epoxy Primer System:

a. Prime Coat: Anticorrosive epoxy primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, water-based, light-industrial coating, eggshell, semigloss.

7. Alkyd System:

a. Prime Coat: Alkyd quick-dry primer for metal, alkyd anticorrosive primer, or shop primer specified in Section where substrate is specified.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, alkyd, eggshell, semigloss.

8. Alkyd over Surface-Tolerant Primer System:

a. Prime Coat: Surface-tolerant metal primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, alkyd, eggshell, semigloss

9. Quick-Dry Enamel System:

a. Prime Coat: Alkyd quick-dry primer for metal.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, alkyd, eggshell, semigloss.

10. Elastomeric Encapsulation System over Existing Lead-Based Painted Ferrous Metal:

a. Surface Preparation:

1) Remove loose rust and unsound coatings.
2) Spot-prime exposed bare metal with manufacturer's rust-inhibitive primer.

b. Prime Coat: Elastomeric lead encapsulating primer.
c. Intermediate Coat: Matching elastomeric encapsulating coating.
d. Topcoat: Matching elastomeric encapsulating finish coating.
e. Total Dry Film Thickness: As required by encapsulating coating manufacturer, but not less than the tested encapsulation system thickness.

G. Galvanized-Metal Substrates:

1. Latex System:

a. Prime Coat: Cementitious galvanized primer or Water-based galvanized primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, flat.

2. Institutional Low-Odor/VOC Latex System:

a. Prime Coat: Water-based galvanized primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, institutional low odor/VOC, flat.

3. High-Performance Architectural Latex System:

a. Prime Coat: Water-based galvanized primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, high-performance architectural coating, low sheen.

4. Water-Based Light-Industrial Coating System:

a. Prime Coat: Cementitious galvanized primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, water-based, light-industrial coating, eggshell.

5. Alkyd over Cementitious Primer System:

a. Prime Coat: Cementitious galvanized primer.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, alkyd, flat.

H. Spray-Textured Ceiling Substrates:

1. Latex, Flat System: Spray applied:

a. Prime Coat: Matching topcoat.
b. Topcoat: Interior, latex, flat.

2. Latex System: Spray applied:

a. Prime Coat: Matching topcoat.
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, flat.

3. Latex over Alkyd Sealer System:

a. Prime Coat: Interior alkyd primer sealer
b. Intermediate Coat: Matching topcoat.
c. Topcoat: Interior, latex, flat.

4. Alkyd, Flat System:

a. Prime Coat: Matching topcoat.
b. Topcoat: Interior, alkyd, flat.

5. Alkyd over Alkyd Sealer System:

    a. Prime Coat: Interior alkyd primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, alkyd, flat.

I. Gypsum Board and Plaster Substrates:

1. Latex over Latex Sealer System:

    a. Prime Coat: Interior latex primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, acrylic, eggshell.

2. Latex over Alkyd Primer System (for Plaster Only):

    a. Prime Coat: Interior acrylic, latex primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, acrylic, eggshell.

3. Institutional Low-Odor/VOC Latex System:

    a. Prime Coat: Interior, institutional low-odor/VOC primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, institutional low odor/VOC, eggshell.

4. High-Performance Architectural Latex System:

    a. Prime Coat: Interior latex primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, latex, high-performance architectural coating, eggshell.

5. Water-Based Light-Industrial Coating System:

    a. Prime Coat: Interior latex primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, water-based, light-industrial coating, eggshell.

6. Alkyd over Latex Sealer System:

    a. Prime Coat: Interior latex primer sealer.
    b. Intermediate Coat: Matching topcoat.
    c. Topcoat: Interior, alkyd, eggshell.

END OF SECTION 099123

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 101423.16 - ROOM-IDENTIFICATION PANEL SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes room-identification signs that are directly attached to the building.

1.3 DEFINITIONS

A. Accessible: In accordance with the accessibility standard.

1.4 COORDINATION

A. Furnish templates for placement of sign-anchorage devices embedded in permanent construction by other installers.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For room-identification signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
3. Show message list, typestyles, graphic elements, including raised characters and Braille, and layout for each sign at least half size.

C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.

1. Include representative Samples of available typestyles and graphic symbols.

D. Product Schedule: For room-identification signs. Use same designations indicated on Drawings or specified.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and manufacturer.

B. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For signs to include in maintenance manuals.

1.8 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Variable Component Materials: 12 replaceable text inserts and interchangeable characters (letters, numbers, and graphic elements) of each type.
2. Tools: One set of specialty tools for assembling signs and replacing variable sign components.

1.9 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.10 FIELD CONDITIONS

A. Field Measurements: Verify locations of anchorage device embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.11 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Deterioration of finishes beyond normal weathering.
b. Deterioration of embedded graphic image.
c. Separation or delamination of sheet materials and components.

2. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Accessibility Standard: Comply with applicable provisions in the USDOJ's "2017 ICC A117.1 Accessible and Usable Buildings and Facilities".

2.2 ROOM-IDENTIFICATION SIGNS

A. Room-Identification Signs. Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; and as follows:

1. Laminated-Sheet Sign: Photopolymer face sheet with raised graphics laminated to acrylic backing sheet to produce composite sheet.

    a. Composite-Sheet Thickness: Manufacturer's standard for size of sign.
    b. Surface-Applied Graphics: Applied vinyl film.
    c. Subsurface Graphics: Snap-in changeable insert beneath removable face sheet.
    d. Color(s): As selected by Architect or Owner from manufacturer's full range.

2. Sign-Panel Perimeter: Finish edges smooth.
3. Mounting: Surface mounted to wall with adhesive or concealed screwed mount.
4. Text and Typeface: Accessible raised characters and Braille and typeface as selected by Architect from manufacturer's full range.

2.3 SIGN MATERIALS

A. Acrylic Sheet: ASTM D4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).

B. Paints and Coatings for Sheet Materials: Inks, dyes, and paints that are recommended by manufacturer for optimum adherence to surface and are UV and water resistant for colors and exposure indicated.

2.4 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following:

1. Use concealed fasteners and anchors unless indicated to be exposed.
2. Exposed Metal-Fastener Components, General:

    a. Fabricated from same basic metal and finish of fastened sign unless otherwise indicated.
    b. Fastener Heads: Use flathead or oval countersunk screws and bolts with tamper-resistant Allen-head or one-way-head slots unless otherwise indicated.

3. Sign Mounting Fasteners:

    a. Concealed Studs: Concealed (blind), threaded studs welded or brazed to back of sign material or screwed into back of sign assembly unless otherwise indicated.
    b. Through Fasteners: Exposed metal fasteners matching sign finish, with type of head indicated, and installed in predrilled holes.

B. Adhesive: As recommended by sign manufacturer.

2.5 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.

1. Preassemble signs and assemblies in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.
2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
3. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
4. Provide rabbets, lugs, and tabs necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.

B. Subsurface-Etched Graphics: Reverse etch back face of clear face-sheet material. Fill resulting copy with manufacturer's standard enamel. Apply opaque manufacturer's standard background color coating over enamel-filled copy.

C. Signs with Changeable Message Capability: Fabricate signs to allow insertion of changeable messages as follows:

1. For snap-in changeable inserts beneath removable face sheet, furnish one suction or other device to assist in removing face sheet. Furnish initial changeable insert. Furnish two blank inserts for each sign for Owner's use.

2.6 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.

1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
2. Install signs so they do not protrude or obstruct according to the accessibility standard.
3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.

B. Accessibility: Install signs in locations on walls as indicated on Drawings and according to the accessibility standard.

C. Mounting Methods:

1. Concealed Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.

    a. Masonry Substrates: Fill holes with adhesive. Leave recess space in hole for displaced adhesive. Place sign in position and push until flush to surface, embedding studs in holes. Temporarily support sign in position until adhesive fully sets.
    b. Thin or Hollow Surfaces: Place sign in position and flush to surface, install washers and nuts on studs projecting through opposite side of surface, and tighten.

2. Through Fasteners: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.
3. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.

3.2 ADJUSTING AND CLEANING

A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.

B. Remove temporary protective coverings and strippable films as signs are installed.

C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 101423.16

SECTION 102113.17 - PHENOLIC-CORE TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Phenolic-core toilet compartments.

B. Related Requirements:

1. Section 061000 “Rough Carpentry” for blocking.
2. Section 102800 "Toilet, Bath, and Laundry Accessories" for accessories mounted on toilet compartments.

1.2 COORDINATION

A. Coordinate requirements for blocking, reinforcing, and other supports concealed within wall to ensure that toilet compartments can be supported and installed as indicated.

1.3 SUBMITTALS

A. Product Data.

1. Phenolic-core toilet compartments.

a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.

B. Shop Drawings:

1. Include plans, elevations, sections, details, and attachment details.
2. Show locations of cutouts for compartment-mounted toilet accessories.
3. Show locations of centerlines of toilet fixtures.
4. Verify dimensions with field measurements prior to final production of toilet compartments.

C. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of toilet compartment.

1. Include Samples of hardware and accessories involving material and color selection.

D. Samples for Verification: For each finish product specified, two samples, minimum size 6 inches (150 mm) square representing actual product, color, and patterns.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Extra Stock Materials: Furnish extra materials to Owner that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Door Hinges: One continuous hinge(s) with associated fasteners.
2. Latch and Keeper: One latch(es) and keeper(s) with associated fasteners.
3. Door Bumper: One door bumper(s) with associated fasteners.
4. Door Pull: One door pull(s) with associated fasteners.
5. Fasteners: 10 fasteners of each size and type.

1.5 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of toilet fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements, and coordinate before fabrication.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain phenolic-core toilet compartments from single source from single manufacturer.

B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 30 or less.
2. Smoke-Developed Index: 450 or less.

C. Structural Performance: Where grab bars are mounted on toilet compartments, design panels to comply with the following requirements:

1. Panels are able to withstand a concentrated load on grab bar of at least 250 lbf (1112 N) applied at any direction and at any point, without deformation of panel.

D. Regulatory Requirements: Comply with applicable provisions in ICC A117.1 for toilet compartments designated as accessible.

2.2 PHENOLIC-CORE TOILET COMPARTMENTS

A. Basis-of-Design Product: Bobrick Washroom Equipment, Inc., DuraLineSeries

1. Approved alternates: ASI Global Partitions or Bradley Commercial Products

B. Toilet-Enclosure Style: Floor anchored.

C. Urinal-Screen Style: Wall hung.

D. Door, Panel, and Pilaster Construction: Solid phenolic-core material with melamine facing on both sides fused to substrate during manufacture (not separately laminated), and with eased and polished edges. Provide minimum 3/4-inch- (19-mm-) thick doors and pilasters and minimum 1/2-inch- (13-mm-) thick panels.

E. Urinal-Screen Construction: Matching panel construction.

F. Pilaster Shoes: Formed from stainless steel sheet, not less than 0.031-inch (0.79-mm) nominal thickness and 3 inches (76 mm) high, finished to match hardware.

G. Phenolic Compartment Finish: **One color** in each room.

1. Through-Color Phenolic: Manufacturer's standard solid through-color.

a. Color: **As indicated on the drawings.**

2.3 HARDWARE AND ACCESSORIES

A. Door Hardware and Accessories: Manufacturer's operating hardware and accessories.

1. Hinges: Manufacturer's stainless steel continuous, cam type that swings to a closed or partially open position, allowing emergency access by lifting door.
2. Latch and Keeper: Manufacturer's standard stainless steel, surface-mounted latch unit designed for emergency access and with combination rubber-faced door strike and keeper. Provide units that comply with regulatory requirements for accessibility at toilet enclosures designated as accessible.
3. Coat Hook: Manufacturer's standard stainless steel combination hook and rubber-tipped bumper, sized to prevent inswinging door from hitting compartment-mounted accessories.
4. Door Bumper: Manufacturer's standard stainless steel, rubber-tipped bumper at outswinging doors.
5. Door Pull: Manufacturer's standard stainless steel pull at outswinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at toilet enclosures designated as accessible.

B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.

C. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless steel, hot-dip galvanized-steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.4 MATERIALS

A. Aluminum Castings: ASTM B26/B26M.

B. Aluminum Extrusions: ASTM B221 (ASTM B221M).

C. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304, stretcher-leveled standard of flatness.

D. Stainless Steel Castings: ASTM A743/A743M.

2.5 FABRICATION

A. Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.

B. Floor-Anchored Units: Manufacturer's standard corrosion-resistant anchoring assemblies at pilasters and walls, with leveling adjustment nuts at pilasters for structural connection to floor. Provide shoes at pilasters to conceal anchorage.

C. Door Size and Swings: Unless otherwise indicated, provide 24-inch- (610-mm-) wide, inswinging doors for standard toilet enclosures and 36-inch- (914-mm-) wide, outswinging doors with a minimum 32-inch- (813-mm-) wide, clear opening for toilet enclosures designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.

1. Confirm location and adequacy of blocking and supports required for installation.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.

1. Maximum Clearances:

a. Pilasters and Panels or Screens: 1/2 inch (13 mm).
b. Panels or Screens and Walls: 1 inch (25 mm).

B. Floor-Anchored Units: Set pilasters with anchors penetrating not less than 2 inches (51 mm) into structural floor unless otherwise indicated in manufacturer's written instructions. Level, plumb, and tighten pilasters. Hang doors and adjust so tops of doors are level with tops of pilasters when doors are in closed position.

C. Urinal Screens: Attach with anchoring devices to suit supporting structure. Set units level and plumb, rigid, and secured to resist lateral impact.

3.3 ADJUSTING

A. Hardware Adjustment: Adjust and lubricate hardware in accordance with hardware manufacturer's written instructions for proper operation. Set hinges on in-swinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on out-swinging doors to return doors to fully closed position.

END OF SECTION 102113.17

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 102800 – TOILET ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Washroom accessories.

1.2 COORDINATION

A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.

B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Washroom accessories.

B. Product Data Submittals: For each product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.

C. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.
2. Identify accessories using designations indicated.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For accessories to include in maintenance manuals.

1.6 WARRANTY

A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, visible silver spoilage defects..
2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 OWNER-FURNISHED MATERIALS

A. Owner-Furnished Materials: As indicated on drawings.

2.2 PERFORMANCE REQUIREMENTS

A. Structural Performance: Design accessories and fasteners to comply with the following requirements:

1. Grab Bars: Installed units are able to resist 250 lbf (1112 N) concentrated load applied in any direction and at any point.
2. Shower Seats: Installed units are able to resist 360 lbf (1601 N) concentrated load applied in any direction and at any point.

2.3 WASHROOM ACCESSORIES

A. Source Limitations: Obtain washroom accessories from single source from single manufacturer. See Accessories Toilet Room Accessories legend in drawings for schedule of accessories.

B. Mirror Unit:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, Bradley Corp., or approved by Owner/Architect

2. Frame: Stainless steel channel.

    a. Corners: Manufacturer's standard.

3. Size: As indicated on Drawings.
4. Hangers: Concealed Manufacturer's standard rigid, tamper and theft resistant.

C. Hook:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, Bradley Corp., or approved by Owner/Architect

2. Description: Single-prong unit.
3. Mounting: Concealed.
4. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin)

D. Shower Curtain Rod:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, Bradley Corp., or approved by Owner/Architect

2. Description: 1-inch- (25.4-mm-) OD, straight rod.
3. Configuration: As indicated on Drawings.
4. Mounting Flanges: Concealed fasteners; in manufacturer's standard material and finish.
5. Rod Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

E. Folding Shower Seat:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, Bradley Corp., or approved by Owner/Architect

2. Configuration: L-shaped seat, designed for wheelchair access.
3. Seat: Stainless steel, ASTM A480/A480M No. 4 finish (satin); 0.05-inch- (1.3-mm-) minimum nominal thickness; with single-piece, pan-type construction and edge seams welded and ground smooth.
4. Mounting Mechanism: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
5. Dimensions: See drawings.

F. Robe Hook:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, or approved by Owner/Architect

2. Description: Double-prong unit.
3. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin)

G. Grab Bar:

1. Basis-Of-Design Product: Bobrick Washroom Equipment, Inc.

    a. Approved alternates: ASI Group, Bradley Corp., or approved by Owner/Architect

2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel, 0.05 inch (1.3 mm) thick.

a. Finish: Smooth, ASTM A480/A480M No. 4 finish (satin).

4. OD: 1-1/4 inches (32 mm).
5. Configuration and Length: As indicated on Drawings.

2.4 MATERIALS

A. Stainless Steel: ASTM A240/A240M or ASTM A666, Type 304, 0.031-inch- (0.8-mm-) minimum nominal thickness unless otherwise indicated.

B. Steel Sheet: ASTM A1008/A1008M, Designation CS (cold rolled, commercial steel), 0.036-inch- (0.9-mm-) minimum nominal thickness.

C. Galvanized-Steel Sheet: ASTM A653/A653M, with G60 (Z180) hot-dip zinc coating.

D. Galvanized-Steel Mounting Devices: ASTM A153/A153M, hot-dip galvanized after fabrication.

E. Fasteners: Screws, bolts, and other devices of same material as accessory unit, unless otherwise recommended by manufacturer or specified in this Section, and tamper and theft resistant where exposed, and of stainless or galvanized steel where concealed.

F. Mirrors: ASTM C1503, Mirror Glazing Quality, clear-glass mirrors, nominal 6.0 mm thick.

2.5 FABRICATION

A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.

B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install accessories in accordance with manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.

1. Remove temporary labels and protective coatings.

B. Grab Bars: Install to comply with specified structural-performance requirements.

C. Shower Seats: Install to comply with specified structural-performance requirements.

3.2 ADJUSTING AND CLEANING

A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.

B. Clean and polish exposed surfaces in accordance with manufacturer's written instructions.

END OF SECTION 102800

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 104416 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes portable, surface-mounted fire extinguishers.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher and mounting brackets.

B. Product Schedule: For fire extinguishers. Coordinate final fire-extinguisher schedule with fire-protection cabinet schedule to ensure proper fit and function. Use same designations indicated on Drawings.

1.3 INFORMATIONAL SUBMITTALS

A. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.

1.5 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace fire extinguishers that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Failure of hydrostatic test according to NFPA 10 when testing interval required by NFPA 10 is within the warranty period.
b. Faulty operation of valves or release levers.

2. Warranty Period: Six years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."

B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

1. Provide fire extinguishers approved, listed, and labeled by FM Global.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

A. Fire Extinguishers: UL listed and labeled units; J.L. Industries or approved equal

1. Type ABC, multi-purpose dry chemical type, 10 pound

B. Cabinets: Enameled steel box with trim, frame, door, and accessories; J.L. Industries or approved equal. Noted as FEC on Drawings.

1. Semi-recessed cabinet mounting with rounded corners.
2. Door panel: 1/8 inch thick convex clear acrylic bubble.
3. Finish: Stainless steel

C. Hangers: Extinguisher manufacturer’s standard surface mounted wall hanging bracket and accessories.

D. Mounting Brackets: Manufacturer's standard steel, designed to secure fire extinguisher to wall or structure, of sizes required for types and capacities of fire extinguishers indicated, with plated or red baked-enamel finish.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine fire extinguishers for proper charging and tagging.

1. Remove and replace damaged, defective, or undercharged fire extinguishers.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Install fire extinguishers and mounting brackets in locations indicated and in compliance with requirements of authorities having jurisdiction.

B. Mounting Brackets: Fasten mounting brackets to surfaces, square and plumb, at locations indicated.

1. Mounting Height: Top of fire extinguisher to be at **42 inches (1067 mm)** above finished floor.

END OF SECTION 104416

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Sleeves.
2. Stack-sleeve fittings.
3. Sleeve-seal systems.
4. Sleeve-seal fittings.
5. Grout.
6. Silicone sealants.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

PART 2 - PRODUCTS

2.1 SLEEVES

A. Cast-Iron Pipe Sleeves: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop collar.

B. Steel Pipe Sleeves: ASTM A53/A53M, Type E, Grade B, Schedule 40, anticorrosion coated, with plain ends and integral welded waterstop collar.

C. Galvanized-Steel Sheet Sleeves: 0.0239-inch (0.6-mm) minimum thickness; round tube closed with welded longitudinal joint.

2.2 STACK-SLEEVE FITTINGS

A. Description: Manufactured, Dura-coated or Duco-coated cast-iron sleeve with integral clamping flange for use in waterproof floors and roofs. Include clamping ring, bolts, and nuts for membrane flashing.

1. Underdeck Clamp: Clamping ring with setscrews.

2.3 SLEEVE-SEAL SYSTEMS

A. Description:

1. Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.
2. Designed to form a hydrostatic seal of 20 psig (137 kPa) minimum.
3. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
4. Pressure Plates: Carbon steel.
5. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, ASTM B633 of length required to secure pressure plates to sealing elements.

2.4 SLEEVE-SEAL FITTINGS

A. Description: Manufactured plastic, sleeve-type, waterstop assembly made for imbedding in concrete slab or wall.

B. Plastic or rubber waterstop collar with center opening to match piping OD.

2.5 GROUT

A. Description: Nonshrink, for interior and exterior sealing openings in non-fire-rated walls or floors.

B. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.

C. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.

D. Packaging: Premixed and factory packaged.

2.6 SILICONE SEALANTS

A. Silicone, S, NS, 25, NT: Single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant, ASTM C920, Type S, Grade NS, Class 25, Use NT.

B. Silicone, S, P, 25, T, NT: Single-component, pourable, plus 25 percent and minus 25 percent movement capability, traffic- and nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade P, Class 25, Uses T and NT. Grade P Pourable (self-leveling) formulation is for opening in floors and other horizontal surfaces that are not fire rated.

C. Silicone Foam: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.1 SLEEVE INSTALLATION

A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.

B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch (25-mm) annular clear space between piping and concrete slabs and walls.

1. Sleeves are not required for core-drilled holes.

C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.

1. Cut sleeves to length for mounting flush with both surfaces.

2. Using grout or silicone sealant, seal the space outside of sleeves in slabs and walls without sleeve-seal system.

D. Install sleeves for pipes passing through interior partitions.

1. Cut sleeves to length for mounting flush with both surfaces.
2. Install sleeves that are large enough to provide 1/4-inch (6.4-mm) annular clear space between sleeve and pipe or pipe insulation.
3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint.

E. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping and fill materials specified in Section 078413 "Penetration Firestopping."

3.2 STACK-SLEEVE-FITTING INSTALLATION

A. Install stack-sleeve fittings in new slabs as slabs are constructed.

1. Install fittings that are large enough to provide 1/4-inch (6.4-mm) annular clear space between sleeve and pipe or pipe insulation.
2. Secure flashing between clamping flanges for pipes penetrating floors with membrane waterproofing. Comply with requirements for flashing specified in Section 076200 "Sheet Metal Flashing and Trim."
3. Install section of cast-iron soil pipe to extend sleeve to 2 inches (50 mm) above finished floor level.
4. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
5. Use silicone sealant to seal the space around outside of stack-sleeve fittings.

B. Fire-Resistance-Rated Penetrations, Horizontal Assembly Penetrations, and Smoke Barrier Penetrations: Maintain indicated fire or smoke rating of floors at pipe penetrations. Seal pipe penetrations with fire- and smoke-stop materials. Comply with requirements for firestopping specified in Section 078413 "Penetration Firestopping."

3.3 SLEEVE-SEAL-SYSTEM INSTALLATION

A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.

B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.4 SLEEVE-SEAL-FITTING INSTALLATION

A. Install sleeve-seal fittings in new walls and slabs as they are constructed.

B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.

C. Secure nailing flanges to concrete forms.

D. Use grout or silicone sealant to seal the space around outside of sleeve-seal fittings.

3.5 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Leak Test: After allowing for a full cure, test sleeves and sleeve seals for leaks. Repair leaks and retest until no leaks exist.

B. Sleeves and sleeve seals will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

3.6 SLEEVE AND SLEEVE-SEAL SCHEDULE

A. Use sleeves and sleeve seals for the following piping-penetration applications:

1. Exterior Concrete Walls above Grade:

   a. Piping Smaller Than NPS 6 (DN 150): Cast-iron pipe sleeves with sleeve-seal system, or Sleeve-seal fittings.

2. Exterior Concrete Walls below Grade:

   a. Piping Smaller Than NPS 6 (DN 150): Cast-iron pipe sleeves with sleeve-seal system, or Sleeve-seal fittings.

      1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.

3. Concrete Slabs-on-Grade:

   a. Piping Smaller Than NPS 6 (DN 150): Cast-iron pipe sleeves with sleeve-seal system , or Sleeve-seal fittings.

      1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.

4. Concrete Slabs above Grade:

   a. Piping Smaller Than NPS 6 (DN 150): Steel pipe sleeves, PVC pipe sleeves, Stack-sleeve fittings, Sleeve-seal fittings.

END OF SECTION 220517

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220518 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Escutcheons.
2. Floor plates.

1.3 DEFINITIONS

A. Existing Piping to Remain: Existing piping that is not to be removed and that is not otherwise indicated to be removed and salvaged, or removed and reinstalled.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

A. One-Piece, Steel Type: With polished, chrome-plated finish and setscrew fastener.

B. One-Piece, Stainless-Steel Type: With polished stainless-steel finish.

C. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.

D. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped steel with polished, chrome-plated finish and spring-clip fasteners.

E. One-Piece, Stamped-Steel Type: With polished, chrome-plated finish and spring-clip fasteners.

F. Split-Plate, Stamped-Steel Type: With polished, chrome-plated finish; concealed hinge; and spring-clip fasteners.

2.2 FLOOR PLATES

A. Split Floor Plates: Cast brass with concealed hinge.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.

B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of insulated piping and with OD that completely covers opening.

1. Escutcheons for New Piping:

a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep pattern.
b. Chrome-Plated Piping: One-piece steel with polished, chrome-plated finish.
c. Insulated Piping: One-piece stainless steel with polished stainless-steel finish.
d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece stainless steel with polished stainless-steel finish.
e. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece stainless steel with polished stainless-steel finish.
f. Bare Piping in Unfinished Service Spaces: One-piece steel with polished, chrome-plated finish.
g. Bare Piping in Equipment Rooms: One-piece steel with polished, chrome-plated finish.

2. Escutcheons for Existing Piping to Remain:

a. Chrome-Plated Piping: Split-casting, stamped steel with concealed hinge with polished, chrome-plated finish.
b. Insulated Piping: Split-plate, stamped steel with concealed hinge with polished, chrome-plated finish
c. Bare Piping at Wall and Floor Penetrations in Finished Spaces: Split-plate, stamped steel with concealed hinge with polished, chrome-plated finish.
d. Bare Piping at Ceiling Penetrations in Finished Spaces: Split-plate, stamped steel with concealed hinge with polished, chrome-plated finish.
e. Bare Piping in Unfinished Service Spaces: Split-plate, stamped steel with concealed hinge with polished, chrome-plated finish.
f. Bare Piping in Equipment Rooms: Split-plate, stamped steel with concealed hinge with polished, chrome-plated finish.

C. Install floor plates for piping penetrations of equipment-room floors.

D. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.

1. New Piping: One-piece, floor plate.
2. Existing Piping: Split floor plate.

3.2 FIELD QUALITY CONTROL

A. Using new materials, replace broken and damaged escutcheons and floor plates.

END OF SECTION 220518

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220519 - METERS AND GAGES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Thermometers.
2. Gages.
3. Test plugs.

1.3 DEFINITIONS

A. CR: Chlorosulfonated polyethylene synthetic rubber.

B. EPDM: Ethylene-propylene-diene terpolymer rubber.

1.4 SUBMITTALS

A. Product Data: For each type of product indicated; include performance curves.

B. Shop Drawings: Schedule for thermometers and gages indicating manufacturer's number, scale range and location for each.

C. Product Certificates: For each type of thermometer and gage, signed by product manufacturer.

PART 2 - PRODUCTS

2.1 PLASTIC-CASE, LIQUID-IN-GLASS THERMOMETERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Ernst Gage Co.
2. Marsh Bellofram.
3. Trerice, H. O. Co.

4. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.

B. Case: Plastic, 9 inches long.

C. Tube: Red or blue reading, organic-liquid filled, with magnifying lens.

D. Tube Background: Satin-faced, nonreflective aluminum with permanently etched scale markings.

E. Window: Glass or plastic.

F. Connector: Adjustable type, 180 degrees in vertical plane, 360 degrees in horizontal plane, with locking device.

G. Stem: Metal, for thermowell installation and of length to suit installation.

H. Accuracy: Plus or minus 1 percent of range or plus or minus 1 scale division to maximum of 1.5 percent of range.

2.2 BIMETALLIC-ACTUATED DIAL THERMOMETERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Ashcroft Commercial Instrument Operations; Dresser Industries; Instrument Div.
2. Ernst Gage Co.
3. Marsh Bellofram.
4. Palmer - Wahl Instruments Inc.
5. Trerice, H. O. Co.
6. Weiss Instruments, Inc.
7. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.

B. Description: Direct-mounting, bimetallic-actuated dial thermometers complying with ASME B40.3.

C. Case: Liquid-filled type, stainless steel with 5-inch diameter.

D. Element: Bimetal coil.

E. Dial: Satin-faced, nonreflective aluminum with permanently etched scale markings.

F. Pointer: Red or other dark-color metal.

G. Window: Glass.

H. Ring: Stainless steel.

I. Connector: Adjustable angle type.

J. Stem: Metal, for thermowell installation and of length to suit installation.

K. Accuracy: Plus or minus 1 percent of range or plus or minus 1 scale division to maximum of 1.5 percent of range.

2.3 THERMOWELLS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AMETEK, Inc.; U.S. Gauge Div.
2. Ernst Gage Co.
3. Palmer - Wahl Instruments Inc.
4. Trerice, H. O. Co.
5. Weiss Instruments, Inc.
6. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.

B. Description: Pressure-tight, socket-type metal fitting made for insertion into piping and of type, diameter, and length required to hold thermometer.

2.4 PRESSURE GAGES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AMETEK, Inc.; U.S. Gauge Div.
2. Ernst Gage Co.
3. Palmer - Wahl Instruments Inc.
4. Trerice, H. O. Co.
5. Weiss Instruments, Inc.
6. Weksler Instruments Operating Unit; Dresser Industries; Instrument Div.

B. Direct-Mounting, Dial-Type Pressure Gages: Indicating-dial type complying with ASME B40.100.

1. Case: Dry type, stainless steel or cast aluminum, 4-1/2-inch diameter.
2. Pressure-Element Assembly: Bourdon tube, unless otherwise indicated.
3. Pressure Connection: Brass, NPS 1/4, bottom-outlet type unless back-outlet type is indicated.
4. Movement: Mechanical, with link to pressure element and connection to pointer.
5. Dial: Satin-faced, nonreflective aluminum with permanently etched scale markings.
6. Pointer: Red or other dark-color metal.
7. Window: Glass.
8. Ring: Stainless steel.
9. Accuracy: Grade A, plus or minus 1 percent of middle half scale.
10. Vacuum-Pressure Range: 30-in. Hg of vacuum to 22 psig of pressure.
11. Range for Fluids under Pressure: Two times operating pressure.

C. Pressure-Gage Fittings:

1. Valves: NPS 1/4 brass or stainless-steel needle type.
2. Snubbers: ASME B40.5, NPS 1/4 brass bushing with corrosion-resistant, porous-metal disc of material suitable for system fluid and working pressure.

2.5 TEST PLUGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Flow Design, Inc.
2. MG Piping Products Co.
3. National Meter, Inc.
4. Peterson Equipment Co., Inc.
5. Sisco Manufacturing Co.
6. Trerice, H. O. Co.
7. Watts Industries, Inc.; Water Products Div.

B. Description: Corrosion-resistant brass or stainless-steel body with core inserts and gasketed and threaded cap, with extended stem for units to be installed in insulated piping.

C. Minimum Pressure and Temperature Rating: 500 psig at 200 deg F.

D. Core Inserts: One or two self-sealing rubber valves.

1. Insert material for water service at 20 to 200 deg F shall be CR.
2. Insert material for water service at minus 30 to plus 275 deg F shall be EPDM.
3. Low-Range Thermometer: Small bimetallic insertion type with 1- to 2-inch-diameter dial and tapered-end sensing element. Dial ranges shall be 25 to 125 deg F.
4. Carrying case shall have formed instrument padding.

PART 3 - EXECUTION

3.1 THERMOMETER APPLICATIONS

A. Install liquid-in-glass direct-mounting, or bimetallic-actuated dial thermometers in the outlet of each domestic, hot-water storage tank.

B. Provide the following temperature ranges for thermometers:

1. Domestic Hot Water: 30 to 180 deg F, with 2-degree scale divisions.
2. Domestic Cold Water: 0 to 100 deg F, with 2-degree scale divisions.

3.2 GAGE APPLICATIONS

A. Install dry-case-type pressure gages for discharge of each pressure-reducing valve.

B. Install dry-case-type pressure gages at suction and discharge of each pump.

3.3 INSTALLATIONS

A. Install direct-mounting thermometers and adjust vertical and tilted positions.

B. Install remote-mounting dial thermometers on panel, with tubing connecting panel and thermometer bulb supported to prevent kinks. Use minimum tubing length.

C. Install thermowells with socket extending to center of pipe and in vertical position in piping tees where thermometers are indicated.

D. Install direct-mounting pressure gages in piping tees with pressure gage located on pipe at most readable position.

E. Install needle-valve and snubber fitting in piping for each pressure gage.

F. Install test plugs in tees in piping.

G. Install permanent indicators on walls or brackets in accessible and readable positions.

H. Install connection fittings for attachment to portable indicators in accessible locations.

I. Install thermometers and gages adjacent to machines and equipment to allow service and maintenance for thermometers, gages, machines, and equipment.

J. Adjust faces of thermometers and gages to proper angle for best visibility.

END OF SECTION 220519

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220523 - GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes general duty valves common to plumbing piping systems. Related Sections: The following Sections contain requirements that relate to this Section:

1. Special purpose valves are specified in Division 22 piping system Sections.
2. Valve tags and charts are specified in Division 22 Section " IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT."

1.3 SUBMITTALS

A. General: Submit each item in this Article according to the Conditions of the Contract and Section 22 Specification Sections.

B. Product Data for each valve type. Include body material, valve design, pressure and temperature classification, end connection details, seating materials, trim material and arrangement, dimensions and required clearances, and installation instructions. Include list indicating valve and its application.

C. Maintenance data for valves to include in the operation and maintenance manual specified in Division 1. Include detailed manufacturer's instructions on adjusting, servicing, disassembling, and repairing.

1.4 QUALITY ASSURANCE

A. ASTM Compliance: Brass valves- ASTM B-61, ASTM B-62, and ASTM B-584. Silicon Brass- ASTM B-371 Alloy 694 or ASTM B-99 Alloy 651. Only valves containing 15% or less of zinc will be acceptable.

B. ASME Compliance: Comply with ASME B31.9 for building services piping and ASME B31.1 for power piping.

C. ASME Compliance for Ferrous Valves: ASME B16.10 and ASME B16.34 for dimension and design criteria.

D. MSS Compliance: Comply with the various MSS Standard Practice documents referenced.

E. NSF Compliance: NSF 61 for valve materials for potable water.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, and grooves.
3. Set ball valves open to minimize exposure of functional surfaces.
4. Set butterfly valves closed or slightly open.
5. Block check valves in either closed or open position.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store indoors and maintain valve temperature higher than ambient dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

C. Use a sling to handle large valves. Rig to avoid damage to exposed parts. Do not use handwheels and stems as lifting or rigging points.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Ball Valves:

a. Conbraco Industries, Inc.; Apollo Division.
b. Hammond Valve Corporation.
c. NIBCO Inc.
d. Stockham Valves & Fittings, Inc.
e. Watts

2. Butterfly Valves:

a. General Signal; DeZurik Unit.
b. Grinnell Corp.
c. Hammond Valve Corporation.

d. Keystone Valve USA, Inc.
e. NIBCO Inc.
f. Stockham Valves & Fittings, Inc.
g. Watts

3. Swing Check Valves:

a. Cla-Val Co.
b. Hammond Valve Corporation.
c. NIBCO Inc.
d. Powell: Wm. Powell Company (The).
e. Stockham Valves & Fittings, Inc.
f. Watts

4. Wafer Check Valves:

a. Hammond Valve Corporation.
b. NIBCO Inc.
c. Stockham Valves & Fittings, Inc.
d. Watts

2.2 BASIC, COMMON FEATURES

A. Pressure and Temperature Ratings: As indicated in the "Application Schedule" of Part 3 of this Section and as required to suit system pressures and temperatures.

B. Sizes: Same size as upstream pipe, unless otherwise indicated.

C. Operators: Use specified operators and handwheels, except provide the following special operator features:

1. Handwheels: For valves other than quarter turn.
2. Lever Handles: For quarter-turn valves 4 inches and smaller.
3. Gear-Drive Operators: For quarter-turn valves 6 inches and larger.

D. Extended Stems: Where insulation is indicated or specified, provide extended stems arranged to receive insulation.

E. Bypass and Drain Connections: Comply with MSS SP-45 bypass and drain connections.

F. Threads: ASME B1.20.1.

G. Flanges: ASME B16.1 for cast iron, ASME B16.5 for steel, and ASME B16.24 for bronze valves.

2.3 BALL VALVES

A. Ball Valves, 4 Inches and Smaller: MSS SP-110, Class 150, 600-psi CWP, ASTM B 584 bronze body and bonnet, 2-piece construction; chrome-plated brass ball, full port for 1-inch valves and smaller and conventional port for 1-1/4-inch valves and larger; blowout proof; bronze or brass stem; teflon seats and seals; threaded or soldered end connections:

1. Operator: Vinyl-covered steel lever handle.
2. Operator: Lever operators with lock where called for on the drawings.
3. Stem Extension: For valves installed in insulated piping.
4. Memory Stop: For operator handles.

2.4 BUTTERFLY VALVES

A. Butterfly Valves: MSS SP-67, 200-psi CWP, 150-psi maximum pressure differential, ASTM A 126 cast-iron body and bonnet, extended neck, stainless-steel stem, field-replaceable EPDM or Buna N sleeve and stem seals, wafer, lug, or grooved style:

1. Disc Type: Nickel-plated ductile iron.
2. Disc Type: Epoxy-coated ductile iron.
3. Operator for Sizes 2-1/2 Inches to 4 Inches : Lever handle with latch lock.
4. Operator for Sizes 6 Inches and larger: Gear operator with position indicator.
5. Operator for Sizes 6 Inches and Larger, 96 Inches or Higher above Floor: Chain-wheel operator.

2.5 CHECK VALVES

A. Swing Check Valves, 2-1/2 Inches and Smaller: MSS SP-80; Class 125, 200-psi CWP, or Class 150, 300-psi CWP; horizontal swing, Y-pattern, ASTM B 62 cast-bronze body and cap, rotating bronze disc with rubber seat or composition seat, threaded or soldered end connections:

B. Swing Check Valves, 3 Inches and Larger: MSS SP-71, Class 125, 200-psi CWP, ASTM A 126 cast-iron body and bolted cap, horizontal-swing bronze disc, flanged or grooved end connections.

C. Wafer Check Valves: Class 125, 200-psi CWP, ASTM A 126 cast-iron body, bronze disc/plates, stainless-steel pins and springs, Buna N seals, installed between flanges.

D. Check Valves-Vertical Position: Check Valves used in vertical position shall be Mueller Steam Specialty Co., Figure 105-BP glove type, bronze body, flanged ends, 175# W.W.P., seats and disc of composition bronze, guide pins and bushings of silicon bronze, phosphor bronze springs. The units shall be designed for quiet action and positive protection against water hammer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine piping system for compliance with requirements for installation tolerances and other conditions affecting performance of valves. Do not proceed with installation until unsatisfactory conditions have been corrected.

B. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.

C. Operate valves from fully open to fully closed positions. Examine guides and seats made accessible by such operation.

D. Examine threads on valve and mating pipe for form and cleanliness.

E. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Check gasket material for proper size, material composition suitable for service, and freedom from defects and damage.

F. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION

A. Install valves as indicated, according to manufacturer's written instructions.

B. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate the general arrangement of piping, fittings, and specialties.

C. Install valves with unions or flanges at each piece of equipment arranged to allow servicing, maintenance, and equipment removal without system shutdown.

D. Locate valves for easy access and provide separate support where necessary.

E. Install valves in horizontal piping with stem at or above the center of the pipe.

F. Install valves in a position to allow full stem movement.

G. For chain-wheel operators, extend chains to 60 inches above finished floor elevation.

H. Installation of Check Valves: Install for proper direction of flow as follows:

1. Swing Check Valves: Horizontal position with hinge pin level.
2. Wafer Check Valves: Horizontal or vertical position, between flanges.

3.3 THREADED CONNECTIONS

A. Note the internal length of threads in valve ends and proximity of valve internal seat or wall to determine how far pipe should be threaded into valve.

B. Align threads at point of assembly.

C. Apply appropriate tape or thread compound to the external pipe threads, except where dry seal threading is specified.

D. Assemble joint, wrench tight. Wrench on valve shall be on the valve end into which the pipe is being threaded.

3.4 FLANGED CONNECTIONS

A. Align flange surfaces parallel.

B. Assemble joints by sequencing bolt tightening to make initial contact of flanges and gaskets as flat and parallel as possible. Use suitable lubricants on bolt threads. Tighten bolts gradually and uniformly with a torque wrench.

C. For dead-end service, butterfly valves require flanges both upstream and downstream for proper shutoff and retention.

3.5 VALVE END SELECTION

A. Select valves with the following ends or types of pipe/tube connections:

1. Copper Tube Size, 2 Inches and Smaller: Threaded ends.
2. Copper Tube Size 2-1/2 Inches and Larger: Flanged ends.

3.6 APPLICATION SCHEDULE

A. General Application: Use gate, ball, and butterfly valves for shutoff duty; globe, ball, and butterfly for throttling duty. Refer to piping system Specification Sections for specific valve applications and arrangements.

B. Domestic Water Systems: Use the following valve types:

1. Ball Valves: Class 150, 600-psi CWP, with stem extension.
2. Butterfly Valves: Nickel-plated ductile iron or elastomer-coated ductile iron disc; EPDM or Buna N sleeve and stem seals.
3. Bronze Swing Check: Class 125, with rubber seat.
4. Check Valves: Class 125, swing or wafer type as indicated.

END OF SECTION 220523

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following hangers and supports for plumbing system piping and equipment:

1. Steel pipe hangers and supports.
2. Trapeze pipe hangers.
3. Thermal-hanger shield inserts.
4. Fastener systems.
5. Pipe stands.
6. Pipe positioning systems.
7. Equipment supports.

B. Related Sections include the following:

1. Division 5 Section "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.

1.3 DEFINITIONS

A. MSS: Manufacturers Standardization Society for The Valve and Fittings Industry Inc.

B. Terminology: As defined in MSS SP-90, "Guidelines on Terminology for Pipe Hangers and Supports."

1.4 PERFORMANCE REQUIREMENTS

A. Design supports for multiple pipes, including pipe stands, capable of supporting combined weight of supported systems, system contents, and test water.

B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

C. Design seismic-restraint hangers and supports for piping and equipment and obtain approval from authorities having jurisdiction.

1.5 SUBMITTALS

A. Product Data: For the following:

1. Steel pipe hangers and supports.
2. Thermal-hanger shield inserts.
3. Powder-actuated fastener systems.
4. Pipe positioning systems.

B. Shop Drawings: Show fabrication and installation details and include calculations for the following:

1. Trapeze pipe hangers. Include Product Data for components.
2. Metal framing systems. Include Product Data for components.
3. Pipe stands. Include Product Data for components.
4. Equipment supports.

C. Welding certificates.

1.6 QUALITY ASSURANCE

A. Welding: Qualify procedures and personnel according to AWS D1.1, "Structural Welding Code--Steel."

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 STEEL PIPE HANGERS AND SUPPORTS

A. Description: MSS SP-58, Types 1 through 58, factory-fabricated components. Refer to Part 3 "Hanger and Support Applications" Article for where to use specific hanger and support types.

B. Manufacturers:

1. B-Line Systems, Inc.; a division of Cooper Industries.

2. Empire Industries, Inc.
3. Globe Pipe Hanger Products, Inc.
4. Grinnell Corp.
5. GS Metals Corp.
6. National Pipe Hanger Corporation.
7. Piping Technology & Products, Inc.
8. Tolco Inc.

C. Galvanized, Metallic Coatings: Pregalvanized or hot dipped.

D. Nonmetallic Coatings: Plastic coating, jacket, or liner.

E. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion for support of bearing surface of piping.

2.3 TRAPEZE PIPE HANGERS

A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural-steel shapes with MSS SP-58 hanger rods, nuts, saddles, and U-bolts.

2.4 METAL FRAMING SYSTEMS

A. Description: MFMA-3, Shop or field fabricated pipe support assembly made of steel channels and other components.

B. Manufacturers:

1. B-Line Systems, Inc.; A Division of Cooper Industries.
2. Erico/Michigan Hanger Co.; Eristrut Division.
3. GS Metals Corporation.
4. Tolco, Inc.
5. Unistrut Corp.; Tyco International, Ltd.

C. Nonmetallic Coatings: Plastic coating, jacket or liner.

2.5 THERMAL-HANGER SHIELD INSERTS

A. Description: 100-psig-minimum, compressive-strength insulation insert encased in sheet metal shield.

B. Manufacturers:

1. Carpenter & Paterson, Inc.
2. ERICO/Michigan Hanger Co.
3. PHS Industries, Inc.
4. Pipe Shields, Inc.

5. Rilco Manufacturing Company, Inc.

C. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with vapor barrier.

D. Insulation-Insert Material for Hot Piping: ASTM C 552, Type II cellular glass, with vapor barrier.

E. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.

F. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.

G. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.6 FASTENER SYSTEMS

A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

1. Manufacturers:

a. Hilti, Inc.
b. ITW Ramset/Red Head.
c. Masterset Fastening Systems, Inc.
d. MKT Fastening, LLC.
e. Powers Fasteners.

B. Mechanical-Expansion Anchors: Insert-wedge-type zinc-coated steel, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

1. Manufacturers:

a. B-Line Systems, Inc.; a division of Cooper Industries.
b. Empire Industries, Inc.
c. Hilti, Inc.
d. ITW Ramset/Red Head.
e. MKT Fastening, LLC.
f. Powers Fasteners.

2.7 PIPE STAND FABRICATION

A. Pipe Stands, General: Shop or field-fabricated assemblies made of manufactured corrosion-resistant components to support roof-mounted piping.

2.8 PIPE POSITIONING SYSTEMS

A. Description: IAPMO PS 42, system of metal brackets, clips, and straps for positioning piping in pipe spaces for plumbing fixtures for commercial applications.

B. Manufacturers:

1. C & S Mfg. Corp.
2. HOLDRITE Corp.; Hubbard Enterprises.
3. Samco Stamping, Inc.

2.9 EQUIPMENT SUPPORTS

A. Description: Welded, shop- or field-fabricated equipment support made from structural-steel shapes.

2.10 MISCELLANEOUS MATERIALS

A. Structural Steel: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.

B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.

1. Properties: Nonstaining, noncorrosive, and nongaseous.
2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT APPLICATIONS

A. Specific hanger and support requirements are specified in Sections specifying piping systems and equipment.

B. Comply with MSS SP-69 for pipe hanger selections and applications that are not specified in piping system Sections.

C. Use hangers and supports with galvanized, metallic coatings for piping and equipment that will not have field-applied finish.

D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.

E. Use padded hangers for piping that is subject to scratching.

F. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated stationary pipes, NPS 1/2 to NPS 30.
2. Pipe Hangers (MSS Type 5): For suspension of pipes, NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
3. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated stationary pipes, NPS 3/4 to NPS 8.
4. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated stationary pipes, NPS 1/2 to NPS 8.
5. Split Pipe-Ring with or without Turnbuckle-Adjustment Hangers (MSS Type 11): For suspension of noninsulated stationary pipes, NPS 3/8 to NPS 8.
6. U-Bolts (MSS Type 24): For support of heavy pipes, NPS 1/2 to NPS 30.
7. Adjustable, Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes, NPS 2-1/2 to NPS 36, if vertical adjustment is required, with steel pipe base stanchion support and cast-iron floor flange.
8. Complete Pipe Rolls (MSS Type 44): For support of pipes, NPS 2 to NPS 42, if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
9. Pipe Roll and Plate Units (MSS Type 45): For support of pipes, NPS 2 to NPS 24, if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.

G. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers, NPS 3/4 to NPS 20.
2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers, NPS 3/4 to NPS 20, if longer ends are required for riser clamps.

H. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
3. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
4. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.

I. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction to attach to top flange of structural shape.
2. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
3. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
4. C-Clamps (MSS Type 23): For structural shapes.
5. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.

6. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
7. Malleable Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.

J. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
2. Thermal-Hanger Shield Inserts: For supporting insulated pipe.

K. Comply with MSS SP-69 for trapeze pipe hanger selections and applications that are not specified in piping system Sections.

L. Comply with MFMA-102 for metal framing system selections and applications that are not specified in piping system Sections.

M. Use pipe positioning systems in pipe spaces behind plumbing fixtures to support supply and waste piping for plumbing fixtures.

3.2 HANGER AND SUPPORT INSTALLATION

A. Steel Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from building structure.

B. Trapeze Pipe Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping and support together on field-fabricated trapeze pipe hangers.

1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified above for individual pipe hangers.
2. Field fabricate from ASTM A 36/A 36M, steel shapes selected for loads being supported. Weld steel according to AWS D1.1.

C. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.

D. Pipe Stand Installation:

1. Pipe Stand Types: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.

E. Pipe Positioning System Installation: Install support devices to make rigid supply and waste piping connections to each plumbing fixture. Refer to Division 15 Section "Plumbing Fixtures" for plumbing fixtures. Support devices shall be such that applied insulation undisturbed within supporting system.

F. Install hangers and supports complete with necessary inserts, bolts, rods, nuts, washers, and other accessories.

G. Equipment Support Installation: Fabricate from welded-structural-steel shapes.

H. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

I. Install lateral bracing with pipe hangers and supports to prevent swaying.

J. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.

K. Load Distribution: Install hangers and supports so piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

L. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and so maximum pipe deflections allowed by ASME B31.9 (for building services piping) are not exceeded.

M. Insulated Piping: Comply with the following:

1. Attach clamps and spacers to piping.

    a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
    b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
    c. Do not exceed pipe stress limits according to ASME B31.9 for building services piping.

2. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.

    a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Shield Dimensions for Pipe: Not less than the following:

    a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
    b. NPS 4: 12 inches long and 0.06 inch thick.
    c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.

4. Insert Material: Length at least as long as protective shield.
5. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.3 EQUIPMENT SUPPORTS

A. Fabricate structural-steel stands to support equipment above floor.

B. Grouting: Place grout under supports for equipment and make smooth bearing surface.

C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.4 METAL FABRICATIONS

A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.

C. Field Welding: Comply with AWS D1.1 procedures for shielded metal arc welding, appearance and quality of welds, and methods used in correcting welding work, and with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. Finish welds at exposed connections so no roughness shows after finishing and contours of welded surfaces match adjacent contours.

3.5 ADJUSTING

A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.6 PAINTING

A. Touch Up: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.

B. Touch Up: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal are specified in Division 9 painting Sections.

C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 220529

SECTION 220548 - VIBRATION AND SEISMIC CONTROLS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

B. 2005 ASCE (American Society of Civil Engineers) 7 – Minimum Design Loads for Buildings and Other Structures.

C. SMACNA Seismic Restraint Manual Guidelines for Mechanical Systems (latest edition).

D. International Code Council (ICC) Evaluation Service Program-provided seismic restraint, anchorage, and only bracing guidelines and details (latest editions).

1.2 SUMMARY

A. This Section includes designing, furnishing, and installing the following:

1. Hangers and supports for plumbing equipment and systems.
2. Seismic restraints for plumbing equipment and systems.
3. Concrete bases for mechanical, plumbing or fire protection equipment.

1.3 DEFINITIONS

A. ASTM: American Society for Testing and Materials

B. AWS: American Welding Society

C. IBC: International Building Code (2018 IBC)

D. ICC: International Code Council.

E. MFMA: Metal Framing Manufacturer’s Association.

F. MSS: Manufacturer's Standardization Society.

G. NBC: National Building Code (latest edition).

H. NFPA: National Fire Protection Association.

I. Seismic Restraint: A structural support element (such as a metal framing member, a cable, an anchor bolt or stud, a fastening device, or an assembly of these items) used to transfer seismic forces from an item of equipment or system to a building structural element and/or to limit movement of such item during a seismic event.

J. SMACNA: Sheet Metal and Air Conditioning Contractor's National Association.

1.4 SUBMITTALS

A. Product Data submitted shall illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of electrical support or seismic-restraint component used:

1. Tabulate types, sizes and points of application of all seismic restraints, anchorages, sway bracing and other support elements to be used complete with report on numbers and rated strength in tension and shear, as evaluated by an agency acceptable to authorities having jurisdiction.
2. Annotate to indicate application point of each product submitted and to document compliance with requirements.

B. Shop Drawings submitted shall indicate materials and dimensions as well as identify hardware, (including attachment and anchorage devices), identify seismic support locations, all signed and sealed by a qualified registered professional engineer. Professional engineer qualification requirements are specified in Division 1 of this Specification include the following, as a minimum:

1. Fabricated Supports: Representations of field-fabricated supports for all required locations.
2. Seismic Restraints: Detailing anchorage bracing, and location. Include the following:

    a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads. Include location of designed restraint.
    b. Details: Fabrication and arrangement, as well as attachments of restraints to the restrained items and to the structure shall be detailed. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events.
    c. Pre-approval and Evaluation Documentation from by an agency acceptable to authorities having jurisdiction shall be submitted, showing maximum ratings of restraint items and the basis for approval (tests or calculations).
    d. Location: Identify by tables or drawings all required seismic restraint locations and associated restraints for this Project.

3. Contractor is hereby cautioned that the design of the anchorages, sway bracing, seismic restraints, and other support elements required to be completed under this Section of this Specification by a qualified, registered professional engineer may NOT be accomplished solely by means of general references to published design manuals, tables, standard details, or other such references from Accepted Engineering Practice documents. However, incorporating such information, tables, details, or other published reference

material directly into the specific design of such anchorages, sway bracing, seismic restraints, and other support elements required to be completed under this Section of this Specification (that will ultimately be signed and sealed by the registered professional engineer prior to submittal) is permissible.

C. Coordination Drawings shall show coordination of seismic bracing for mechanical, plumbing and fire protection components with other systems and equipment in the vicinity, including other supports and seismic restraints.

D. Welding certificates shall be submitted, as appropriate.

E. Qualification Data for registered professional design engineer and testing agency shall be submitted.

F. Field quality-control test reports shall be submitted.

1.5 QUALITY ASSURANCE

A. Comply with seismic-restraint requirements in the IBC, unless requirements in these Contract Documents are more stringent.

B. Testing of Seismic Anchorage Devices: Comply with testing requirements in Part 3 of this Specification Section.

C. Welding: Qualify welding procedures and welding personnel capabilities according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

D. Seismic restraint devices shall have been subjected to both horizontal and vertical load testing and analysis acceptable to authorities having jurisdiction, showing maximum seismic restraint ratings.

Ratings based on independent testing are preferred to ratings based on calculations. Testing and/or calculations must include both shear and tensile loads (including combined shear and tensile loads), and one test or analysis at 45 degrees to the weakest mode.

1.6 PROJECT CONDITIONS

A. See Table(s) on Structural Drawings for specific project seismic conditions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. In other Part 2 articles where titles below introduce lists of acceptable manufacturers, the following requirements apply to product selection:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified or Engineer-approved equal.

2.2 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

A. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed on mechanical and plumbing system components for this Project, with a minimum structural safety factor of five (5) times the applied force.

B. Steel Slotted Support Systems shall comply with MFMA-3, factory-fabricated components for field assembly.

1. Acceptable Manufacturers:

a. Cooper B-Line; a division of Cooper Industries.
b. ERICO International Corporation.
c. Allied Support Systems; Power-Strut Unit.
d. GS Metals Corp.
e. Michigan Hanger Co., Inc.; O-Strut Div.
f. National Pipe Hanger Corp.
g. Thomas & Betts Corporation.
h. Unistrut; Tyco International, Ltd.
i. Wesanco, Inc.
j. Engineer-approved equal.

2. Finishes:

a. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-3.
b. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-3.

3. Channel Dimension shall be selected for structural loading condition and applicable seismic forces.

C. Raceway and Cable Tray Support shall be as described in the IBC and ASCE 7 documents.

D. Conduit and Cable Support Device shall be steel hangers, clamps, and associated fittings, specifically designed for the types and sizes of raceway or pipe to be supported.

E. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.

F. Mounting, Anchoring, and Attachment Components: Requirements for items for fastening mechanical or plumbing items or their supports to building surfaces shall include the following:

1. Verify suitability of all fasteners for use with lightweight concrete or concrete slabs less than 4 inches thick.

2. Powder-Actuated Fasteners shall be threaded-steel stud, for use in hardened portland cement concrete, steel, or wood; with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.

    a. Acceptable Manufacturers:

        1) Hilti, Inc.
        2) ITW Construction Products.
        3) MKT Fastening, LLC.
        4) Simpson Strong-Tie Co. Inc.
        5) Engineer-approved equal.

3. Mechanical-Expansion Anchors shall be insert-wedge-type, stainless steel, for use in hardened portland cement concrete; with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.

    a. Acceptable Manufacturers:

        1) Cooper B-Line; a division of Cooper Industries.
        2) Empire Tool and Manufacturing Co., Inc
        3) Hilti, Inc.
        4) ITW Construction Products.
        5) MKT Fastening, LLC.
        6) Powers Fasteners.
        7) Engineer-approved equal.

4. Concrete Inserts shall be steel or malleable-iron slotted-support-system units similar to MSS Type 18; complying with MFMA-3 or MSS SP-58.
5. Clamps for Attachment to Steel Structural Elements shall conform to MSS SP-58, type suitable for attached structural element.
6. Through Bolts shall be structural type, hex head, high-strength. Comply with ASTM A 325.
7. Toggle Bolts shall be all-steel springhead type.
8. Hanger Rods shall be threaded steel.

2.3 SEISMIC RESTRAINT COMPONENTS

A. Manufacturers:

1. Amber/Booth Company, Inc.
2. B-Line Systems, Inc.
3. California Dynamics Corp.
4. Kinetics Noise Control, Inc.
5. Loos & Co., Inc.; Cableware Technology Division.
6. Mason Industries, Inc.
7. Unistrut Diversified Products Co.; Wayne Manufacturing Division.
8. Vibration Eliminator Co., Inc.
9. Vibration Isolation Co., Inc.

10. Vibration Mountings & Controls/Korfund.

B. Rated Strength, Features, and Application Requirements for Restraint Components shall be as defined by an agency acceptable to authorities having jurisdiction.

1. Structural Safety Factor: Strength in tension, shear, and pullout force of components used shall be at least five (5) times the maximum seismic forces to which they will be subjected.

C. Angle and Channel-Type Brace Assemblies: Steel angles or steel slotted-support-system components; with accessories for attachment to braced component at one end and to building structure at the other end.

D. Cable Restraints: ASTM A 603, zinc-coated, steel wire rope attached to steel or stainless-steel thimbles, brackets, swivels, and bolts designed for restraining cable service.

E. Seismic Mountings, Anchors, and Attachments: For this application, items shall be selected to resist seismic forces.

1. Hanger Rod Stiffeners shall be steel tube or steel slotted-support-system sleeves with internally bolted connections or reinforcing steel angle clamped to hanger rod, of design recognized by an agency acceptable to authorities having jurisdiction.
2. Bushings for Floor-Mounted Equipment Anchors shall be neoprene units designed for seismically rated rigid equipment mountings, and matched to type and size of anchor bolts and studs used.
3. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves shall be designed for seismically-rated rigid equipment mountings, and matched to type and size of attachment devices used.

F. Seismic Snubbers: Factory fabricated using welded structural-steel shapes and plates, anchor bolts, and replaceable resilient isolation washers and bushings.

1. Anchor bolts for attaching to concrete shall be seismic-rated, drill-in, and stud-wedge or female-wedge type.
2. Resilient Isolation Washers and Bushings: 1-piece, molded, bridge-bearing neoprene complying with AASHTO M 251 and having a durometer of 50, plus or minus 5.

2.4 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

A. Comply with IBC for specific application requirements for hangers and supports for mechanical and plumbing equipment and systems, except if requirements in these Contract Documents are stricter.

B. Multiple Raceways or Pipes: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits; and:

1. Secure raceways and pipes to trapeze member with clamps approved for application by an agency acceptable to authorities having jurisdiction.
2. Secure raceways and pipes to these supports with two-bolt pipe clamps.

C. Spring-steel clamps designed for supporting single pipes without bolts may be used for 1-1/2-inch and smaller raceways, and for fastening raceways to trapeze supports.

D. Install all supports, restraints, attachments, and other elements specified in this Section of this Specification in strict conformance with the written installation requirements of the manufacturers of each support, restraint, attachment, or other element.

3.2 SUPPORT AND SEISMIC RESTRAINT INSTALLATION

A. Comply with SMACNA and MSS for installation requirements, except as otherwise specified in this Article of this Section of this Specification.

B. Install seismic restraint components using methods approved by the evaluation service providing required submittals for component.

C. Strength of Support and Seismic Restraint Assemblies: Where not otherwise indicated, select sizes of components so that strength will be adequate to carry present and future static and seismic loads within specified loading limits. Minimum static design load used for strength determination shall be the weight of the supported components plus 200 lb.

D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten mechanical and plumbing items and their supports to building structural elements by the following methods, unless otherwise indicated by code:

1. To Wood: Fasten with lag screws or through bolts.
2. To New Concrete: Bolt to concrete inserts.
3. To Masonry: Use approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
4. To Existing Concrete: Fasten with expansion anchors.
5. Instead of expansion anchors, powder-actuated driven threaded studs provided with lock washers and nuts may be used in existing standard-weight concrete 4 inches thick or greater. Do not use for anchorage to lightweight-aggregate concrete or for slabs less than 4 inches thick.

6. To Steel: Use welded threaded studs complying with AWS D1.1/D1.1M, with lock washers and nuts or beam clamps (MSS Type 19, 21, 23, 25, or 27) complying with MSS SP-69 or Spring-tension clamps.
7. To Light Steel: Use sheet metal screws.
8. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount such devices on slotted-channel racks attached to substrate by means that meet seismic restraint strength and anchorage requirements.

E. Drill holes for expansion anchors in reinforced concrete at locations and to depths that avoid reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.

B. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 CONCRETE BASES

A. Concrete Bases: Anchor equipment to concrete base according to equipment manufacturer's written instructions and seismic requirements for Project.

B. Construct concrete bases of dimensions indicated but not less than 4 inches larger in both directions than supported unit, and such that expansion anchors will be a minimum of 10 bolt diameters from edge of the base; and:

1. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around full perimeter of the base.
2. Install epoxy-coated anchor bolts for supported equipment that extend through concrete base, and anchor into structural concrete floor.
3. Place and secure anchorage devices using the equipment to be supported manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
4. Install anchor bolts to elevations required for proper attachment to supported equipment.
5. Install anchor bolts according to anchor-bolt manufacturer's written instructions.
6. Use 3000-psi, 28-day compressive-strength concrete, minimum.

3.5 INSTALLATION OF SEISMIC RESTRAINT COMPONENTS

A. Install bushing assemblies for anchor bolts for floor-mounted equipment, arranged to provide resilient media between anchor bolt and mounting hole in concrete base.

B. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.

C. Restraint Cables shall be installed with slack within maximum tolerance recommended by cable manufacturer.

D. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, upper truss chords of bar joists, or at concrete members.

3.6 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

A. Make flexible connections in runs of raceways and piping where they cross expansion and seismic control joints, where adjacent sections or branches are supported by different structural elements, and where they terminate with connection to mechanical and plumbing equipment that is anchored to a different structural element from the one supporting them as they approach equipment.

3.7 FIELD QUALITY CONTROL TESTS

A. Testing Agency: Engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.

B. Record test results and submit to Engineer.

C. Test pullout resistance of seismic anchorage devices, and:

1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
2. Schedule test with Owner and Engineer present before connecting anchorage devices to components to be restrained (unless post-connection testing has been approved by Engineer in advance). Provide at least 7 days advance notice of scheduled test.
3. Obtain Engineer’s concurrence before transferring test loads to structure. Provide temporary load-spreading members.
4. Test at least four of each type and size of installed anchorages and fasteners.
5. Test anchorages and fasteners to 90 percent of rated proof load of item.
6. If any item fails test, modify all installations of same type for project, then retest item until satisfactory test result is achieved.

3.8 PAINTING AND FINISHING

A. Refer to Division 09 Finishes for field painting requirements.

B. Damage and Touch-Up: Repair marred and damaged factory-painted finishes with materials and procedures to match original factory finish.

3.9 CUTTING AND PATCHING

A. Cut, channel, chase, and drill floors, walls, partitions, ceilings, and other surfaces necessary for mechanical installations. Perform cutting by skilled mechanics of the trades involved.

B. Repair cut surfaces to match adjacent surfaces.

3.10 GROUTING

A. Install non-metallic, non-shrink grout for mechanical equipment base bearing surfaces, pump and other equipment base plates and anchors. Mix grout according to manufacturer's printed instructions.

B. Clean surfaces that will come into contact with grout.

C. Provide forms for placement of grout, as required.

D. Avoid air entrapment when placing grout.

E. Place grout, completely filling equipment bases.

F. Place grout on concrete bases to provide a smooth bearing surface for equipment.

G. Place grout around anchors.

H. Cure placed grout according to manufacturer's printed instructions.

END OF SECTION 220548

SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Warning signs and labels.
3. Pipe labels.
4. Stencils.
5. Valve tags.
6. Warning tags.

1.3 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Samples: For color, letter style, and graphic representation required for each identification material and device.

C. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.

D. Valve numbering scheme.

E. Valve Schedules: For each piping system to include in maintenance manuals.

1.4 COORDINATION

A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.

B. Coordinate installation of identifying devices with locations of access panels and doors.

C. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

1. Material and Thickness: Brass, 0.032-inch, Aluminum, 0.032-inch or anodized aluminum, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
2. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
3. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
4. Fasteners: Stainless-steel rivets or self-tapping screws.
5. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified.

C. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 WARNING SIGNS AND LABELS

A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16 inch thick, and having predrilled holes for attachment hardware.

B. Letter Color: Black.

C. Background Color: Yellow.

D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.

E. Minimum Label Size: Length and width vary for required label content, but not less than 2 inch by 5 inch.

F. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.

G. Fasteners: Stainless-steel rivets or self-tapping screws.

H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

I. Label Content: Include caution and warning information, plus emergency notification instructions.

2.3 PIPE LABELS

A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.

B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to partially cover circumference of pipe and to attach to pipe without fasteners or adhesive.

C. Self-Adhesive Pipe Labels: Printed vinyl with pressure-sensitive, permanent-adhesive backing.

D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings, pipe size, and an arrow indicating flow direction.

1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
2. Lettering Size: At least 1-1/2 inches high.

2.4 VALVE TAGS

A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.

1. Tag Material: 1½″ Diameter, Brass, 0.032-inch, minimum thickness, and having predrilled or stamped holes for attachment hardware.
2. Fasteners: Brass #6 bead chain or #16 brass jack chain.

B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.

1. Valve-tag schedule shall be included in operation and maintenance data.

2.5 WARNING TAGS

A. Warning Tags: Preprinted or partially preprinted, accident-prevention tags, of plasticized card stock with matte finish suitable for writing.

1. Size: 2 by 5 inches minimum.
2. Fasteners: Brass grommet and wire.
3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."

4. Color: Yellow background with black lettering.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 EQUIPMENT LABEL INSTALLATION

A. Install or permanently fasten labels on each major item of mechanical equipment.

B. Locate equipment labels where accessible and visible.

3.3 PIPE LABEL INSTALLATION

A. Piping Color-Coding: Painting of piping is specified in Division 9 Section "High-Performance Coatings."

B. Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:

1. Near each valve and control device.
2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
4. At access doors, manholes, and similar access points that permit view of concealed piping.
5. Near major equipment items and other points of origination and termination.
6. Spaced at maximum intervals of 25 feet along each run.

C. Pipe Label Color Schedule:

1. Domestic Water Piping:

   a. Background Color: White.
   b. Letter Color: Green.

2. Sanitary Waste, Vent and Storm Drainage Piping:

   a. Background Color: White.
   b. Letter Color: Red.

3.4 VALVE-TAG INSTALLATION

A. Install tags on valves and control devices in piping systems, except check valves; valves within factory-fabricated equipment units; shutoff valves; faucets; convenience and lawn-watering hose connections; and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.

B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:

1. Valve-Tag Size and Shape:

   a. Cold Water: 1-1/2 inches, round.
   b. Hot Water: 1-1/2 inches, round.

2. Chains shall be attached to valve lever handle or around valve system.
3. Valve tags located above lay-in ceiling shall be hung where tag hangs below the level of the piping.

3.5 WARNING-TAG INSTALLATION

A. Write required message on, and attach warning tags to, equipment and other items where required.

END OF SECTION 220553

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220593 - TESTING, ADJUSTING, AND BALANCING FOR PLUMBING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. TAB of domestic water system.
2. TAB of plumbing equipment:

    a. Domestic hot-water in-line circulation pumps.
    b. Sanitary sewage pumps.

3. Pipe-leakage test verification.

1.3 DEFINITIONS

A. AABC: Associated Air Balance Council.

B. NEBB: National Environmental Balancing Bureau.

C. TAB: Testing, adjusting, and balancing.

D. TABB: Testing, Adjusting, and Balancing Bureau.

E. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

F. TDH: Total dynamic head.

1.4 PREINSTALLATION MEETINGS

A. TAB Conference: Conduct a TAB conference at Project site after approval of the TAB strategies and procedures plan, to develop a mutual understanding of the details. Provide a minimum of 14 days' advance notice of scheduled meeting time and location.

1. Minimum Agenda Items:

a. The Contract Documents examination report.
b. The TAB plan.
c. Needs for coordination and cooperation of trades and subcontractors.
d. Proposed procedures for documentation and communication flow.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: Within 30 days of Contractor's Notice to Proceed, submit documentation that the TAB specialist and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.

B. Contract Documents Examination Report: Within 30 days of Contractor's Notice to Proceed, submit the Contract Documents review report, as specified in Part 3.

C. Strategies and Procedures Plan: Within 30 days of Contractor's Notice to Proceed, submit TAB strategies and step-by-step procedures, as specified in "Preparation" Article.

D. System Readiness Checklists: Within 30 days of Contractor's Notice to Proceed, submit system readiness checklists, as specified in "Preparation" Article.

E. Examination Report: Submit a summary report of the examination review required in "Examination" Article.

F. Certified TAB reports.

G. Sample report forms.

H. Instrument calibration reports, to include the following:

1. Instrument type and make.
2. Serial number.
3. Application.
4. Dates of use.
5. Dates of calibration.

1.6 QUALITY ASSURANCE

A. TAB Specialists Qualifications, Certified by AABC:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by AABC.
2. TAB Technician: Employee of the TAB specialist and certified by AABC.

B. TAB Specialists Qualifications, Certified by NEBB or TABB:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by NEBB or TABB.
2. TAB Technician: Employee of the TAB specialist and certified by NEBB or TABB.

C. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."

D. ASHRAE 111 Compliance: Requirements in ASHRAE 111 applicable to analogous domestic water system and plumbing equipment balancing.

E. ASHRAE 188 Compliance: Comply with balancing and report requirements, Section 8.3 "Balancing."

F. Code and Authorities Having Jurisdiction Compliance: TAB is required to comply with governing codes and requirements of authorities having jurisdiction.

1.7 FIELD CONDITIONS

A. Partial Owner Occupancy: Owner may occupy completed areas of building before Substantial Completion. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 TAB SPECIALISTS

A. Subject to compliance with requirements, available TAB specialists that may be engaged include, but are not limited to, the following:

3.2 EXAMINATION

A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems designs that may preclude proper TAB of systems and equipment.

B. Examine installed systems for balancing devices, such as test ports, gauge cocks, thermometer wells, flow-control devices, and balancing valves and fittings. Verify that locations of these balancing devices are applicable for intended purpose and are accessible.

C. Examine approved submittals for plumbing systems and equipment.

D. Examine design data, including plumbing system descriptions, statements of design assumptions for environmental conditions and systems output, and statements of philosophies and assumptions about plumbing system and equipment controls.

E. Examine equipment performance data, including pump curves.

1. Relate performance data to Project conditions and requirements, including pump system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
2. Calculate pump system-effect factors to reduce performance ratings of plumbing equipment when installed under conditions different from the conditions used to rate equipment performance. Compare results with the design data and installed conditions.

F. Examine system and equipment installations, and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.

G. Examine test reports specified in individual system and equipment Sections.

H. Examine plumbing equipment and verify that bearings are greased, belts are aligned and tight, filters are clean, and equipment with functioning controls is ready for operation.

I. Examine temporary and permanent strainers. Verify that temporary strainer screens used during system cleaning and flushing have been removed and permanent strainers are installed and clean.

J. Examine control valves for proper installation for their intended function of isolating, throttling, diverting, or mixing fluid flows.

K. Examine system pumps to ensure absence of entrained air in the suction piping.

L. Examine operating safety interlocks and controls on plumbing equipment.

M. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.3 PREPARATION

A. Prepare a TAB plan that includes the following:

1. Equipment and systems to be tested.
2. Strategies and step-by-step procedures for balancing the systems.
3. Instrumentation to be used.
4. Sample forms with specific identification for all equipment.

B. Perform system-readiness checks of plumbing systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:

1. Domestic Water System:

a. Verify leakage and pressure tests on water distribution systems have been satisfactorily completed in accordance with applicable code and authority having jurisdiction.
b. Water heaters are installed and functioning.

c. Piping is complete and all points of outlet are installed.
d. Water treatment is complete.
e. Systems are flushed, filled, and air purged.
f. Strainers are clean.
g. Control valves are functioning in accordance with the sequence of operation.
h. Shutoff and balance valves are 100 percent open.
i. Hot-water circulating pumps are operational and proper rotation is verified.
j. Pump gauge connections are installed directly at pump inlet and outlet flanges or in discharge and suction pipe prior to valves or strainers.
k. Variable-frequency controllers' startup is complete and safeties are verified.
l. Suitable access to balancing devices and equipment is provided.

2. Sanitary Sewage/Drainage System:

a. Leakage and pressure tests on sanitary sewage/drainage systems have been completed in accordance with applicable code and authority having jurisdiction requirements.
b. Piping is complete.
c. Sanitary sewage pumps/drainage pumps are operational.
d. Control valves are functioning in accordance with the sequence of operation.
e. Shutoff valves are 100 percent open.
f. Suitable access to equipment is provided.

3.4 GENERAL PROCEDURES FOR TESTING AND BALANCING

A. Perform testing and balancing procedures on each system in accordance with the procedures contained in AABC's "National Standards for Total System Balance" and in this Section.

B. Cut insulation, pipes, and equipment casings for installation of test probes to the minimum extent necessary for TAB procedures.

1. Where holes for probes are required in piping or equipment, install pressure and temperature test plugs to seal systems.
2. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish in accordance with Section 220719 "Plumbing Piping Insulation."

C. Mark equipment and balancing devices, including valve position indicators and similar controls and devices, with paint or other suitable, permanent identification material to show final settings.

D. Take and report testing and balancing measurements in inch-pound (IP) units.

3.5 GENERAL PROCEDURES FOR PLUMBING EQUIPMENT

A. Test, adjust, and balance plumbing equipment indicated on Drawings, including, but not limited to, the following:

1. Domestic water in-line pumps.
2. Domestic water heaters.
3. Drainage pumps.

3.6 PROCEDURES FOR DOMESTIC WATER SYSTEMS

A. Prepare test reports for pumps and other equipment. Obtain approved submittals and manufacturer-recommended testing procedures. Crosscheck the summation of required equipment flow rates with system design flow rates.

B. Prepare schematic diagrams of systems' Record drawings piping layouts.

C. In addition to requirements in "Preparation" Article, prepare domestic water systems for testing and balancing as follows:

1. Check expansion tank for proper setting.
2. Check water heater for proper discharge temperature setting.
3. Check remotest point of outlet for adequate pressure.
4. Check flow-control valves for proper position.
5. Locate start-stop and disconnect switches, electrical interlocks, and motor controllers.
6. Verify that motor controllers are equipped with properly sized thermal protection.
7. Check that air has been purged from the system.

D. Measure and record upstream and downstream pressure of each piece of equipment.

E. Measure and record upstream and downstream pressure of pressure-reducing valves.

F. Check settings and operation of automatic temperature-control valves, self-contained control valves, and pressure-reducing valves. Record final settings.

G. Check settings and operation of each safety valve. Record settings.

3.7 PROCEDURES FOR DOMESTIC HOT-WATER CIRCULATING INLINE PUMP

A. Balance system with manual or automatic balancing valves by setting at design flow.

1. Measure flow in main and branch pipes.
2. Adjust main and branch balance valves for design flow.
3. Re-measure each main and branch after all have been adjusted.

B. Adjust pump to deliver total design flow.

1. Measure pump TDH as follows:

a. Measure discharge pressure directly at the pump outlet flange or in discharge pipe prior to any valves.

b. Measure inlet pressure directly at the pump inlet flange or in suction pipe prior to any valves or strainers.
c. Convert pressure to head and correct for differences in gauge heights.
d. Verify pump impeller size by measuring the TDH with the discharge valve closed. Note the point on manufacturer's pump curve at zero flow, and verify that the pump has the intended impeller size.

2. Monitor motor performance during procedures, and do not operate motor in an overloaded condition.
3. Mark final settings and verify that all memory stops have been set.
4. Verify final system conditions as follows:

a. Re-measure and confirm that total flow is within design.
b. Re-measure final pumps' operating data, TDH, volts, amps, speed, and static profile.
c. Mark final settings.

3.8 PROCEDURES FOR WATER HEATERS

A. Gas- and Oil-Fired Water Heaters:

1. Measure and record entering- and leaving-water temperatures.
2. Measure and record water flow.
3. Measure and record pressure drop.
4. Record relief valve(s) pressure setting.
5. Capacity: Calculate in Btu/h (kW) of heating output.
6. Fuel Consumption: If fuel supply is equipped with flow meter, measure and record consumption.
7. Efficiency: Calculate operating efficiency for comparison to submitted equipment.
8. Fan, motor, and motor controller operating data.

3.9 TOLERANCES

A. Set plumbing system's flow rates within the following tolerances:

1. Domestic Water Flow Rate: Plus 10 percent or minus 5 percent. If design value is less than 10 gpm (0.63 L/s), within 10 percent.

3.10 PROGRESS REPORTING

A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for system-balancing devices. Recommend changes and additions to system-balancing devices, to facilitate proper performance measuring and balancing. Recommend changes and additions to plumbing systems and general construction to allow access for performance-measuring and -balancing devices.

B. Status Reports: Prepare weekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

3.11 FINAL REPORT

A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.

1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
2. Include a list of instruments used for procedures, along with proof of calibration.
3. Certify validity and accuracy of field data.

B. Final Report Contents: In addition to certified field-report data, include the following:

1. Pump curves.
2. Manufacturers' test data.
3. Field test reports prepared by system and equipment installers.
4. Other information relative to equipment performance; do not include Shop Drawings and Product Data.

C. General Report Data: In addition to form titles and entries, include the following data:

1. Title page.
2. Name and address of the TAB specialist.
3. Project name.
4. Project location.
5. Architect's name and address.
6. Engineer's name and address.
7. Contractor's name and address.
8. Report date.
9. Signature of TAB supervisor who certifies the report.
10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
11. Summary of contents, including the following:

    a. Indicated versus final performance.
    b. Notable characteristics of systems.
    c. Description of system operation sequence if it varies from the Contract Documents.

12. Nomenclature sheets for each item of equipment.
13. Notes to explain why certain final data in the body of reports vary from indicated values.
14. Test conditions for pump performance forms, including the following:

    a. Variable-frequency controller settings for variable-flow hydronic systems.

b. Settings for pressure controller(s).
c. Other system operating conditions that affect performance.

D. System Diagrams: Include schematic layouts of distribution systems. Present each system with single-line diagram and include the following:

1. Flow rates.
2. Pipe and valve sizes and locations.
3. Balancing stations.
4. Position of balancing devices.

E. Gas- and Oil-Fired Water Heaters Test Reports: In addition to manufacturer's factory startup equipment reports, include the following:

1. Unit Data:

a. System identification.
b. Location.
c. Make and type.
d. Model number and unit size.
e. Manufacturer's serial number.
f. Fuel type in input data.
g. Output capacity in Btu/h (kW).
h. Ignition type.
i. Burner-control types.
j. Motor horsepower and speed.
k. Motor volts, phase, and hertz.
l. Motor full-load amperage and service factor.
m. Sheave make, size in inches (mm), and bore.
n. Center-to-center dimensions of sheave and amount of adjustments in inches (mm).

2. Test Data (Indicated and Actual Values):

a. Total airflow rate in cfm (L/s).
b. Entering-water temperature in deg F (deg C).
c. Leaving-water temperature in deg F (deg C).
d. Low-fire fuel input in Btu/h (kW).
e. High-fire fuel input in Btu/h (kW).
f. High-temperature-limit setting in deg F (deg C).
g. Operating set point in Btu/h (kW).
h. Heating value of fuel in Btu/h (kW).

F. Pump Test Reports: Calculate impeller size by plotting the shutoff head on pump curves, and include the following:

1. Unit Data:

a. Unit identification.
b. Location.

c. Service.
d. Make and size.
e. Model number and serial number.
f. Water flow rate in gpm (L/s).
g. Water-pressure differential in feet of head or psig (kPa).
h. Required net positive suction head in feet of head or psig (kPa).
i. Pump speed.
j. Impeller diameter in inches (mm).
k. Motor make and frame size.
l. Motor horsepower and rpm.
m. Voltage at each connection.
n. Amperage for each phase.
o. Full-load amperage and service factor.
p. Seal type.

2. Test Data (Indicated and Actual Values):

a. Static head in feet of head or psig (kPa).
b. Pump shutoff pressure in feet of head or psig (kPa).
c. Actual impeller size in inches (mm).
d. Full-open flow rate in gpm (L/s).
e. Full-open pressure in feet of head or psig (kPa).
f. Final discharge pressure in feet of head or psig (kPa).
g. Final suction pressure in feet of head or psig (kPa).
h. Final total pressure in feet of head or psig (kPa).
i. Final water flow rate in gpm (L/s).
j. Voltage at each connection.
k. Amperage for each phase.

G. Instrument Calibration Reports:

1. Report Data:

a. Instrument type and make.
b. Serial number.
c. Application.
d. Dates of use.
e. Dates of calibration.

3.12 VERIFICATION OF TAB REPORT

A. The TAB specialist's test and balance engineer shall conduct the inspection in the presence of Construction Manager.

B. Construction Manager shall randomly select measurements, documented in the final report, to be rechecked. Rechecking shall be limited to the lesser of either 10 percent of the total measurements recorded or the extent of measurements that can be accomplished in a normal 8-hour business day.

C. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."

D. If the number of "FAILED" measurements is greater than 10 percent of the total measurements checked during the final inspection, the TAB shall be considered incomplete and shall be rejected.

E. If recheck measurements find the number of failed measurements noncompliant with requirements indicated, proceed as follows:

1. TAB specialists shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection. All changes shall be tracked to show changes made to previous report.
2. If the second final inspection also fails, Owner may pursue other Contract options to complete TAB work.

F. Prepare test and inspection reports.

3.13 ADDITIONAL TESTS

A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.

END OF SECTION 220593

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220719 - PLUMBING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Insulation Materials:

    a. Flexible elastomeric.
    b. Mineral fiber.
    c. Cellular glass.

2. Insulating cements.
3. Adhesives.
4. Mastics.
5. Lagging adhesives.
6. Sealants.
7. Factory-applied jackets.
8. Field-applied fabric-reinforcing mesh.
9. Field-applied cloths.
10. Field-applied jackets.
11. Tapes.
12. Securements.
13. Corner angles.

1.3 SUBMITTALS

A. Product Data: For each type of product indicated. Include thermal conductivity, thickness, and jackets (both factory and field applied, if any).

B. Shop Drawings:

1. Application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
2. Insulation application at pipe expansion joints for each type of insulation.

3. Insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
4. Removable insulation at piping specialties, equipment connections, and access panels.
5. Application of field-applied jackets.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.

B. Fire-Test-Response Characteristics: Insulation and related materials shall have fire-test-response characteristics indicated, as determined by testing identical products per ASTM E 84, by a testing and inspecting agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing and inspecting agency.

1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

A. Coordinate size and location of supports, hangers, and insulation shields specified in Division 22 Section "Hangers and Supports."

B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

1.7 SCHEDULING

A. Schedule insulation application after pressure testing systems. Insulation application may begin on segments that have satisfactory test results.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

A. Comply with requirements in Part 3 schedule articles for where insulating materials shall be applied.

B. Products shall not contain asbestos, lead, mercury, or mercury compounds.

C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.

D. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.

E. Flexible Elastomeric: Closed cell or expanded rubber materials comply with ASTM C534, Type I for tubular materials and Type II for sheet materials.

1. Products: Subject to compliance with requirements, provide the following:

a. Aeroflex USA, Inc.; Aerocel.
b. Armacell, LLP; Armaflex.
c. RBX Corp.; Insul-Sheet 1800 and Insul Tube 180.

F. Mineral-Fiber, Preformed Pipe Insulation:

1. Products: Subject to compliance with requirements, provide the following:

a. Fibrex Insulations Inc.; Coreplus 1200.
b. Johns Manville; Micro-Lok.
c. Knauf Insulation; 1000(Pipe Insulation.
d. Manson Insulation Inc.; Alley-K.
e. Owens Corning; Fiberglas Pipe Insulation.

2. Type I, 850 deg F Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

G. Cellular Glass: Inorganic, incombustible, foamed or cellulated glass with annealed, rigid, hermetically sealed cells. Factory-applied jacket requirements are specified in “Factory-Applied Jackets” article.

1. Products: Subject to compliance with requirements, provide the following:

a. Cell-U-Foam Corp.; Ultra-CUF.
b. Pittsburgh Corning Corp.; FoamGlas Super K.

2. Special Shaped Insulation: ASTM 552, Type III.

3. Preformed Pipe Insulation without Jacket: Comply with ASTM C552, Type II, Class 1.
4. Preformed Pipe Insulation with Factory-Applied Jacket: Comply with ASTM C552, Type II, Class 2.
5. Factory fabricate shades according to ASTM C450 and ASTM C585.

2.2 ADHESIVES

A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated, unless otherwise indicated.

B. Flexible Elastomeric Adhesive: Comply with MIL-A-24179A, Type II, Class 1.

1. Products: Subject to compliance with requirements, provide the following:

a. Aeroflex USA, Inc.; Aeroseal.
b. Armacell, LLC; 520 Adhesive.
c. RBX Corp.; Rubatex Contact Adhesive.

C. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

1. Products: Subject to compliance with requirements, provide the following:

a. Childers Products, Division of ITW; CP-82.
b. Foster Products Corporation, H. B. Fuller Company; 85-20.
c. ITW TACC, Division of Illinois Tool Works; S-90/80.
d. Marathon Industries, Inc.; 225.
e. Mon-Eco Industries, Inc.; 22-25.

D. Cellular Glass Adhesive: Solvent-based resin adhesive, with a service temperature range of minus 75 to plus 300 degrees F.

1. Products: Subject to compliance with requirements, provide the following:

a. Childers Products, Division of ITW; CP-96.
b. Foster Products Corp.; H.B. Fuller Co.; 81-33.

2.3 MASTICS

A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-C-19565C, Type II.

B. Vapor-Barrier Mastic: Solvent based; suitable for indoor use on below ambient services.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Childers Products, Division of ITW; CP-30.
b. Foster Products Corporation, H. B. Fuller Company; 30-35.

c. ITW TACC, Division of Illinois Tool Works; CB-25.
d. Marathon Industries, Inc.; 501.
e. Mon-Eco Industries, Inc.; 55-10.

2. Water-Vapor Permeance: ASTM F 1249, 0.05 perm at 35-mil dry film thickness.
3. Service Temperature Range: 0 to 180 deg F.
4. Solids Content: ASTM D 1644, 44 percent by volume and 62 percent by weight.
5. Color: White.

2.4 LAGGING ADHESIVES

A. Description: Comply with MIL-A-3316C Class I, Grade A and shall be compatible with insulation materials, jackets, and substrates.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Childers Products, Division of ITW; CP-52.
b. Foster Products Corporation, H. B. Fuller Company; 81-42.
c. Marathon Industries, Inc.; 130.
d. Mon-Eco Industries, Inc.; 11-30.
e. Vimasco Corporation; 136.

2. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over equipment and pipe insulation.
3. Service Temperature Range: Minus 50 to plus 180 deg F.
4. Color: White.

2.5 SEALANTS

A. Joint Sealants:

1. Materials shall be compatible with insulation materials, jackets, and substrates.
2. Permanently flexible, elastomeric sealant.
3. Service Temperature Range: Minus 100 to plus 300 deg F.
4. Color: White.

2.6 FACTORY-APPLIED JACKETS

A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C 1136, Type I.
2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C 1136, Type I.

3. PVDC Jacket for Indoor Applications: 4-mil- thick, white PVDC biaxially oriented barrier film with a permeance at 0.02 perms when tested according to ASTM E 96 and with a flame-spread index of 5 and a smoke-developed index of 20 when tested according to ASTM E 84.

    a. Products: Subject to compliance with requirements, provide the following:

        1) Dow Chemical Company (The); Saran 540 Vapor Retarder Film and Saran 560 Vapor Retarder Film.

4. PVDC-SSL Jacket: PVDC jacket with a self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip.

    a. Products: Subject to compliance with requirements, provide the following:

        1) Dow Chemical Company (The); Saran 540 Vapor Retarder Film and Saran 560 Vapor Retarder Film.

2.7 FIELD-APPLIED FABRIC-REINFORCING MESH

A. Woven Glass-Fiber Fabric for Pipe Insulation: Approximately 2 oz./sq. yd. with a thread count of 10 strands by 10 strands/sq. inch for covering pipe and pipe fittings.

1. Products: Subject to compliance with requirements, provide the following:

    a. Vimasco Corporation; Elastafab 894.

B. Woven Glass-Fiber Fabric for Equipment Insulation: Approximately 6 oz./sq. yd. with a thread count of 5 strands by 5 strands/sq. inch for covering equipment.

1. Products: Subject to compliance with requirements, provide the following:

    a. Childers Products, Division of ITW; Chil-Glas No. 5.

2.8 FIELD-APPLIED CLOTHS

A. Woven Glass-Fiber Fabric: Comply with MIL-C-20079H, Type I, plain weave, and presized a minimum of 8 oz./sq. yd.

1. Products: Subject to compliance with requirements, provide the following:

    a. Alpha Associates, Inc.; Alpha-Maritex 84215 and 84217/9485RW, Luben 59.

2.9 FIELD-APPLIED JACKETS

A. Field-applied jackets shall comply with ASTM C 921, Type I, unless otherwise indicated.

B. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D 1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Johns Manville; Zeston.
b. P.I.C. Plastics, Inc.; FG Series.
c. Proto PVC Corporation; LoSmoke.
d. Speedline Corporation; SmokeSafe.

2. Adhesive: As recommended by jacket material manufacturer.
3. Color: White Color-code jackets based on system or Color as selected by Architect.
4. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.

a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.

5. Factory-fabricated tank heads and tank side panels.

C. Metal Jacket:

1. Products: Subject to compliance with requirements, provide one of the following:

a. Childers Products, Division of ITW; Metal Jacketing Systems.
b. PABCO Metals Corporation; Surefit.
c. RPR Products, Inc.; Insul-Mate.

2. Aluminum Jacket: Comply with ASTM B 209, Alloy 3003, 3005, 3105 or 5005, Temper H-14.

a. Factory cut and rolled to size.
b. Finish and thickness are indicated in field-applied jacket schedules.
c. Moisture Barrier for Indoor Applications: 3-mil-thick, heat-bonded polyethylene and kraft paper.
d. Factory-Fabricated Fitting Covers:

1) Same material, finish, and thickness as jacket.
2) Preformed 2-piece or gore, 45- and 90-degree, short- and long-radius elbows.
3) Tee covers.
4) Flange and union covers.
5) End caps.
6) Beveled collars.
7) Valve covers.
8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.

2.10 TAPES

A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.

1. Products: Subject to compliance with requirements, provide one of the following:

   a. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0835.
   b. Compac Corp.; 104 and 105.
   c. Ideal Tape Co., Inc., an American Biltrite Company; 428 AWF ASJ.
   d. Venture Tape; 1540 CW Plus, 1542 CW Plus, and 1542 CW Plus/SQ.

2. Width: 3 inches.
3. Thickness: 11.5 mils.
4. Adhesion: 90 ounces force/inch in width.
5. Elongation: 2 percent.
6. Tensile Strength: 40 lbf/inch in width.
7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.

B. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive. Suitable for indoor and outdoor applications.

1. Products: Subject to compliance with requirements, provide one of the following:

   a. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0555.
   b. Compac Corp.; 130.
   c. Ideal Tape Co., Inc., an American Biltrite Company; 370 White PVC tape.
   d. Venture Tape; 1506 CW NS.

2. Width: 2 inches.
3. Thickness: 6 mils.
4. Adhesion: 64 ounces force/inch in width.
5. Elongation: 500 percent.
6. Tensile Strength: 18 lbf/inch in width.

C. PVDC Tape: White vapor-retarder PVDC tape with acrylic adhesive.

1. Products: Subject to compliance with requirements, provide the following:

   a. Dow Chemical Company (The); Saran 540 Vapor Retarder Tape.

2. Width: 3 inches.
3. Film Thickness: 4 mils.
4. Adhesive Thickness: 1.5 mils.
5. Elongation at Break: 145 percent.
6. Tensile Strength: 55 lbf/inch in width.

2.11 SECUREMENTS

A. Bands:

1. Products: Subject to compliance with requirements, provide one of the following:

   a. Childers Products; Bands.
   b. PABCO Metals Corporation; Bands.
   c. RPR Products, Inc.; Bands.

2. Stainless Steel: ASTM A 167 or ASTM A 240/A 240M, Type 304 or Type 316; 0.015 inch thick, 1/2 inch wide with wing or closed seal.
3. Aluminum: ASTM B 209, Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inch thick, 3/4 inch wide with wing or closed seal.
4. Springs: Twin spring set constructed of stainless steel with ends flat and slotted to accept metal bands. Spring size determined by manufacturer for application.

B. Insulation Pins and Hangers:

1. Metal, Adhesively Attached, Perforated-Base Insulation Hangers: Baseplate welded to projecting spindle that is capable of holding insulation, of thickness indicated, securely in position indicated when self-locking washer is in place. Comply with the following requirements:

   a. Products: Subject to compliance with requirements, provide one of the following:

      1) AGM Industries, Inc.; Tactoo Insul-Hangers, Series T.
      2) GEMCO; Perforated Base.
      3) Midwest Fasteners, Inc.; Spindle.

   b. Baseplate: Perforated, galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.

   c. Spindle: Copper- or zinc-coated, low carbon steel, fully annealed, 0.106-inch-diameter shank, length to suit depth of insulation indicated.

   d. Adhesive: Recommended by hanger manufacturer. Product with demonstrated capability to bond insulation hanger securely to substrates indicated without damaging insulation, hangers, and substrates.

2. Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch- thick, galvanized-steel sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.

   a. Products: Subject to compliance with requirements, provide one of the following:

      1) AGM Industries, Inc.; RC-150.
      2) GEMCO; R-150.
      3) Midwest Fasteners, Inc.; WA-150.

4) Nelson Stud Welding; Speed Clips.

b. Protect ends with capped self-locking washers incorporating a spring steel insert to ensure permanent retention of cap in exposed locations.

3. Nonmetal Insulation-Retaining Washers: Self-locking washers formed from 0.016-inch-thick nylon sheet, with beveled edge sized as required to hold insulation securely in place but not less than 1-1/2 inches in diameter.

a. Products: Subject to compliance with requirements, provide one of the following:

1) GEMCO.
2) Midwest Fasteners, Inc.

2.12 CORNER ANGLES

A. PVC Corner Angles: 30 mils thick, minimum 1 by 1 inch, PVC according to ASTM D 1784, Class 16354-C. White or color-coded to match adjacent surface.

B. Aluminum Corner Angles: 0.040 inch thick, minimum 1 by 1 inch, aluminum according to ASTM B 209, Alloy 3003, 3005, 3105 or 5005; Temper H-14.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions for compliance with requirements for installation and other conditions affecting performance of insulation application.

1. Verify that systems and equipment to be insulated have been tested and are free of defects.
2. Verify that surfaces to be insulated are clean and dry.
3. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

B. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless-steel surfaces, use demineralized water.

3.3 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of equipment and piping including fittings, valves, and specialties.

B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of equipment and pipe system as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.

D. Install insulation with longitudinal seams at top and bottom of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.

G. Keep insulation materials dry during application and finishing.

H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

I. Install insulation with least number of joints practical.

J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.

1. Install insulation continuously through hangers and around anchor attachments.
2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.

K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

L. Install insulation with factory-applied jackets as follows:

1. Draw jacket tight and smooth.
2. Cover circumferential joints with 3-inch- wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.

3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 4 inches o.c.

    a. For below ambient services, apply vapor-barrier mastic over staples.

4. Cover joints and seams with tape as recommended by insulation material manufacturer to maintain vapor seal.
5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.

M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.

N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

P. For above ambient services, do not install insulation to the following:

1. Vibration-control devices.
2. Testing agency labels and stamps.
3. Nameplates and data plates.
4. Manholes.
5. Handholes.
6. Cleanouts.

3.4 PENETRATIONS

A. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.

B. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.

1. Comply with requirements in Division 7 Section "Through-Penetration Firestop Systems" for firestopping and fire-resistive joint sealers.

C. Insulation Installation at Floor Penetrations:

1. Pipe: Install insulation continuously through floor penetrations.
2. Seal penetrations through fire-rated assemblies. Comply with requirements in Division 7 Section "Firestopping"

3.5 GENERAL PIPE INSULATION INSTALLATION

A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.

B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:

1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity, unless otherwise indicated.
2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece shall be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below ambient services and a breather mastic for above ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
8. For services not specified to receive a field-applied jacket except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
9. Stencil or label the outside insulation jacket of each union with the word "UNION." Match size and color of pipe labels.

C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes, vessels, and equipment. Shape insulation at these connections by tapering it to and around the

connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.

D. Install removable insulation covers at locations indicated. Installation shall conform to the following:

1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as adjoining pipe insulation.
2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union long at least two times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless-steel or aluminum bands. Select band material compatible with insulation and jacket.
3. Construct removable valve insulation covers in same manner as for flanges except divide the two-part section on the vertical center line of valve body.
4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless-steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.6 CELLULAR-GLASS INSULATION INSTALLATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above ambient services, secure laps with outward clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below ambient services, do not staple longitudinal tabs but secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install preformed pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of cellular-glass block insulation of same thickness as pipe insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch, and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available. Secure according to manufacturer's written instructions.
2. When preformed sections of insulation are not available, install mitered sections of cellular-glass insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of cellular-glass insulation to valve body.
2. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.

3.7 MINERAL-FIBER INSULATION INSTALLATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above ambient surfaces, secure laps with outward clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below ambient surfaces, do not staple longitudinal tabs but secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

C. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.8 FLEXIBLE ELASTOMERIC INSULATION INSTALLATION

A. Seal longitudinal seams and end joints with manufacturers recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

B. Insulation Installation on Pipe Flanges:

1. Install pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as pipe insulation.
4. Secure insulation to flanges and seal seams with manufacturers recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install mitered sections of pipe insulation.
2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed valve covers manufactured of same material as pipe insulation when available.
2. When preformed valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
3. Install insulation to flanges as specified for flange insulation application.
4. Secure insulation to valves and specialties and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.9 FIELD-APPLIED JACKET INSTALLATION

A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.

1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
2. Embed glass cloth between two 0.062-inch- thick coats of lagging adhesive.
3. Completely encapsulate insulation with coating, leaving no exposed insulation.

B. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications, install with longitudinal seams along top and bottom of tanks and vessels. Seal with manufacturer's recommended adhesive.

1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

C. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless-steel bands 12 inches o.c. and at end joints.

D. Where PVDC jackets are indicated, install as follows:

1. Apply three separate wraps of filament tape per insulation section to secure pipe insulation to pipe prior to installation of PVDC jacket.
2. Wrap factory-presized jackets around individual pipe insulation sections with one end overlapping the previously installed sheet. Install presized jacket with an approximate overlap at butt joint of 2 inches over the previous section. Adhere lap seal using adhesive or SSL, and then apply 1-1/4 circumferences of appropriate PVDC tape around overlapped butt joint.
3. Continuous jacket can be spiral wrapped around a length of pipe insulation. Apply adhesive or PVDC tape at overlapped spiral edge. When electing to use adhesives, refer to manufacturer's written instructions for application of adhesives along this spiral edge to maintain a permanent bond.
4. Jacket can be wrapped in cigarette fashion along length of roll for insulation systems with an outer circumference of 33-1/2 inches or less. The 33-1/2-inch- circumference limit allows for 2-inch- overlap seal. Using the length of roll allows for longer sections of jacket to be installed at one time. Use adhesive on the lap seal. Visually inspect lap seal for "fishmouthing," and use PVDC tape along lap seal to secure joint.
5. Repair holes or tears in PVDC jacket by placing PVDC tape over the hole or tear and wrapping a minimum of 1-1/4 circumferences to avoid damage to tape edges.

3.10 FINISHES

A. Equipment and Pipe Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Division 9 painting Sections.

1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.

a. Finish Coat Material: Interior, flat, latex-emulsion size.

B. Color: Final color as selected by Architect. Vary first and second coats to allow visual inspection of the completed Work.

C. Do not field paint aluminum or stainless-steel jackets.

3.11 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Inspect field-insulated equipment, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to one location(s) for each type of equipment defined in the "Equipment Insulation Schedule" Article. For large equipment, remove only a portion adequate to determine compliance.
2. Inspect pipe, fittings, strainers, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.

D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.12 PIPING INSULATION SCHEDULE, GENERAL

A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.

B. Pipe insulation exposed in return air plenums shall be noncombustible or shall be listed and labeled as having a flame spread index of not more than 25 and a smoke-developed index of not more than 50 when tested in accordance with ASTM E 84 or UL 723.

C. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:

1. Underground piping.
2. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.13 INDOOR PIPING INSULATION SCHEDULE: All Insulation to meet ASHRAE 90.1.

A. Domestic Cold Water:

1. NPS 1-1/4 and Smaller: Insulation shall be the following:

a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1/2 inch thick.

2. NPS 1-1/2 and Larger: Insulation shall be the following:

a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

B. Domestic Hot and Recirculated Hot Water:

1. NPS 1-1/4 and Smaller: Insulation shall be the following:

a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.

2. NPS 1-1/2 and Larger: Insulation shall be the following:

a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1½ inch thick.

C. Exposed Sanitary Drains, Domestic Water, Domestic Hot Water, and Stops for Plumbing Fixtures for People with Disabilities:

1. All Pipe Sizes: Insulation shall be the following:

a. Flexible Elastomeric: 3/4 inch thick.
b. Polyolefin: 3/4 inch thick.

3.14 INDOOR, FIELD-APPLIED JACKET SCHEDULE

A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.

B. If more than one material is listed, selection from materials listed is Contractor's option.

C. Equipment, Concealed:

1. None.

D. Piping, Exposed:

1. PVC: 30 mils thick.
2. Aluminum, Smooth: 0.032 inch thick.
3. Painted Aluminum, Smooth: 0.032 inch thick.

END OF SECTION 220719

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221116 - WATER DISTRIBUTION PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes water distribution piping from locations indicated to fixtures and equipment inside building.

1.3 DEFINITIONS

A. Water Service Piping: Water piping outside building that conveys water to building.

B. Service Entrance Piping: Water piping at entry into building between water service piping and water distribution piping.

C. Water Distribution Piping: Water piping inside building that conveys water to fixtures and equipment throughout the building.

D. The following are industry abbreviations for plastic piping materials:

1) CPVC: Chlorinated polyvinyl chloride.
2) PVC: Polyvinyl chloride.

1.4 SYSTEM PERFORMANCE REQUIREMENTS

A. Provide components and installation capable of producing piping systems with the following minimum working-pressure ratings, unless otherwise indicated:

1) Combined Fire-Protection and Domestic, Service Entrance Piping: 200 psig.
2) Service Entrance Piping: 150 psig.
3) Water Distribution Piping: 150 psig.

1.5 QUALITY ASSURANCE

A. Provide listing/approval stamp, label, or other marking on piping made to specified standards.

B. Piping, fittings, and components shall meet NSF 61.

PART 2 - PRODUCTS

2.1 COPPER TUBE AND FITTINGS

A. Hard Copper Tube: ASTM B 88, Type L tube, drawn temper.

B. Tube in "Soft Copper Tube" Paragraph below is available in NPS 1/8 to NPS 12 (DN 6 to DN 300).

C. Soft Copper Tube: ASTM B 88, Type K water tube, annealed temper.

D. Fittings in "Cast-Copper, Solder-Joint Fittings" Paragraph below are available in NPS 1/4 to NPS 12 (DN 8 to DN 300).

E. Cast-Copper, Solder-Joint Fittings: ASME B16.18, pressure fittings.

F. Fittings in "Wrought-Copper, Solder-Joint Fittings" Paragraph below are available in NPS 1/4 to NPS 8 (DN 8 to DN 200).

G. Wrought-Copper, Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.

H. Flanges in "Bronze Flanges" Paragraph below are available in NPS 1/2 to NPS 12 (DN 15 to DN 300).

I. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends.

J. Unions in "Copper Unions" Paragraph below are available in NPS 1/4 to NPS 4 (DN 8 to DN 100).

K. Copper Unions:

1) MSS SP-123.
2) Cast-copper-alloy, hexagonal-stock body.
3) Ball-and-socket, metal-to-metal seating surfaces.
4) Solder-joint or threaded ends.

L. Copper Pressure-Seal-Joint Fittings:

1) Fittings for NPS 2 (DN 50) and Smaller: Wrought-copper fitting with EPDM-rubber, O-ring seal in each end.
2) Fittings for NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Cast-bronze or wrought-copper fitting with EPDM-rubber, O-ring seal in each end.

M. Copper Push-on-Joint Fittings:

1) Description:

a. Cast-copper fitting complying with ASME B16.18 or wrought-copper fitting complying with ASME B 16.22.
b. Stainless-steel teeth and EPDM-rubber, O-ring seal in each end instead of solder-joint ends.

N. Appurtenances for Grooved-End Copper Tubing:

1) Bronze Fittings for Grooved-End, Copper Tubing: ASTM B 75 (ASTM B 75M) copper tube or ASTM B 584 bronze castings.
2) Mechanical Couplings for Grooved-End Copper Tubing:

a. Copper-tube dimensions and design similar to AWWA C606.
b. Ferrous housing sections.
c. EPDM-rubber gaskets suitable for hot and cold water.
d. Bolts and nuts.
e. Minimum Pressure Rating: 300 psig (2070 kPa).

2.2 JOINING MATERIALS

A. General: Applications of the following piping joining materials are indicated in Part 3 "Piping Applications" Article.

B. Solder: ASTM B 32, Alloy Sn95; lead free.

C. Transition Couplings: Coupling or other manufactured fitting same size as, with pressure rating at least equal to, and with ends compatible with piping to be joined.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Transition and special fittings with pressure ratings at least equal to piping pressure rating may be used in applications below, unless otherwise indicated.

B. Flanges may be used on aboveground piping, unless otherwise indicated.

C. Aboveground, Water Distribution Piping Mains: Use the following:

1) 2-Inch NPS and Smaller: Hard copper tube, Type L; copper, solder-joint fittings; and soldered joints, or Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); copper pressure-seal-joint fittings; and pressure-sealed joints.
2) 2-1/2 to 4-Inch NPS: Hard copper tube, Type L; copper, solder-joint fittings; and soldered joints, or Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); copper pressure-seal-joint fittings; and pressure-sealed joints.

D. Aboveground, Water Distribution Piping Branches (downstream of shut-off valves): Use the

following:

1) 2-Inch NPS and Smaller: Hard copper tube, Type L; copper, solder-joint fittings; and soldered joints, or Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); copper pressure-seal-joint fittings; and pressure-sealed joints.
2) 2-1/2 to 4-Inch NPS: Hard copper tube, Type L; copper, solder-joint fittings; and soldered joints, or Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); copper pressure-seal-joint fittings; and pressure-sealed joints.

E. Underground, Water Distribution Piping: Do not use flanges or valves underground. Use the following:

1) 2-Inch NPS and Smaller: Soft copper tube, Type K; wrought-copper, solder-joint pressure fittings; and soldered joints.
2) 2-1/2- to 4-Inch NPS: Hard copper tube, Type K; wrought-copper, solder-joint pressure fittings; and soldered joints.

3.2 VALVE APPLICATIONS

A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:

1) Shutoff Duty: Use ball, or butterfly valves.

B. Grooved-end butterfly valves may be used with grooved-end piping.

3.3 PIPING INSTALLATION, GENERAL

A. Refer to Division 22 Section "Basic Plumbing Requirements" for basic piping installation.

3.4 SERVICE ENTRANCE PIPING INSTALLATION

A. Extend service entrance piping to exterior water service piping in sizes and locations indicated for service entrances into building.

B. Install shutoff valve, hose-end drain valve, strainer, pressure gage, and test tee with valve, inside building at each service entrance pipe.

C. Install cast-iron sleeve with water stop and mechanical sleeve seal at each service entrance pipe penetration through foundation wall. Select number of interlocking rubber links required to make installation watertight. Refer to Division 22 Section "Basic Mechanical Materials and Methods" for sleeves and mechanical sleeve seals.

D. Install wall penetration system at each service entrance pipe penetration through foundation wall. Make installation watertight. Refer to Division 22 Section "Basic Mechanical Materials and Methods" for wall penetration systems.

3.5 WATER DISTRIBUTION PIPING INSTALLATION

A. Install piping with 0.25 percent slope downward toward drain.

3.6 JOINT CONSTRUCTION

A. Refer to Division 22 Section "Basic Plumbing Requirements" for basic piping joint construction.

B. Grooved Joints: Assemble joints with coupling, gasket, lubricant, and bolts according to coupling and fitting manufacturer's written instructions.

3.7 VALVE INSTALLATION

A. Sectional Valves: Install sectional valves close to main on each branch and riser serving plumbing fixtures or equipment, and where indicated. Use ball valves for piping 2-inch NPS and smaller. Use butterfly valves for piping 2-1/2-inch NPS and larger.

B. Shutoff Valves: Install shutoff valve on each water supply to equipment, on each supply to plumbing fixtures without supply stops, and where indicated. Use ball valves for piping 2-inch NPS and smaller. Use butterfly valves for piping 2-1/2-inch NPS and larger.

C. Drain Valves: Install drain valves for equipment, at base of each water riser, at low points in horizontal piping, and where required to drain water piping.

1) Install hose-end drain valves at low points in water mains, risers, and branches.

D. Balancing Valves: Install in each hot-water circulation return branch, discharge side of each pump and circulator, and where indicated.

3.8 HANGER AND SUPPORT INSTALATION

A. Comply with requirements in Division 22 Section "Vibration and Seismic Controls for Plumbing Piping and Equipment" for seismic-restraint devices.

B. Comply with requirements in Division 22 Section "Hangers and Supports for Plumbing Piping and Equipment" for pipe hanger and support products and installation.

1) Vertical Piping: MSS Type 8 or 42, clamps.
2) Individual, Straight, Horizontal Piping Runs:

a. 100 Feet (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
b. Longer Than 100 Feet (30 m): MSS Type 43, adjustable roller hangers.
c. Longer Than 100 Feet (30 m) If Indicated: MSS Type 49, spring cushion rolls.

3) Multiple, Straight, Horizontal Piping Runs 100 Feet (30 m) or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
4) Base of Vertical Piping: MSS Type 52, spring hangers.

C. Support vertical piping and tubing at base and at each floor.

D. Rod diameter may be reduced one size for double-rod hangers, to a minimum of 3/8 inch (10 mm).

E. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:

1) NPS 3/4 (DN 20) and Smaller: 60 inches (1500 mm) with 3/8-inch (10-mm) rod.
2) NPS 1 and NPS 1-1/4 (DN 25 and DN 32): 72 inches (1800 mm) with 3/8-inch (10-mm) rod.
3) NPS 1-1/2 and NPS 2 (DN 40 and DN 50): 96 inches (2400 mm) with 3/8-inch (10-mm) rod.
4) NPS 2-1/2 (DN 65): 108 inches (2700 mm) with 1/2-inch (13-mm) rod.
5) NPS 3 to NPS 5 (DN 80 to DN 125): 10 feet (3 m) with 1/2-inch (13-mm) rod.
6) NPS 6 (DN 150): 10 feet (3 m) with 5/8-inch (16-mm) rod.
7) NPS 8 (DN 200): 10 feet (3 m) with 3/4-inch (19-mm) rod.

F. Install supports for vertical copper tubing every 10 feet (3 m).

G. Install hangers for galvanized steel piping with the following maximum horizontal spacing and minimum rod diameters:

1) NPS 8 to NPS 12 (DN 200 to DN 300): 12 feet (3.7 m) with 7/8-inch (22-mm) rod.

H. Install supports for vertical steel piping every 15 feet (4.5 m).

I. Support piping and tubing not listed in this article according to MSS SP-69 and manufacturer's written instructions.

3.9 CONNECTIONS

A. Connect service entrance piping to exterior water service piping. Use transition fitting to join dissimilar piping materials.

B. Connect water distribution piping to service entrance piping at shutoff valve, and extend to and connect to the following:

1) Water Heaters: Connect cold-water supply and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
2) Plumbing Fixtures: Connect hot- and cold-water supply piping in sizes indicated, but not smaller than required by plumbing code. Refer to Division 22 Section "Plumbing Fixtures."
3) Equipment: Connect hot- and cold-water supply piping as indicated. Provide shutoff valve and union for each connection. Use flanges instead of unions for connections 2-1/2-inch NPS and larger.

3.10 FIELD QUALITY CONTROL

A. Inspect water distribution piping as follows:

1) Inspect service entrance piping and water distribution piping as follows:

a. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
b. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
c. Roughing-In Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
d. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
e. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections, and arrange for reinspection.
f. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

2) Test service entrance piping and water distribution piping as follows:

a. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
b. Leave uncovered and unconcealed new, altered, extended, or replaced water piping until it has been tested and approved. Expose work that has been covered or concealed before it has been tested and approved.
c. Cap and subject piping to static water pressure of 150 psig. Isolate test source and allow to stand for 4 hours. Leaks and loss in test pressure constitute defects that must be repaired.
d. Repair leaks and defects with new materials and retest piping or portion thereof until satisfactory results are obtained.
e. Prepare reports for tests and required corrective action.

3.11 CLEANING

A. Clean and disinfect service entrance piping and water distribution piping as follows:

1) Purge new piping and parts of existing water piping that have been altered, extended, or repaired before using.
2) Use purging and disinfecting procedure prescribed by authorities having jurisdiction or, if method is not prescribed, procedure described in either AWWA C651 or AWWA C652 or as described below:

a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
b. Fill and isolate system according to either of the following:

1) Fill system or part thereof with water/chlorine solution with at least 50 ppm

of chlorine. Isolate with valves and allow to stand for 24 hours.

2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for 3 hours.

c. Flush system with clean, potable water until chlorine is no longer in water coming from system after the standing time.

d. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows contamination.

B. Prepare and submit reports for purging and disinfecting activities.

C. Clean interior of piping system. Remove dirt and debris as work progresses.

3.12 COMMISSIONING

A. Fill water piping. Check components to determine that they are not air bound and that piping is full of water.

B. Perform the following steps before putting into operation:

C. Close drain valves, hydrants, and hose bibbs.

1) Open shutoff valves to fully open position.
2) Set balancing valves to proper setting.
3) Remove plugs used during testing of piping and plugs used for temporary sealing of piping during installation.
4) Remove and clean strainer screens. Close drain valves and replace drain plugs.
5) Remove filter cartridges from housings and verify that cartridges are as specified for application where used and that cartridges are clean and ready for use.

D. Check plumbing equipment and verify proper settings, adjustments, and operation. Do not operate water heaters before filling with water.

E. Check plumbing specialties and verify proper settings, adjustments, and operation.

1) Water-Pressure Regulators: Set outlet pressure at 80 psig maximum, unless otherwise indicated.

F. Energize pumps and verify proper operation.

END OF SECTION 221116

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Vacuum breakers.
2. Backflow preventers.
3. Balancing valves.
4. Temperature-actuated, water mixing valves.
5. Strainers for domestic water piping.
6. Outlet boxes.
7. Hose bibbs.
8. Wall hydrants.
9. Drain valves.
10. Water-hammer arresters.
11. Flexible connectors.

B. Related Requirements:

1. Section 220519 "Meters and Gauges for Plumbing Piping" for thermometers, pressure gauges, and flow meters in domestic water piping.
2. Section 221116 "Domestic Water Piping" for water meters.

1.3 DEFINITIONS

A. AMI: Advanced Metering Infrastructure.

B. AMR: Automatic Meter Reading.

C. FKM: A family of fluroelastomer materials defined by ASTM D1418.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For domestic water piping specialties.

1. Include diagrams for power, signal, and control wiring.

1.5 INFORMATIONAL SUBMITTALS

A. Test and inspection reports.

B. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

A. Domestic water piping specialties intended to convey or dispense water for human consumption are to comply with the SDWA, requirements of authorities having jurisdiction, and NSF 61 and NSF 372, or to be certified in compliance with NSF 61 and NSF 372 by an American National Standards Institute (ANSI)-accredited third-party certification body that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

2.2 PERFORMANCE REQUIREMENTS

A. Minimum Working Pressure for Domestic Water Piping Specialties: **125 psig (860 kPa)** unless otherwise indicated.

2.3 VACUUM BREAKERS

A. Pipe-Applied, Atmospheric-Type Vacuum Breakers:

1. Standard: ASSE 1001.
2. Size: NPS 1/4 to NPS 3 (DN 8 to DN 80), as required to match connected piping.
3. Body: Bronze.
4. Inlet and Outlet Connections: Threaded.
5. Finish: Rough bronze.

B. Hose-Connection Vacuum Breakers:

1. Standard: ASSE 1011.
2. Body: Bronze, nonremovable, with manual drain.
3. Outlet Connection: Garden-hose threaded complying with ASME B1.20.7.
4. Finish: Rough bronze.

C. Pressure Vacuum Breakers:

1. Standard: ASSE 1020.
2. Operation: Continuous-pressure applications.
3. Pressure Loss: 5 psig (35 kPa) maximum, through middle third of flow range.
4. Size: 1/2 NPS to 3 NPS (DN).
5. Accessories:

    a. Valves: Ball type, on inlet and outlet.

2.4 BACKFLOW PREVENTERS

A. Reduced-Pressure-Principle Backflow Preventers:

1. See Plumbing Schedule sheet P6.00 for more information.
2. Standard: ASSE 1013.
3. Operation: Continuous-pressure applications.
4. Pressure Loss: 12 psig (83 kPa) maximum, through middle third of flow range.
5. Size: ½ NPS to 3 NPS.
6. Design Flow Rate: See Plumbing Schedule sheet P6.00 for more information.
7. Body: Bronze or stainless steel for NPS 2 (DN 50) and smaller; ductile or cast iron with interior lining that complies with AWWA C550 or that is FDA approved or stainless steel for NPS 2-1/2 (DN 65) and larger.
8. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.
9. Configuration: Designed for horizontal, straight-through flow.
10. Accessories:

    a. Valves NPS 2 (DN 50) and Smaller: Ball type with threaded ends on inlet and outlet.
    b. Valves NPS 2-1/2 (DN 65) and Larger: Outside-screw and yoke-gate type with flanged ends on inlet and outlet.
    c. Air-Gap Fitting: ASME A112.1.2, matching backflow-preventer connection.

B. Backflow-Preventer Test Kits:

1. Description: Factory calibrated, with gauges, fittings, hoses, and carrying case with test-procedure instructions.

2.5 BALANCING VALVES

A. Thermostatic Balance Valve

1. The valve shall be certified lead free according to NSF/ANSI 61 standards.
2. The valve body shall be constructed out of stainless steel.
3. The valve shall be rated for 200 PSIG working pressure and 250°F max. temperature.
4. The valve shall have a fixed, non-adjustable (tamper proof) temperature setpoint; temperature setpoints range from 80°F (27°C) to 170°F (27°C) in 5°F (2.8°C) increments.
5. The valve shall have a temperature accuracy of ±3.0°F (±1.7°C).
6. The valve shall have a wax thermostatic element.
7. The valve shall come in six sizes: 1/2”; 3/4”; 1”; 1 1/4”; 1 1/2”; 2”.

2.6 TEMPERATURE-ACTUATED, WATER MIXING VALVES

A. Water-Temperature Limiting Devices:

1. Standard: ASSE 1070.
2. Pressure Rating: 125 psig (860 kPa).
3. Type: Thermostatically controlled, water mixing valve.
4. Material: Bronze body with corrosion-resistant interior components.
5. Connections: Threaded union inlets and outlet.
6. Accessories: Check stops on hot- and cold-water supplies, and adjustable, temperature-control handle.
7. Tempered-Water Setting: 105 deg F.
8. Valve Finish: Rough bronze.

B. Primary, Thermostatic, Water Mixing Valves:

1. Standard: ASSE 1017.
2. Pressure Rating: 125 psig (860 kPa) minimum unless otherwise indicated.
3. Type: Exposed-mounted, thermostatically controlled, water mixing valve.
4. Material: Bronze body with corrosion-resistant interior components.
5. Connections: Threaded union inlets and outlet.
6. Accessories: Manual temperature control, check stops on hot- and cold-water supplies, and adjustable, temperature-control handle.
7. Tempered-Water Setting: 120 deg F.
8. Tempered-Water Design Flow Rate: See Plumbing Schedule sheet P6.00 for more information.
9. Selected Valve Flow Rate at 45-psig (310-kPa) Pressure Drop: See Thermostatic Mixing Valve Schedule.
10. Pressure Drop at Design Flow Rate: See Thermostatic Mixing Valve Schedule.
11. Valve Finish: Rough bronze.
12. Piping Finish: Copper.

C. Individual-Fixture, Water Tempering Valves:

1. Manufacturers:

a. Leonard Valve Company
b. Zurn
c. Watts
d. Acorn

2. Standard: ASSE 1016, thermostatically controlled, water tempering valve.
3. Pressure Rating: 125 psig (860 kPa) minimum unless otherwise indicated.
4. Material: Bronze body with corrosion-resistant interior components.
5. Temperature Control: Adjustable.
6. Connections: Threaded inlets and outlet.
7. Finish: Chrome plated.
8. Tempered-Water Setting: 105 deg F.

2.7 STRAINERS FOR DOMESTIC WATER PIPING

A. Y-Pattern Strainers:

1. Manufacturers:

a. Watts
b. Zurn
c. Titan

2. Pressure Rating: 125 psig (860 kPa) minimum unless otherwise indicated.
3. Body: Bronze for NPS 2 (DN 50) and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved, epoxy coated and for NPS 2-1/2 (DN 65) and larger.
4. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.
5. Screen: Stainless steel with round perforations unless otherwise indicated.
6. Perforation Size:

a. Strainers NPS 2 (DN 50) and Smaller: 0.033 inch (0.84 mm).
b. Strainers NPS 2-1/2 to NPS 4 (DN 65 to DN 100): 0.062 inch (1.57 mm).

7. Drain: Pipe plug.

2.8 HOSE BIBBS

A. Hose Bibbs:

1. See Plumbing Schedule sheet P6.00 for more information.
2. Standard: ASME A112.18.1 for sediment faucets.
3. Body Material: Bronze.
4. Seat: Bronze, replaceable.
5. Supply Connections: NPS 1/2 or NPS 3/4 (DN 15 or DN 20) threaded or solder-joint inlet.
6. Outlet Connection: Garden-hose thread complying with ASME B1.20.7.

7. Pressure Rating: 125 psig (860 kPa).
8. Vacuum Breaker: Integral or field-installation, nonremovable, drainable, hose-connection vacuum breaker complying with ASSE 1011.
9. Finish for Equipment Rooms: Rough bronze, or chrome or nickel plated.
10. Finish for Service Areas: Rough bronze, Chrome or nickel plated.
11. Finish for Finished Rooms: Chrome or nickel plated.
12. Operation for Equipment Rooms: Wheel handle or operating key.
13. Operation for Service Areas: Wheel handle, or Operating key.
14. Operation for Finished Rooms: Wheel handle, or Operating key.
15. Include operating key with each operating-key hose bibb.
16. Include integral wall flange with each chrome- or nickel-plated hose bibb.

2.9 WALL HYDRANTS

A. Non-freeze Wall Hydrants:

1. See Plumbing Schedule sheet P6.00 for more information.
2. Standard: ASME A112.21.3M for concealed, or exposed-outlet, self-draining wall hydrants.
3. Pressure Rating: 125 psig (860 kPa).
4. Operation: Loose key.
5. Casing and Operating Rod: Of length required to match wall thickness. Include wall clamp.
6. Inlet: NPS 3/4 or NPS 1 (DN 20 or DN 25).
7. Outlet, Concealed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
8. Box: Deep, flush mounted with cover.
9. Box and Cover Finish: Polished nickel bronze, or Rough bronze.
10. Outlet, Exposed: With integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
11. Nozzle and Wall-Plate Finish: Polished nickel bronze, Rough bronze, or Chrome plated.
12. Operating Keys(s): One with each wall hydrant.

B. Non-freeze Vacuum Breaker Wall Hydrants:

1. See Plumbing Schedule sheet P6.00 for more information.
2. Standard: ASSE 1019, Type A or Type B.
3. Type: Automatic draining with integral air-inlet valve.
4. Classification: Type B, for automatic draining with hose removed or with hose attached and nozzle closed.
5. Pressure Rating: 125 psig (860 kPa).
6. Operation: Loose key.
7. Casing and Operating Rod: Of length required to match wall thickness. Include wall clamp.
8. Inlet: NPS 1/2 or NPS 3/4 (DN 15 or DN 20).
9. Outlet: Exposed with garden-hose thread complying with ASME B1.20.7.

2.10 DRAIN VALVES

A. Ball-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-110 for standard-port, two-piece ball valves.
2. Pressure Rating: 400-psig (2760-kPa) minimum CWP.
3. Size: NPS 3/4 (DN 20).
4. Body: Copper alloy.
5. Ball: Chrome-plated brass.
6. Seats and Seals: Replaceable.
7. Handle: Vinyl-covered steel.
8. Inlet: Threaded or solder joint.
9. Outlet: Threaded, short nipple with garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

B. Gate-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-80 for gate valves.
2. Pressure Rating: Class 125.
3. Size: NPS 3/4 (DN 20).
4. Body: ASTM B62 bronze.
5. Inlet: NPS 3/4 (DN 20) threaded or solder joint.
6. Outlet: Garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

C. Stop-and-Waste Drain Valves:

1. Standard: MSS SP-110 for ball valves or MSS SP-80 for gate valves.
2. Pressure Rating: 200-psig (1380-kPa) minimum CWP or Class 125.
3. Size: NPS 3/4 (DN 20).
4. Body: Copper alloy or ASTM B62 bronze.
5. Drain: NPS 1/8 (DN 6) side outlet with cap.

2.11 WATER-HAMMER ARRESTERS

A. Water-Hammer Arresters:

1. Standard: ASSE 1010 or PDI-WH 201.
2. Type: Piston.
3. Size: ASSE 1010, Sizes AA and A through F, or PDI-WH 201, Sizes A through F.

2.12 FLEXIBLE CONNECTORS

A. Bronze-Hose Flexible Connectors: Corrugated-bronze tubing with bronze wire-braid covering and ends brazed to inner tubing.

1. Working-Pressure Rating: Minimum 200 psig (1380 kPa).

2. End Connections NPS 2 (DN 50) and Smaller: Threaded copper pipe or plain-end copper tube.
3. End Connections NPS 2-1/2 (DN 65) and Larger: Flanged copper alloy.

B. Stainless Steel-Hose Flexible Connectors: Corrugated-stainless steel tubing with stainless steel wire-braid covering and ends welded to inner tubing.

1. Working-Pressure Rating: Minimum 200 psig (1380 kPa).
2. End Connections NPS 2 (DN 50) and Smaller: Threaded steel-pipe nipple.
3. End Connections NPS 2-1/2 (DN 65) and Larger: Flanged steel nipple.

PART 3 - EXECUTION

3.1 INSTALLATION OF PIPING SPECIALTIES

A. Backflow Preventers: Install in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with authorities having jurisdiction.

1. Locate backflow preventers in same room as connected equipment or system.
2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe-to-floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are unacceptable for this application.
3. Do not install bypass piping around backflow preventers.

B. Water Regulators: Install with inlet and outlet shutoff valves. Install pressure gauges on inlet and outlet.

C. Water Control Valves: Install with inlet and outlet shutoff valves. Install pressure gauges on inlet and outlet.

D. Automatic Water Shutoff Valves: Test for signal strength before valve installation. Install automatic shutoff valve downstream from main domestic water shutoff valve. Install valve controller in an accessible location with sensors in areas where water is likely to accumulate.

E. Balancing Valves: Install in locations where they can easily be adjusted. Set at indicated design flow rates.

F. Temperature-Actuated, Water Mixing Valves: Install with check stops or shutoff valves on inlets and with shutoff valve on outlet.

1. Install cabinet-type units recessed in or surface mounted on wall as specified.

G. Y-Pattern Strainers: For water, install on supply side of each control valve, water pressure-reducing valve, solenoid valve, and pump.

H. Outlet Boxes: Install boxes recessed in wall or surface mounted on wall. Install 1-1/2-by-3-1/2-inch (38-by-89-mm) fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."

I. Water-Hammer Arresters: Install in water piping in accordance with PDI-WH 201.

3.2 PIPING CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. When installing piping specialties adjacent to equipment and machines, allow space for service and maintenance.

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

3.4 CONTROL CONNECTIONS

A. Connect control wiring in accordance with Devision 26.

3.5 IDENTIFICATION

A. Plastic Labels for Equipment: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:

1. Vacuum breakers.
2. Backflow preventers.
3. Water pressure-reducing valves.
4. Automatic water shutoff valve systems.
5. Balancing valves.
6. Temperature-actuated, water mixing valves.
7. Outlet boxes.
8. Hose stations.
9. Wall hydrants.

B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.6 ADJUSTING

A. Set field-adjustable pressure set points of water pressure-reducing valves.

B. Set field-adjustable flow set points of balancing valves.

C. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.

D. Adjust each pressure vacuum breaker, reduced-pressure-principle backflow preventer double-check, backflow-prevention assembly, and double-check, detector-assembly backflow preventer in accordance with manufacturer's written instructions, authorities having jurisdiction and the device's reference standard.

3.7 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform the following tests and inspections with the assistance of a factory-authorized service representative.

1. Test each pressure vacuum breaker, reduced-pressure-principle backflow preventer, double-check, backflow-prevention assembly and, double-check, detector-assembly backflow preventer according to authorities having jurisdiction and the device's reference standard.
2. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
3. Operational Test: After electrical circuitry has been energized, start units to confirm unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

D. Domestic water piping specialties will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports.

END OF SECTION 221119

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following for soil, waste, and vent piping inside the building:

1. Pipe, tube, and fittings.
2. Special pipe fittings.
3. Encasement for underground metal piping.

1.3 DEFINITIONS

A. ABS: Acrylonitrile-butadiene-styrene plastic.

B. EPDM: Ethylene-propylene-diene terpolymer rubber.

C. LLDPE: Linear, low-density polyethylene plastic.

D. NBR: Acrylonitrile-butadiene rubber.

E. PE: Polyethylene plastic.

F. PVC: Polyvinyl chloride plastic.

G. TPE: Thermoplastic elastomer.

1.4 PERFORMANCE REQUIREMENTS

A. Components and installation shall be capable of withstanding the following minimum working pressure, unless otherwise indicated:

1. Soil, Waste, and Vent Piping: 10-foot head of water.

1.5 SUBMITTALS

A. Product Data: For pipe, tube, fittings, and couplings.

B. Field quality-control inspection and test reports.

1.6 QUALITY ASSURANCE

A. Piping materials shall bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. In other Part 2 articles where titles below introduce lists, the following requirements apply to product selection:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the manufacturers specified.

2.2 PIPING MATERIALS

A. Refer to Part 3 "Piping Applications" Article for applications of pipe, fitting, and joining materials.

2.3 PVC PIPE AND FITTINGS

A. Solid-Wall PVC Pipe: ASTM D 2665, drain, waste, and vent.

1. PVC Socket Fittings: ASTM D 2665, socket type, made to ASTM D 3311, drain, waste, and vent patterns.

B. Solvent Cement and Adhesive Primer:

1. Use PVC solvent cement that has a VOC content of 510 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
2. Use adhesive primer that has a VOC content of 550 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

2.4 HUBLESS CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings: Shall conform to the requirements of CISPI 301, ASTM A 888, and shall bear the collective trademark of the Cast Iron Soil Pipe Institute and be listed by NSF International.

a. Manufacturers:

1) Charlotte Pipe
2) Tyler Pipe
3) ABI

B. Shielded Couplings: ASTM C 1277 assembly of metal shield or housing, corrosion-resistant fasteners, and rubber sleeve with integral, center pipe stop.

1. Heavy-Duty, Shielded, Stainless-Steel Couplings: With stainless-steel shield, 4 stainless-steel bands and tightening devices, conforming to ASTM C 564 and ASTM C 1540.

a. Manufacturers:

1) ANACO.
2) Clamp-All Corp.
3) Ideal Div.; Stant Corp.
4) Mission Rubber Co.
5) Tyler Pipe; Soil Pipe Div.

2. Heavy-Duty, Shielded, Cast-Iron Couplings: ASTM A 48/A 48M, two-piece, cast-iron housing; stainless-steel bolts and nuts; and ASTM C 564, rubber sleeve.

C. Rigid, Unshielded Couplings: ASTM C 1461, sleeve-type, reducing- or transition-type mechanical coupling molded from ASTM C 1440, TPE material with corrosion-resistant-metal tension band and tightening mechanism on each end.

PART 3 - EXECUTION

3.1 EXCAVATION

A. Refer to Section 220512 for excavating, trenching, and backfilling.

3.2 PIPING APPLICATIONS

A. Aboveground, soil and waste piping located in plenum spaces NPS 4 and smaller shall be the following:
1. Hubless cast-iron soil pipe and fittings and heavy-duty shielded, stainless-steel couplings; and hubless-coupling joints.

B. Aboveground, vent piping NPS 4 and smaller shall be the following:
1. Hubless cast-iron soil pipe and fittings and heavy-duty shielded, stainless-steel couplings; and hubless-coupling joints.

C. Underground, soil, waste, and vent piping NPS 6 and smaller shall be the following:

1. Schedule 40 PVC.

3.3 PIPING INSTALLATION

A. Basic piping installation requirements are specified in Division 22 Section "Basic Plumbing Requirements."

B. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers.

C. Install cleanout fitting with closure plug inside the building in sanitary force-main piping.

D. Install cast-iron sleeve with water stop and mechanical sleeve seal at each service pipe penetration through foundation wall. Select number of interlocking rubber links required to make installation watertight.

E. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."

1. Install encasement on underground piping according to ASTM A 674 or AWWA C105.

F. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn, double Y-branch and 1/8-bend fittings if 2 fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

G. Install soil and waste drainage and vent piping at the following minimum slopes, unless otherwise indicated:

1. Horizontal Sanitary Drain: 2 percent downward in direction of flow for piping NPS 2 and smaller; 1 percent downward in direction of flow for piping NPS 3 and larger.
2. Vent Piping: 1 percent down toward vertical fixture vent or toward vent stack.

H. Sleeves are not required for cast-iron soil piping passing through concrete slabs-on-grade if slab is without membrane waterproofing.

I. Install PVC soil and waste drainage and vent piping according to ASTM D 2665.

J. Install underground PVC soil and waste drainage piping according to ASTM D 2321.

K. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

3.4 JOINT CONSTRUCTION

A. Basic piping joint construction requirements are specified in Division 15 Section "Basic Mechanical Materials and Methods."

B. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

C. Join hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-coupling joints.

3.5 HANGER AND SUPPORT INSTALLATION

A. Pipe hangers and supports are specified in Division 22 Section "Hangers and Supports." Install the following:

1. Vertical Piping: MSS Type 8 or Type 42, clamps.
2. Install individual, straight, horizontal piping runs according to the following:

    a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
    b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.

3. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
4. Base of Vertical Piping: MSS Type 52, spring hangers.

B. Install supports according to Division 22 Section "Hangers and Supports."

C. Support vertical piping and tubing at base and at each floor.

D. Rod diameter may be reduced 1 size for double-rod hangers, with 3/8-inch minimum rods.

E. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:

1. NPS 1-1/2 and NPS 2: 60 inches with 3/8-inch rod.
2. NPS 3: 60 inches with 1/2-inch rod.
3. NPS 4 and NPS 5: 60 inches with 5/8-inch rod.

F. Install supports for vertical cast-iron soil piping every 15 feet.

G. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.

3.6 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.

C. Connect drainage and vent piping to the following:

1. Plumbing Fixtures: Connect drainage piping in sizes indicated, but not smaller than required by plumbing code.
2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
3. Plumbing Specialties: Connect drainage and vent piping in sizes indicated, but not smaller than required by plumbing code.
4. Equipment: Connect drainage piping as indicated. Provide shutoff valve, if indicated, and union for each connection. Use flanges instead of unions for connections NPS 2-1/2 and larger.

3.7 FIELD QUALITY CONTROL

A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.

B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.

C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.

D. Test sanitary drainage and vent piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping, except outside leaders, on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks.
4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1-inch wg. Use U-tube or manometer inserted in trap

of water closet to measure this pressure. Air pressure must remain constant without introducing additional air throughout period of inspection. Inspect plumbing fixture connections for gas and water leaks.

5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
6. Prepare reports for tests and required corrective action.

3.8 CLEANING

A. Clean interior of piping. Remove dirt and debris as work progresses.

B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.

C. Place plugs in ends of uncompleted piping at end of day and when work stops.

END OF SECTION 221316

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following sanitary drainage piping specialties:

1. Cleanouts.
2. Floor drains.
3. Floor sinks.
4. Shower Drains.
5. Roof flashing assemblies.
6. Through-penetration firestop assemblies.
7. Miscellaneous sanitary drainage piping specialties.
8. Flashing materials.

1.3 SUBMITTALS

A. Field quality-control test reports.

B. Operation and Maintenance Data: For drainage piping specialties to include in emergency, operation, and maintenance manuals.

1.4 QUALITY ASSURANCE

A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

1.5 COORDINATION

A. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 3.

B. Coordinate size and location of roof penetrations.

PART 2 - PRODUCTS

2.1 CLEANOUTS

A. Metal Floor Cleanouts (FCO):

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
    b. Tyler Pipe; Wade Div.
    c. Zurn Plumbing Products Group; Light Commercial Operation.
    d. Josam Company; Josam Div.

2. Standard: ASME A112.36.2M for heavy-duty, adjustable housing cleanout.
3. Size: Same as connected branch.
4. Type: Heavy-duty, adjustable housing.
5. Body or Ferrule: Cast iron.
6. Clamping Device: Required.
7. Outlet Connection: Spigot.
8. Closure: Brass plug with tapered threads.
9. Adjustable Housing Material: Cast iron with threads.
10. Frame and Cover Material and Finish: Stainless steel and acid resistant epoxy coated in food preparation areas.
11. Frame and Cover Shape: Round.
12. Top Loading Classification: Heavy Duty.
13. Riser: ASTM A 74, Extra-Heavy class, cast-iron drainage pipe fitting and riser to cleanout.
14. Standard: ASME A112.3.1.
15. Size: Same as connected branch.

B. Wall Cleanouts (WCO):

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
    b. Tyler Pipe; Wade Div.
    c. Zurn Plumbing Products Group; Specification Drainage Operation.
    d. Josam Company; Josam Div.

2. Standard: ASME A112.36.2M. Include wall access.
3. Size: Same as connected drainage piping.
4. Body: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
5. Closure: Countersunk, drilled-and-threaded brass plug.
6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
7. Wall Access: Round, flat, chrome-plated brass or stainless-steel cover plate with screw.

2.2 FLOOR DRAINS

A. Floor Drains:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
    b. Tyler Pipe; Wade Div.
    c. Zurn Plumbing Products Group; Specification Drainage Operation.
    d. Josam Company; Josam Div.

2. Standard: ASME A112.6.3.
3. Refer to schedule on plans.
4. Trap Material: Cast iron.
5. Trap Pattern: Deep-Seal P-trap.

B. Floor Sinks:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
    b. Tyler Pipe; Wade Div.
    c. Zurn Plumbing Products Group; Specification Drainage Operation.
    d. Josam Company; Josam Div.

2. Standard: ASME A112.6.3.
3. Refer to schedule on plans.
4. Trap Material: Cast iron.
5. Trap Pattern: Deep-Seal P-trap.

C. Shower Drains:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
    b. Tyler Pipe; Wade Div.
    c. Zurn Plumbing Products Group; Specification Drainage Operation.
    d. Josam Company; Josam Div.

2. Standard: ASME A112.6.3.
3. Refer to schedule on plans.
4. Trap Material: Cast iron.
5. Trap Pattern: Deep-Seal P-trap

2.3 ROOF FLASHING ASSEMBLIES

A. Roof Flashing Assemblies:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Acorn Engineering Company; Elmdor/Stoneman Div.
b. Thaler Metal Industries Ltd.

B. Description: Manufactured assembly made of 4.0-lb/sq. ft., 0.0625-inch-thick, lead flashing collar and skirt extending at least 6 inches from pipe, with galvanized-steel boot reinforcement and counterflashing fitting.

1. Open-Top Vent Cap: Without cap.
2. Extended Vent Cap: With field-installed, vandal-proof vent cap.

2.4 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Frost-Resistant Vent Terminals:

1. Description: Manufactured or shop-fabricated assembly constructed of copper, lead-coated copper or galvanized steel.
2. Design: To provide 1-inch enclosed air space between outside of pipe and inside of flashing collar extension, with counterflashing.

B. Zinc-Coated Steel Sheet: ASTM A 653/A 653M, with 0.20 percent copper content and 0.04-inch minimum thickness, unless otherwise indicated. Include G90 hot-dip galvanized, mill-phosphatized finish for painting if indicated.

C. Fasteners: Metal compatible with material and substrate being fastened.

D. Metal Accessories: Sheet metal strips, clamps, anchoring devices, and similar accessory units required for installation; matching or compatible with material being installed.

E. Solder: ASTM B 32, lead-free alloy.

F. Bituminous Coating: SSPC-Paint 12, solvent-type, bituminous mastic.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Refer to Division 22 Section "Common Work Results for Plumbing" for piping joining materials, joint construction, and basic installation requirements.

B. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:

1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
2. Locate at each change in direction of piping greater than 45 degrees.
3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
4. Locate at base of each vertical soil and waste stack.

C. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.

D. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.

E. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.

1. Position floor drains for easy access and maintenance.
2. Set floor drains below elevation of surrounding finished floor to allow floor drainage. Set with grates depressed according to the following drainage area radii:

a. Radius, 30 Inches or Less: Equivalent to 1 percent slope, but not less than 1/4-inch total depression.
b. Radius, 30 to 60 Inches: Equivalent to 1 percent slope.
c. Radius, 60 Inches or Larger: Equivalent to 1 percent slope, but not greater than 1-inch total depression.

3. Install floor-drain flashing collar or flange so no leakage occurs between drain and adjoining flooring. Maintain integrity of waterproof membranes where penetrated.
4. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.

F. Install through-penetration firestop assemblies in plastic conductors at floor penetrations.

G. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.

H. Install frost-resistant vent terminals on each vent pipe passing through roof. Maintain 1-inch clearance between vent pipe and roof substrate.

I. Install wood-blocking reinforcement for wall-mounting-type specialties.

J. Install traps on plumbing specialty drain outlets. Omit traps on indirect wastes unless trap is indicated.

K. Install escutcheons at wall, floor, and ceiling penetrations in exposed finished locations and within cabinets and millwork. Use deep-pattern escutcheons if required to conceal protruding pipe fittings.

3.2 CONNECTIONS

A. Piping installation requirements are specified in other Division 22 Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Install piping adjacent to equipment to allow service and maintenance.

3.3 FLASHING INSTALLATION

A. Fabricate flashing from single piece unless large pans, sumps, or other drainage shapes are required. Join flashing according to the following if required:

1. Solder joints of lead sheets 4.0-lb/sq. ft., 0.0625-inch thickness or thinner.
2. Copper Sheets: Solder joints of copper sheets.

B. Install sheet flashing on pipes, sleeves, and specialties passing through or embedded in floors and roofs with waterproof membrane.

1. Pipe Flashing: Sleeve type, matching pipe size, with minimum length of 10 inches, and skirt or flange extending at least 8 inches around pipe.
2. Sleeve Flashing: Flat sheet, with skirt or flange extending at least 8 inches around sleeve.
3. Embedded Specialty Flashing: Flat sheet, with skirt or flange extending at least 8 inches around specialty.

C. Set flashing on floors and roofs in solid coating of bituminous cement.

D. Secure flashing into sleeve and specialty clamping ring or device.

E. Install flashing for piping passing through roofs with counterflashing or commercially made flashing fittings, according to Division 7 Section "Sheet Metal Flashing and Trim."

F. Extend flashing up vent pipe passing through roofs and turn down into pipe, or secure flashing into cast-iron sleeve having calking recess.

G. Fabricate and install flashing and pans, sumps, and other drainage shapes.

3.4 LABELING AND IDENTIFYING

A. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Division 22 Section "Identification for Plumbing Piping and Equipment."

3.5 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.6 PROTECTION

A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.

B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 22 13 23 – SANITARY WASTE INTERCEPTORS

PART 1 – GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hydromechanical grease interceptors located below sink fixtures.
2. Piping connections, flow controls, vents, and accessories associated with grease interceptors.
3. Removal and replacement of existing under-sink grease interceptor as indicated on Drawings.

B. Related Requirements:

1. Section 22 05 29 "Hangers and Supports for Plumbing Piping and Equipment."
2. Section 22 05 53 "Identification for Plumbing Piping and Equipment."
3. Section 22 13 16 "Sanitary Waste and Vent Piping."

1.2 ACTION SUBMITTALS

A. Product Data: For each type of sanitary waste interceptor.

1. Include rated flow capacity, grease retention capacity, dimensions, inlet and outlet sizes, materials, accessories, and installation requirements.

B. Shop Drawings:

2. Indicate interceptor size, piping arrangement, venting, clearances for maintenance, and relationship to adjacent construction.

1.3 INFORMATIONAL SUBMITTALS

A. Manufacturer's installation instructions.

B. Operation and maintenance data.

1.4 QUALITY ASSURANCE

A. Comply with applicable plumbing code requirements.

B. Interceptor shall comply with ASME A112.14.3.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Deliver products in manufacturer's original packaging.

B. Protect equipment from damage and contamination during storage and handling.

1.6 WARRANTY

A. Manufacturer's standard warranty.

PART 2 – PRODUCTS

2.1 MANUFACTURERS

A. Subject to compliance with requirements, provide products by one of the following:

1. Jay R. Smith Mfg. Co.
2. Zurn Industries, LLC
3. Josam Company
4. Schier Products Company
5. Wade Drains

2.2 HYDROMECHANICAL GREASE INTERCEPTORS

A. Description:

1. Factory-fabricated, ASME A112.14.3-compliant hydromechanical grease interceptor designed for installation below sink fixtures.
2. Interceptor shall be suitable for food service applications including three-compartment sinks and associated cooking equipment.
3. Provide interceptor size, flow rate, and grease retention capacity as indicated on Drawings.

B. Construction:

1. Body: Fabricated steel with corrosion-resistant interior and exterior coating, or stainless steel.
2. Internal Components: Removable flow control, baffles, and air relief components.
3. Cover: Gasketed, removable cover designed to permit cleaning and maintenance access.
4. Connections: Threaded or no-hub inlet and outlet connections sized as indicated.

C. Accessories:

1. Flow control fitting.
2. Air intake and vent connections.
3. External vented flow control where required by manufacturer.
4. Inlet and outlet connection gaskets and seals.

2.3 PIPING MATERIALS

A. Sanitary Waste Piping:

1. As specified in Section 221316.

B. Supports and Anchors:

1. As specified in Section 220529.

PART 3 – EXECUTION

3.1 EXAMINATION

A. Verify existing conditions and dimensions prior to installation.

B. Verify existing piping connections and invert elevations are suitable for installation of new interceptor.

3.2 REMOVAL OF EXISTING INTERCEPTOR

A. Disconnect and remove existing under-sink grease interceptor and associated piping components indicated for removal.

B. Cap, reconnect, or modify piping as required for installation of new interceptor.

C. Dispose of removed materials in accordance with applicable regulations.

3.3 INSTALLATION

A. Install grease interceptor in accordance with manufacturer's written instructions, approved submittals, and applicable plumbing codes.

B. Install interceptor level and fully accessible for inspection, cleaning, and maintenance.

C. Install flow control fitting and venting components as required by manufacturer.

D. Coordinate installation with food service equipment and sink locations.

E. Provide clearance required for removal of cover and internal components.

F. Connect inlet and outlet piping with joints watertight and gas-tight.

G. Support piping independently so equipment is not subjected to piping loads.

3.4 FIELD QUALITY CONTROL

A. Test interceptor and associated piping for leaks after installation.

B. Correct leaks and retest until systems are watertight.

3.5 CLEANING AND PROTECTION

A. Clean exposed surfaces and remove debris from interceptor interior prior to final acceptance.

B. Protect installed equipment from damage during remainder of construction.

END OF SECTION 223400

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221429 - SUMP PUMPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Sump pumps - submersible.
2. Packaged drainage-pump units - submersible.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Sump pumps - submersible.
2. Packaged drainage-pump units - submersible.

B. Product Data Submittals: For each product.

1. Construction details, material descriptions, dimensions of individual components and profiles.
2. Rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

C. Shop Drawings:

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

1.3 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For pumps and controls.

1. Indicate actual installed items by marking submittals with an arrow or box.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Retain shipping flange protective covers and protective coatings during storage.

B. Protect bearings and couplings against damage.

C. Comply with manufacturer's written instructions for handling.

1.5 WARRANTY

A. Manufacturer Warranty: Manufacturer and Installer agree to repair or replace sump pumps that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 3 year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each type of sump pump from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and use.

B. UL Compliance: Comply with UL 778 for motor-operated water pumps.

2.3 SUMP PUMPS - SUBMERSIBLE

A. Sump Pumps - Submersible, Fixed Position, Single Seal: .

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. GRUNDFOS CBS Inc.
b. Liberty Pumps.
c. Zoeller Company.

2. Description: Factory-assembled and -tested sump-pump unit.
3. Pump Type: Submersible, end-suction, single-stage, close-coupled, overhung-impeller, centrifugal sump pump as defined in HI 14.1-14.2 and HI 14.3.
4. Pump Casing: Cast iron, with strainer inlet; legs that elevate pump to permit flow into impeller; and vertical discharge for piping connection.

5. Impeller: Statically and dynamically balanced, manufacturer's standard designed for clear wastewater handling, and keyed and secured to shaft.
6. Pump and Motor Shaft: Stainless steel or steel, with factory-sealed, grease-lubricated ball bearings.
7. Seal: Mechanical.
8. Motor: Hermetically sealed, capacitor-start type; with built-in overload protection; lifting eye or lug; and three-conductor, waterproof power cable of length required and with grounding plug and cable-sealing assembly for connection at pump.

    a. Motor Housing Fluid: Oil.

9. Capacities and Characteristics:

    a. Unit Capacity: 10 gpm.
    b. Number of Pumps: One.
    c. Each Pump:

        1) Capacity: 10 gpm .
        2) Total Dynamic Head: 25 feet .
        3) Speed: See Sump Pump schedule.
        4) Discharge Size: **1-1/2" NPS .**
        5) Electrical Characteristics:

            a) Motor Horsepower: 1/2 hp.
            b) Volts: 115 V ac.
            c) Phases: Single.
            d) Hertz: 60.

10. Controls, Rod-and-Float Type:

    a. Enclosure: NEMA 250, Type 4X.
    b. Switch Type: Pedestal-mounted float switch with float rods and rod buttons.
    c. Automatic Alternator: Start pumps on successive cycles and start multiple pumps if one cannot handle load.
    d. Float Guides: Pipe or other restraint for floats and rods in basins of depth greater than 60 inches .
    e. High-Water Alarm: Cover-mounted, compression-probe alarm, with electric bell; 120 V ac, with transformer and contacts for remote alarm bell.

11. Controls, Float- and Pressure-Switch Type:

    a. Enclosure: NEMA 250, Type 4X; wall mounted.
    b. Switch Type: Mechanical-float type, in NEMA 250, Type 6 enclosures with mounting rod and electric cables.
    c. Automatic Alternator: Start pumps on successive cycles and start multiple pumps if one cannot handle load.
    d. High-Water Alarm: Rod-mounted, NEMA 250, Type 6 enclosure with mechanical-float, mercury-float, or pressure switch matching control and electric bell; 120 V ac, with transformer and contacts for remote alarm bell.

12. Control-Interface Features:

    a. Remote Alarm Contacts: For remote alarm interface.
    b. Building Automation System Interface: Auxiliary contacts in pump controls for interface to building automation system and capable of providing the following:

        1) On-off status of pump.
        2) Alarm status.

2.4 MOTORS

A. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 220500 "Common Work Results for Plumbing."

    1. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.

B. Motors for submersible pumps are to be hermetically sealed.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for plumbing piping to verify actual locations of storm drainage piping connections before sump-pump installation.

3.2 INSTALLATION

A. Pump Installation Standards: Comply with HI 14.4 for installation of sump pumps.

B. Equipment Mounting:

    1. Comply with requirements for vibration isolation and seismic control devices specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment."

C. Wiring Method: Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

D. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools.

3.3 PIPING CONNECTIONS

A. Comply with requirements for piping specified in Section 221319 "Storm Drainage Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to equipment, allow space for service and maintenance.

3.4 STARTUP SERVICE

A. Engage a factory-authorized service representative to perform startup service.

1. Complete installation and startup checks in accordance with manufacturer's written instructions.

3.5 ADJUSTING

A. Adjust pumps to function smoothly, and lubricate as recommended by manufacturer.

B. Adjust control set points.

3.6 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test, inspect, and adjust components, assemblies, and equipment installations, including connections.

C. Tests and inspections:

1. Perform each visual and mechanical inspection.
2. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
5. Pumps and controls will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

3.7 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain controls and pumps.

END OF SECTION 221429

SECTION 223100 - DOMESTIC WATER SOFTENERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Water softeners.
2. Chemicals.
3. Water-testing sets.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings:

1. Include diagrams for power, signal, and control wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Seismic Qualification Data: Certificates, for water softeners, accessories, and components, from manufacturer.

B. Source quality-control reports.

C. Field quality-control reports.

D. Sample warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and maintenance data.

1.5 COORDINATION

A. Coordinate sizes and locations of concrete bases with actual equipment provided.

1.6 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of water softeners that fail in materials or workmanship within specified warranty period.

1. Water Softeners, Warranty Period: From date of Substantial Completion.

a. Mineral Tanks: Five years.
b. Brine Tanks: 10 years.
c. Control Valve: One year.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Drinking Water System Components - Health Effects and Drinking Water System Components - Lead Content Compliance: NSF 61 and NSF 372.

B. Seismic Performance: Water softeners shall withstand the effects of earthquake motions determined according to ASCE/SEI 7

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified.

2.2 WATER SOFTENERS

A. Description: Factory-assembled, pressure-type water softener.

1. Configuration: Single unit with one mineral tank and one brine tank.
2. Mounting: On skids.
3. Mineral Tanks: FRP, pressure-vessel quality.
   a. Pressure Rating: 100 psig (kPa) minimum.
   b. Freeboard: 50 percent minimum for backwash expansion above normal resin bed level.
   c. Support Legs or Skirt: Constructed of structural steel, welded to tank.
   d. Upper Distribution System: Single, point type, fabricated from galvanized-steel pipe and fittings.
   e. Lower Distribution System: Hub and radial-arm or header-lateral type; fabricated from nonmetallic pipe and fittings with individual, fine-slotted, nonclogging plastic strainers, and arranged for even flow distribution through resin bed.
   f. Liner: PE, ABS, or other material suitable for potable water.

4. Mineral Tanks: Steel or Stainless steel, electric welded; pressure-vessel quality.

a. Seismic Requirements: Fabricate supports and attachments to tank with reinforcement strong enough to resist tank movement during seismic event when tank supports are anchored to building structure.
b. Freeboard: 50 percent minimum for backwash expansion above normal resin bed level.
c. Handholes: 4 inches (102 mm) round or 4 by 6 inches (102 by 152 mm) elliptical, in top head and lower sidewall of tanks 30 inches (mm) and smaller in diameter.
d. Finish: Hot-dip galvanized on exterior and interior of tank after fabrication unless tank is stainless steel.
e. Finish: Exterior of tank spray-painted with rust-resistant prime coat, 2- to 3-mil (0.051- to 0.076-mm) dry film thickness. Interior sandblasted and lined with epoxy-polyamide coating, 8- to 10-mil (0.203- to 0.254-mm) dry film thickness.
f. Upper Distribution System: Single, point type, fabricated from galvanized-steel pipe and fittings.
g. Lower Distribution System: Hub and radial-arm or header-lateral type; fabricated from PVC pipe and fittings with individual, fine-slotted, nonclogging PE strainers, and arranged for even flow distribution through resin bed.
h. Liner: PE, ABS, or other material suitable for potable water.

5. Controls: Automatic; 120V; factory wired and factory mounted on unit.

a. Adjustable duration of various regeneration steps.
b. Push-button start and complete manual operation.
c. Electric time clock and switch for automatic operation except for manual return to service.
d. Sequence of Operation: Multiport pilot-control valve automatically pressure-actuates main operating valve through steps of regeneration.
e. Pointer on pilot-control valve shall indicate cycle of operation.
f. Includes means of manual operation of pilot-control valve if power fails.

6. Main Operating Valves: Industrial, automatic, multiport, diaphragm type with the following features:

a. Slow opening and closing, nonslam operation.
b. Diaphragm guiding on full perimeter from fully open to fully closed.
c. Isolated, dissimilar metals within valve.
d. Self-adjusting, internal, automatic brine injector that draws brine and rinses at constant rate independent of pressure.
e. Valve for single mineral-tank unit with internal automatic bypass of raw water during regeneration.
f. Sampling cocks for soft water.
g. Special tools are not required for service.

7. Flow Control: Automatic, to control backwash and flush rates over wide variations in operating pressure; does not require field adjustments.

a. Meter Control: Each mineral tank is equipped with signal-register-head water meter that produces electrical signal indicating need for regeneration on reaching hand-set total in gallons (liters). Signal will continue until reset.

b. Demand-Initiated Control: Single mineral tank is equipped with automatic-reset-head water meter that electrically activates cycle controller to initiate regeneration at preset total in gallons (liters). Head automatically resets to preset total in gallons (liters) for next service run.
c. Demand-Initiated Control: Each mineral tank of twin mineral-tank unit is equipped with automatic-reset-head water meter that electrically activates cycle controllers to initiate regeneration at preset total in gallons (liters). Head automatically resets to preset total in gallons (liters) for next service run. Electrical lockout prevents simultaneous regeneration of both tanks.
d. Demand-Initiated Control: Each twin mineral-tank unit is equipped with automatic-reset-head water meter, in common outlet header, that electrically activates cycle controller to automatically regenerate one mineral tank at preset total in gallons (liters) and divert flow to other tank. Automatically repeats with other tank. Electrical lockout prevents simultaneous regeneration of both tanks.

8. Brine Tank: Combination measuring and wet-salt storing system.

a. Tank and Cover Material: Fiberglass, 3/16 inch (4.8 mm) thick; or molded PE, 3/8 inch (9.5 mm) thick.
b. Brine Valve: Float operated and plastic fitted for automatic control of brine withdrawal and freshwater refill.
c. Size: Large enough for at least four regenerations at full salting.

9. Factory-Installed Accessories:

a. Piping, valves, tubing, and drains.
b. Sampling cocks.
c. Main-operating-valve position indicators.
d. Water meters.

2.3 CHEMICALS

A. Mineral: High-capacity, sulfonated-polystyrene, ion-exchange resin that is stable over entire pH range with good resistance to bead fracture from attrition or shock.

B. Salt for Brine Tanks: High-purity sodium chloride, free of dirt and foreign material. Rock and granulated forms are unacceptable.

2.4 WATER-TESTING SETS

A. Description: Manufacturer's standard water-hardness testing apparatus and chemicals with testing procedure instructions. Include metal container suitable for wall mounting.

2.5 SOURCE QUALITY CONTROL

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. ASME Compliance for Steel Tanks: Fabricate and label mineral tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 1, where indicated.

C. ASME Compliance for FRP Tanks: Fabricate and label mineral tanks to comply with ASME Boiler and Pressure Vessel Code: Section X, where indicated.

D. UL Compliance: Fabricate and label water softeners to comply with UL 979, "Water Treatment Appliances."

E. Hydrostatically test mineral tanks before shipment to a minimum of one and one-half times the pressure rating.

F. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 INSTALLATION OF WATER SOFTENERS

A. Equipment Mounting:

1. Install water softeners on cast-in-place concrete equipment base(s). Comply with requirements for equipment bases and foundations specified in Section 033000 "Cast-in-Place Concrete."
2. Comply with requirements for vibration isolation and seismic-control devices specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment."
3. Comply with requirements for vibration isolation devices specified in Section 220548 "Vibration Controls for Plumbing Piping and Equipment."

B. Install seismic restraints for tanks and floor-mounting accessories and anchor to building structure.

C. Install brine lines and fittings furnished by equipment manufacturer, but not specified to be factory installed.

D. Prepare mineral-tank distribution system and underbed for minerals and place specified mineral into mineral tanks.

E. Install water-testing sets mounted on wall, unless otherwise indicated, and near water softeners.

3.2 PIPING CONNECTIONS

A. Comply with requirements for piping specified in Section 221116 "Domestic Water Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to equipment, allow space for service and maintenance.

C. Install shutoff valves on raw-water inlet and soft-water outlet piping of each mineral tank.

1. Metal general-duty valves are specified in Section 220523 "General-Duty Valves for Plumbing Piping."
2. Plastic valves are specified in Section 221116 "Domestic Water Piping."
3. Exception: Water softeners with factory-installed shutoff valves at locations indicated.

D. Install pressure gauges on raw-water inlet and soft-water outlet piping of each mineral tank. Pressure gauges are specified in Section 220500 "Common Work Results for Plumbing."

1. Exception: Water softeners with factory-installed pressure gauges at locations indicated.
2. Exception: Household water softeners.
3. Exception: Water softeners in hot-water service.

E. Install valved bypass in water piping around water softeners.

1. Metal general-duty valves are specified in Section 220523 "General-Duty Valves for Plumbing Piping."
2. Plastic valves are specified in Section 221116 "Domestic Water Piping."
3. Water piping is specified in Section 221116 "Domestic Water Piping."
4. Exception: Water softeners in hot-water service.

F. Install indirect wastes to spill into open drains or pit with drain.

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.

3.4 IDENTIFICATION

A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

C. Perform tests and inspections[with the assistance of a factory-authorized service representative].

D. Tests and Inspections:

1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
2. Operational Test: After electrical circuitry has been energized, start units to confirm proper unit operation.
3. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

E. Water softeners will be considered defective if they do not pass tests and inspections.

F. Prepare test and inspection reports.

3.6 STARTUP SERVICE

A. Perform startup service.

1. Complete installation and startup checks according to manufacturer's written instructions.

B. Add water to brine tanks and fill with the following form of salt:

1. Water Softeners: Processed, plain salt pellets

C. Sample water softener effluent after startup and at three consecutive seven-day intervals (total of four samples), and prepare certified test reports for required water performance characteristics. Comply with the following:

1. ASTM D859, "Test Method for Silica in Water."
2. ASTM D1067, "Test Methods for Acidity or Alkalinity of Water."
3. ASTM D1068, "Test Methods for Iron in Water."
4. ASTM D1126, "Test Method for Hardness in Water."
5. ASTM D1129, "Terminology Relating to Water."
6. ASTM D3370, "Practices for Sampling Water from Closed Conduits."

3.7 MAINTENANCE SERVICE

A. Initial Maintenance Service: Beginning at Substantial Completion, maintenance service shall include six months' full maintenance by skilled employees of water softener Installer. Include

quarterly preventive maintenance, repair or replacement of worn or defective components, cleaning, and adjusting as required for proper water softener operation at rated capacity. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

B. Continuing Maintenance Proposal: From Installer to Owner, in the form of a standard yearly (or other period) maintenance agreement, starting on date initial maintenance service is concluded. State services, obligations, conditions, and terms for agreement period and for future renewal options.

3.8 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain domestic water softeners.

END OF SECTION 223100

SECTION 223400 - FUEL-FIRED, DOMESTIC-WATER HEATERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Gas-fired, tankless, domestic-water heaters.
2. Domestic-water heater accessories.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings:

1. Include diagrams for power, signal, and control wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Equipment room drawing or BIM model, drawn to scale, on which the items described in this Section are shown and coordinated with all building trades.

B. Seismic Qualification Data: Certificates, for fuel-fired, domestic-water heaters, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

C. Domestic-Water Heater Labeling: Certified and labeled by testing agency acceptable to authorities having jurisdiction.

D. Source quality-control reports.

E. Field quality-control reports.

F. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fuel-fired, domestic-water heaters to include in emergency, operation, and maintenance manuals.

1.5 COORDINATION

A. Coordinate sizes and locations of concrete bases with actual equipment provided.

1.6 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of fuel-fired, domestic-water heaters that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including storage tank and supports.
b. Faulty operation of controls.
c. Deterioration of metals, metal finishes, and other materials beyond normal use.

2. Warranty Periods: From date of Substantial Completion.

a. Gas-Fired, Tankless, Domestic-Water Heaters:

1) Heat Exchanger: Five years.
2) Controls and Other Components: Three years.

b. Expansion Tanks: Five years.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and use.

B. Seismic Performance: Commercial domestic-water heaters shall withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."
2. Component Importance Factor: 1.5.

C. ASHRAE/IES Compliance: Fabricate and label fuel-fired, domestic-water heaters to comply with ASHRAE/IES 90.1.

D. ASME Compliance:

1. Where ASME-code construction is indicated, fabricate and label commercial, domestic-water heater storage tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 1.
2. Where ASME-code construction is indicated, fabricate and label commercial, finned-tube, domestic-water heaters to comply with ASME Boiler and Pressure Vessel Code: Section IV.

E. NSF Compliance: Fabricate and label equipment components that will be in contact with potable water to comply with NSF 61 and NSF 372.

2.2 GAS-FIRED DOMESTIC-WATER HEATERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. A. O. Smith Corporation.
2. Bradford White Corporation.
3. State Water Heaters.
4. Lochinvar.

B. Source Limitations: Obtain domestic-water heaters from single source from single manufacturer.

C. Standard: ANSI Z21.10.3/CSA 4.3 for gas-fired, instantaneous, domestic-water heaters for indoor application.

D. Construction: Copper piping or tubing complying with NSF 61 and NSF 372 barrier materials for potable water, without storage capacity.

1. Tappings: ASME B1.20.1 pipe thread.
2. Pressure Rating: 150 psig (1035 kPa).
3. Heat Exchanger: Stainless steel.
4. Insulation: Comply with ASHRAE/IES 90.1.
5. Jacket: Metal, with enameled finish, or plastic.
6. Burner: For use with tankless, domestic-water heaters and natural-gas fuel.
7. Automatic Ignition: Manufacturer's proprietary system for automatic, gas ignition.
8. Temperature Control: Adjustable thermostat.

2.3 DOMESTIC-WATER HEATER ACCESSORIES

A. Domestic-Water Expansion Tanks:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. AMTROL, Inc.
b. ProFlo; a Ferguson Enterprises, Inc. brand.
c. Taco Comfort Solutions.

2. Source Limitations: Obtain domestic-water heaters from single source from single manufacturer.
3. Description: Steel, pressure-rated tank constructed with welded joints and factory-installed, butyl-rubber diaphragm. Include air precharge to minimum system-operating pressure at tank.
4. Construction:

a. Tappings: Factory-fabricated steel, welded to tank before testing and labeling. Include ASME B1.20.1 pipe thread.
b. Interior Finish: Comply with NSF 61 and NSF 372 barrier materials for potable-water tank linings, including extending finish into and through tank fittings and outlets.
c. Air-Charging Valve: Factory installed.

5. Capacity and Characteristics:

a. Working-Pressure Rating: 150 psig.
b. Capacity Acceptable: 15 gallon minimum.
c. Air Precharge Pressure: 55 psig.

B. Drain Pans: Corrosion-resistant metal with raised edge. Include dimensions not less than base of domestic-water heater, and include drain outlet not less than NPS 3/4 (DN 20) with ASME B1.20.1 pipe threads.

C. Piping-Type Heat Traps: Field-fabricated piping arrangement in accordance with ASHRAE/IES 90.1.

D. Heat-Trap Fittings: ASHRAE 90.2.

E. Manifold Kits: Domestic-water heater manufacturer's factory-fabricated inlet and outlet piping for field installation, for multiple domestic-water heater installation. Include ball-, butterfly-, or gate-type shutoff valves to isolate each domestic-water heater and calibrated balancing valves to provide balanced flow through each domestic-water heater.

F. Comply with requirements for ball-, butterfly-, or gate-type shutoff valves specified in Section 220523 "General-Duty Valves for Plumbing Piping."

1. Comply with requirements for balancing valves specified in Section 221119 "Domestic Water Piping Specialties."

G. Factory-furnished by domestic-water heater manufacturer and selected for use with the specified domestic-water heater system.
1. Provide pump complete with integral or manufacturer-furnished controls, check valve, isolation valves, and accessories required for a complete and operational domestic hot-water recirculation system.

2. Pump shall be compatible with potable-water service and comply with NSF 61 and NSF 372 where in contact with potable water.

H. Gas Shutoff Valves: ANSI Z21.15/CSA 9.1, manually operated. Furnish for installation in piping.

I. Gas Pressure Regulators: ANSI Z21.18/CSA 6.3, appliance type. Include 2-psig (13.8-kPa) pressure rating as required to match gas supply.

J. Automatic Gas Valves: ANSI Z21.21/CSA 6.5, appliance, electrically operated, on-off automatic valve.

K. Combination Temperature-and-Pressure Relief Valves: Include relieving capacity at least as great as heat input, and include pressure setting less than working-pressure rating of domestic-water heater. Select relief valves with sensing element that extends into storage tank.

1. Gas-Fired, Domestic-Water Heaters: ANSI Z21.22/CSA 4.4.

L. Pressure Relief Valves: Include pressure setting less than working-pressure rating of domestic-water heater.

1. Gas-Fired, Domestic-Water Heaters: ANSI Z21.22/CSA 4.4.

M. Vacuum Relief Valves: ANSI Z21.22/CSA 4.4.

2.4 SOURCE QUALITY CONTROL

A. Factory Tests: Test and inspect assembled domestic-water heaters and storage tanks specified to be ASME-code construction, in accordance with ASME Boiler and Pressure Vessel Code.

B. Hydrostatically test commercial domestic-water heaters and storage tanks to minimum of one and one-half times pressure rating before shipment.

C. Domestic-water heaters will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports.

PART 3 - EXECUTION

3.1 INSTALLATION OF DOMESTIC-WATER HEATER

A. Commercial, Domestic-Water Heater Mounting: Install commercial domestic-water heaters on concrete base. Comply with requirements for concrete base specified in Section 033000 "Cast-in-Place Concrete."

1. Exception: Omit concrete bases for commercial domestic-water heaters if installation on stand, bracket, suspended platform, or directly on floor is indicated.

2. Maintain manufacturer's recommended clearances.
3. Arrange units so controls and devices that require servicing are accessible.
4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch (450-mm) centers around the full perimeter of concrete base.
5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
6. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
7. Install anchor bolts to elevations required for proper attachment to supported equipment.
8. Anchor domestic-water heaters to substrate.

B. Residential, Domestic-Water Heater Mounting: Install residential domestic-water heaters on floor.

1. Maintain manufacturer's recommended clearances.
2. Arrange units so controls and devices that require servicing are accessible.
3. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
4. Install anchor bolts to elevations required for proper attachment to supported equipment.
5. Anchor domestic-water heaters to substrate.

C. Install domestic-water heaters level and plumb, in accordance with layout drawings, original design, and referenced standards. Maintain manufacturer's recommended clearances. Arrange units so controls and devices needing service are accessible.

1. Install shutoff valves on domestic-water-supply piping to domestic-water heaters and on domestic-hot-water outlet piping. Comply with requirements for shutoff valves specified in Section 220523 "General-Duty Valves for Plumbing Piping."

D. Install gas-fired, domestic-water heaters in accordance with NFPA 54.

1. Install gas shutoff valves on gas supply piping to gas-fired, domestic-water heaters without shutoff valves.
2. Install gas pressure regulators on gas supplies to gas-fired, domestic-water heaters without gas pressure regulators if gas pressure regulators are required to reduce gas pressure at burner.
3. Install automatic gas valves on gas supplies to gas-fired, domestic-water heaters if required for operation of safety control.
4. Comply with requirements for gas shutoff valves, gas pressure regulators, and automatic gas valves specified in Section 231123 "Facility Natural-Gas Piping."

E. Install oil-fired, domestic-water heaters in accordance with NFPA 31.

1. Install shutoff valves on fuel-oil supply piping to oil-fired water-heater burners without shutoff valves. Comply with requirements for shutoff valves specified in Section 231123 "Facility Natural-Gas Piping."

F. Install commercial domestic-water heaters with seismic-restraint devices. Comply with requirements for seismic-restraint devices specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment".

G. Install combination temperature-and-pressure relief valves in top portion of storage tanks. Use relief valves with sensing elements that extend into tanks. Extend domestic-water-heater relief-valve outlet, with drain piping same as domestic-water piping in continuous downward pitch, and discharge by positive air gap onto closest floor drain.

H. Install combination temperature-and-pressure relief valves in water piping for domestic-water heaters without storage. Extend domestic-water-heater relief-valve outlet, with drain piping same as domestic-water piping in continuous downward pitch, and discharge by positive air gap onto closest floor drain.

I. Install water-heater drain piping as indirect waste to spill by positive air gap into open drains or over floor drains. Install hose-end drain valves at low points in water piping for domestic-water heaters that do not have tank drains. Comply with requirements for hose-end drain valves specified in Section 221119 "Domestic Water Piping Specialties."

J. Install thermometer on outlet piping of domestic-water heaters. Comply with requirements for thermometers specified in Section 220500 "Common Work Results for Plumbing."

K. Assemble and install inlet and outlet piping manifold kits for multiple domestic-water heaters. Fabricate, modify, or arrange manifolds for balanced water flow through each domestic-water heater. Include shutoff valve and thermometer in each domestic-water heater inlet and outlet, and throttling valve in each domestic-water heater outlet. Comply with requirements for valves specified in Section 220523 "General-Duty Valves for Plumbing Piping" and comply with requirements for thermometers specified in Section 220500 "Common Work Results for Plumbing."

L. Install piping-type heat traps on inlet and outlet piping of domestic-water heater storage tanks without integral or fitting-type heat traps.

M. Fill domestic-water heaters with water.

N. Charge domestic-water expansion tanks with air to required system pressure.

O. Install dielectric fittings in all locations where piping of dissimilar metals is to be joined. The wetted surface of the dielectric fitting contacted by potable water shall contain less than 0.25 percent of lead by weight.

3.2 PIPING CONNECTIONS

A. Comply with requirements for domestic-water piping specified in Section 221116 "Domestic Water Piping."

B. Comply with requirements for gas piping specified in Section 231123 "Facility Natural-Gas Piping."

C. Drawings indicate general arrangement of piping, fittings, and specialties.

D. Where installing piping adjacent to fuel-fired, domestic-water heaters, allow space for service and maintenance of water heaters. Arrange piping for easy removal of domestic-water heaters.

3.3 IDENTIFICATION

A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

A. Testing Agency:

1. Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform tests and inspections with the assistance of a factory-authorized service representative.

D. Tests and Inspections:

1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
2. Operational Test: After electrical circuitry has been energized, start units to confirm proper operation.
3. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

E. Domestic-water heaters will be considered defective if they do not pass tests and inspections.

F. Prepare test and inspection reports.

3.5 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain gas-fired, tankless domestic-water heaters. Training shall be a minimum of one hour(s).

END OF SECTION 223400

SECTION 224200 - COMMERCIAL PLUMBING FIXTURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Commercial lavatories.
2. Commercial showers.
3. Commercial sinks.
4. Commercial urinals.
5. Commercial water closets.
6. Flushometer valves.
7. Toilet seats.
8. Fixture carriers.

B. Related Requirements:

1. Refer to Division 22 - Plumbing.

1.2 DEFINITIONS

A. FRP: Fiberglass-reinforced plastic.

B. PMMA: Polymethyl methacrylate; also known as "acrylic."

C. Standard-Efficiency Flush Volume: 1.6 gal. (6 L) per flush.

D. High-Efficiency Flush Volume: 1.28 gal. (4.8 L) or less per flush.

E. WaterSense Fixture: Water closet and/or flushometer valve/tank certified by the EPA to meet the WaterSense performance criteria.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for plumbing fixtures.

2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings:

1. Plans, elevations, sections, and mounting details.
2. Details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories and/or counter-mounted sinks.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data:

1. For lavatories and faucets.

2. For shower valves to include in maintenance manuals
3. For sinks and faucets to include in operation and maintenance manuals.

4. For flushometer valves to include in operation and maintenance manuals.
5. For wash fountains and components to include in operation and maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials to Owner that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Faucet Washers and O-Rings: Equal to 10 percent of amount of each type and size installed.
2. Faucet Cartridges and O-Rings: Equal to 5 percent of amount of each type and size installed.
3. Shower Valve Washers and O-Rings: Equal to 10 percent of amount of each type and size installed.
4. Shower Valve Cartridges and O-Rings: Equal to 5 percent of amount of each type and size installed.
5. Waterless Urinal Trap-Seal Cartridges: Equal to 200 percent of amount of each type installed, but no fewer than 12 of each type.
6. Waterless Urinal Trap-Seal Liquid: Equal to 1 gal. (3.8 L) for each urinal installed.
7. Flushometer-Valve Repair Kits: Equal to 10 percent of amount of each type installed, but no fewer than one of each type.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Lavatory faucets, sink faucets, shower valves, and wash fountain spray heads and faucets intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), with requirements of the Authority Having Jurisdiction (AHJ), and with NSF 61 and NSF 372, or be certified in compliance with NSF 61 and NSF 372 by an ANSI-accredited third-party certification body, in that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 COMMERCIAL LAVATORIES

1. Lavatories, Wall Mounted - Vitreous China, Rectangular with Back:

    a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

        1) American Standard.
        2) Kohler Co.
        3) Mansfield Plumbing Products LLC.
        4) Zurn Industries, LLC.

    b. Fixture:

        1) Standard: ASME A112.19.2/CSA B45.1.
        2) Type: For wall hanging.
        3) Nominal Size: Rectangular, 18 by 16 inches (457 by 406 mm).
        4) Faucet-Hole Punching: Three holes, 4-inch (102-mm) centers.
        5) Faucet-Hole Location: Top.
        6) Color: White.
        7) Mounting Material: Chair carrier.

    c. Faucet: Lavatory Faucets, Manually Operated
    d. Support: Lavatory carrier, floor affixed with steel uprights, concealed arm.
    e. Lavatory Mounting Height: Standard.

B. Lavatory Faucets, Manually Operated
    1. Standard: ASME A112.18.1/CSA B125.1.
    2. Operation Type: Two handle, mixing, Commercial.
    3. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and fixture receptor.
    4. Body Type: Centerset.

5. Body Material: Commercial, solid-brass, or die-cast housing with brazed copper and brass waterway.
6. Finish: Polished chrome plate.
7. Maximum Flow Rate: 0.5 gpm.
8. Mounting Type: Deck, exposed.
9. Valve Handle(s): Wrist blade, 4 inches.
10. Spout: Rigid type.
11. Spout Outlet: Aerator.
12. Operation: Compression, manual.
13. Drain: Not part of faucet.

C. Lavatory Supply Fittings:

1. NSF Standard: Comply with NSF 61 and NSF 372 for supply-fitting materials that will be in contact with potable water.
2. Standard: ASME A112.18.1/CSA B125.1.
3. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless steel wall flange.
4. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
5. Operation: Loose key.
6. Risers:

    a. NPS 3/8.
    b. ASME A112.18.6/CSA B125.6, braided or corrugated stainless steel, flexible hose riser.

D. Lavatory Waste Fittings:

1. Standard: ASME A112.18.2/CSA B125.2.
2. Drain: Grid type with NPS 1-1/4 offset and straight tailpiece.
3. Trap:

    a. Size: NPS 1-1/2 by NPS 1-1/4.
    b. Material:

        1) Chrome-plated, one-piece, cast-brass trap with swivel 0.029-inch thick tubular brass wall bend and chrome-plated, brass or steel wall flange.

2.3 COMMERCIAL SHOWERS

A. Shower Valve Assemblies:

1. Shower Valve Assemblies - Single-Handle, Pressure-Balanced Mixing Valve with Head:

    a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1) Kohler Co.
2) Moen Incorporated.
3) Symmons Industries, Inc.
4) Zurn Industries, LLC.

b. Source Limitations: Obtain shower heads and shower valves from single source from single manufacturer.
c. Description: Single-handle,pressure-balance mixing valve with hot- and cold-water indicators; diverting valve check stops; and shower head.
d. Shower Valve:

1) Standards:

a) ASME A112.18.1/CSA B125.1.
b) ASSE 1016/ASME A112.1016/CSA B125.16.

2) Body Material: Solid brass.
3) Finish: Polished chrome plate.
4) Mounting: Exposed.
5) Operation: Single-handle, twist or rotate control.
6) Antiscald Device: Furnish with ASSE 1016 thermostatic mixing valve.
7) Check Stops: Check-valve type, integral with or attached to body; on hot- and cold-water supply connections.

e. Supply Connections: NPS 1/2.
f. Shower Head:

1) Standard: ASME A112.18.1/CSA B125.1.
2) Type: Ball joint and head integral with mounting flange.
3) Shower Head Maximum Flow Rate: 1.75 gpm.
4) Shower Head Material: Metallic with chrome-plated finish.
5) Spray Pattern: Fixed.
6) Integral Volume Control: Not required.

B. Grout:

1. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
2. Characteristics: Nonshrink; recommended for interior and exterior applications.
3. Design Mix: 5000 psi (34.5 MPa), 28-day compressive strength.
4. Packaging: Premixed and factory packaged.

2.4 COMMERCIAL SINKS

A. Service Sinks, Floor Mounted:
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. American Standard; FIAT Products.
b. Florestone Products Co.
c. Mustee; E. L. Mustee & Sons, Inc.
d. Stern-Williams Products LLC.

2. Service Sinks, Floor Mounted - Molded Stone <**Insert drawing designation**>:
   a. Source Limitations: Obtain sinks from single source from single manufacturer.
   b. Fixture:

      1) Standard: ASME A112.18.2/CSA B125.2.
      2) Shape: Rectangular.
      3) Nominal Size: Per Schedule.
      4) Height: Per Schedule.
      5) Rim Guard: On all top surfaces.
      6) Color: Manufacturer standard.
      7) Drain: Grid with NPS 3 outlet.

   c. Mounting: On floor and flush to wall.
   d. Faucet: See Sink Faucets, Manually Operated - Service Sink.

B. Sink Faucets, Manually Operated:

1. Sink Faucets, Manually Operated Two handle, mixing.
   a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      1) Chicago Faucets.
      2) Delta Faucet Company.
      3) Kohler Co.
      4) Moen Incorporated.
      5) Zurn Industries, LLC.
   b. Source Limitations: Obtain sink faucets from single source from single manufacturer.
   c. Standards:

      1) ASME A112.18.1/CSA B125.1.
      2) NSF 61.
      3) NSF 372.

   d. Description: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and sink receptor.
   e. Body Type: Widespread.
   f. Body Material: Commercial, solid-brass, or die-cast housing with brazed copper and brass waterway.
   g. Finish: Chrome plated.
   h. Maximum Flow Rate: 1.0 to 1.28 gpm.
   i. Mounting Type: Deck, concealed.
   j. Valve Handle(s): Lever.
   k. Spout Type: Rigid, high arc.

l. Vacuum Breaker: Not required.
m. Spout Outlet: Aerator.

2. Sink Faucets, Manually Operated - Service Sink:
   a. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
      1) Chicago Faucets.
      2) Speakman Company.
      3) T&S Brass and Bronze Works, Inc.
      4) Zurn Industries, LLC.
   b. Source Limitations: Obtain sink faucets from single source from single manufacturer.
   c. Description: Wall/back mounted, brass body, with integral service stops, checks, spout with bucket/pail hook, 3/4-inch hose thread end, integral vacuum breaker, inlets 8 inches o.c., and two-handle mixing.
   d. Faucet:

      1) Standards:

         a) ASME A112.18.1/CSA B125.1.
         b) NSF 61 and NSF 372.
         c) ICC A117.1.
         d) ASSE 1001 (VB).

      2) Finish: Rough chrome plated.
      3) Cartridges: Ceramic, quarter-turn, with integral check valves.
      4) Brace: Adjustable top brace.

   e. Vacuum Breaker: Required for hose outlet.
   f. Spout Outlet: Hose thread in accordance with ASME B1.20.7.

C. Sink Supply Fittings:

1. NSF Standard: Comply with NSF 61 and NSF 372 for supply-fitting materials that will be in contact with potable water.
2. Standard: ASME A112.18.1/CSA B125.1.
3. Supply Piping: Chrome-plated brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated brass or stainless steel wall flange.
4. Supply Stops: Chrome-plated brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
5. Operation: Loose key.
6. Risers:

   a. NPS 3/8.
   b. ASME A112.18.6/CSA B125.6, braided or corrugated stainless steel flexible hose.

D. Sink Waste Fittings:

1. Standard: ASME A112.18.2/CSA B125.2.
2. Drain: Grid type with NPS 1-1/2 (DN 40) offset and straight tailpiece.
3. Trap:

    a. Size: NPS 1-1/2 (DN 40).
    b. Material:

        1) Chrome-plated, one-piece, cast-brass trap with swivel 17-gauge tubular brass wall bend and chrome-plated brass or steel wall flange.

E. Grout:

1. Standard: ASTM C1107/C1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
2. Characteristics: Nonshrink; recommended for interior and exterior applications.
3. Design Mix: 5000 psi, 28-day compressive strength.
4. Packaging: Premixed and factory packaged.

2.5 COMMERCIAL URINALS

A. Urinals, Wall Hung:

1. Urinals, Wall Hung - Back Outlet, Siphon Jet :

    a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

        1) American Standard.
        2) Kohler Co.
        3) Mansfield Plumbing Products LLC.
        4) Zurn Industries, LLC.

    b. Fixture:

        1) Standards:

            a) ASME A112.19.2/CSA B45.1.
            b) ASME A112.19.5/CSA B45.15.

        2) Material: Vitreous china.
        3) Type: Siphon jet with extended shields.
        4) Strainer or Trapway: Manufacturer's standard strainer with integral trap.
        5) Water Consumption: 1.0 gpf.
        6) Spud Size and Location: NPS 3/4; top.
        7) Outlet Size and Location: NPS 2; back.
        8) Color: White.

    c. Flushometer Valve: See Flushometer Valves, Manually Operated.

d. Waste Fitting:

1) Standard: ASME A112.18.2/CSA B125.2 for coupling.
2) Size: NPS 2.

e. Support: Urinal carrier, floor affixed with steel uprights with fixture support plates and coupling with seal and fixture bolts and hardware matching fixture.
f. Urinal Mounting Height: As indicated on Drawings; accessible fixtures in accordance with ICC A117.1.

2.6 COMMERCIAL WATER CLOSETS

A. Water Closets, Wall Mounted:

1. Water Closets, Wall Mounted - Top Spud:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) American Standard.
2) Kohler Co.
3) Mansfield Plumbing Products LLC.
4) Zurn Industries, LLC.

b. Source Limitations: Obtain water closets from single source from single manufacturer.
c. Standard: ASME A112.19.2/CSA B45.1.
d. Bowl:

1) Material: Vitreous china.
2) Type: Siphon jet.
3) Style: Flushometer valve.
4) Mounting Height: Standard, Accessible in accordance with ICC A117.1.
5) Rim Contour: Elongated.
6) Water Consumption: 1.6 gal. per flush.
7) Spud Size and Location: NPS 1-1/2; top.
8) Color: White.

e. Flushometer Valve: See Flushometer Valves, Manually Operated.
f. Toilet Seat: See Toilet Seats.
g. Support: Water-closet carrier, floor affixed.

2.7 FLUSHOMETER VALVES

A. Flushometer Valves, Manually Operated:

1. Flushometer Valves, Manually Operated - Lever Handle:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) American Standard.
2) Sloan Valve Company.
3) Zurn Industries, LLC.

b. Source Limitations: Obtain flushometer valve from single source from single manufacturer.
c. Standard: ASSE 1037/ASME 112.1037/CSA B125.37.
d. Minimum Pressure Rating: 125 psig.
e. Features: Include integral check stop and backflow-prevention device.
f. Material: Brass body with corrosion-resistant components.
g. Style: Exposed.
h. Flushometer-Valve Finish: Chrome-plated.
i. Handle Finish: Chrome plated.
j. Consumption: GPM per flush as scheduled.
k. Minimum Inlet: NPS 3/4 for urinals, NPS 1 for water closets.
l. Minimum Outlet: NPS 3/4 for urinals, NPS 1-1/4 for water closets.

2.8 TOILET SEATS

A. Toilet Seats:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. American Standard.
b. Bemis Manufacturing Company.
c. ProFlo; a Ferguson Enterprises, Inc. brand.
d. Zurn Industries, LLC.

2. Source Limitations: Obtain toilet seat from single source from single manufacturer.
3. Standard: IAPMO/ANSI Z124.5.
4. Material: Plastic.
5. Type: Commercial (Heavy duty).
6. Shape: Elongated rim, open front.
7. Hinge: Check.
8. Hinge Material: Noncorroding metal.
9. Seat Cover: Not required.
10. Color: White.
11. Surface Treatment: Antimicrobial.

2.9 FIXTURE CARRIERS

A. Fixture Carriers - Lavatory:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Jay R. Smith Mfg Co; a division of Morris Group International.
    b. MIFAB, Inc.
    c. Zurn Industries, LLC.

2. Source Limitations: Obtain lavatory carriers from single source from single manufacturer.
3. Standards:

    a. ASME A112.6.1M.
    b. ASME A112.6.2.

B. Fixture Carriers - Urinal:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Jay R. Smith Mfg Co; a division of Morris Group International.
    b. MIFAB, Inc.
    c. Zurn Industries, LLC.

2. Source Limitations: Obtain urinal carriers from single source from single manufacturer.
3. Standard: ASME A112.6.1M.
4. Description: Waste-fitting assembly, as required to match drainage piping material and arrangement with faceplates, couplings, gaskets, and feet; bolts and hardware matching fixture.

C. Fixture Carriers - Water Closet:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Jay R. Smith Mfg Co; a division of Morris Group International.
    b. MIFAB, Inc.
    c. Zurn Industries, LLC.

2. Source Limitations: Obtain water closet carriers from single source from single manufacturer.
3. Standard: ASME A112.6.1M.
4. Description: Waste-fitting assembly, as required to match drainage piping material and arrangement with faceplates, couplings, gaskets, and feet; bolts and hardware matching fixture.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in of water-supply piping and sanitary drainage and vent piping systems to verify actual locations of piping connections before plumbing fixture installation.

B. Examine walls and floors for suitable conditions where plumbing fixtures will be installed.

C. Examine counters for suitable conditions where lavatories and sinks will be installed.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF COMMERCIAL PLUMBING FIXTURES

A. Lavatory Installation:

1. Install lavatories level and plumb in accordance with roughing-in drawings.
2. Install supports, affixed to building substrate, for wall-mounted lavatories.
3. Install accessible, wall-mounted lavatories at mounting height in accordance with ICC A117.1.
4. Install water-supply piping with stop on each supply to each lavatory faucet. Install stops in locations that are accessible for ease of operation.
5. Install trap and waste piping on each drain outlet of each lavatory to be connected to sanitary drainage system.
6. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."
7. Seal joints between lavatories, counters, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."
8. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

B. Shower Installation:

1. Assemble shower components in accordance with manufacturers' written instructions.
2. Install showers level and plumb in accordance with roughing-in drawings.
3. Install ball[**or gate**] valves in water-supply piping to the shower if supply stops are specified with the shower valve. Comply with ball[**or gate**] valve requirements specified in Section 220523 "General Duty Valves for Plumbing Piping." Install valves in locations that are accessible for ease of operation.
4. Install shower flow-control fittings with specified maximum flow rates in shower arms.
5. Set [**shower receptors**] [**and**] [**shower basins**] in leveling bed of cement grout.

6. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."
7. Seal joints between showers, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

C. Sink Installation:

1. Install sinks level and plumb in accordance with roughing-in drawings.
2. Install supports, affixed to building substrate, for wall-mounted sinks.
3. Install accessible, wall-mounted sinks at mounting height in accordance with ICC A117.1.
4. Set floor-mounted sinks in leveling bed of cement grout.
5. Install water-supply piping with stop on each supply to each sink faucet.

    a. Exception: Use ball or gate valves if supply stops are not specified with sink. Comply with valve requirements specified in Section 220523 "General Duty Valves for Plumbing Piping."
    b. Install stops/valves in locations that are accessible for ease of operation.

6. Install trap and waste piping on each drain outlet of each sink to be connected to sanitary drainage system.
7. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."
8. Seal joints between sinks, counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."
9. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible sinks. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

D. Urinal Installation:

1. Install urinals level and plumb in accordance with roughing-in drawings.
2. Install wall-hung, back-outlet urinals onto waste-fitting seals and attached to supports.
3. Install wall-hung, bottom-outlet urinals with tubular waste piping attached to supports.
4. Install accessible, wall-mounted urinals at mounting height in accordance with ICC A117.1.
5. Install trap-seal liquid in waterless urinals.
6. Install supports, affixed to building substrate, for wall-hung urinals.
7. Use off-floor carriers with waste fitting and seal for back-outlet urinals.
8. Use carriers without waste fitting for urinals with tubular waste piping.
9. Use chair-type carrier supports with rectangular steel uprights for accessible urinals.
10. Measure support height installation from finished floor, not structural floor.
11. Install flushometer-valve, water-supply fitting on each supply to each urinal.

12. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
13. Install lever-handle flushometer valves for accessible urinals with handle mounted on open side of compartment.
14. Install actuators in locations easily reachable for people with disabilities.
15. Install new batteries in battery-powered, electronic-sensor mechanisms.
16. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Install deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."
17. Seal joints between urinals, walls, and floors using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to urinal color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

E. Water Closet Installation:

1. Install water closets level and plumb in accordance with roughing-in drawings.
2. Install floor-mounted water closets on bowl-to-drain connecting fitting attachments to piping or building substrate.
3. Install accessible, wall-mounted water closets at mounting height in accordance with ICC A117.1.
4. Install supports, affixed to building substrate, for floor-mounted, back-outlet water closets.
5. Use carrier supports with waste-fitting assembly and seal.
6. Install floor-mounted, back-outlet water closets, attached to building floor substrate, onto waste-fitting seals; and attach to support.
7. Install wall-mounted, back-outlet water-closet supports with waste-fitting assembly and waste-fitting seals, and affix to building substrate.
8. Measure support height installation from finished floor, not structural floor.
9. Install flushometer-valve, water-supply fitting on each supply to each water closet.
10. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
11. Install lever-handle flushometer valves for accessible water closets with handle mounted on open side of water closet.
12. Install actuators in locations easily reachable for people with disabilities.
13. Install new batteries in battery-powered, electronic-sensor mechanisms.
14. Install toilet seats on water closets.
15. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Install deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."
16. Seal joints between water closets, walls, and floors using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to water-closet color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 INSTALLATION OF PIPING CONNECTIONS

A. Connect plumbing fixtures with water supplies and soil, waste, and vent piping. Use size fittings required to match plumbing fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Comply with soil, waste, and vent piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

D. Install protective-shielding pipe covers and enclosures on exposed supplies and waste piping of accessible plumbing fixtures. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

E. Where installing piping adjacent to water closets and urinals, allow space for service and maintenance.

3.4 INSTALLATION OF CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

3.5 ADJUSTING

A. Operate and adjust plumbing fixtures and controls. Replace damaged and malfunctioning plumbing fixtures, fittings, and controls.

B. Adjust water pressure at faucets to produce proper flow.

C. Adjust water pressure at shower valves to produce proper flow.

D. Adjust water pressure at flushometer valves to produce proper flow.

3.6 CLEANING AND PROTECTION

A. After completing installation of plumbing fixtures, inspect and repair damages finishes. Replace any fixtures unable to be repaired to the satisfaction of the [**Architect**] [**Owner**].

B. Clean plumbing fixtures and associated faucets, valves, flushometer valves, and fittings with manufacturers' recommended cleaning methods and materials.

C. Provide protective covering for installed plumbing fixtures and associated faucets, valves, flushometer valves, and fittings.

D. Do not allow use of plumbing fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224200

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 224700 - DRINKING FOUNTAINS AND WATER COOLERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Bottle filling stations.

1.2 ACTION SUBMITTALS

A. Product Data:

   1. For each type of product.

      a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
      b. Include operating characteristics, and furnished specialties and accessories.

B. Shop Drawings:

   1. Include plans, elevations, sections, and mounting / attachment details.
   2. Include details of fixture assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
   3. Include diagrams for power wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Seismic Qualification Certificates: For remote water coolers, accessories, and components, from manufacturer.

   1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
   2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
   3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For bottle filling stations to include in maintenance manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Comply with manufacturer's written instructions for delivery, storage, and handling.

1.6 WARRANTY

A. Manufacturer Warranty: Manufacturer and Installer agree to repair or replace bottle filling stations that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Faulty operation of sensor and refrigeration system.
b. Deterioration of metals, metal finishes, and other materials beyond normal use.

B. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Standards:

1. Drinking fountains, water coolers, bottle filling stations, and remote water coolers intended to convey or dispense water for human consumption are to comply with the U.S. Safe Drinking Water Act (SDWA), requirements of the authority having jurisdiction, and with NSF 61 or NSF 372, or be certified in compliance with NSF 61 or NSF 372 by an ANSI-accredited third-party certification body, that the weighted average lead content at wetted surfaces is less than or equal to 0.25 percent.

B. Seismic Performance: Remote water coolers are to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7. See Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment"

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified[and the unit will be fully operational after the seismic event."
2. Component Importance Factor: 1.0.

2.2 BOTTLE FILLING STATIONS

A. Bottle Filling Station - Recessed, Wall Mounted, Stainless Steel

1. Basis of Design: Elkay EZWS8K
   a. Approved Equivalents: Murdock Manufacturing, Oasis International , or as approved by Architect.
2. Source Limitations: Obtain recessed, wall-mounted, stainless steel, bottle filling stations from single source from single manufacturer.
3. Standards:

   a. NSF 61.
   b. NSF 372.
   c. ASME A112.19.3/CSA B45.4.
4. Cabinet: Stainless steel.
5. Bottle Filler: Sensor
6. Drain: Grid type with NPS 1-1/4 (DN 32) tailpiece.
7. Supply: NPS 3/8 (DN 10) with shutoff valve.
8. Waste Fitting: ASME A112.18.2/CSA B125.2, NPS 1-1/4 (DN 32) brass P-trap.
9. Cooling System: Electric, with hermetically sealed compressor, cooling coil, air-cooled condensing unit, corrosion-resistant tubing, refrigerant, corrosion-resistant-metal storage tank, and adjustable thermostat.

   a. Standards:

      1) ASHRAE 18.
      2) UL 399.
      3) Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

10. Ventilation Grille: Stainless steel, located below bottle filler.
11. Cooling System Capacities and Characteristics:

    a. Cooled Water: 8 gph (0.0084 L/s).
    b. Ambient-Air Temperature: 90 deg F (32 deg C).
    c. Inlet-Water Temperature: 80 deg F (27 deg C.)
    d. Cooled-Water Temperature: 50 deg F (10 deg C).
    e. Electrical Characteristics:
       1) Volts: 115 V ac.
       2) Phase: Single.
       3) Hertz: 60 Hz.
12. Electrical Characteristics:

    a. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
    b. Volts: 115 V ac.
    c. Phase: Single.
    d. Hertz: 60 Hz.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before fixture installation.

B. Examine walls and floors for suitable conditions where fixtures will be installed.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install fixtures level and plumb in accordance with roughing-in drawings. For fixtures indicated for juveniles, install at height required by authorities having jurisdiction.

B. Set pedestal drinking fountains and bottle filling stations on flat surface in accordance with manufacturer's written installation instructions.

C. Set freestanding water coolers on floor.

D. Install recessed drinking fountains and bottle filling stations secured to wood blocking in wall construction.

E. Install off-the-floor carrier supports, affixed to building substrate, for wall-mounted fixtures.

F. Install mounting frames, affixed to building construction, and attach recessed water coolers and bottle filling stations to mounting frames.

G. Install water-supply piping with shutoff valve on supply to each fixture to be connected to domestic-water distribution piping. Use ball valve. Install valves in locations where they can be easily reached for operation. Valves are specified in Section 220523 "General-Duty Valves for Plumbing Piping."

H. Install trap and waste piping on drain outlet of each fixture to be connected to sanitary drainage system.

I. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons where required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220500 "Common Work Results for Plumbing."

J. Seal joints between fixtures and walls using sanitary-type, one-part, mildew-resistant, silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.3 PIPING CONNECTIONS

A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.

B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."

C. Install ball shutoff valve on water supply to each fixture. Comply with valve requirements specified in Section 220523 "General-Duty Valves for Plumbing Piping."

D. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplates to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."

3.5 ADJUSTING

A. Adjust fixture flow regulators for proper flow and stream height.

B. Adjust water cooler temperature settings.

C. Adjust electronic-sensor settings.

3.6 CLEANING

A. After installing fixtures, inspect unit. Remove paint splatters and other spots, dirt, and debris. Repair damaged finish to match original finish.

B. Clean fixtures, on completion of installation, in accordance with manufacturer's written instructions.

C. Provide protective covering for installed fixtures.

D. Do not allow use of fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224700

SECTION 230500 - COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:

1. Piping materials and installation instructions common to most piping systems.
2. Transition fittings.
3. Dielectric fittings.
4. Mechanical sleeve seals.
5. Sleeves.
6. Escutcheons.
7. Grout.
8. HVAC demolition.
9. Equipment installation requirements common to equipment sections.
10. Painting and finishing.
11. Concrete bases.
12. Supports and anchorages.

1.3 DEFINITIONS

A. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct chases, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.

B. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.

C. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.

D. Concealed, Interior Installations: Concealed from view and protected from physical contact by building occupants. Examples include above ceilings and chases.

E. Concealed, Exterior Installations: Concealed from view and protected from weather conditions and physical contact by building occupants but subject to outdoor ambient temperatures. Examples include installations within unheated shelters.

1.4 SUBMITTALS

1.5 QUALITY ASSURANCE

A. Steel Support Welding: Qualify processes and operators according to AWS D1.1, "Structural Welding Code--Steel."

B. Steel Pipe Welding: Qualify processes and operators according to ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."

1. Comply with provisions in ASME B31 Series, "Code for Pressure Piping."
2. Certify that each welder has passed AWS qualification tests for welding processes involved and that certification is current.

C. Electrical Characteristics for HVAC Equipment: Equipment of higher electrical characteristics may be furnished provided such proposed equipment is approved in writing and connecting electrical services, circuit breakers, and conduit sizes are appropriately modified. If minimum energy ratings or efficiencies are specified, equipment shall comply with requirements.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.

B. Store plastic pipes protected from direct sunlight. Support to prevent sagging and bending.

1.7 COORDINATION

A. Arrange for pipe spaces, chases, slots, and openings in building structure during progress of construction, to allow for HVAC installations.

B. Coordinate installation of required supporting devices and set sleeves in poured-in-place concrete and other structural components as they are constructed.

C. Coordinate requirements for access panels and doors for HVAC items requiring access that are concealed behind finished surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. In other Part 2 articles where subparagraph titles below introduce lists, the following requirements apply for product selection:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the manufacturers specified.
2. Manufacturers: Subject to compliance with requirements, provide products by the manufacturers specified.

2.2 PIPE, TUBE, AND FITTINGS

A. Refer to individual Division 23 piping Sections for pipe, tube, and fitting materials and joining methods.

B. Pipe Threads: ASME B1.20.1 for factory-threaded pipe and pipe fittings.

2.3 JOINING MATERIALS

A. Refer to individual Division 23 piping Sections for special joining materials not listed below.

B. Pipe-Flange Gasket Materials: Suitable for chemical and thermal conditions of piping system contents.

1. ASME B16.21, nonmetallic, flat, asbestos-free, 1/8-inch maximum thickness unless thickness or specific material is indicated.

a. Full-Face Type: For flat-face, Class 125, cast-iron and cast-bronze flanges.
b. Narrow-Face Type: For raised-face, Class 250, cast-iron and steel flanges.

2. AWWA C110, rubber, flat face, 1/8 inch thick, unless otherwise indicated; and full-face or ring type, unless otherwise indicated.

C. Flange Bolts and Nuts: ASME B18.2.1, carbon steel, unless otherwise indicated.

D. Plastic, Pipe-Flange Gasket, Bolts, and Nuts: Type and material recommended by piping system manufacturer, unless otherwise indicated.

E. Brazing Filler Metals: AWS A5.8, BCuP Series, copper-phosphorus alloys for general-duty brazing, unless otherwise indicated; and AWS A5.8, BAg1, silver alloy for refrigerant piping, unless otherwise indicated.

F. Welding Filler Metals: Comply with AWS D10.12 for welding materials appropriate for wall thickness and chemical analysis of steel pipe being welded.

G. Solvent Cements for Joining Plastic Piping:

1. CPVC Piping: ASTM F 493.
2. PVC Piping: ASTM D 2564. Include primer according to ASTM F 656.

H. Fiberglass Pipe Adhesive: As furnished or recommended by pipe manufacturer.

2.4 DIELECTRIC FITTINGS

A. Description: Combination fitting of copper alloy and ferrous materials with threaded, solder- joint, plain, or weld-neck end connections that match piping system materials.

B. Insulating Material: Suitable for system fluid, pressure, and temperature.

C. Dielectric Unions: Factory-fabricated, union assembly, for 250-psig minimum working pressure at 180 deg F.

D. Dielectric Flanges: Factory-fabricated, companion-flange assembly, for 150- or 300-psig minimum working pressure as required to suit system pressures.

E. Dielectric-Flange Kits: Companion-flange assembly for field assembly. Include flanges, full- face- or ring-type neoprene or phenolic gasket, phenolic or polyethylene bolt sleeves, phenolic washers, and steel backing washers.

1. Separate companion flanges and steel bolts and nuts shall have 150- or 300-psig minimum working pressure where required to suit system pressures.

F. Dielectric Couplings: Galvanized-steel coupling with inert and noncorrosive, thermoplastic lining; threaded ends; and 300-psig minimum working pressure at 225 deg F.

G. Dielectric Nipples: Electroplated steel nipple with inert and noncorrosive, thermoplastic lining; plain, threaded, or grooved ends; and 300-psig minimum working pressure at 225 deg F.

2.5 MECHANICAL SLEEVE SEALS

A. Description: Modular sealing element unit, designed for field assembly, to fill annular space between pipe and sleeve.

1. Sealing Elements: EPDM interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
2. Pressure Plates: Plastic. Include two for each sealing element.
3. Connecting Bolts and Nuts: Carbon steel with corrosion-resistant coating of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.6 SLEEVES

A. Galvanized-Steel Sheet: 0.0239-inch minimum thickness; round tube closed with welded longitudinal joint.

B. Steel Pipe: ASTM A 53, Type E, Grade B, Schedule 40, galvanized, plain ends.

C. Cast Iron: Cast or fabricated "wall pipe" equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.

D. Stack Sleeve Fittings: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring and bolts and nuts for membrane flashing.

1. Underdeck Clamp: Clamping ring with set screws.

E. Molded PVC: Permanent, with nailing flange for attaching to wooden forms.

F. PVC Pipe: ASTM D 1785, Schedule 40.

G. Molded PE: Reusable, PE, tapered-cup shaped, and smooth-outer surface with nailing flange for attaching to wooden forms.

2.7 ESCUTCHEONS

A. Description: Manufactured wall and ceiling escutcheons and floor plates, with an ID to closely fit around pipe, tube, and insulation of insulated piping and an OD that completely covers opening.

B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with polished chrome-plated finish.

C. One-Piece, Cast-Brass Type: With set screw.

1. Finish: Polished chrome-plated and rough brass.

D. Split-Casting, Cast-Brass Type: With concealed hinge and set screw.

1. Finish: Polished chrome-plated and rough brass.

E. One-Piece, Stamped-Steel Type: With set screw or spring clips and chrome-plated finish.

F. Split-Plate, Stamped-Steel Type: With concealed hinge, set screw or spring clips, and chrome- plated finish.

G. One-Piece, Floor-Plate Type: Cast-iron floor plate.

H. Split-Casting, Floor-Plate Type: Cast brass with concealed hinge and set screw.

2.8 GROUT

A. Description: ASTM C 1107, Grade B, nonshrink and nonmetallic, dry hydraulic-cement grout.

1. Characteristics: Post-hardening, volume-adjusting, nonstaining, noncorrosive, nongaseous, and recommended for interior and exterior applications.
2. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.
3. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 HVAC DEMOLITION

A. Refer to drawings for general demolition requirements and procedures.

B. Disconnect, demolish, and remove HVAC systems, equipment, and components indicated to be removed.

1. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
2. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material.
3. Equipment to Be Removed: Disconnect and cap services and remove equipment.
4. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
5. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.

C. If pipe, insulation, or equipment to remain is damaged in appearance or is unserviceable, remove damaged or unserviceable portions and replace with new products of equal capacity and quality.

3.2 PIPING SYSTEMS - COMMON REQUIREMENTS

A. Install piping according to the following requirements and Division 23 Sections specifying piping systems.

B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.

C. Install piping in concealed locations, unless otherwise indicated and except in equipment rooms and service areas.

D. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

E. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.

F. Install piping to permit valve servicing.

G. Install piping at indicated slopes.

H. Install piping free of sags and bends.

I. Install fittings for changes in direction and branch connections.

J. Install piping to allow application of insulation.

K. Select system components with pressure rating equal to or greater than system operating pressure.

L. Install escutcheons for penetrations of walls, ceilings, and floors according to the following:

1. New Piping:

    a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
    b. Chrome-Plated Piping: One-piece, cast-brass type with polished chrome-plated finish.
    c. Insulated Piping: One-piece, stamped-steel type with spring clips.
    d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast- brass type with polished chrome-plated finish.
    e. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece or split-casting, cast-brass type with polished chrome-plated finish.
    f. Bare Piping in Unfinished Service Spaces: One-piece, cast-brass type with polished chrome-plated finish.
    g. Bare Piping in Equipment Rooms: One-piece, stamped-steel type with set screw or spring clips.
    h. Bare Piping at Floor Penetrations in Equipment Rooms: One-piece, floor-plate type.

2. Existing Piping: Use the following:

    a. Chrome-Plated Piping: Split-casting, cast-brass type with chrome-plated finish.
    b. Insulated Piping: Split-plate, stamped-steel type with concealed concealed or exposed-rivet hinge and spring clips.
    c. Bare Piping at Wall and Floor Penetrations in Finished Spaces: Split-plate, stamped-steel type with concealed hinge and spring clips.
    d. Bare Piping at Ceiling Penetrations in Finished Spaces: Split-plate, stamped-steel type with concealed hinge and set screw.

e. Bare Piping in Unfinished Service Spaces: Split-plate, stamped-steel type with concealed or exposed-rivet hinge and set screw or spring clips.
f. Bare Piping in Equipment Rooms: Split-plate, stamped-steel type with set screw or spring clips.
g. Bare Piping at Floor Penetrations in Equipment Rooms: Split-casting, floor-plate type.

M. Sleeves are not required for core-drilled holes unless drilled through hollow core plank floors.

N. Permanent sleeves are not required for holes formed by removable PE sleeves.

O. Install sleeves for pipes passing through concrete and masonry walls and concrete floor and roof slabs.

1. Cut sleeves to length for mounting flush with both surfaces.

a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches above finished floor level. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.

2. Install sleeves in new walls and slabs as new walls and slabs are constructed.
3. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation. Use the following sleeve materials:

a. Steel Pipe Sleeves: For pipes smaller than NPS 6.
b. Steel Sheet Sleeves: For pipes NPS 6 and larger, penetrating gypsum- board partitions.
c. Stack Sleeve Fittings: For pipes penetrating floors with membrane waterproofing. Secure flashing between clamping flanges. Install section of cast-iron soil pipe to extend sleeve to 2 inches above finished floor level.

1) Seal space outside of sleeve fittings with grout.

4. Except for underground wall penetrations, seal annular space between sleeve and pipe or pipe insulation, using joint sealants appropriate for size, depth, and location of joint. Refer to Division 07 Section "Joint Sealants" for materials and installation.

P. Aboveground, Exterior-Wall Pipe Penetrations: Seal penetrations using sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

1. Install steel pipe for sleeves smaller than 6 inches in diameter.
2. Install cast-iron "wall pipes" for sleeves 6 inches and larger in diameter.
3. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

Q. Underground, Exterior-Wall Pipe Penetrations: Install cast-iron "wall pipes" for sleeves. Seal pipe penetrations using mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

1. Mechanical Sleeve Seal Installation: Select type and number of sealing elements required for pipe material and size. Position pipe in center of sleeve. Assemble mechanical sleeve seals and install in annular space between pipe and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

R. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Coordinate with local fire marshal for specific requirements needed for fireproofing.

S. Verify final equipment locations for roughing-in.

T. Refer to equipment specifications in other Sections of these Specifications for roughing-in requirements.

3.3 PIPING JOINT CONSTRUCTION

A. Join pipe and fittings according to the following requirements and Division 23 Sections specifying piping systems.

B. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.

C. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.

D. Soldered Joints: Apply ASTM B 813, water-flushable flux, unless otherwise indicated, to tube end. Construct joints according to ASTM B 828 or CDA's "Copper Tube Handbook," using lead-free solder alloy complying with ASTM B 32.

E. Brazed Joints: Construct joints according to AWS's "Brazing Handbook," "Pipe and Tube" Chapter, using copper-phosphorus brazing filler metal complying with AWS A5.8.

F. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:

1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.

2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.

G. Welded Joints: Construct joints according to AWS D10.12, using qualified processes and welding operators according to Part 1 "Quality Assurance" Article.

H. Flanged Joints: Select appropriate gasket material, size, type, and thickness for service application. Install gasket concentrically positioned. Use suitable lubricants on bolt threads.

I. Plastic Piping Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:

1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
2. CPVC Piping: Join according to ASTM D 2846/D 2846M Appendix.
3. PVC Pressure Piping: Join schedule number ASTM D 1785, PVC pipe and PVC socket fittings according to ASTM D 2672. Join other-than-schedule-number PVC pipe and socket fittings according to ASTM D 2855.
4. PVC Nonpressure Piping: Join according to ASTM D 2855.

J. Plastic Pressure Piping Gasketed Joints: Join according to ASTM D 3139.

K. Plastic Nonpressure Piping Gasketed Joints: Join according to ASTM D 3212.

L. PE Piping Heat-Fusion Joints: Clean and dry joining surfaces by wiping with clean cloth or paper towels. Join according to ASTM D 2657.

1. Plain-End Pipe and Fittings: Use butt fusion.
2. Plain-End Pipe and Socket Fittings: Use socket fusion.

M. Fiberglass Bonded Joints: Prepare pipe ends and fittings, apply adhesive, and join according to pipe manufacturer's written instructions.

3.4 PIPING CONNECTIONS

A. Make connections according to the following, unless otherwise indicated:

1. Install unions, in piping NPS 2 and smaller, adjacent to each valve and at final connection to each piece of equipment.
2. Install flanges, in piping NPS 2-1/2 and larger, adjacent to flanged valves and at final connection to each piece of equipment.
3. Dry Piping Systems: Install dielectric unions and flanges to connect piping materials of dissimilar metals.
4. Wet Piping Systems: Install dielectric coupling and nipple fittings to connect piping materials of dissimilar metals.

3.5 EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

A. Install equipment to allow maximum possible headroom unless specific mounting heights are not indicated.

B. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.

C. Install HVAC equipment to facilitate service, maintenance, and repair or replacement of components. Connect equipment for ease of disconnecting, with minimum interference to other installations. Extend grease fittings to accessible locations.

D. Install equipment to allow right of way for piping installed at required slope.

3.6 ERECTION OF METAL SUPPORTS AND ANCHORAGES

A. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor HVAC materials and equipment.

B. Field Welding: Comply with AWS D1.1.

3.7 ERECTION OF WOOD SUPPORTS AND ANCHORAGES

A. Cut, fit, and place wood grounds, nailers, blocking, and anchorages to support, and anchor HVAC materials and equipment.

B. Select fastener sizes that will not penetrate members if opposite side will be exposed to view or will receive finish materials. Tighten connections between members. Install fasteners without splitting wood members.

C. Attach to substrates as required to support applied loads.

3.8 GROUTING

A. Mix and install grout for HVAC equipment base bearing surfaces, pump and other equipment base plates, and anchors.

B. Clean surfaces that will come into contact with grout.

C. Provide forms as required for placement of grout.

D. Avoid air entrapment during placement of grout.

E. Place grout, completely filling equipment bases.

F. Place grout on concrete bases and provide smooth bearing surface for equipment.

G. Place grout around anchors.

H. Cure placed grout.

END OF SECTION 230500

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230529 - HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Trapeze pipe hangers.
3. Metal framing systems.
4. Thermal-hanger shield inserts.
5. Fastener systems.
6. Pipe stands.
7. Equipment supports.

B. Related Sections:

1. Division 23 Section "Vibration and Seismic Controls for HVAC" for vibration isolation devices.

1.3 DEFINITIONS

A. MSS: Manufacturers Standardization Society of The Valve and Fittings Industry Inc.

1.4 PERFORMANCE REQUIREMENTS

A. Structural Performance: Hangers and supports for HVAC piping and equipment shall withstand the effects of gravity loads and stresses within limits and under conditions indicated according to Seismic Hazard Level "D" in SMACNA's "Seismic Restraint Manual: Guidelines for Mechanical Systems."Third Edition, March 2008

1. Design supports for multiple pipes, including pipe stands, capable of supporting a combined weight of supported systems, system contents, and test water.
2. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.
3. Design seismic-restraint hangers and supports for piping and equipment and obtain approval from authorities having jurisdiction.

1.5 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Shop Drawings: Show fabrication and installation details and include calculations for the following; include Product Data for components:

1. Trapeze pipe hangers.
2. Metal framing systems.
3. Equipment supports.

1.6 QUALITY ASSURANCE

A. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

B. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.

PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
2. Galvanized Metallic Coatings: Pre-galvanized or hot dipped.
3. Nonmetallic Coatings: Plastic coating, jacket, or liner.
4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

B. Copper Pipe Hangers:

1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
2. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

2.2 TRAPEZE PIPE HANGERS

A. Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U- bolts.

2.3 METAL FRAMING SYSTEMS

A. MFMA Manufacturer Metal Framing Systems:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Allied Tube & Conduit.
   b. Cooper B-Line, Inc.
   c. Flex-Strut Inc.
   d. GS Metals Corp.
   e. Thomas & Betts Corporation.
   f. Unistrut Corporation; Tyco International, Ltd.
   g. Wesanco, Inc.

2. Description: Shop- or field-fabricated pipe-support assembly for supporting multiple parallel pipes.
3. Standard: MFMA-4.
4. Channels: Continuous slotted steel channel with inturned lips.
5. Channel Nuts: Formed or stamped steel nuts or other devices designed to fit into channel slot and, when tightened, prevent slipping along channel.
6. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.
7. Metallic Coating: Hot-dipped galvanized.
8. Paint Coating: Epoxy .
9. Plastic Coating: Epoxy.

2.4 THERMAL-HANGER SHIELD INSERTS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Carpenter & Paterson, Inc.
2. Clement Support Services.
3. ERICO International Corporation.
4. National Pipe Hanger Corporation.
5. PHS Industries, Inc.
6. Pipe Shields, Inc; a subsidiary of Piping Technology & Products, Inc.
7. Piping Technology & Products, Inc.
8. Rilco Manufacturing Co, Inc.
9. Value Engineered Products, Inc.

B. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with 100-psig minimum compressive strength and vapor barrier.

C. Insulation-Insert Material for Hot Piping: Water-repellent treated, ASTM C 533, Type I calcium silicate with 100-psig minimum compressive strength.

D. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.

E. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.

F. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

2.5 FASTENER SYSTEMS

A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened Portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

B. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel anchors, for use in hardened Portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

2.6 PIPE STANDS

A. General Requirements for Pipe Stands: Shop- or field-fabricated assemblies made of manufactured corrosion-resistant components to support roof-mounted piping.

B. Compact Pipe Stand: One-piece plastic unit with integral-rod roller, pipe clamps, or V-shaped cradle to support pipe, for roof installation without membrane penetration.

C. Low-Type, Single-Pipe Stand: One-piece plastic base unit with plastic roller, for roof installation without membrane penetration.

D. High-Type, Multiple-Pipe Stand:

1. Description: Assembly of bases, vertical and horizontal members, and pipe supports, for roof installation without membrane penetration.
2. Bases: One or more; plastic.
3. Vertical Members: Two or more protective-coated-steel channels.
4. Horizontal Member: Protective-coated-steel channel.
5. Pipe Supports: Galvanized-steel, clevis-type pipe hangers.

E. Curb-Mounted-Type Pipe Stands: Shop- or field-fabricated pipe supports made from structural-steel shapes, continuous-thread rods, and rollers, for mounting on permanent stationary roof curb.

2.7 EQUIPMENT SUPPORTS

A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon- steel shapes.

2.8 MISCELLANEOUS MATERIALS

A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.

B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, non-shrink and nonmetallic grout; suitable for interior and exterior applications.

1. Properties: Non-staining, noncorrosive, and nongaseous.
2. Design Mix: 5000-psi, 28-day compressive strength.

PART 3 - EXECUTION

3.1 HANGER AND SUPPORT INSTALLATION

A. Attachments to the existing building structure shall be approved by the Structural Engineer for location, spacing and type prior to fabrication.

B. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.

C. Metal Trapeze Pipe-Hanger Installation:
Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.

1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified for individual pipe hangers.
2. Field fabricate from ASTM A 36, carbon-steel shapes selected for loads being supported. Weld steel according to AWS D1.1.

D. Metal Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled metal framing systems.

E. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.

F. Fastener System Installation:

1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.

G. Pipe Stand Installation:

1. Pipe Stand Types except Curb-Mounted Type: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.
2. Curb-Mounted-Type Pipe Stands: Assemble components or fabricate pipe stand and mount on permanent, stationary roof curb.

H. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.

I. Equipment Support Installation: Fabricate from welded-structural-steel shapes.

J. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.

K. Install lateral bracing with pipe hangers and supports to prevent swaying.

L. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 Insert size and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.

M. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.

N. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.

O. Insulated Piping:

1. Attach clamps and spacers to piping.

    a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
    b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
    c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.

2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

    a. Option: Thermal-hanger shield inserts may be used. Include steel weight- distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier.

Shields shall span an arc of 180 degrees.

a. Option: Thermal-hanger shield inserts may be used. Include steel weight- distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

4. Shield Dimensions for Pipe: Not less than the following:

a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
b. NPS 4: 12 inches long and 0.06 inch thick.
c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

5. Pipes NPS 8 and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.2 EQUIPMENT SUPPORTS

A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.

B. Grouting: Place grout under supports for equipment and make bearing surface smooth.

C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.3 METAL FABRICATIONS

A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.

B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.

C. Field Welding: Comply with AWS D1.1 procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.

4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.4 ADJUSTING

A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.5 HANGER AND SUPPORT SCHEDULE

A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.

B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.

C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.

D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.

E. Use carbon-steel pipe hangers and supports metal trapeze pipe hangers and metal framing systems and attachments for general service applications.

F. Use and stainless-steel or corrosion-resistant attachments for hostile environment applications.

G. Use copper-plated pipe hangers and copper or stainless-steel attachments for copper piping and tubing.

H. Use padded hangers for piping that is subject to scratching.

I. Use thermal-hanger shield inserts for insulated piping and tubing.

J. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of non-insulated or insulated, stationary pipes NPS 1/2 to NPS 30 .
2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of up to 1050 deg F, pipes NPS 4 to NPS 24, requiring up to 4 inches of insulation.
3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes NPS 3/4 to NPS 36, requiring clamp flexibility and up to 4 inches of insulation.
4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes NPS 1/2 to NPS 24 if little or no insulation is required.
5. Pipe Hangers (MSS Type 5): For suspension of pipes NPS 1/2 to NPS 4, to allow off- center closure for hanger installation before pipe erection.

6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of non-insulated, stationary pipes NPS 3/4 to NPS 8.
7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of non-insulated, stationary pipes NPS 1/2 to NPS 8.
8. Adjustable Band Hangers (MSS Type 9): For suspension of non-insulated, stationary pipes NPS 1/2 to NPS 8.
9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of non-insulated, stationary pipes NPS 1/2 to NPS 8.
10. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of non-insulated, stationary pipes NPS 3/8 to NPS 8.
11. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of non-insulated, stationary pipes NPS 3/8 to NPS 3.
12. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
14. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes NPS 4 to NPS 36, with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
16. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
17. Single-Pipe Rolls (MSS Type 41): For suspension of pipes NPS 1 to NPS 30, from two rods if longitudinal movement caused by expansion and contraction might occur.
18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes NPS 2-1/2 to NPS 24, from single rod if horizontal movement caused by expansion and contraction might occur.
19. Complete Pipe Rolls (MSS Type 44): For support of pipes NPS 2 to NPS 42 if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes NPS 2 to NPS 24 if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.
21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes NPS 2 to NPS 30 if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.

K. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.

L. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.

M. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction, to attach to top flange of structural shape.
3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
6. C-Clamps (MSS Type 23): For structural shapes.
7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I- beams for heavy loads.
10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I- beams for heavy loads, with link extensions.
11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
12. Welded-Steel Brackets: F or support of pipes from below or for suspending from above by using clip and rod. Use one of the following for indicated loads:

    a. Light (MSS Type 31): 750 lb.
    b. Medium (MSS Type 32): 1500 lb.
    c. Heavy (MSS Type 33): 3000 lb.

13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.

14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.

N. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): T o fill interior voids with insulation that matches adjoining insulation.
2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.

O. Spring Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:

1. Restraint-Control Devices (MSS Type 47): Where indicated to control piping movement.
2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches.
3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41, roll hanger with springs.
4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from hanger.
6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from base support.
7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from trapeze support.
8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:

   a. Horizontal (MSS Type 54): Mounted horizontally.
   b. Vertical (MSS Type 55): Mounted vertically.
   c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.

P. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.

Q. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.

R. Use powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 230529

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230553 - IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Warning signs and labels.
3. Pipe labels.
4. Valve tags.
5. Warning tags.

1.3 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.

C. Valve numbering scheme.

D. Valve Schedules: For each piping system to include in maintenance manuals.

1.4 COORDINATION

A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.

B. Coordinate installation of identifying devices with locations of access panels and doors.

C. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

1. Material and Thickness: Brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
2. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
3. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three- fourths the size of principal lettering.
4. Fasteners: Stainless-steel rivets or self-tapping screws.

B. Plastic Labels for Equipment:

1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch thick, and having predrilled holes for attachment hardware.
2. Letter Color: Black.
3. Background Color: White.
4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three- fourths the size of principal lettering.
7. Fasteners: Stainless-steel rivets or self-tapping screws.

C. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified.

D. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 WARNING SIGNS AND LABELS

A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch thick, and having predrilled holes for attachment hardware.

B. Letter Color: Red.

C. Background Color: White.

D. Maximum Temperature: Able to withstand temperatures up to 160 deg F.

E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2
by 3/4 inch .

F. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.

G. Fasteners: Stainless-steel rivets or self-tapping screws.

H. Label Content: Include caution and warning information, plus emergency notification instructions.

2.3 WARNING TAGS

A. Warning Tags: Preprinted or partially preprinted, accident-prevention tags, of plasticized card stock with matte finish suitable for writing.

1. Size: 3 by 5-1/4 inches minimum.
2. Fasteners: Reinforced grommet and wire or string.
3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."
4. Color: Yellow background with black lettering.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 EQUIPMENT LABEL INSTALLATION

A. Install or permanently fasten labels on each major item of mechanical equipment.

B. Locate equipment labels where accessible and visible.

3.3 WARNING-TAG INSTALLATION

A. Write required message on, and attach warning tags to, equipment and other items where required.

END OF SECTION 230553

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Testing, Adjusting, and Balancing of Air Systems:

    a. Variable-air-volume systems.

2. Testing, Adjusting, and Balancing of Hydronic Piping Systems:

    a. Variable-flow hydronic systems.

3. Testing, adjusting, and balancing of equipment.
4. Testing, adjusting, and balancing of existing HVAC systems and equipment.
5. Duct leakage tests verification.
6. Pipe leakage tests verification.
7. UFAD plenum leakage tests verification.
8. HVAC-control system verification.

1.2 DEFINITIONS

A. AABC: Associated Air Balance Council.

B. NEBB: National Environmental Balancing Bureau.

C. TAB: Testing, adjusting, and balancing.

D. TABB: Testing, Adjusting, and Balancing Bureau.

E. TAB Specialist: An independent entity meeting qualifications to perform TAB work.

F. TDH: Total dynamic head.

G. UFAD: Underfloor air distribution.

1.3 INFORMATIONAL SUBMITTALS

A. Qualification Data: Within **30** days of Contractor's Notice to Proceed, submit documentation that the TAB specialist and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.

B. Contract Documents Examination Report: Within **30** days of Contractor's Notice to Proceed, submit the Contract Documents review report, as specified in Part 3.

C. Strategies and Procedures Plan: Within **30** days of Contractor's Notice to Proceed, submit TAB strategies and step-by-step procedures, as specified in "Preparation" Article.

D. System Readiness Checklists: Within **30** days of Contractor's Notice to Proceed, submit system readiness checklists, as specified in "Preparation" Article.

E. Examination Report: Submit a summary report of the examination review required in "Examination" Article.

F. Certified TAB reports.

G. Sample report forms.

H. Instrument calibration reports, to include the following:

1. Instrument type and make.
2. Serial number.
3. Application.
4. Dates of use.
5. Dates of calibration.

1.4 QUALITY ASSURANCE

A. TAB Specialists Qualifications, Certified by AABC:

1. TAB Field Supervisor: Employee of the TAB specialist and certified by AABC.
2. TAB Technician: Employee of the TAB specialist and certified by AABC.

B. Instrumentation Type, Quantity, Accuracy, and Calibration: Comply with requirements in ASHRAE 111, Section 4, "Instrumentation."

1.5 FIELD CONDITIONS

A. Full Owner Occupancy: Owner will occupy the site and existing building during entire TAB period. Cooperate with Owner during TAB operations to minimize conflicts with Owner's operations.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems designs that may preclude proper TAB of systems and equipment.

B. Examine installed systems for balancing devices, such as test ports, gauge cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are applicable for intended purpose and are accessible.

C. Examine the approved submittals for HVAC systems and equipment.

D. Examine design data, including HVAC system descriptions, statements of design assumptions for environmental conditions and systems output, and statements of philosophies and assumptions about HVAC system and equipment controls.

E. Examine ceiling plenums and underfloor air plenums used for HVAC to verify that they are properly separated from adjacent areas and sealed.

F. Examine equipment performance data, including fan and pump curves.

1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems - Duct Design." Compare results with the design data and installed conditions.

G. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.

H. Examine test reports specified in individual system and equipment Sections.

I. Examine HVAC equipment and verify that bearings are greased, belts are aligned and tight, filters are clean, and equipment with functioning controls is ready for operation.

J. Examine terminal units, such as variable-air-volume boxes, and verify that they are accessible and their controls are connected and functioning.

K. Examine temporary and permanent strainers. Verify that temporary strainer screens used during system cleaning and flushing have been removed and permanent strainer baskets are installed and clean.

L. Examine control valves for proper installation for their intended function of isolating, throttling, diverting, or mixing fluid flows.

M. Examine heat-transfer coils for correct piping connections and for clean and straight fins.

N. Examine system pumps to ensure absence of entrained air in the suction piping.

O. Examine operating safety interlocks and controls on HVAC equipment.

P. Examine control dampers for proper installation for their intended function of isolating, throttling, diverting, or mixing air flows.

Q. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.2 PREPARATION

A. Prepare a TAB plan that includes the following:

1. Equipment and systems to be tested.
2. Strategies and step-by-step procedures for balancing the systems.
3. Instrumentation to be used.
4. Sample forms with specific identification for all equipment.

B. Perform system-readiness checks of HVAC systems and equipment to verify system readiness for TAB work. Include, at a minimum, the following:

1. Airside:

    a. Verify that leakage and pressure tests on air distribution systems have been satisfactorily completed.
    b. Duct systems are complete with terminals installed.
    c. Volume, smoke, and fire dampers are open and functional.
    d. Clean filters are installed.
    e. Fans are operating, free of vibration, and rotating in correct direction.
    f. Variable-frequency controllers' startup is complete and safeties are verified.
    g. Automatic temperature-control systems are operational.
    h. Ceilings are installed.
    i. Windows and doors are installed.
    j. Suitable access to balancing devices and equipment is provided.

2. Hydronics:

    a. Verify leakage and pressure tests on water distribution systems have been satisfactorily completed.

b. Piping is complete with terminals installed.
c. Water treatment is complete.
d. Systems are flushed, filled, and air purged.
e. Strainers are pulled and cleaned.
f. Control valves are functioning in accordance with the sequence of operation.
g. Shutoff and balance valves have been verified to be 100 percent open.
h. Pumps are started and proper rotation is verified.
i. Pump gauge connections are installed directly at pump inlet and outlet flanges or in discharge and suction pipe prior to valves or strainers.
j. Variable-frequency controllers' startup is complete and safeties are verified.
k. Suitable access to balancing devices and equipment is provided.

3.3 GENERAL PROCEDURES FOR TESTING AND BALANCING

A. Cut insulation, ducts, pipes, and equipment casings for installation of test probes to the minimum extent necessary for TAB procedures.

1. After testing and balancing, patch probe holes in ducts with same material and thickness as used to construct ducts.
2. After testing and balancing, install test ports and duct access doors that comply with requirements in Section 233300 "Ductwork Accessories."
3. Where holes for probes are required in piping or hydronic equipment, install pressure and temperature test plugs to seal systems.
4. Install and join new insulation that matches removed materials. Restore insulation, coverings, vapor barrier, and finish in accordance with Section 230713 "Duct Insulation,"

B. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with paint or other suitable, permanent identification material to show final settings.

C. Take and report testing and balancing measurements in **inch-pound IP** units.

3.4 TESTING, ADJUSTING, AND BALANCING OF HVAC EQUIPMENT

A. Test, adjust, and balance HVAC equipment indicated on Drawings, including, but not limited to, the following:

1. Motors.
2. Pumps.
3. Fans and ventilators.
4. Terminal units.
5. Water chillers.
6. Air-handling units.

7. Rooftop air-conditioning units.

3.5 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.

B. Prepare schematic diagrams of systems' Record drawings duct layouts.

C. For variable-air-volume systems, develop a plan to simulate diversity.

D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.

E. Check airflow patterns from the outdoor-air louvers and dampers and the return- and exhaust-air dampers through the supply-fan discharge and mixing dampers.

F. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.

G. Verify that motor starters are equipped with properly sized thermal protection.

H. Check dampers for proper position to achieve desired airflow path.

I. Check for airflow blockages.

J. Check condensate drains for proper connections and functioning.

K. Check for proper sealing of air-handling-unit components.

3.6 PROCEDURES FOR VARIABLE-AIR-VOLUME SYSTEMS

A. Adjust the variable-air-volume systems as follows:

1. Verify that the system static pressure sensor is located two-thirds of the distance down the duct from the fan discharge.
2. Verify that the system is under static pressure control.
3. Select the terminal unit that is most critical to the supply-fan airflow. Measure inlet static pressure, and adjust system static pressure control set point so the entering static pressure for the critical terminal unit is not less than the sum of the terminal-unit manufacturer's recommended minimum inlet static pressure plus the static pressure needed to overcome terminal-unit discharge system losses.
4. Calibrate and balance each terminal unit for maximum and minimum design airflow as follows:

a. Adjust controls so that terminal is calling for maximum airflow. Some controllers require starting with minimum airflow. Verify calibration procedure for specific project.
b. Measure airflow and adjust calibration factor as required for design maximum airflow. Record calibration factor.
c. When maximum airflow is correct, balance the air outlets downstream from terminal units.
d. Adjust controls so that terminal is calling for minimum airflow.
e. Measure airflow and adjust calibration factor as required for design minimum airflow. Record calibration factor. If no minimum calibration is available, note any deviation from design airflow.
f. On constant volume terminals, in critical areas where room pressure is to be maintained, verify that the airflow remains constant over the full range of full cooling to full heating. Note any deviation from design airflow or room pressure.

5. After terminals have been calibrated and balanced, test and adjust system for total airflow. Adjust fans to deliver total design airflows within the maximum allowable fan speed listed by fan manufacturer.

a. Set outside-air, return-air, and relief-air dampers for proper position that simulates minimum outdoor-air conditions.
b. Set terminals for maximum airflow. If system design includes diversity, adjust terminals for maximum and minimum airflow, so that connected total matches fan selection and simulates actual load in the building.
c. Where duct conditions allow, measure airflow by main Pitot-tube traverse. If necessary, perform multiple Pitot-tube traverses close to the fan and prior to any outlets, to obtain total airflow.
d. Where duct conditions are unsuitable for Pitot-tube traverse measurements, a coil traverse may be acceptable.

6. Measure fan static pressures as follows:

a. Measure static pressure directly at the fan outlet or through the flexible connection.
b. Measure static pressure directly at the fan inlet or through the flexible connection.
c. Measure static pressure across each component that makes up the air-handling system.
d. Report any artificial loading of filters at the time static pressures are measured.

7. Set final return and outside airflow to the fan while operating at maximum return airflow and minimum outdoor airflow.

a. Balance the return-air ducts and inlets.
b. Verify that terminal units are meeting design airflow under system maximum flow.

8. Re-measure the inlet static pressure at the most critical terminal unit, and adjust the system static pressure set point to the most energy-efficient set point to maintain the optimum system static pressure. Record set point and give to controls Contractor.
9. Verify final system conditions as follows:

    a. Re-measure and confirm that minimum outdoor, return, and relief airflows are within design. Readjust to match design if necessary.
    b. Re-measure and confirm that total airflow is within design.
    c. Re-measure final fan operating data, speed, volts, amps, and static profile.
    d. Mark final settings.
    e. Test system in economizer mode. Verify proper operation and adjust if necessary. Measure and record all operating data.
    f. Verify tracking between supply and return fans.

3.7 PROCEDURES FOR MOTORS

A. Motors **1/2** HP and Larger: Test at final balanced conditions and record the following data:

1. Manufacturer's name, model number, and serial number.
2. Motor horsepower rating.
3. Motor rpm.
4. Phase and hertz.
5. Nameplate and measured voltage, each phase.
6. Nameplate and measured amperage, each phase.
7. Starter size and thermal-protection-element rating.
8. Service factor and frame size.

B. Motors Driven by Variable-Frequency Controllers: Test manual bypass of controller to prove proper operation.

3.8 PROCEDURES FOR HEAT-TRANSFER COILS

A. Measure, adjust, and record the following data for each hydronic coil:

1. Entering- and leaving-water temperature.
2. Water flow rate.
3. Water pressure drop.
4. Dry-bulb temperature of entering and leaving air.
5. Wet-bulb temperature of entering and leaving air for cooling coils.
6. Airflow.
7. Air pressure drop.

3.9 DUCT LEAKAGE TESTS

A. Witness the duct leakage testing performed by Installer.

B. Verify that proper test methods are used and that leakage rates are within specified limits.

C. Report deficiencies observed.

3.10 UFAD PLENUM LEAKAGE TESTS

A. Witness the UFAD plenum pressure testing performed by Installer.

B. Verify that proper test methods are used and that leakage rates are within specified limits.

C. Report deficiencies observed.

3.11 HVAC CONTROLS VERIFICATION

A. In conjunction with system balancing, perform the following:

1. Verify HVAC control system is operating within the design limitations.
2. Confirm that the sequences of operation are in compliance with Contract Documents.
3. Verify that controllers are calibrated and function as intended.
4. Verify that controller set points are as indicated.
5. Verify the operation of lockout or interlock systems.
6. Verify the operation of valve and damper actuators.
7. Verify that controlled devices are properly installed and connected to correct controller.
8. Verify that controlled devices travel freely and are in position indicated by controller: open, closed, or modulating.
9. Verify location and installation of sensors to ensure that they sense only intended temperature, humidity, or pressure.

B. Reporting: Include a summary of verifications performed, remaining deficiencies, and variations from indicated conditions.

3.12 PROCEDURES FOR TESTING, ADJUSTING, AND BALANCING EXISTING SYSTEMS

A. Perform a preconstruction inspection of existing equipment that is to remain and be reused.

1. Measure and record the operating speed, airflow, and static pressure of each fan and equipment with fan(s).
2. Measure and record flows, temperatures, and pressures of each piece of equipment in each hydronic system. Compare the values to design or nameplate information, where information is available.
3. Measure motor voltage and amperage. Compare the values to motor nameplate information.
4. Check the condition of filters.
5. Check the condition of coils.
6. Check the operation of the drain pan and condensate-drain trap.
7. Check bearings and other lubricated parts for proper lubrication.
8. Report on the operating condition of the equipment and the results of the measurements taken. Report deficiencies.

B. TAB After Construction: Before performing testing and balancing of renovated existing systems, inspect existing equipment that is to remain and be reused to verify that existing equipment has been cleaned and refurbished in accordance with renovation scope indicated by Contract Documents. Verify the following:

1. New filters are installed.
2. Coils are clean and fins combed.
3. Drain pans are clean.
4. Fans are clean.
5. Bearings and other parts are properly lubricated.
6. Deficiencies noted in the preconstruction report are corrected.

C. Perform testing and balancing of existing systems to the extent that existing systems are affected by the renovation work.

1. Compare the indicated airflow of the renovated work to the measured fan airflows, and determine the new fan speed and the face velocity of filters and coils.
2. Verify that the indicated airflows of the renovated work result in filter and coil face velocities and fan speeds that are within the acceptable limits defined by equipment manufacturer.
3. If calculations increase or decrease the airflow rates and water flow rates by more than **5** percent, make equipment adjustments to achieve the calculated rates. If increase or decrease is **5** percent or less, equipment adjustments are not required.
4. Balance each air outlet.

3.13 TOLERANCES

A. Set HVAC system's airflow rates and water flow rates within the following tolerances:

1. Supply, Return, and Exhaust Fans and Equipment with Fans: **Plus or minus 10 percent**. If design value is less than 100 cfm, within 10 cfm.
2. Air Outlets and Inlets: **Plus or minus 10 percent**. If design value is less than 100 cfm, within 10 cfm.

3. Heating-Water Flow Rate: **Plus or minus 5 percent**. If design value is less than 10 gpm, within 10 percent.
4. Chilled-Water Flow Rate: **Plus or minus 5 percent**. If design value is less than 10 gpm, within 10 percent.

B. Maintaining pressure relationships as designed shall have priority over the tolerances specified above.

3.14 PROGRESS REPORTING

A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for system-balancing devices. Recommend changes and additions to system-balancing devices, to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance-measuring and -balancing devices.

B. Status Reports: Prepare **biweekly** progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system.

3.15 FINAL REPORT

A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.

1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing engineer.
2. Include a list of instruments used for procedures, along with proof of calibration.
3. Certify validity and accuracy of field data.

B. Final Report Contents: In addition to certified field-report data, include the following:

1. Fan curves.
2. Manufacturers' test data.
3. Field test reports prepared by system and equipment installers.
4. Other information relative to equipment performance; do not include Shop Drawings and Product Data.

C. General Report Data: In addition to form titles and entries, include the following data:

1. Title page.
2. Name and address of the TAB specialist.
3. Project name.
4. Project location.
5. Architect's name and address.

6. Engineer's name and address.
7. Contractor's name and address.
8. Report date.
9. Signature of TAB supervisor who certifies the report.
10. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
11. Summary of contents, including the following:

    a. Indicated versus final performance.
    b. Notable characteristics of systems.
    c. Description of system operation sequence if it varies from the Contract Documents.

12. Nomenclature sheets for each item of equipment.
13. Data for terminal units, including manufacturer's name, type, size, and fittings.
14. Notes to explain why certain final data in the body of reports vary from indicated values.
15. Test conditions for fans performance forms, including the following:

    a. Settings for outdoor-, return-, and exhaust-air dampers.
    b. Conditions of filters.
    c. Cooling coil, wet- and dry-bulb conditions.
    d. Heating coil, dry-bulb conditions.
    e. Fan drive settings, including settings and percentage of maximum pitch diameter.
    f. **Variable-frequency controller** settings for variable-air-volume systems.
    g. Settings for pressure controller(s).
    h. Other system operating conditions that affect performance.

16. Test conditions for pump performance forms, including the following:

    a. Variable-frequency controller settings for variable-flow hydronic systems.
    b. Settings for pressure controller(s).
    c. Other system operating conditions that affect performance.

D. System Diagrams: Include schematic layouts of air and hydronic distribution systems. Present each system with single-line diagram and include the following:

1. Quantities of outdoor, supply, return, and exhaust airflows.
2. Water and steam flow rates.
3. Duct, outlet, and inlet sizes.
4. Terminal units.
5. Balancing stations.
6. Position of balancing devices.

E. Air-Handling-Unit Test Reports: For air-handling units, include the following:

1. Unit Data:

a. Unit identification.
b. Location.
c. Make and type.
d. Model number and unit size.
e. Manufacturer's serial number.
f. Unit arrangement and class.
g. Discharge arrangement.
h. Sheave make, size in inches, and bore.
i. Center-to-center dimensions of sheave and amount of adjustments in inches.
j. Number, make, and size of belts.
k. Number, type, and size of filters.

2. Motor Data:

a. Motor make, and frame type and size.
b. Horsepower and speed.
c. Volts, phase, and hertz.
d. Full-load amperage and service factor.
e. Sheave make, size in inches, and bore.
f. Center-to-center dimensions of sheave and amount of adjustments in inches.

3. Test Data (Indicated and Actual Values):

a. Total airflow rate in cfm.
b. Total system static pressure in inches wg.
c. Fan speed.
d. Inlet and discharge static pressure in inches wg.
e. For each filter bank, filter static-pressure differential in inches wg.
f. Cooling-coil static-pressure differential in inches wg.
g. Heating-coil static-pressure differential in inches wg.
h. List for each internal component with pressure-drop, static-pressure differential in inches wg.
i. Outdoor airflow in cfm.
j. Return airflow in cfm.
k. Outdoor-air damper position.
l. Return-air damper position.

F. Apparatus-Coil Test Reports:

1. Coil Data:

a. System identification.
b. Location.
c. Coil type.
d. Number of rows.
e. Fin spacing in fins per inch o.c.
f. Make and model number.

g. Face area in sq. ft.
h. Tube size in NPS.
i. Tube and fin materials.
j. Circuiting arrangement.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Average face velocity in fpm.
c. Air pressure drop in inches wg.
d. Outdoor-air, wet- and dry-bulb temperatures in deg F.
e. Return-air, wet- and dry-bulb temperatures in deg F.
f. Entering-air, wet- and dry-bulb temperatures in deg F.
g. Leaving-air, wet- and dry-bulb temperatures in deg F.

G. Round, Flat-Oval, and Rectangular Duct Traverse Reports: Include a diagram with a grid representing the duct cross-section and record the following:

1. Report Data:

a. System fan and air-handling-unit number.
b. Location and zone.
c. Traverse air temperature in deg F.
d. Duct static pressure in inches wg.
e. Duct size in inches.
f. Duct area in sq. ft.
g. Indicated airflow rate in cfm.
h. Indicated velocity in fpm.
i. Actual airflow rate in cfm.
j. Actual average velocity in fpm.
k. Barometric pressure in psig.

H. Air-Terminal-Device Reports:

1. Unit Data:

a. System and air-handling unit identification.
b. Location and zone.
c. Apparatus used for test.
d. Area served.
e. Make.
f. Number from system diagram.
g. Type and model number.
h. Size.
i. Effective area in sq. ft.

2. Test Data (Indicated and Actual Values):

a. Airflow rate in cfm.
b. Air velocity in fpm.
c. Preliminary airflow rate as needed in cfm.
d. Preliminary velocity as needed in fpm.
e. Final airflow rate in cfm.
f. Final velocity in fpm.
g. Space temperature in deg F.

I. Instrument Calibration Reports:

1. Report Data:

a. Instrument type and make.
b. Serial number.
c. Application.
d. Dates of use.
e. Dates of calibration.

3.16 VERIFICATION OF TAB REPORT

A. The TAB specialist's test and balance engineer shall conduct the inspection in the presence of **Construction Manager**.

B. Project Engineer or **Construction Manager** shall randomly select measurements, documented in the final report, to be rechecked. Rechecking shall be limited to the lesser of either **10** percent of the total measurements recorded or the extent of measurements that can be accomplished in **a normal 8-hour business day.**

C. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements shall be noted as "FAILED."

D. If the number of "FAILED" measurements is greater than **10** percent of the total measurements checked during the final inspection, the TAB shall be considered incomplete and shall be rejected.

E. If recheck measurements find the number of failed measurements noncompliant with requirements indicated, proceed as follows:

1. TAB specialists shall recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection. All changes shall be tracked to show changes made to previous report.
2. If the second final inspection also fails, Owner may pursue others Contract options to complete TAB work.

F. Prepare test and inspection reports.

3.17 ADDITIONAL TESTS

A. Within **90** days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.

B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional TAB during near-peak summer and winter conditions.

END OF SECTION 230593

SECTION 230713 - DUCT INSULATION

PART 1 - GENERAL

1.1 SUMMARY

Section includes insulating the following duct services:

1. Indoor, concealed supply and outdoor air.
2. Indoor, exposed supply and outdoor air.
3. Indoor, concealed return located in unconditioned space.
4. Indoor, exposed return located in unconditioned space.

Related Sections:

2. Section 233113 "Ductwork"

ACTION SUBMITTALS

1.2

Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products in accordance with ASTM E84, by a testing agency acceptable to authorities having jurisdiction. Factory label insulation, jacket materials, adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.

1. All Insulation Installed Indoors and Outdoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.

2.2 INSULATION MATERIALS

A. Products do not contain asbestos, lead, mercury, or mercury compounds.

B. Products that come in contact with stainless steel have a leachable chloride content of less than 50 ppm when tested in accordance with ASTM C871.

C. Insulation materials for use on austenitic stainless steel are qualified as acceptable in accordance with ASTM C795.

D. Glass-Fiber Blanket: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature up to 450 deg F in accordance with ASTM C411. Comply with ASTM C553, Type II, and ASTM C1290, Type III with factory-applied FSK jacketType III with factory-applied FSP jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

E. Glass-Fiber Board Insulation: Glass fibers bonded with a thermosetting resin; suitable for maximum use temperature between 35 deg F and 250 deg F for jacketed and between 35 deg F and 450 deg Ffor unfaced in accordance with ASTM C411. Comply with ASTM C612, Type IA or Type IB. For duct and plenum applications, provide insulation with factory-applied FSK jacket. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.3 ADHESIVES

A. Materials are compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated unless otherwise indicated.

B. Glass-Fiber and Mineral Wool Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

2.4 MASTICS AND COATINGS

A. Materials shall be compatible with insulation materials, jackets, and substrates.

B. Vapor-Retarder Mastic: Water based; suitable for indoor use on below ambient services.

Water-Vapor Permeance: Comply with ASTM C755, Section 7.2.2, Table 2, for insulation type and service conditions.

1. Service Temperature Range: Minus 20 to plus 180 deg F.
2. Comply with MIL-PRF-19565C, Type II, for permeance requirements, with supplier listing on DOD QPD - Qualified Products Database.
3. Color: White.

2.5 SEALANTS

FSK and Metal Jacket Flashing Sealants:

Materials are compatible with insulation materials, jackets, and substrates.

1. Fire- and water-resistant, flexible, elastomeric sealant.
2. Service Temperature Range: Minus 40 to plus 250 deg F.
3. Color: Aluminum.

B. ASJ Flashing Sealants, and Vinyl and PVC Jacket Flashing Sealants:
1. Materials are compatible with insulation materials, jackets, and substrates.
2. Fire- and water-resistant, flexible, elastomeric sealant.
3. Service Temperature Range: Minus 40 to plus 250 deg F.
4. Color: White.

2.6 TAPES

A. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C1136.
1. Width: 3 inches.
2. Thickness: 6.5 mils.
3. Adhesion: 90 ounces force/inch in width.
4. Elongation: **2** percent.
5. Tensile Strength: 40 lbf/inch in width.
6. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.

B. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.
1. Width: 2 inches.
2. Thickness: 6 mils.
3. Adhesion: 64 ounces force/inch in width.
4. Elongation: **500** percent.
5. Tensile Strength: 18 lbf/inch in width.

C. Aluminum-Foil Tape: Vapor-retarder tape with acrylic adhesive.
1. Width: 2 inches.
2. Thickness: 3.7 mils.
3. Adhesion: 100 ounces force/inch in width.
4. Elongation: **5** percent.
5. Tensile Strength: 34 lbf/inch in width.

2.7 SECUREMENTS

A. Aluminum Bands: ASTM B209, Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inchthick, 3/4 inch wide with wing seal, closed seal.

2.8 CORNER ANGLES

A. PVC Corner Angles: 30 mils thick, minimum 1 by 1 inch, PVC in accordance with ASTM D1784, Class 16354-C. White or color-coded to match adjacent surface.

B. Aluminum Corner Angles: 0.040 inch thick, minimum 1 by 1 inch, aluminum in accordance with ASTM B209, Alloy 3003, 3005, 3105, or 5005; Temper H-14.

PART 3 - EXECUTION

3.1 PREPARATION

A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.

3.2 GENERAL INSTALLATION REQUIREMENTS

A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of ducts and fittings.

B. Install insulation materials, vapor barriers or retarders, jackets, and thicknesses required for each item of duct system as specified in insulation system schedules.

C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, compress, or otherwise damage insulation or jacket .

D. Install insulation with longitudinal seams at top and bottom of horizontal runs.

E. Install multiple layers of insulation with longitudinal and end seams staggered.

F. Keep insulation materials dry during application and finishing. Replace insulation materials that get wet during storage or in the installation process before being properly covered and sealed in accordance with Contract Documents**,** unless otherwise approved by the engineer-of-record.

G. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.

H. Install insulation with least number of joints practical.

I. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
   1. Install insulation continuously through hangers and around anchor attachments.
   2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
   3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.

J. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.

K. Install insulation with factory-applied jackets as follows:
1. Draw jacket tight and smooth, but not to the extent of creating wrinkles or areas of compression in the insulation.
2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
3. Overlap jacket longitudinal seams at least 1-1/2 inches. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
   a. For below ambient services, apply vapor-barrier mastic over staples.
4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to duct flanges and fittings.

L. Cut insulation in a manner to avoid compressing insulation.

M. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.

N. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.

3.3 PENETRATIONS

A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.

1. Seal penetrations with flashing sealant.
2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches below top of roof flashing.
4. Seal jacket to roof flashing with flashing sealant.

B. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.

C. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Terminate insulation at fire damper sleeves for fire-rated wall and partition penetrations. Externally insulate damper sleeves to match adjacent insulation and overlap duct insulation at least 2 inches.
1. Comply with local regulations and requirements for firestopping procedures.

3.4 INSTALLATION OF GLASS-FIBER AND MINERAL-WOOL INSULATION

Blanket Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.

A. Comply with manufacturer's written installation instructions.

B. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for **100** percent coverage of duct and plenum surfaces.
   1. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
   2. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

C. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
   1. On duct sides with dimensions larger than 18 inches, place pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
   2. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
   3. Do not overcompress insulation during installation.
   4. Impale insulation over pins and attach speed washers.
   5. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.

D. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inch outward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.

E. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
   1. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-footintervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.

F. Overlap unfaced blankets a minimum of 2 inches on longitudinal seams and end joints. At end joints, secure with steel bands spaced a maximum of 18 inches o.c.
   1. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.

2. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

G. Board Insulation Installation on Ducts and Plenums: Secure with adhesive and insulation pins.
1. Apply adhesives according to manufacturer's recommended coverage rates per unit area, for **100** percent coverage of duct and plenum surfaces.
2. Apply adhesive to entire circumference of ducts and to all surfaces of fittings and transitions.
3. Install either capacitor-discharge-weld pins and speed washers or cupped-head, capacitor-discharge-weld pins on sides and bottom of horizontal ducts and sides of vertical ducts as follows:

H. On duct sides with dimensions 18 inches and smaller, place pins along longitudinal centerline of duct. Space 3 inches maximum from insulation end joints, and 16 inches o.c.
1. On duct sides with dimensions larger than 18 inches, space pins 16 inches o.c. each way, and 3 inches maximum from insulation joints. Install additional pins to hold insulation tightly against surface at cross bracing.
2. Pins may be omitted from top surface of horizontal, rectangular ducts and plenums.
3. Do not overcompress insulation during installation.
4. Cut excess portion of pins extending beyond speed washers or bend parallel with insulation surface. Cover exposed pins and washers with tape matching insulation facing.
5. For ducts and plenums with surface temperatures below ambient, install a continuous unbroken vapor barrier. Create a facing lap for longitudinal seams and end joints with insulation by removing 2 inches from one edge and one end of insulation segment. Secure laps to adjacent insulation section with 1/2-inchoutward-clinching staples, 1 inch o.c. Install vapor barrier consisting of factory- or field-applied jacket, adhesive, vapor-barrier mastic, and sealant at joints, seams, and protrusions.
6. Repair punctures, tears, and penetrations with tape or mastic to maintain vapor-barrier seal.
    a. Install vapor stops for ductwork and plenums operating below 50 deg F at 18-footintervals. Vapor stops consist of vapor-barrier mastic applied in a Z-shaped pattern over insulation face, along butt end of insulation, and over the surface. Cover insulation face and surface to be insulated a width equal to two times the insulation thickness, but not less than 3 inches.
7. Install insulation on rectangular duct elbows and transitions with a full insulation section for each surface. Groove and score insulation to fit as closely as possible to outside and inside radius of elbows. Install insulation on round and flat-oval duct elbows with individually mitered gores cut to fit the elbow.
8. Insulate duct stiffeners, hangers, and flanges that protrude beyond insulation surface with 6-inch-wide strips of same material used to insulate duct. Secure on alternating sides of stiffener, hanger, and flange with pins spaced 6 inches o.c.

3.5 FIELD-APPLIED JACKET INSTALLATION

1. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications, install with longitudinal seams along top and bottom of tanks and vessels. Seal with manufacturer's recommended adhesive.
2. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.
3. Where metal jackets are indicated, install with 2-inchoverlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless-steel bands 12 inches o.c. and at end joints.

3.6 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

C. Inspect ductwork, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection is limited to **one** location for each duct system defined in the "Duct Insulation Schedule, General" Article.

D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.7 DUCT INSULATION SCHEDULE, GENERAL

Plenums and Ducts Requiring Insulation:

Indoor, concealed supply and outdoor air.

1. Indoor, exposed supply and outdoor air.
2. Indoor, concealed return located in unconditioned space.
3. Indoor, exposed return located in unconditioned space.

Items Not Insulated:

4. Factory-insulated flexible ducts.
5. Flexible connectors.
6. Vibration-control devices.
7. Factory-insulated access panels and doors.

3.8 INDOOR DUCT AND PLENUM INSULATION SCHEDULE

A. Concealed, Supply-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft. nominal density.

B. Concealed, Return-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft. nominal density.

C. Concealed, Outdoor-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft nominal density.

D. Concealed, Exhaust-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft. nominal density.

E. Exposed, Supply-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft nominal density.

F. Exposed, Return-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft. nominal density.

G. Exposed, Outdoor-Air Duct and Plenum Insulation: Glass **fiber** 2 inches thick and 1.5 lb/cu. ft. nominal density.

H. Exposed, Exhaust-Air Duct and Plenum Insulation: **Glass-fiber** 2 inches thick and 1.5 lb/cu. ft.nominal density.

END OF SECTION 230713

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 231123 - FACILITY NATURAL-GAS PIPING

PART 1 - GENERAL.

1.1 SUMMARY

A. Section Includes:

1. Pipes, tubes, and fittings.
2. Manual gas shutoff valves.
3. Pressure regulators.
4. Dielectric fittings.

1.2 DEFINITIONS

A. CWP: Cold working pressure.

B. Exposed, Exterior Installations: Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. An example includes rooftop locations.

C. Exposed, Interior Installations: Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.

D. Finished Spaces: Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct shafts, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.

1.3 ACTION SUBMITTALS

A. Product Data:

1. Piping specialties.
2. Corrugated, stainless steel tubing with associated components.
3. Valves. Include pressure rating, capacity, settings, and electrical connection data of selected models.
4. Pressure regulators. Indicate pressure ratings and capacities.
5. Service meters. Indicate pressure ratings and capacities.
6. Dielectric fittings.

B. Shop Drawings: For facility natural-gas piping layout. Include plans, piping layout and elevations, sections, and details for fabrication of pipe anchors, hangers, supports for multiple pipes, alignment guides, expansion joints and loops, and attachments of the same to building structure. Detail location of anchors, alignment guides, and expansion joints and loops.

1. Shop Drawing Scale: 1/4 inch per foot.

2. Detail mounting, supports, and valve arrangements for service-meter assembly and pressure regulator assembly.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans and details, drawn to scale, on which natural-gas piping is shown and coordinated with other installations, using input from installers of the items involved.

B. Welding certificates.

C. Site Survey: Plans, drawn to scale, on which natural-gas piping is shown and coordinated with other services and utilities.

D. Field quality-control reports.

E. Qualification Statements: For professional engineer.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For motorized gas valves pressure regulators service meters to include in emergency, operation, and maintenance manuals.

1.6 QUALITY ASSURANCE

A. Steel Support Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M, "Structural Welding Code - Steel."

B. Pipe Welding Qualifications: Qualify procedures and operators in accordance with the ASME Boiler and Pressure Vessel Code.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Handling Flammable Liquids: Remove and dispose of liquids from existing natural-gas piping in accordance with requirements of authorities having jurisdiction.

B. Deliver pipes and tubes with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe end damage and to prevent entrance of dirt, debris, and moisture.

C. Store and handle pipes and tubes having factory-applied protective coatings to avoid damaging coating, and protect from direct sunlight.

D. Protect stored PE pipes and valves from direct sunlight.

1.8 PROJECT CONDITIONS

A. Perform site survey, research public utility records, and verify existing utility locations. Contact utility-locating service for area where Project is located.

B. Interruption of Existing Natural-Gas Service: Do not interrupt natural-gas service to facilities occupied by Owner or others unless permitted under the following conditions, and then only after arranging to provide purging and startup of natural-gas supply in accordance with requirements indicated:

1. Notify Owner no fewer than seven days in advance of proposed interruption of natural-gas service AND again one day in advance.
2. Do not proceed with interruption of natural-gas service without Owner's written permission.

1.9 COORDINATION

A. Coordinate sizes and locations of concrete bases with actual equipment provided.

B. Coordinate requirements for access panels and doors for valves installed and concealed behind finished surfaces. Comply with requirements in Section 083113 "Access Doors and Frames."

C. Coordinate requirements for piping identification for natural-gas piping. Comply with requirements in Section 220553 "Identification of Plumbing Piping and Equipment."

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

A. Obtain each product type from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Comply with the International Fuel Gas Code.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Seismic Performance: Natural-gas piping system is to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

1. The term "withstand" means "the piping system will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the piping system will be fully operational after the seismic event."
2. Component Importance Factor: 1.5.

2.3 PIPES, TUBES, AND FITTINGS

A. Steel Pipe: ASTM A53/A53M, black steel, Schedule 40, Type E or S, Grade B.

1. Malleable-Iron Threaded Fittings: ASME B16.3, Class 150, standard pattern.
2. Wrought-Steel Welding Fittings: ASTM A234/A234M for butt welding and socket welding.
3. Unions: ASME B16.39, Class 150, malleable iron with brass-to-iron seat, ground joint, and threaded ends.
4. Forged-Steel Flanges and Flanged Fittings: ASME B16.5, minimum Class 150, including bolts, nuts, and gaskets of the following material group, end connections, and facings:

    a. Material Group: 1.1.
    b. End Connections: Threaded or butt welding to match pipe.
    c. Lapped Face: Not permitted underground.
    d. Gasket Materials: ASME B16.20, metallic, flat, asbestos free, aluminum O-rings, and spiral-wound metal gaskets.
    e. Bolts and Nuts: ASME B18.2.1, carbon steel aboveground and stainless steel underground.

5. Protective Coating for Underground Piping: Factory-applied, three-layer coating of epoxy, adhesive, and PE.

    a. Joint Cover Kits: Epoxy paint, adhesive, and heat-shrink PE sleeves.

2.4 PIPING SPECIALTIES

A. Appliance Flexible Connectors:

1. Indoor, Fixed-Appliance Flexible Connectors: Comply with ANSI Z21.24.
2. Indoor, Movable-Appliance Flexible Connectors: Comply with ANSI Z21.69.
3. Outdoor, Appliance Flexible Connectors: Comply with ANSI Z21.75.
4. Corrugated, stainless steel tubing with polymer coating.
5. Operating-Pressure Rating: 0.5 psig.
6. End Fittings: Zinc-coated steel.
7. Threaded Ends: Comply with ASME B1.20.1.
8. Maximum Length: 72 inches.

B. Y-Pattern Strainers:

1. Body: ASTM A126, Class B, cast iron with bolted cover and bottom drain connection.
2. End Connections: Threaded ends for NPS 2 and smaller; flanged ends for NPS 2-1/2 and larger.
3. Strainer Screen: 40 60-mesh startup strainer, and perforated stainless steel basket with 50 percent free area.
4. CWP Rating: 125 psig.

C. Weatherproof Vent Cap:

1. Cast- or malleable-iron increaser fitting with corrosion-resistant wire screen, with free area at least equal to cross-sectional area of connecting pipe and threaded-end connection.

2.5 JOINING MATERIALS

A. Joint Compound and Tape: Suitable for natural gas.

2.6 MANUAL GAS SHUTOFF VALVES

A. General Requirements for Metallic Valves, NPS 2 and Smaller: Comply with ASME B16.33.

1. CWP Rating: 125 psig.
2. Threaded Ends: Comply with ASME B1.20.1.
3. Dryseal Threads on Flare Ends: Comply with ASME B1.20.3.
4. Tamperproof Feature: Locking feature for valves indicated in "Underground, Manual Gas Shutoff Valve Schedule" and "Aboveground, Manual Gas Shutoff Valve Schedule" articles.
5. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for valves 1 inch and smaller.
6. Service Mark: Valves NPS 1-1/4 to NPS 2 having initials "WOG" permanently marked on valve body.

B. General Requirements for Metallic Valves, NPS 2-1/2 and Larger: Comply with ASME B16.38.

1. CWP Rating: 125 psig.
2. Flanged Ends: Comply with ASME B16.5 for steel flanges.
3. Tamperproof Feature: Locking feature for valves indicated in "Underground, Manual Gas Shutoff Valve Schedule" and "Aboveground, Manual Gas Shutoff Valve Schedule" articles.
4. Service Mark: Initials "WOG" permanently marked on valve body.

C. One-Piece, Bronze Ball Valve with Bronze Trim: MSS SP-110.

1. Body: Bronze, complying with ASTM B584.
2. Ball: Chrome-plated brass.
3. Stem: Bronze; blowout proof.
4. Seats: Reinforced TFE; blowout proof.
5. Packing: Separate packnut with adjustable-stem packing threaded ends.
6. Ends: Threaded, flared, or socket as indicated in "Underground, Manual Gas Shutoff Valve Schedule" and "Aboveground, Manual Gas Shutoff Valve Schedule" articles.
7. CWP Rating: 600 psig.
8. Listing: Valves NPS 1 and smaller are to be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
9. Service: Suitable for natural-gas service with "WOG" indicated on valve body.

D. Two-Piece, Full-Port, Bronze Ball Valves with Bronze Trim: MSS SP-110.

1. Body: Bronze, complying with ASTM B584.
2. Ball: Chrome-plated bronze.
3. Stem: Bronze; blowout proof.
4. Seats: Reinforced TFE; blowout proof.
5. Packing: Threaded-body packnut design with adjustable-stem packing.
6. Ends: Threaded, flared, or socket as indicated in "Underground, Manual Gas Shutoff Valve Schedule" and "Aboveground, Manual Gas Shutoff Valve Schedule" articles.
7. CWP Rating: 600 psig.
8. Listing: Valves NPS 1 and smaller are to be listed and labeled by an NRTL acceptable to authorities having jurisdiction.
9. Service: Suitable for natural-gas service with "WOG" indicated on valve body.

E. Valve Boxes:

1. Cast-iron, two-section box.
2. Top section with cover with "GAS" lettering.
3. Bottom section with base to fit over valve and barrel a minimum of 5 inches in diameter.
4. Adjustable cast-iron extensions of length required for depth of bury.
5. Include tee-handle, steel operating wrench with socket end fitting valve nut or flat head, and with stem of length required to operate valve.

2.7 MOTORIZED GAS VALVES

A. Automatic Gas Valves: Comply with ANSI Z21.21.

1. Body: Brass or aluminum.
2. Seats and Disc: NBR.
3. Springs and Valve Trim: Stainless steel.
4. Normally closed.
5. Visual position indicator.
6. Electrical Mechanical actuator operated by appliance automatic shutoff device.

B. Electrically Operated Valves: Comply with UL 429.

1. Pilot operated.
2. Body: Brass or aluminum.
3. Seats and Disc: NBR.
4. Springs and Valve Trim: Stainless steel.
5. 120 V ac, 60 Hz, Class B, continuous-duty molded coil, and replaceable.
6. NEMA ICS 6, Type 4, coil enclosure.
7. Normally closed.
8. Visual position indicator.

2.8 PRESSURE REGULATORS

A. General Requirements:

1. Single stage and suitable for natural gas.
2. Steel jacket and corrosion-resistant components.
3. Elevation compensator.
4. End Connections: Threaded for regulators NPS 2 and smaller; flanged for regulators NPS 2-1/2 and larger.

B. Service Pressure Regulators: Comply with ANSI Z21.80A.

1. Body and Diaphragm Case: Cast iron or die-cast aluminum.
2. Springs: Zinc-plated steel; interchangeable.
3. Diaphragm Plate: Zinc-plated steel.
4. Seat Disc: NBR; resistant to gas impurities, abrasion, and deformation at the valve port.
5. Orifice: Aluminum; interchangeable.
6. Seal Plug: UV-stabilized, mineral-filled nylon.
7. Single-port, self-contained regulator with orifice no larger than required at maximum pressure inlet, and no pressure sensing piping external to regulator.
8. Pressure regulator is to maintain discharge pressure setting downstream and is to not exceed 150 percent of design discharge pressure at shutoff.
9. Overpressure Protection Device: Factory mounted on pressure regulator.
10. Atmospheric Vent: Factory- or field-installed, stainless steel screen in opening if not connected to vent piping.
11. Maximum Inlet Pressure: 100 psig Insert pressure.

C. Line Pressure Regulators: Comply with ANSI Z21.80A.

1. Body and Diaphragm Case: Cast iron or die-cast aluminum.
2. Springs: Zinc-plated steel; interchangeable.
3. Diaphragm Plate: Zinc-plated steel.
4. Seat Disc: NBR; resistant to gas impurities, abrasion, and deformation at the valve port.
5. Orifice: Aluminum; interchangeable.
6. Seal Plug: UV-stabilized, mineral-filled nylon.
7. Single-port, self-contained regulator with orifice no larger than required at maximum pressure inlet, and no pressure sensing piping external to regulator.
8. Pressure regulator is to maintain discharge pressure setting downstream and is to not exceed 150 percent of design discharge pressure at shutoff.
9. Overpressure Protection Device: Factory mounted on pressure regulator.
10. Atmospheric Vent: Factory- or field-installed, stainless steel screen in opening if not connected to vent piping.
11. Maximum Inlet Pressure: 2 psig 5 psig 10 psig Insert pressure.

D. Appliance Pressure Regulators: Comply with ANSI Z21.18.

1. Body and Diaphragm Case: Die-cast aluminum.
2. Springs: Zinc-plated steel; interchangeable.
3. Diaphragm Plate: Zinc-plated steel.

4. Seat Disc: NBR.
5. Seal Plug: UV-stabilized, mineral-filled nylon.
6. Factory-Applied Finish: Minimum three-layer polyester and polyurethane paint finish.
7. Regulator may include vent limiting device, instead of vent connection, if approved by authorities having jurisdiction.
8. Maximum Inlet Pressure: 1 psig 2 psig 5 psig Insert pressure.

2.9 DIELECTRIC FITTINGS

A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

B. Dielectric Unions:

1. Description:

a. Standard: ASSE 1079.
b. Pressure Rating: 125 psig minimum at 180 deg F 150 psig 250 psig Insert pressure.
c. End Connections: Solder-joint copper alloy and threaded ferrous.

C. Dielectric Flanges:

1. Description:

a. Standard: ASSE 1079.
b. Factory-fabricated, bolted, companion-flange assembly.
c. Pressure Rating: 125 psig minimum at 180 deg F 150 psig 175 psig 300 psig Insert pressure.
d. End Connections: Solder-joint copper alloy and threaded ferrous; threaded solder-joint copper alloy and threaded ferrous.

D. Dielectric-Flange Insulating Kits:

1. Description:

a. Nonconducting materials for field assembly of companion flanges.
b. Pressure Rating: 150 psig.
c. Gasket: Neoprene or phenolic.
d. Bolt Sleeves: Phenolic or polyethylene.
e. Washers: Phenolic with steel backing washers.

2.10 LABELING AND IDENTIFYING

A. Detectable Warning Tape: Acid- and alkali-resistant, PE film warning tape manufactured for marking and identifying underground utilities, a minimum of 6 inches wide and 4 mils thick, continuously inscribed with a description and rated pressure of utility, with metallic core encased in a protective jacket for corrosion protection, detectable by metal detector when tape is buried up to 30 inches deep; colored yellow.

B. Label and identify gas piping and pressure outside a multitenant building by tenant.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine roughing-in for natural-gas piping system to verify actual locations of piping connections before equipment installation.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Close equipment shutoff valves before turning off natural gas to premises or piping section.

B. Inspect natural-gas piping in accordance with the International Fuel Gas Code to determine that natural-gas utilization devices are turned off in piping section affected.

C. Comply with the International Fuel Gas Code requirements for preventing accidental ignition.

3.3 INSTALLATION OF OUTDOOR PIPING

A. Comply with the International Fuel Gas Code for installation and purging of natural-gas piping.

B. Steel Piping with Protective Coating:

1. Apply joint cover kits to pipe after joining to cover, seal, and protect joints.
2. Repair damage to PE coating on pipe as recommended in writing by protective coating manufacturer.
3. Replace pipe having damaged PE coating with new pipe.

C. Install fittings for changes in direction and branch connections.

D. Install pressure gauge upstream and downstream from each service regulator. Pressure gauges are specified in Section 230500 "Common Work Results for HVAC."

3.4 INSTALLATION OF INDOOR PIPING

A. Comply with the International Fuel Gas Code for installation and purging of natural-gas piping.

B. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on Coordination Drawings.

C. Arrange for pipe spaces, chases, slots, sleeves, and openings in building structure during progress of construction, to allow for mechanical installations.

D. Do not install piping in concealed locations unless sleeved with the sleeve open at both ends.

E. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.

F. Where installing piping above accessible ceilings, allow sufficient space for ceiling panel removal.

G. Locate valves for easy access. Do not locate valves within return air plenums.

H. Install natural-gas piping at uniform grade of 2 percent down toward drip and sediment traps.

I. Install piping free of sags and bends.

J. Install fittings for changes in direction and branch connections.

K. Verify final equipment locations for roughing-in.

L. Comply with requirements in Sections specifying gas-fired appliances and equipment for roughing-in requirements.

M. Drips and Sediment Traps: Install drips at points where condensate may collect, including service-meter outlets. Locate where accessible to permit cleaning and emptying. Do not install where condensate is subject to freezing.

1. Construct drips and sediment traps using tee fitting with bottom outlet plugged or capped. Use nipple a minimum length of 3 pipe diameters, but not less than 3 inches long and same size as connected pipe. Install with space below bottom of drip to remove plug or cap.
2. Install sediment trap on both sides of regulators for gas reduction to 2 psig with valve and cap.

N. Extend relief vent connections for service regulators, line regulators, and overpressure protection devices to outdoors and terminate with weatherproof vent cap.

O. Conceal pipe installations in walls, pipe spaces, utility spaces, above ceilings, below grade or floors, and in floor channels unless indicated to be exposed to view.

P. Concealed Location Installations: Except as specified below, install concealed natural-gas piping and piping installed under the building in containment conduit constructed of steel pipe with welded joints as described in Part 2. Install a vent pipe from containment conduit to outdoors and terminate with weatherproof vent cap.

1. Above Accessible Ceilings: Natural-gas piping, fittings, valves, and regulators may be installed in accessible spaces without containment conduit.
2. In Floors: Install natural-gas piping with welded or brazed joints and protective coating in cast-in-place concrete floors. Cover piping to be cast in concrete slabs with minimum of 1-1/2 inches of concrete. Piping may not be in physical contact with other metallic structures such as reinforcing rods or electrically neutral conductors. Do not embed piping in concrete slabs containing quick-set additives or cinder aggregate.
3. In Floor Channels: Install natural-gas piping in floor channels. Channels must have cover and be open to space above cover for ventilation.
4. In Walls or Partitions: Protect tubing installed inside partitions or hollow walls from physical damage using steel striker barriers at rigid supports.

    a. Exception: Tubing passing through partitions or walls does not require striker barriers.

5. Prohibited Locations:

    a. Do not install natural-gas piping in or through circulating air ducts, clothes or trash chutes, chimneys or gas vents (flues), ventilating ducts, or dumbwaiter or elevator shafts.
    b. Do not install natural-gas piping in solid walls or partitions.

Q. Use eccentric reducer fittings to make reductions in pipe sizes. Install fittings with level side down.

R. Connect branch piping from top or side of horizontal piping.

S. Install unions in pipes NPS 2 and smaller, adjacent to each valve, at final connection to each piece of equipment. Unions are not required at flanged connections.

T. Do not use natural-gas piping as grounding electrode.

U. Install strainer on inlet of each line-pressure regulator and automatic or electrically operated valve.

V. Install pressure gauge upstream and downstream from each line regulator. Pressure gauges are specified in Section 230500 "Common Work Results for HVAC."

W. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 230500 "Common Work Results for HVAC."

X. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 230500 "Common Work Results for HVAC."

Y. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 230500 "Common Work Results for HVAC."

3.5 INSTALLATION OF SERVICE-METER ASSEMBLIES

A. Install service-meter assemblies aboveground, on concrete bases.

B. Install metal shutoff valves upstream from service regulators. Shutoff valves are not required at second regulators if two regulators are installed in series.

C. Install strainer on inlet of service-pressure regulator and meter set.

D. Install service regulators mounted outside with vent outlet horizontal or facing down. Install screen in vent outlet if not integral with service regulator.

E. Install metal shutoff valves upstream from service meters. Install dielectric fittings downstream from service meters.

F. Install service meters downstream from pressure regulators.

G. Install metal bollards to protect meter assemblies. Comply with requirements in Section 055000 "Metal Fabrications" for pipe bollards.

3.6 INSTALLATION OF VALVES

A. Install manual gas shutoff valve for each gas appliance ahead of corrugated stainless steel tubing, aluminum, or copper connector.

B. Install underground valves with valve boxes.

C. Install regulators and overpressure protection devices with maintenance access space adequate for servicing and testing.

D. Install earthquake valves aboveground outside buildings according to listing.

E. Install anode for metallic valves in underground PE piping.

F. Do not install valves in return-air plenums.

3.7 PIPING JOINT CONSTRUCTION

A. Ream ends of pipes and tubes and remove burrs.

B. Remove scale, slag, dirt, and debris from inside and outside of pipe and fittings before assembly.

C. Threaded Joints:

1. Thread pipe with tapered pipe threads complying with ASME B1.20.1.
2. Cut threads full and clean using sharp dies.
3. Ream threaded pipe ends to remove burrs and restore full inside diameter of pipe.
4. Apply appropriate tape or thread compound to external pipe threads unless dryseal threading is specified.
5. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.

3.8 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with requirements for seismic-restraint devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

B. Comply with requirements in Section 230529 "Hangers and Supports for HVAC Piping and Equipment" for hangers, supports, and anchor devices.

C. Install hangers for steel and copper tubing, with maximum horizontal spacing and minimum rod diameters, to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

D. Install hangers for corrugated stainless steel tubing, with maximum horizontal spacing and minimum rod diameters, to comply with manufacturer's written instructions, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

E. Support horizontal piping within 12 inches of each fitting.

F. Support vertical runs of steel and copper tubing to comply with MSS SP-58, locally enforced codes, and authorities having jurisdiction requirements, whichever are most stringent.

3.9 PIPING CONNECTIONS

A. Connect to utility's gas main according to utility's procedures and requirements.

B. Install natural-gas piping electrically continuous, and bonded to gas-appliance equipment grounding conductor of the circuit powering the appliance in accordance with NFPA 70.

C. Where installing piping adjacent to appliances, allow space for service and maintenance of appliances.

D. Connect piping to appliances using manual gas shutoff valves and unions. Install valve within 72 inches of each gas-fired appliance and equipment. Install union between valve and appliances or equipment.

3.10 LABELING AND IDENTIFICATION

A. Comply with requirements in Section 230553 "Identification for HVAC Piping and Equipment" for piping and valve identification.

B. Install detectable warning tape directly above gas piping, 12 inches below finished grade, except 6 inches below subgrade under pavements and slabs.

3.11 CONCRETE BASES

A. Concrete Bases: Anchor equipment to concrete base in accordance with seismic codes at Project. See Section 230548 "Vibration and Seismic Controls for HVAC."

1. Construct concrete bases of dimensions indicated, but not less than 4 inches larger in both directions than supported unit.
2. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of the base.
3. Install epoxy-coated anchor bolts for supported equipment that extend through concrete base, and anchor into structural concrete floor.
4. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
5. Install anchor bolts to elevations required for proper attachment to supported equipment.
6. Use 3000 psig, 28-day, compressive-strength concrete and reinforcement as specified in Section 033000 "Cast-in-Place Concrete."

3.12 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Test, inspect, and purge natural gas in accordance with the International Fuel Gas Code and authorities having jurisdiction.
2. Natural-gas piping will be considered defective if it does not pass tests and inspections.

B. Prepare test and inspection reports.

3.13 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain earthquake valves.

3.14 OUTDOOR PIPING SCHEDULE

A. Aboveground natural-gas piping is to be one of the following:

1. Steel pipe with malleable-iron fittings and threaded joints.

2. Steel pipe with wrought-steel fittings and welded joints.

3.15 ABOVEGROUND, MANUAL GAS SHUTOFF VALVE SCHEDULE

A. Valves for pipe sizes NPS 2 and smaller at service meter are to be one of the following:

1. One-piece, bronze ball valve with bronze trim.

B. Valves for pipe sizes NPS 2-1/2 and larger at service meter are to be one of the following:

1. Two-piece, regular-port, bronze ball valves with bronze trim.

C. Valves in branch piping for single appliance are to be one of the following:

1. One-piece, bronze ball valve with bronze trim.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION **233113** - **METAL DUCTS**

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Rectangular ducts and fittings - single wall.
2. Round ducts and fittings - single wall.
3. Sheet metal materials.
4. Sealants and gaskets.
5. Hangers and supports.

1.2 DEFINITIONS

A. OSHPD: Office of Statewide Health Planning and Development (State of California).

1.3 ACTION SUBMITTALS

A. Product Data: For each type of the following products:

1. Liners and adhesives.
2. Sealants and gaskets.
3. Seismic-restraint devices.

B. Shop Drawings:

1. Fabrication, assembly, and installation, including plans, elevations, sections, components, and attachments to other work.
2. Factory- and shop-fabricated ducts and fittings.
3. Duct layout indicating sizes, configuration, liner material, and static-pressure classes.
4. Elevation of bottom of ducts.
5. Fittings.
6. Reinforcement and spacing.
7. Seam and joint construction.
8. Penetrations through fire-rated and other partitions.
9. Equipment installation based on equipment being used on Project.
10. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.
11. Hangers and supports, including methods for duct and building attachment, seismic restraints, and vibration isolation.

1.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: A single set of plans or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

B. Field quality control reports.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Duct Design: Duct construction, including sheet metal thicknesses, seam and joint construction, reinforcements, and hangers and supports, comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and with performance requirements and design criteria indicated in "Duct Schedule" Article.

B. Retain seismic options and design criteria in "Structural Performance" Paragraph below that are approved by authorities having jurisdiction.

C. Structural Performance: Duct hangers and supports and seismic restraints are to withstand the effects of gravity and seismic loads and stresses within limits and under conditions described in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" and ASCE/SEI 7. Seismically brace duct hangers and supports in accordance with SMACNA's "Seismic Restraint Manual: Guidelines for Mechanical Systems.".

D. Seismic Performance: Ductwork to withstand the effects of earthquake motions.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."
   a. Component Importance Factor: Per Drawings.

E. Airstream Surfaces: Surfaces in contact with airstream comply with requirements in ASHRAE 62.1.

F. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment," and Section 7 - "Construction and System Startup."

G. ASHRAE/IES Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6.4.4 - "HVAC System Construction and Insulation."

H. Duct Dimensions: Unless otherwise indicated, all duct dimensions indicated on Drawings are inside clear dimensions and do not include insulation or duct wall thickness.

2.2 RECTANGULAR DUCTS AND FITTINGS

A. Rectangular Ducts and Fittings - Single Wall:

1. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" based on static-pressure class indicated on the Drawings.

    a. Construct ducts of galvanized sheet steel.

2. Transverse Joints: Fabricate joints in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-1, "Rectangular Duct/Transverse Joints," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

    a. For ducts with longest side less than 36 inches, select joint types in accordance with Figure 2-1.
    b. For ducts with longest side 36 inches or greater, use flange joint connector Type T-22, T-24, T-24A, T-25a, or T-25b. Factory-fabricated flanged duct connection system may be used if submitted and approved by engineer of record.

3. Longitudinal Seams: Select seam types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Duct/Longitudinal Seams," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible." All longitudinal seams are to be Pittsburgh lock seams unless otherwise specified for specific application.

4. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 4, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2.3 ROUND DUCTS AND FITTINGS

A. Round Ducts and Fittings - Single Wall:

1. Source Limitations: Obtain single-wall, round ducts and fittings from single manufacturer.

2. General Fabrication Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Ch. 3, "Round, Oval, and Flexible Duct," based on static-pressure class indicated on the Drawings.

    a. Construct ducts of galvanized sheet steel.

2.4 SHEET METAL MATERIALS

A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods. Sheet metal materials are to be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.

B. Galvanized Sheet Steel: Comply with ASTM A653/A653M.

1. Galvanized Coating Designation: G90.
2. Finishes for Surfaces Exposed to View: Mill phosphatized.
3. Lockforming Quality: Sheet steel and galvanized coating is to be able to be formed with back-to-back bends in seams such as the Pittsburgh lock at high speed without cracking or flaking of the coating on the outside of the bend.

2.5 SEALANTS AND GASKETS

A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets are to be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested in accordance with UL 723; certified by an NRTL.

B. Water-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Solids Content: Minimum 65 percent.
3. Shore A Hardness: Minimum 20.
4. Water resistant.
5. Mold and mildew resistant.
6. VOC: Maximum 75 g/L (less water).
7. Maximum Static-Pressure Class: 10-inch wg, positive and negative.
8. Service: Indoor or outdoor.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

2.6 HANGERS AND SUPPORTS

A. Hanger Rods for Noncorrosive Environments: Galvanized-steel rods and nuts.

B. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct."

C. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A603.

D. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.

E. Trapeze and Riser Supports:

1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.

PART 3 - EXECUTION

3.1 INSTALLATION OF DUCTS

A. plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and coordination drawings.

B. Install ducts in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

C. Install ducts in maximum practical lengths with fewest possible joints.

D. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.

E. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.

F. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.

G. Install ducts with a clearance of 1 inch, plus allowance for insulation thickness.

H. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.

I. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches.

J. Install fire, combination fire/smoke, and smoke dampers where indicated on Drawings and as required by code, and by local authorities having jurisdiction. Comply with requirements in Section 233300 "Air Duct Accessories" for fire and smoke dampers and specific installation requirements of the damper UL listing.

K. Install heating coils, cooling coils, air filters, dampers, and all other duct-mounted accessories in air ducts where indicated on Drawings.

L. Protect duct interiors from moisture, construction debris and dust, and other foreign materials both before and after installation.

M. Elbows: Use long-radius elbows wherever they fit.

1. Fabricate 90-degree rectangular mitered elbows to include turning vanes.
2. Fabricate 90-degree round elbows with a minimum of three segments for 12 inches and smaller and a minimum of five segments for 14 inches and larger.

N. Branch Connections: Use lateral or conical branch connections.

O. Installation of Metal, Cable-Type Strut Support System for Ductwork: Install in accordance with manufacturer's written installation instructions.

3.2 INSTALLATION OF EXPOSED DUCTWORK

A. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.

B. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.

C. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding.

D. Maintain consistency, symmetry, and uniformity in arrangement and fabrication of fittings, hangers and supports, duct accessories, and air outlets.

E. Repair or replace damaged sections and finished work that does not comply with these requirements.

3.3 ADDITIONAL INSTALLATION REQUIREMENTS FOR TYPE 1 COMMERCIAL KITCHEN GREASE HOOD EXHAUST DUCT

A. Install ducts in accordance with NFPA 96, "Ventilation Control and Fire Protection of Commercial Cooking Operation"; SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; and SMACNA's "Kitchen Ventilation Systems and Food Service Equipment Fabrication and Installation Guidelines."

B. Install all ducts without dips and traps that may hold grease, and sloped a minimum of 2 percent to drain grease back to the hood.

C. All ducts exposed to view are to be constructed of stainless steel as per "Duct Schedule" Article. All ducts concealed from view are to be carbon steel as per "Duct Schedule" Article.

D. All joints are to be welded and are to be telescoping, bell, or flange joint as per NFPA 96.

E. Install fire-rated access panel assemblies at each change in direction and at maximum intervals of 12 ft. in horizontal ducts, and at every floor for vertical ducts, or as indicated on Drawings.

F. Do not penetrate fire-rated assemblies except as allowed by applicable building codes and authorities having jurisdiction.

3.4 REQUIREMENTS FOR DUCTWORK EXPOSED TO WEATHER

A. All external joints are to have secure watertight mechanical connections. Seal all openings to provide weatherproof construction.

B. Construct ductwork to resist external loads of wind, snow, ice, and other effects of weather. Provide necessary supporting structures.

C. Single Wall:

1. Ductwork is to be G90 galvanized steel.

a. If duct outer surface is uninsulated, protect outer surface with suitable paint. Paint materials and application requirements are specified in Section 099113 "Exterior Painting."

2. Where ducts have external insulation, provide weatherproof aluminum jacket. See Section 230713 "Duct Insulation."

D. Double Wall:

1. Ductwork is to comply with requirements in "Rectangular Ducts and Fittings - Double Wall," "Round Ducts and Fittings - Double Wall," or "Flat-Oval Ducts and Fittings - Double Wall" Product Type.
2. Ductwork outer wall is to be G90 galvanized steel indicated by manufacturer in writing to be suitable for outdoor installation.
3. Provide interstitial insulation as specified under Part 2.
4. If duct outer surface is uninsulated, protect outer surface with suitable paint. Paint materials and application requirements are specified in Section 099113 "Exterior Painting."

3.5 DUCT SEALING

A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified in "Duct Schedule" Article in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

B. Seal ducts at a minimum to the following seal classes in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible":

1. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."

2. See Duct Construction Schedule on Drawings.

3.6 INSTALLATION OF HANGERS AND SUPPORTS

A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 5, "Hangers and Supports."

B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.

1. Where practical, install concrete inserts before placing concrete.
2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
3. Use powder-actuated concrete fasteners for standard-weight aggregate concretes or for slabs more than 4 inches thick.
4. Do not use powder-actuated concrete fasteners for lightweight-aggregate concretes or for slabs less than 4 inches thick.
5. Do not use powder-actuated concrete fasteners for seismic restraints. Coordinate with Section 230548 "Vibration and Seismic Controls for HVAC."

C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 5-1, "Rectangular Duct Hangers Minimum Size," and Table 5-2, "Minimum Hanger Sizes for Round Duct," for maximum hanger spacing; install hangers and supports within 24 inches of each elbow and within 48 inches of each branch intersection.

D. Hangers Exposed to View: Threaded rod and angle or channel supports.

E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 ft..

F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.7 INSTALLATION OF SEISMIC-RESTRAINT DEVICES

A. See Section 230548 "Vibration and Seismic Controls for HVAC" for seismic restraint installation requirements.

3.8 DUCTWORK CONNECTIONS

A. Make connections to equipment with flexible connectors complying with Section 233300 "Air Duct Accessories."

B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.9 PAINTING

A. Paint interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. Paint materials and application requirements are specified in Section 099123 "Interior Painting."

3.10 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Leakage Tests:

1. Comply with SMACNA's "HVAC Air Duct Leakage Test Manual." Submit a test report for each test.
2. Test the following systems:

    a. Ducts with a Pressure Class Higher than 3-Inch wg (750 Pa): Test representative duct sections, totaling no less than 25 percent of total installed duct area for each designated pressure class.
    b. Ducts located outdoors: test representative 100 percent of total installed duct area for each designated pressure class.
    c. Exhaust ducts, filter housing and exhaust equipment used for shooting range: test representative 100 percent of total installed duct area for each designated pressure class.

3. Disassemble, reassemble, and seal segments of systems to accommodate leakage testing and for compliance with test requirements.
4. Testing of each duct section is to be performed with access doors, coils, filters, dampers, and other duct-mounted devices in place as designed. No devices are to be removed or blanked off so as to reduce or prevent additional leakage.
5. Test for leaks before applying external insulation.
6. Conduct tests at static pressures equal to maximum design pressure of system or section being tested. If static-pressure classes are not indicated, test system at maximum system design pressure. Do not pressurize systems above maximum design operating pressure.
7. Give seven days' advance notice for testing.

C. Duct System Cleanliness Tests:

1. Visually inspect duct system to ensure that no visible contaminants are present.
2. Test sections of metal duct system, chosen randomly by Owner, for cleanliness in accordance with "Description of Method 3 - NADCA Vacuum Test" in NADCA ACR, "Assessment, Cleaning, and Restoration of HVAC Systems."

    a. Acceptable Cleanliness Level: Net weight of debris collected on the filter media is to not exceed 0.75 mg/100 sq. cm.

D. Duct system will be considered defective if it does not pass tests and inspections.

E. Prepare test and inspection reports.

3.11 DUCT CLEANING

A. Clean new duct system(s) before testing, adjusting, and balancing.

B. Use duct cleaning methodology as indicated in NADCA ACR.

C. Use service openings for entry and inspection.

1. Provide openings with access panels appropriate for duct static-pressure and leakage class at dampers, coils, and any other locations where required for inspection and cleaning access. Provide insulated panels for insulated or lined duct. Patch insulation and liner as recommended by duct liner manufacturer. Comply with Section 233300 "Air Duct Accessories" for access panels and doors.
2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
3. Remove and reinstall ceiling to gain access during the cleaning process.

D. Particulate Collection and Odor Control:

1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.

E. Clean the following components by removing surface contaminants and deposits:

1. Air outlets and inlets (registers, grilles, and diffusers).
2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.
3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
4. Coils and related components.
5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
6. Supply-air ducts, dampers, actuators, and turning vanes.
7. Dedicated exhaust and ventilation components and makeup air systems.

F. Mechanical Cleaning Methodology:

1. Clean metal duct systems using mechanical cleaning methods that extract contaminants from within duct systems and remove contaminants from building.
2. Use vacuum-collection devices that are operated continuously during cleaning. Connect vacuum device to downstream end of duct sections so areas being cleaned are under negative pressure.

3. Use mechanical agitation to dislodge debris adhered to interior duct surfaces without damaging integrity of metal ducts, duct liner, or duct accessories.
4. Clean fibrous-glass duct liner with HEPA vacuuming equipment; do not permit duct liner to get wet. Replace fibrous-glass duct liner that is damaged, deteriorated, or delaminated or that has friable material, mold, or fungus growth.
5. Clean coils and coil drain pans in accordance with NADCA ACR. Keep drain pan operational. Rinse coils with clean water to remove latent residues and cleaning materials; comb and straighten fins.
6. Provide drainage and cleanup for wash-down procedures.
7. Antimicrobial Agents and Coatings: Apply EPA-registered antimicrobial agents if fungus is present. Apply antimicrobial agents in accordance with manufacturer's written instructions after removal of surface deposits and debris.

3.12 STARTUP

A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.13 DUCT SCHEDULE

A. Fabricate all ducts with G90 galvanized sheet steel except as otherwise indicated.

B. See drawings for duct schedule, pressure / seal / and leakage classifications.

C. Elbow Configuration:

1. Rectangular Duct - Requirements for All Velocities: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-2, "Rectangular Elbows."

    a. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
    b. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

2. Round Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "Round Duct Elbows."

    a. Minimum Radius-to-Diameter Ratio and Elbow Segments: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 3-1, "Mitered Elbows." Elbows with less than 90-degree change of direction have proportionately fewer segments.

        1) Radius-to-Diameter Ratio: 1.5.

    b. Round Elbows:

        1) Stamped or pleated for 12 inches and smaller diameters.

2) Standing seam for 14 inches and larger diameter.

D. Branch Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 4-6, "Branch Connection."

   a. Rectangular Main to Rectangular Branch: 45-degree entry.
   b. Rectangular Main to Round Branch: Conical spin in.

2. Round: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-5, "90 Degree Tees and Laterals," and Figure 3-6, "Conical Tees." Saddle taps are permitted in existing duct.

   a. All velocities: 45-degree lateral.

END OF SECTION

SECTION 233300 - AIR DUCT ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Manual volume dampers.
2. Turning vanes.
3. Duct-mounted access doors.
4. Flexible connectors.
5. Flexible ducts, insulated.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Construction details, material descriptions, and dimensions of individual components.
2. For dampers, include housings, linkages, and operators.
3. For damper operators, include electrical or pneumatic pressure rating and damper size rating.
4. For duct-mounted duct silencers, include pressure drop, dynamic insertion loss, and self-generated noise data. Include breakout noise calculations for high-transmission-loss casings.

PART 2 - PRODUCTS

2.1 MANUAL VOLUME DAMPERS

A. Standard, Steel, Manual Volume Dampers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Air Balance; MESTEK, Inc.
   b. Aire Technologies, Inc.; DMI Companies.
   c. American Warming and Ventilating (AWV); Mestek, Inc.
   d. Arrow United Industries; Mestek, Inc.

2. Performance:

   a. Leakage Rating Class III: Leakage not exceeding 40 cfm/sq. ft. against design differential static pressure.

3. Construction:

    a. Linkage out of airstream.
    b. Suitable for horizontal or vertical airflow applications.

4. Frames:

    a. Hat-shaped, 16-gauge- thick, galvanized sheet steel.
    b. Mitered and welded corners.
    c. Flanges for attaching to walls and flangeless frames for installing in ducts.

5. Blades:

    a. Multiple blade.
    b. Opposed-blade design.
    c. Stiffen damper blades for stability.
    d. Galvanized steel; 16 gauge thick.

6. Blade Axles: Stainless steel.

7. Tie Bars and Brackets: Galvanized steel.
8. Locking device to hold damper blades in a fixed position without vibration.

B. Jackshaft:

1. Size: 0.5-inch diameter.
2. Material: Galvanized-steel pipe rotating within pipe-bearing assembly mounted on supports at each mullion and at each end of multiple-damper assemblies.
3. Length and Number of Mountings: As required to connect linkage of each damper in multiple-damper assembly.

C. Damper Hardware:

1. Zinc-plated, die-cast core with dial and handle, made of 3/32-inch- thick zinc-plated steel, and a 3/4-inch hexagon locking nut.
2. Include center hole to suit damper operating-rod size.
3. Include elevated platform for insulated duct mounting.

2.2 TURNING VANES

A. Manufactured Turning Vanes for Metal Ducts: Fabricate curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.

1. Turning Vanes: Fabricate single-wall curved blades of.

B. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figure 4-3, "Vanes and Vane Runners," and Figure 4-4, "Vane Support in Elbows."

C. Vane Construction:

1. Wall: Single.

2.3 DUCT-MOUNTED ACCESS DOORS AND PRESSURE-RELIEF DOORS

A. General Requirements: Fabricate access doors in accordance with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figure 7-2, "Duct Access Doors and Panels," and Figure 7-3, "Access Doors - Round Duct."

2.4 DUCT FLEXIBLE CONNECTORS

A. Fire-Performance Characteristics: Adhesives, sealants, fabric materials, and accessory materials are to have flame-spread index not exceeding 25 and smoke-developed index not exceeding 50 when tested in accordance with ASTM E84.

B. Airstream Surfaces: Surfaces in contact with the airstream are to comply with requirements in ASHRAE 62.1.

C. Materials: Flame-retardant or noncombustible fabrics.

D. Coatings and Adhesives: Comply with UL 181, Class 1.

Outdoor System, Duct Flexible Connector Fabric: Glass fabric double coated with weatherproof, synthetic rubber resistant to UV rays and ozone.

1. Minimum Weight: 24 oz./sq. yd..
2. Tensile Strength: 530 lbf/inch in the warp and 440 lbf/inch in the filling.
3. Service Temperature: Minus 50 to plus 250 deg F.

2.5 MATERIALS

A. Galvanized Sheet Steel: Comply with ASTM A653/A653M.

1. Galvanized Coating Designation: G90.
2. Exposed-Surface Finish: Mill phosphatized.

B. Reinforcement Shapes and Plates: Galvanized-steel reinforcement where installed on galvanized sheet metal ducts; compatible materials for aluminum and stainless steel ducts.

C. Tie Rods: Galvanized steel, 3/8-inch minimum diameter.

2.6 FLEXIBLE DUCTS, INSULATED

A. Standard: Product is to be UL 181 listed and bearing the UL label.

B. Flexible Ducts, Insulated - Class 0, Interlocking Spiral of Aluminum Foil; Fibrous-Glass Insulation:

1. Pressure Rating: 8 inch wg positive or negative.
2. Maximum Air Velocity: 5000 fpm.
3. Temperature Range: Minus 20 to plus 250 deg F.
4. Insulation R-Value: R8.
5. Vapor-Barrier Film: Aluminized, ASTM E96/E96M.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

A. Tests and Inspections:

1. Operate dampers to verify full range of movement.
2. Inspect locations of access doors, and verify that size and location of access doors are adequate to perform required operation.
3. Operate fire, smoke, and combination fire and smoke dampers to verify full range of movement and that proper heat-response device is installed.
4. Inspect turning vanes for proper and secure installation, and verify that vanes do not move or rattle.
5. Operate remote damper operators to verify full range of movement of operator and damper.

END OF SECTION

SECTION 233400 - HVAC FANS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
1. Ventilators, centrifugal - ceiling mounted.
2. Ventilators, centrifugal - roof-mounted upblast.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

a. Construction details, material descriptions, dimensions of individual components and profiles, and finishes for fans.
b. Rated capacities, furnished specialties, and accessories for each fan.
c. Fans:

1) Certified fan performance curves with system operating conditions indicated.
2) Certified fan sound-power ratings.
3) Fan construction and accessories.
4) Motor ratings and electrical characteristics, plus motor and electrical accessories.
5) Fan speed controllers.

d. Material thickness and finishes, including color charts.
e. Dampers, including housings, linkages, and operators.

B. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.
4. Design Calculations: Calculate requirements for selecting vibration isolators and seismic restraints and for designing vibration isolation bases.
5. Vibration Isolation Base Details: Detail fabrication, including anchorages and attachments to structure and to supported equipment. Include adjustable motor bases, rails, and frames for equipment mounting.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans showing fan rooms and fan system layouts, reflected ceiling plans, and other drawings required to illustrate relationships between components and adjacent structural and mechanical elements. Show support locations, type of support, and weight on each support. Indicate and certify field measurements.

B. Seismic Qualification Data: Certificates, for fans, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

C. Startup service reports.

D. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For fans and ventilators, include the following:

1. Operation in normal and emergency modes.
2. Operation and maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective coverage for storage and identified with labels describing contents.

1. Belts: One set(s) for each belt-driven unit.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of unit components.

C. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

D. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

E. Seismic Performance: Fans and ventilators are to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.

2.2 VENTILATORS, CENTRIFUGAL - CEILING MOUNTED

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. CaptiveAire Systems.
2. Cook; Loren Cook Company.
3. Greenheck Fan Corporation.
4. Twin City Fan & Blower.

B. Source Limitations: Obtain ceiling-mounted centrifugal ventilators from single manufacturer.

C. Standards: Comply with UL 705.

D. Housing: Steel, lined with acoustical insulation.

E. Fan Wheel: Centrifugal wheels directly mounted on motor shaft. Fan shrouds, motor, and fan wheel are removable for service.

F. Back-draft damper: Integral.

G. Grille: Plastic, louvered grille with flange on intake and thumbscrew or spring retainer attachment to fan housing.

H. Electrical Requirements: Junction box for electrical connection on housing and receptacle for motor plug-in.

I. Accessories:
1. Manual Starter Switch: Single-pole rocker switch assembly with cover and pilot light.
2. Time-Delay Switch: Assembly with single-pole rocker switch, timer, and cover plate.
3. Motion Sensor: Motion detector with adjustable shutoff timer.
4. Ceiling Radiation Damper: Fire-rated assembly with ceramic blanket, stainless steel springs, and fusible link.
5. Filter: Washable aluminum to fit between fan and grille.
6. Isolation: Rubber-in-shear vibration isolators.
7. Manufacturer's standard roof jack or wall cap, and transition fittings.

2.3 VENTILATORS, CENTRIFUGAL - ROOF-MOUNTED UPBLAST

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. CaptiveAire Systems.

2. Cook; Loren Cook Company.
3. Greenheck Fan Corporation.
4. Twin City Fan & Blower.

B. Source Limitations: Obtain roof-mounted upblast or sidewall-mounted centrifugal ventilators from single manufacturer.

C. Standards:

1. Comply with UL 705.
2. Power ventilators for use with restaurant kitchen exhaust are to comply with UL 762.

D. Configuration: Centrifugal roof upblast and roof upblast, kitchen grease hood ventilator.

E. Housing: Removable spun-aluminum dome top and outlet baffle; square, one-piece aluminum base with venturi inlet cone.

1. Upblast Units: Provide spun-aluminum discharge baffle to direct discharge air upward, with rain and snow drains.
2. Provide grease collector where applicable.

F. Fan Wheels: Aluminum hub and wheel with backward-inclined blades; spark-resistant construction classified in accordance with AMCA 99, Section 8, Type A.
1. Fan and motor are isolated from exhaust airstream.

G. Accessories:

1. Variable-Frequency Motor Controller: Solid-state control to reduce speed from 100 to less than 50 percent.
2. Disconnect Switch: Nonfusible type, with thermal-overload protection mounted inside fan housing, factory wired through an internal aluminum conduit.
3. Bird Screens: Removable, 1/2-inch (13-mm) mesh, aluminum or brass wire.
4. Dampers: Counterbalanced, parallel-blade, backdraft dampers mounted in curb base; factory set to close when fan stops.
5. Motorized Dampers: Parallel-blade dampers mounted in curb base with electric actuator; wired to close when fan stops.
6. Mounting Pedestal: Galvanized steel with removable access panel.
7. Wall Mount Adapter: Attach wall-mounted fan to wall.
8. Restaurant Kitchen Exhaust: UL 762 listed for grease-laden air exhaust.

H. Prefabricated Roof Curbs: Galvanized steel; mitered and welded corners; 1-1/2-inch- (40-mm-) thick, rigid, fiberglass insulation adhered to inside walls; and 1-1/2-inch (40-mm) wood nailer. Size as required to suit roof opening and fan base.

1. Configuration: Self-flashing without a cant strip, with mounting flange.

I. Prefabricated Kitchen Exhaust Roof Curbs: Galvanized steel; mitered and welded corners; ventilation openings on all sides to ventilate curb interstitial space. Size as required to suit roof opening and fan base.

1. Configuration: Self-flashing without a cant strip, with mounting flange.
2. NFPA 96 code requirements for commercial cooking operations.
3. Kitchen Hood Exhaust: UL 762 listed for grease-laden air.

2.4 MOTORS

A. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230500 "Common Work Results for HVAC."

B. Where variable-frequency drives are indicated or scheduled, provide fan motor compatible with variable-frequency drive.

2.5 CONTROLS

A. General Exhaust Fans:
1. Furnish each fan with all factory-installed electrical components required for operation.
2. Provide all field-mounted switches, relays, contactors, disconnects, sensors, controllers, and control wiring required for a complete and operational system.
3. Provide wall-mounted speed controllers for fans scheduled for variable speed operation where indicated on the Drawings.
4. Provide all interlocks, control wiring, and accessories required to operate the fan in accordance with the sequences of operation indicated on the Drawings.
5. Coordinate operation with associated HVAC equipment, occupancy controls, and other building systems as indicated on the Drawings.

B. Kitchen Exhaust Fans:
1. Controls for kitchen grease exhaust fans shall be furnished by the kitchen hood manufacturer.
2. HVAC Contractor shall install all field wiring between the hood control panel, exhaust fan, makeup air unit, fire suppression system, and associated devices as required for a complete operating system.
3. Coordinate installation and operation with the kitchen hood manufacturer and fire suppression contractor.
4. Verify operation of all fan start/stop functions, interlocks, and fire suppression shutdown sequences during startup.

C. Control Sequences:
1. Factory and field controls shall be programmed and wired to perform the sequences of operation indicated on the Drawings.
2. Furnish all thermostats, sensors, relays, controllers, actuators, and control wiring required for complete operation unless specifically indicated to be furnished by others.

2.6 SOURCE QUALITY CONTROL

A. AMCA Certification for Fan Sound Performance Rating: Test, rate, and label in accordance with AMCA 311.

B. AMCA Certification for Fan Aerodynamic Performance Ratings: Test, rate, and label in accordance with AMCA 211.

C. AMCA Certification for Fan Energy Index (FEI): Test, rate, and label in accordance with AMCA 211.

D. Fan Operating Limits: Classify fans in accordance with AMCA 99, Section 14.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Install fans level and plumb.

B. Disassemble and reassemble units, as required for moving to the final location, in accordance with manufacturer's written instructions.

C. Lift and support units with manufacturer's designated lifting or supporting points.

D. Equipment Mounting:

1. Install floor-mounted fans on cast-in-place concrete equipment bases. Comply with requirements for equipment bases and foundations specified in Section 033000 "Cast-in-Place Concrete."
2. Install roof-mounted fans on roof curbs or support steel. See Drawings for specific requirements.
3. Unit Support: Install fans level on structural curbs. Coordinate with duct connections. Coordinate wall penetrations and flashing with wall construction. Secure units to structural support with anchor bolts.
4. Support duct-mounted and other hanging fans directly from the building structure, using suitable hanging systems as specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."
5. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."
6. Comply with requirements for vibration isolation devices specified in Section 230548.13 "Vibration Controls for HVAC."

E. Curb Support, Prefabricated: Rail-type wood support provided by fan manufacturer.

F. Unit Support: Install centrifugal fans level on structural curbs. Coordinate with duct connections. Coordinate wall penetrations and flashing with wall construction. Secure units to structural support with anchor bolts.

1. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

G. Install units with adequate clearances for service and maintenance.

H. Label fans in accordance with requirements specified in Section 230553 "Identification for HVAC Piping and Equipment."

3.2 DUCTWORK CONNECTIONS

A. Drawings indicate general arrangement of ducts and duct accessories. Make final duct connections with flexible connectors. Flexible connectors are specified in Section 233300 "Air Duct Accessories."

B. Where installing ducts adjacent to fans, allow space for service and maintenance.

3.3 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate is to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate is to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch (13 mm) high.

3.4 CONTROL INSTALLATION

A. Install all factory-furnished and field-mounted control devices in accordance with the manufacturer's written instructions.

B. Provide all field control wiring required for complete fan operation.

C. Coordinate wiring and interlocks with kitchen hood controls, makeup air units, fire alarm system, and fire suppression system where applicable.

D. Verify proper operation of all control devices, safeties, interlocks, and sequences prior to Substantial Completion.

3.5 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.6 STARTUP SERVICE:

A. Perform startup service.

1. Complete installation and startup checks in accordance with manufacturer's written instructions.
2. Verify that shipping, blocking, and bracing are removed.
3. Verify that unit is secure on mountings and supporting devices and that connections to ducts and electrical components are complete. Verify that proper thermal-overload protection is installed in motors, starters, and disconnect switches.
4. Verify that cleaning and adjusting are complete.
5. For direct-drive fans, verify proper motor rotation direction and verify fan wheel free rotation and smooth bearing operation.
6. For belt-drive fans, disconnect fan drive from motor, verify proper motor rotation direction, and verify fan wheel free rotation and smooth bearing operation. Reconnect fan drive system, align and adjust belts, and install belt guards.
7. Adjust belt tension.
8. Adjust damper linkages for proper damper operation.
9. Verify lubrication for bearings and other moving parts.
10. Verify that manual and automatic volume control and fire and smoke dampers in connected ductwork systems are in fully open position.
11. Disable automatic temperature-control operators, energize motor and confirm proper motor rotation and unit operation, adjust fan to indicated rpm, and measure and record motor voltage and amperage.
12. Shut unit down and reconnect automatic temperature-control operators.
13. Remove and replace malfunctioning units and retest as specified above.

3.7 ADJUSTING

A. Adjust damper linkages for proper damper operation.

B. Adjust belt tension.

C. Lubricate bearings.

D. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.8 CLEANING

A. After completing system installation and testing, adjusting, and balancing and after completing startup service, clean fans internally to remove foreign material and construction dirt and dust.

3.9 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

B. Perform tests and inspections with the assistance of a factory-authorized service representative.

1. Fan Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
2. Test and adjust controls and safeties.
3. Fans and components will be considered defective if they do not pass tests and inspections.
4. Prepare test and inspection reports.

3.10 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain HVAC fans.

END OF SECTION 233400

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 233533 - LISTED KITCHEN VENTILATION SYSTEM EXHAUST DUCTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Listed grease ducts.
2. Access doors.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for listed grease ducts.

B. Shop Drawings: For listed grease ducts.

1. Include plans, elevations, sections, and attachment details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Detail fabrication and assembly of hangers and seismic restraints.

1.3 INFORMATIONAL SUBMITTALS

A. Welding certificates.

1.4 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel," for hangers and supports.
2. AWS D9.1/D9.1M, "Sheet Metal Welding Code," for shop and field welding of joints and seams in listed grease ducts and field-fabricated grease ducts.

PART 2 - PRODUCTS

2.1 LISTED GREASE DUCTS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
   1. Ductmate Industries, Inc.
   2. Grease Duct Industries, LLC.
   3. Metal-Fab, Inc.
   4. Selkirk Corporation.

B. Description: Factory-fabricated, -listed, and -labeled, double-wall ducts tested according to UL 1978 and rated for 500 deg F (260 deg C) continuously, or 2000 deg F (1093 deg C) for 30 minutes; with positive or negative duct pressure and complying with NFPA 211.

C. Construction: Inner shell and outer jacket separated by at least a 2-inch (50-mm) [**4-inch (100-mm)**] annular space filled with high-temperature, ceramic-fiber insulation.

   1. Inner Shell: ASTM A666, Type 304 stainless steel.
   2. Outer Jacket: Stainless steel where concealed. Stainless steel where exposed.

D. Gaskets and Flanges: Ensure that gaskets and sealing materials are rated at 1500 deg F (816 deg C) minimum.

E. Hood Connectors: Constructed from same material as grease duct with internal or external continuously welded or brazed joints.

F. Accessories: Tees, elbows, increasers, terminations, adjustable roof flashings, storm collars, support assemblies, thimbles, firestop spacers, and fasteners; fabricated from similar materials and designs as vent-pipe straight sections; all listed for same assembly. Include unique components required to comply with NFPA 96 including cleanouts, transitions, adapters, and drain fittings.

G. Grease Duct Supports: Construct duct bracing and supports from non-combustible material.

   1. Design bracing and supports to carry static and seismic loads within stress limitations of the International Building Code.
   2. Ensure that bolts, screws, rivets and other mechanical fasteners do not penetrate duct walls.

H. Comply with ASTM E2336.

I. Factory Tests: Test and inspect fire resistance of grease duct system according to ASTM E2336.

2.2 ACCESS DOORS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Ductmate Industries, Inc.
2. Grease Duct Industries, LLC.
3. Metal-Fab, Inc.
4. Selkirk Corporation.

B. Description: Factory-fabricated, -listed, and -labeled, double-wall personnel and maintenance access doors tested according to UL 1978 and rated for 500 deg F (260 deg C) continuously, or 2000 deg F (1093 deg C) for 30 minutes; with positive or negative duct pressure and complying with NFPA 211.

1. Construction: 0.0625 inch (1.6 mm) ASTM A666, Type 304 stainless steel inner shell and stainless steel outer cover with two handles.
2. Fasteners: Stainless steel bolts and wing nuts.
    a. Ensure that bolts do not penetrate interior of duct space.
3. Door Label: Mark door with uppercase lettering as follows: "ACCESS PANEL. DO NOT OBSTRUCT."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Coordinate installation of roof curbs, equipment supports, and roof penetrations.

B. Coordinate connections to kitchen exhaust hoods with requirements in Section 233813 "Commercial-Kitchen Hoods."

C. Coordinate connections to exhaust fans with requirements in Section 233400 "HVAC Fans."

D. Coordinate firestopping where grease ducts penetrate fire separations with requirements in Section 078413 "Penetration Firestopping."

E. Comply with minimum clearances from combustibles and minimum termination heights according to product listing or NFPA 211 and UL 2221, whichever is most stringent.

F. Install airtight personnel and maintenance access doors where indicated.

G. Seal between sections of grease exhaust ducts according to manufacturer's written installation instructions, using sealants recommended by manufacturer.

H. Connections: Make grease duct connections according to the International Mechanical Code.

1. Grease duct to exhaust fan connections: Connect grease ducts to inlet side of fan using flanges, gaskets, and bolts.
2. Grease duct to hood connections:

a. Make grease duct to hood joints connections using internal or external continuously welded or brazed joints.

I. Support ducts at intervals recommended by manufacturer to support weight of ducts and accessories, without applying loading on kitchen hoods.

1. Securely attach supports and bracing to structure.

J. Grease Duct Enclosures: Comply with requirements of the International Building Code and ASTM E2336.

K. Coordinate fire-rated enclosure construction with Section 092900 "Gypsum Board."

L. Repair damage to adjacent materials caused by listed kitchen ventilation system exhaust ducts installation.

3.3 FIELD QUALITY CONTROL

A. Perform air leakage test in presence of Owner before concealment of any portion of the grease duct system.

1. Notify Owner a minimum of two days before test is performed.

END OF SECTION 233533

SECTION 233713 – DIFFUSERS, REGISTERS AND GRILLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Diffusers.
2. Grilles.

1.2 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

a. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
b. Register and Grille Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.

1.3 INFORMATIONAL SUBMITTALS

A. See Section 013100 "Project Management and Coordination."

B. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Ceiling suspension assembly members.
2. Method of attaching hangers to building structure.
3. Size and location of initial access modules for acoustical tile.
4. Ceiling-mounted items, including lighting fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.
5. Duct access panels.

PART 2 - PRODUCTS

2.1 SCHEDULES

A. See drawings for scheduled equipment.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas where registers and grilles are installed for compliance with requirements for installation tolerances and other conditions affecting performance of equipment.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF REGISTERS AND GRILLES

A. Install registers and grilles level and plumb.

B. Outlets and Inlets Locations: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Architect for a determination of final location.

C. Install registers and grilles with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.

3.3 ADJUSTING

A. After installation, adjust registers and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION

SECTION 233813 - COMMERCIAL-KITCHEN HOODS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:
   1. Commercial-kitchen hoods, Type II.

B. Related Requirements:

   1. Section 233533 "Listed Kitchen Ventilation System Exhaust Ducts" for fire-rated ducts connecting to kitchen hoods.

1.3 DEFINITIONS

A. Listed Hood: A hood, factory fabricated and tested for compliance with UL 710 by a testing agency acceptable to authorities having jurisdiction.

B. Standard Hood: A hood, usually field fabricated, that complies with design, construction, and performance criteria of applicable national and local codes.

C. Type I Hood: A hood designed for grease exhaust applications.

D. Type II Hood: A hood designed for heat and steam removal and for other nongrease applications.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data: For the following:

   1. Standard hoods.
   2. Filters/baffles.
   3. Fire-suppression systems.
   4. Luminaires.

B. Shop Drawings: Signed and sealed by a qualified professional engineer.

1. Shop Drawing Scale: 1/4 inch = 1 foot (1:50).
2. Show plan view, elevation view, sections, roughing-in dimensions, service requirements, duct connection sizes, and attachments to other work.
3. Show cooking equipment plan and elevation to confirm minimum code-required overhang.
4. Indicate performance, exhaust and makeup air airflow, and pressure loss at actual Project-site elevation.
5. Show control cabinets.
6. Show fire-protection cylinders, piping, actuation devices, and manual control devices.
7. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
8. Design Calculations: Calculate requirements for selecting seismic restraints.
9. Include diagrams for power, signal, and control wiring.
10. Duct Connections: Detail connections between ducts and hoods, including access doors and panels.
11. Piping Diagrams: Detail fire-suppression piping and components and differentiate between manufacturer-installed and field-installed piping. Include roughing-in requirements for drain connections. Show cooking equipment plan and elevation to illustrate fire-suppression nozzle locations.

    a. Piping Diagram Scale: 1/4 inch = 1 foot (1:50).

1.6 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Coordination Drawing Scale: 1/4 inch = 1 foot (1:50).
2. Suspended ceiling assembly components.
3. Structural members to which equipment will be attached.
4. Roof framing and support members for duct penetrations.
5. Items penetrating finished ceiling including the following:

    a. Luminaires.
    b. Air outlets and inlets.
    c. Speakers.
    d. Sprinklers.
    e. Access panels.
    f. Moldings on hoods and accessory equipment.

B. Welding certificates.

C. Seismic Qualification Data: Submit certification that commercial-kitchen hoods, accessories, and components will withstand seismic forces, including the following:

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.

2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

D. Field quality-control reports.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Grease Filters/Baffles: One complete set(s).

1.8 QUALITY ASSURANCE

A. Engineering Responsibility: Preparation of Shop Drawings and comprehensive engineering analysis by a qualified professional engineer.

B. Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D 1.1M, "Structural Welding Code - Steel," for hangers and supports; and AWS D9.1/D9.1M, "Sheet Metal Welding Code," for joint and seam welding.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 HOOD MATERIALS

A. Stainless-Steel Sheet: ASTM A666, Type 304.

1. Minimum Thickness: 0.050 inch (1.3 mm).
2. Finish: Comply with SSINA's "Finishes for Stainless Steel" for recommendations for applying and designating finishes.

a. Finish shall be free from tool and die marks and stretch lines and shall have uniform, directionally textured, polished finish indicated, free of cross scratches. Grain shall run with long dimension of each piece.

3. Concealed Stainless-Steel Surfaces: ASTM A480/A480M, No. 2B finish (bright, cold-rolled, unpolished finish).
4. Exposed Surfaces: ASTM A480/A480M, No. 4 finish (directional satin).
5. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

B. Carbon-Steel Sheets: ASTM A1008/A1008M, cold-rolled sheets; commercial quality; with oiled, exposed matte finish.

1. Minimum Thickness: 0.0478 inch (1.2 mm).

C. Galvanized-Steel Sheet: Lock-forming quality; ASTM A653/A653M, G90 (Z275) coating designation.

1. Minimum Thickness: 0.052 inch (1.32 mm).

D. Zinc-Coated Steel Shapes: ASTM A36/A36M, zinc coated according to ASTM A123/A123M requirements.

E. Sealant: ASTM C920; Type S, Grade NS, Class 25, Use NT. Elastomeric sealant shall be NSF certified for commercial-kitchen hood application. Sealants, when cured and washed, shall comply with requirements in 21 CFR 177.2600, for use in areas that come in contact with food.

1. Color: As selected by Architect from manufacturer's full range.
2. Backer Rod: Closed-cell polyethylene, in diameter larger than joint width.

F. Sound Dampening: NSF-certified, non-absorbent, hard-drying, sound-deadening compound for permanent adhesion to metal in minimum 1/8-inch (3-mm) thickness that does not chip, flake, or blister.

G. Gaskets: NSF certified for end-use application indicated; of resilient rubber, neoprene, or PVC that is nontoxic, stable, odorless, nonabsorbent, and unaffected by exposure to foods and cleaning compounds, and that passes testing according to UL 710.

2.3 GENERAL HOOD FABRICATION REQUIREMENTS

A. Welding: Use welding rod of same composition as metal being welded. Use methods that minimize distortion and develop strength and corrosion resistance of base metal. Make ductile welds free of mechanical imperfections such as gas holes, pits, or cracks.

1. Welded Butt Joints: Full-penetration welds for full-joint length. Make joints flat, continuous, and homogenous with sheet metal without relying on straps under seams, filling in with solder, or spot welding.
2. Grind exposed welded joints flush with adjoining material and polish to match adjoining surfaces.
3. Where fasteners are welded to underside of equipment, finish reverse side of weld smooth and flush.
4. Coat concealed stainless-steel welded joints with metallic-based paint to prevent corrosion.

5. After zinc-coated steel is welded, clean welds and abraded areas and apply SSPC-Paint 20, high-zinc-dust-content, galvanizing repair paint to comply with ASTM A780/A780M.

B. For metal butt joints, comply with SMACNA's "Kitchen Ventilation Systems & Food Service Equipment Guidelines."

C. Where stainless steel is joined to a dissimilar metal, use stainless-steel welding material or fastening devices.

D. Form metal with break bends that are not flaky, scaly, or cracked in appearance; where breaks mar uniform surface appearance of material, remove marks by grinding, polishing, and finishing.

E. Sheared Metal Edges: Finish free of burrs, fins, and irregular projections.

F. In food zones, as defined in NSF, fabricate surfaces free from exposed fasteners.

G. Cap exposed fastener threads, including those inside cabinets, with stainless-steel lock washers and stainless-steel cap (acorn) nuts.

H. Fabricate pipe slots on equipment with turned-up edges sized to accommodate service and utility lines and mechanical connections.

I. Fabricate enclosures, including panels, housings, and skirts, to conceal service lines, operating components, and mechanical and electrical devices including those inside cabinets unless otherwise indicated.

J. Fabricate seismic restraints according to SMACNA's "Kitchen Ventilation Systems & Food Service Equipment Guidelines," Appendix A, "Seismic Restraint Details."

K. Fabricate equipment edges and backsplashes according to SMACNA's "Kitchen Ventilation Systems & Food Service Equipment Guidelines."

L. Fabricate enclosure panels to ceiling and wall as follows:

1. Fabricate panels on all exposed side(s) with same material as hood, and extend from ceiling to top of hood canopy and from canopy to wall.
2. Wall Offset Spacer: Minimum of 3 inches (75 mm).
3. Wall Shelves and Overshelves: Fabricate according to SMACNA's "Kitchen Ventilation Systems & Food Service Equipment Guidelines," with minimum 0.0625-inch- (1.58-mm-) thick, stainless-steel shelf tops.

2.4 EXHAUST HOOD FABRICATION, TYPE II HOOD

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
1. CaptiveAire Systems.
2. Gaylord Industries, Inc.
3. Greenheck Fan Corporation.

4. Halton Company.

B. Fabricate hoods according to NSF 2, "Food Equipment."

C. Hood Configuration: Exhaust only.
1. Makeup air shall be introduced through front and bottom of canopy through supply-air registers.

D. Hood Type: Heat and vapor removal.

E. Hood Style: Double-island canopy.

F. Condensate Hood Baffles: Removable, stainless-steel baffles to drain into a hood drain trough, and stainless-steel drain piping.

G. Luminaires: Surface-mounted, LED luminaires and lamps with lenses sealed vapor tight. Wiring shall be installed in stainless-steel conduit on hood exterior. Number and location of luminaires shall provide a minimum of 70 fc (753 lx) at 30 inches (762 mm) above finished floor.

1. Light switches shall be mounted on front panel of hood canopy.
2. Luminaires: LED complying with UL 1598.

H. Capacities and Characteristics:
1. See Schedule on Drawings.

2.5 FIRE-SUPPRESSION SYSTEM, WET CHEMICAL

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:
1. Ansul; a brand of Johnson Controls International plc, Building Solutions North America.
2. Badger Fire Protection; a Carrier company.
3. Kidde; Carrier Global Corporation.
4. Pyro-Chem; a brand of Johnson Controls International plc, Building Solutions North America.

B. Description: Engineered distribution piping designed for automatic detection and release or manual release of fire-suppression agent by hood operator. Fire-suppression system shall be listed and labeled for complying with NFPA 17A, "Wet Chemical Extinguishing Systems," by a qualified testing agency acceptable to authorities having jurisdiction.

1. Steel Pipe, NPS 2 (DN 50) and Smaller: ASTM A53/A53M, Type S, Grade A, Schedule 40, plain ends.
2. Malleable-Iron Threaded Fittings: ASME B16.3, Classes 150 and 300.
3. Piping, fusible links and release mechanism, tank containing the suppression agent, and controls shall be factory installed. Controls shall be in stainless-steel control cabinet mounted on hood. Furnish manual pull station for wall mounting. Exposed piping shall be covered with chrome-plated aluminum tubing. Exposed fittings shall be chrome plated.
4. Liquid Extinguishing Agent: Noncorrosive, low-pH liquid.

5. Furnish electric-operated gas shutoff valve with clearly marked open and closed indicator for field installation.
6. Fire-suppression system controls shall be integrated with controls for fans, lights, and fuel supply and located in a single cabinet for each group of hoods immediately adjacent.
7. Wiring shall have color-coded, numbered terminal blocks and grounding bar. Spare terminals for fire alarm, optional wiring to start fan with fire alarm, red pilot light to indicate fan operation, and control switches shall all be factory wired in control cabinet with relays or starters. Include spare terminals for fire alarm, and wiring to start fan with fire alarm.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for piping systems to verify actual locations of piping connections before equipment installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Coordinate equipment layout and installation with adjacent Work, including luminaires, HVAC equipment, plumbing, and fire-suppression system components.

B. Complete field assembly of hoods where required.

1. Make closed butt and contact joints that do not require filler.
2. Grind field welds on stainless-steel equipment smooth, and polish to match adjacent finish. Comply with welding requirements in "General Hood Fabrication Requirements" Article.

C. Install hoods and associated services with clearances and access for maintaining, cleaning, and servicing hoods, filters/baffles, grease extractor, and fire-suppression systems according to manufacturer's written instructions and requirements of authorities having jurisdiction.

D. Make cutouts in hoods where required to run service lines and to make final connections, and seal openings according to UL 1978.

E. Securely anchor and attach items and accessories to walls, floors, or bases with stainless-steel fasteners unless otherwise indicated.

F. Install hoods to operate free from vibration.

G. Install seismic restraints according to SMACNA's "Kitchen Ventilation Systems & Food Service Equipment Guidelines," Appendix A, "Seismic Restraint Details."

H. Install trim strips and similar items requiring fasteners in a bed of sealant. Fasten with stainless-steel fasteners at 48 inches (1200 mm) o.c. maximum.

I. Install sealant in joints between equipment and abutting surfaces with continuous joint backing unless otherwise indicated. Provide airtight, watertight, vermin-proof, sanitary joints.

J. Install lamps, with maximum recommended wattage, in equipment with integral lighting.

K. Set initial temperatures, and calibrate sensors.

L. Set field-adjustable switches.

3.3 CONNECTIONS

A. Connect ducts according to requirements in Section 233300 "Air Duct Accessories." Install flexible connectors on makeup air supply duct. Weld exhaust-duct connections with continuous liquidtight joint.

B. Install fire-suppression piping for remote-mounted suppression systems according to NFPA 17A, "Wet Chemical Extinguishing Systems."

3.4 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform the following tests and inspections with the assistance of a factory-authorized service representative:

1. Test each equipment item for proper operation. Repair or replace equipment that is defective, including units that operate below required capacity or that operate with excessive noise or vibration.
2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
3. Test water, drain, gas, and liquid-carrying components for leaks. Repair or replace leaking components.
4. Perform hood performance tests required by authorities having jurisdiction.
5. Perform fire-suppression system performance tests required by authorities having jurisdiction.

D. Commercial-kitchen hoods will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports.

3.5 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain commercial-kitchen hoods.

END OF SECTION 233813

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 235533.16 - GAS-FIRED UNIT HEATERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Gas-fired unit heaters.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of gas-fired unit heater.

1. Include rated capacities, operating characteristics, and accessories.

B. Shop Drawings: For gas-fired unit heaters. Include plans, elevations, sections, and attachment details.

1. Prepare by or under the supervision of a qualified professional engineer detailing fabrication and assembly of gas-fired unit heaters, as well as procedures and diagrams.
2. Design Calculations: Calculate requirements for selecting vibration isolators and for designing vibration isolation bases.
3. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
4. Include diagrams for power wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Plans, elevations, and other details, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Structural members to which equipment will be attached.
2. Items penetrating roof and the following:

a. Vent and gas piping rough-ins and connections.

B. Seismic Qualification Certificates: For gas-fired unit heaters, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.

2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

C. Field quality-control reports.

D. Sample Warranty: For special warranty.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For gas-fired unit heaters to include in emergency, operation, and maintenance manuals.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Fan Belts: One for each belt-driven fan size.

1.6 QUALITY ASSURANCE

A. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

1.7 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace heat exchanger of gas-fired unit heater that fails in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Gas-fired unit heaters shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. Seismic Fabrication Requirements: Fabricate and reinforce suspension attachments of gas-fired unit heaters, accessories mountings, and components with reinforcement strong enough to withstand seismic forces when gas-fired unit heater is anchored to building structure.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

C. Capacities and Characteristics:

1. Gas Input: 60,000 BTUH.
2. Gas Output: 49,800 BTUH.
3. Minimum Airflow: 990 cfm.
4. Motor Enclosure: Totally enclosed, fan cooled.
5. Electrical Characteristics:
   a. Volts: 120.
   b. Phase: Single.
   c. Hertz: 60.

2.2 GAS-FIRED UNIT HEATERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. Lennox.
2. Modine Manufacturing Company.
3. REZNOR, a brand of Nortek Global HVAC.

B. Description: Factory assembled, piped, and wired, and complying with ANSI Z83.8/CSA 2.6.

C. Gas Type: Design burner for natural gas having characteristics same as those of gas available at Project site.

D. Type of Venting: Powered vented.

E. Housing: Steel, with integral draft hood and inserts for suspension mounting rods.

1. External Casings and Cabinets: Powder coating over corrosion-resistant-treated surface.
2. Discharge Louvers: Independently adjustable, horizontal blades.
3. Discharge Nozzle: Discharge at 25 to 65 degrees from horizontal.

F. Accessories:

1. Four-point suspension kit.
2. Power Venter: Centrifugal aluminized-steel fan, with stainless steel shaft; 120-V ac motor.

G. Heat Exchanger: Stainless steel.

H. Burner Material: Aluminized steel with stainless steel inserts.

I. Propeller Unit Fan:

1. Aluminum propeller blades riveted to heavy-gage steel spider bolted to cast-iron hub, dynamically balanced, and resiliently mounted.
2. Fan-Blade Guard: Galvanized steel, complying with OSHA specifications, removable for maintenance.

J. Motors:

1. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230500 "Common Work Results for HVAC."
2. Enclosure Materials: Rolled steel.

3. Efficiency: Premium efficient.

K. Controls: Regulated redundant gas valve containing pilot solenoid valve, electric gas valve, pilot filter, pressure regulator, pilot shutoff, and manual shutoff all in one body.

1. Gas Control Valve: Single stage.
2. Ignition: Electronically controlled electric spark with flame sensor.
3. Fan Thermal Switch: Operates fan on heat-exchanger temperature.
4. Vent Flow Verification: Differential pressure switch to verify open vent.
5. Control transformer.
6. High Limit: Thermal switch or fuse to stop burner.
7. Thermostat:

a. Mounting: Wall.
b. Single stage.
c. Fan on-off-automatic switch.
d. 24-V ac.
e. 50 to 90 deg F operating range.

L. Electrical Connection: Factory wire motors and controls for a single electrical connection.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install and connect gas-fired unit heaters and associated gas and vent features and systems according to NFPA 54 applicable local codes and regulations, and manufacturer's written instructions.

3.2 EQUIPMENT MOUNTING

A. Suspended Units: Suspend from substrate using threaded rods, spring hangers, and building attachments. Secure rods to unit hanger attachments. Adjust hangers so unit is level and plumb.

B. Substrate-Mounted Units: Provide supports connected to substrate. Secure units to supports.

1. Spring hangers are specified in Section 230529 "Hangers and Supports for HVAC Piping and Equipment."
2. Threaded Rods, Spring Hangers, and Building Attachments: Comply with requirements in Section 230529 "Hangers and Supports for HVAC Piping and Equipment"

3.3 CONNECTIONS

A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to gas-fired unit heater, allow space for service and maintenance.

C. Gas Piping: Comply with Section 231123 "Facility Natural-Gas Piping. Connect gas piping to gas train inlet; provide union with enough clearance for burner removal and service.

D. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

E. Connect wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

3.4 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

B. Perform the following tests and inspections:

1. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
2. Verify bearing lubrication.
3. Verify proper motor rotation.
4. Test Reports: Prepare a written report to record the following:

    a. Test procedures used.
    b. Test results that comply with requirements.
    c. Test results that do not comply with requirements and corrective action taken to achieve compliance with requirements.

C. Gas-fired unit heater will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

3.5 ADJUSTING

A. Adjust initial temperature and humidity set points.

B. Adjust burner and other unit components for optimum heating performance and efficiency.

3.6 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain gas-fired unit heaters.

END OF SECTION 235533.16

Section 237416.11 - Packaged, Small-Capacity, Rooftop Air Conditioning Units.

PART 1 - GENERAL

PART 2 - SUMMARY

A. Section Includes:

1. Packaged, small-capacity, rooftop air-conditioning units.

2.2 DEFINITIONS

A. RTU: Rooftop unit. As used in this Section, this abbreviation means packaged, small-capacity, rooftop air-conditioning units. This abbreviation is used regardless of whether the unit is mounted on the roof or on a concrete base on ground.

2.3 ACTION SUBMITTALS

A. Product Data:

1. For each RTU.

a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
b. Include rated capacities, dimensions, required clearances, characteristics, and furnished specialties and accessories.
c. Include unit dimensions and weight.
d. Include cabinet material, metal thickness, finishes, insulation, and accessories.
e. Fans:

1) Include certified fan-performance curves with system operating conditions indicated.
2) Include certified fan-sound power ratings.
3) Include fan construction and accessories.
4) Include motor ratings, electrical characteristics, and motor accessories.

f. Include certified coil-performance ratings with system operating conditions indicated.
g. Include filters with performance characteristics.
h. Include gas furnaces with performance characteristics.
i. Include dampers, including housings, linkages, and operators.

B. Shop Drawings: For each packaged, small-capacity, rooftop air-conditioning unit.

1. Include plans, elevations, sections, and attachment details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.

3. Include diagrams for power, signal, and control wiring.

2.4 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Floor plans and other details, or BIM model, drawn to scale, showing the items described in this Section, and coordinated with all building trades.

B. Sample Warranty: For manufacturer's warranty.

C. Seismic Qualification Data: Certificates, for RTUs, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
4. Restraint of internal components.

D. Product Certificates: Submit certification that specified equipment will withstand wind forces identified in "Performance Requirements" Article and in Section 230548 "Vibration and Seismic Controls for HVAC."

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculations.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of wind force and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

E. Source quality-control reports.

F. System startup reports.

G. Field quality-control reports.

2.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For RTUs to include in emergency, operation, and maintenance manuals.

2.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Filters: One set(s) of filters for each unit.

2. Gaskets: One set(s) for each access door.
3. Fan Belts: One set(s) for each belt-driven fan.

2.7 WARRANTY

A. Warranty: Manufacturer agrees to repair or replace components of packaged, small-capacity, rooftop air-conditioning unit that fail in materials or workmanship within specified warranty period.

1. Warranty Period: 1 year(s) from date of Substantial Completion.
2. Warranty Period for Heat Exchangers: Manufacturer's standard, but not less than 10 years from date of Substantial Completion

PART 3 - PRODUCTS

3.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an NRTL, and marked for intended location and application.

B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of RTUs and components.

C. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

D. ASHRAE 15 Compliance: For refrigeration system safety.

E. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

F. UL Compliance: Comply with UL 1995.

G. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design mounting and restraints for RTUs, including comprehensive engineering analysis.

1. Design RTU supports to comply with wind performance requirements.

3.2 CAPACITIES AND CHARACTERISTICS

A. Unit capacities, performance characteristics, electrical characteristics, construction, and factory-installed accessories shall be as indicated on the Drawings and equipment schedules.

3.3 PACKAGED, SMALL-CAPACITY, ROOFTOP AIR-CONDITIONING UNITS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
   1. Carrier Corporation.
   2. Daikin Applied Americas Inc.
   3. Trane Technologies plc.
   4. York; Johnson Controls International plc.

B. Unit Casings:

   1. General Fabrication Requirements for Casings: Formed and reinforced double-wall insulated panels, fabricated to allow removal for access to internal parts and components, with joints between sections sealed.
   2. Double-Wall Construction:

      a. Outside Casing Wall: Galvanized steel, minimum 18 gauge (1.3 mm) thick with manufacturer's standard finish, with pitched roof panels and knockouts with grommet seals for electrical and piping connections and lifting lugs.
      b. Inside Casing Wall: G90 (Z275)-coated galvanized steel, 0.034 inch (0.86 mm) thick.
      c. Floor Plate: G90 (Z275) galvanized steel,minimum 18 gauge (1.3 mm) thick.
      d. Casing Insulation:

         1) Materials: Injected polyurethane foam insulation.
         2) Casing insulation shall be manufacturer’s standard double wall foam insulation.
         3) Insulation Thickness: 1 inch (25 mm).
         4) Thermal Break: Provide continuity of insulation with no through-casing metal in casing walls, floors, or roof of unit.

   3. Airstream Surfaces: Surfaces in contact with airstream to comply with requirements in ASHRAE 62.1.
   4. Static-Pressure Classifications:

      a. For Unit Sections Upstream of Fans: Minus 2-inch wg (500 Pa).
      b. For Unit Sections Downstream and Including Fans: 2-inch wg (500 Pa).

   5. Panels and Doors:

      a. Panels:

         1) Fabrication: Formed and reinforced with same materials and insulation thickness as casing.
         2) Fasteners: Two or more camlock type for panel lift-out operation. Arrangement to allow panels to be opened against air-pressure differential.
         3) Gasket: Neoprene, applied around entire perimeters of panel frames.
         4) Size: Large enough to allow inspection and maintenance of air-handling unit's internal components.

      b. Access Doors:

1) Hinges: A minimum of two ball-bearing hinges or stainless steel piano hinge and two wedge-lever-type latches, operable from inside and outside. Arrange doors to be opened against air-pressure differential.
2) Gasket: Neoprene, applied around entire perimeters of panel frames.
3) Size: Large enough to allow inspection and maintenance of air-handling unit's internal components.

c. Locations and Applications:

1) Fan Section: Doors and inspection and access panels.
2) Access Section: Doors.
3) Coil Section: Inspection and access panels.
4) Damper Section: Doors.
5) Filter Section: Inspection and access panels large enough to allow periodic removal and installation of filters.
6) Mixing Section: Doors.

6. Condensate Drain Pans:

a. Location: Each type of cooling coil.
b. Construction:

1) Single-wall, galvanized-steel or noncorrosive polymer sheet.

c. Drain Connection:

1) Located at lowest point of pan and sized to prevent overflow. Terminate with threaded nipple on one end of pan.
2) Minimum Connection Size: NPS 1 (DN 25).

d. Slope: Minimum 0.125-in./ft. (10-mm/mm) slope in at least two planes to collect condensate from cooling coils (including coil piping connections, coil headers, and return bends) and from humidifiers and to direct water toward drain connection.
e. Length: Extend drain pan downstream from leaving face for distance to comply with ASHRAE 62.1.
f. Width: Entire width of water producing device.
g. Depth: A minimum of 2 inches (50 mm) deep.
h. Pan-Top Surface Coating for Galvanized-Steel Drain Pans: Asphaltic waterproofing compound.
i. Units with stacked coils must have an intermediate drain pan to collect condensate from top coil.

C. Fans, Drives, And Motors:

1. Fan and Drive Assemblies: Statically and dynamically balanced and designed for continuous operation at maximum-rated fan speed and motor horsepower.
2. Supply-Air Fans: Centrifugal or plenum fans as provided by the manufacturer, rated according to AMCA 210; galvanized or painted steel; mounted on solid-steel shaft.

a. Shafts: With field-adjustable alignment.

1) Turned, ground, and polished hot-rolled steel with keyway.

b. Shaft Bearings:

1) Heavy-duty, self-aligning, pillow-block type with an L-50 rated life of minimum 100,000 hours according to ABMA 9.

c. Housings: Formed- and reinforced-steel panels to form curved scroll housings with shaped cutoff and spun-metal inlet bell.

1) Bracing: Steel angle or channel supports for mounting and supporting fan scroll, wheel, motor, and accessories.

d. Fan Wheels: Inlet flange, backplate, and shallow blades with inlet and tip curved forward in direction of airflow and mechanically fastened to flange and backplate; steel or aluminum hub swaged to backplate and fastened to shaft with setscrews.
e. Mounting: For internal vibration isolation. Factory-mount fans with manufacturer's standard restrained vibration isolation mounting devices having a minimum static deflection of 1 inch (25 mm).

3. Drives, Direct: Factory-mounted, direct drive.

4. Condenser-Coil Fan: EC or variable speed propeller condenser fans.
5. Motors:

a. Comply with NEMA designation, temperature rating, service factor, and efficiency requirements for motors specified in Section 230500 "Common Work Results for HVAC."
b. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.
c. Enclosure Type: Open, dripproof or Totally enclosed, fan cooled.

d. Efficiency: Premium efficient as defined in NEMA MG 1.
e. Motor Pulleys: Adjustable pitch for use with 5-hp motors and smaller; fixed pitch for use with motors larger than 5 hp. Select pulley size so pitch adjustment is at the middle of adjustment range at fan design conditions.
f. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in electrical Sections.

D. Rotary Heat Exchanger:

1. Heat exchanger integral with unit.
2. Casing:

a. Galvanized steel, stainless steel, or aluminum with manufacturer's standard factory-painted finish.
b. Integral purge section limiting carryover of exhaust air to between 0.05 percent at 1.6-inch wg and 0.20 percent at 4-inch wg (0.05 percent at 400-Pa and 0.20 percent at 1000-Pa) differential pressure.
c. Casing seals on periphery of rotor and on duct divider and purge section.

3. Rotor - Aluminum or Polymer: Segmented wheel, strengthened with radial spokes.
4. Rotor - Aluminum, Metallic, or Polymer: Aluminum, metallic, or polymer segmented wheel, strengthened with radial spokes impregnated with nonmigrating, water-selective, 3-angstrom molecular-sieve desiccant coating.
5. Drive: Fractional horsepower motor and gear reducer, with speed changed by variable-frequency controller. Permanently lubricated wheel bearings with an L-10 400,000 hours.

E. Coils:

1. General Requirements for Coils:

   a. Comply with AHRI 410.
   b. Fabricate coils section to allow for removal and replacement of coil for maintenance and to allow in-place access for service and maintenance of coil(s).
   c. Coils to not act as structural component of unit.

2. Supply-Air Refrigerant Coil:

   a. Tubes: Copper.
   b. Fins:

      1) Material: Aluminum.
      2) Fin Spacing: Maximum 10 fins per inch (mm).

   c. Fin and Tube Joints: Mechanical bond.
   d. Headers: Seamless-copper headers with brazed connections.
   e. Frames: Galvanized steel.
   f. Coatings: None.
   g. Ratings: Designed, tested, and rated according to ASHRAE 33 and AHRI 410.

      1) Working Pressure: Minimum 300 psig (2070 kPa).

3. Outdoor-Air Refrigerant Coil:

   a. Tubes: Copper.
   b. Fins:

      1) Material: Aluminum.
      2) Fin Spacing: Maximum 10 fins per inch (mm).

   c. Fin and Tube Joints: Mechanical bond.
   d. Headers: Seamless-copper headers with brazed connections.
   e. Frames: Galvanized steel.
   f. Coatings: None.
   g. Ratings: Designed, tested, and rated according to ASHRAE 33 and AHRI 410.

      1) Working Pressure: Minimum 300 psig (2070 kPa).

4. Hot-Gas Reheat Refrigerant Coil:

   a. Tubes: Copper.

b. Fins:

1) Material: Aluminum.
2) Fin Spacing: Maximum 10 fins per inch (mm).

c. Fin and Tube Joints: Mechanical bond.
d. Headers: Seamless-copper headers with brazed connections.
e. Frames: Galvanized steel.
f. Coatings: None.
g. Ratings: Designed, tested, and rated according to ASHRAE 33 and AHRI 410.

1) Working Pressure: Minimum 300 psig (2070 kPa).

h. Suction-discharge bypass valve.

5. Electric-Resistance Heating Coils: Comply with UL 1995.

F. Refrigerant Circuit Components:

1. Compressor: Hermetic scroll compressors, single-stage, tandem, digital, or variable-speed as required to meet scheduled performance, mounted on vibration isolators; with internal overcurrent and high-temperature protection, internal pressure relief.
2. Refrigeration Specialties:

a. Refrigerant: R-410A of R-454B.
1) Units utilizing A2L refrigerants shall comply with all applicable requirements of UL 60335-2-40 and applicable mechanical codes regarding refrigerant leak detection and mitigation.
b. Expansion valve with replaceable thermostatic element.
c. Refrigerant filter/dryer.
d. Manual-reset high-pressure safety switch.
e. Automatic-reset low-pressure safety switch.
f. Minimum off-time relay.
g. Automatic-reset compressor motor thermal overload.
h. Brass service valves installed in compressor suction and liquid lines.
i. Low-ambient kit high-pressure sensor.
j. Hot-gas reheat solenoid valve modulating with a replaceable magnetic coil.
k. Hot-gas bypass solenoid valve with a replaceable magnetic coil.
l. Four-way reversing valve with a replaceable magnetic coil, thermostatic expansion valves with bypass check valves, and a suction line accumulator.

G. Air Filtration:

1. Particulate air filtration is specified in Section 234100 "Particulate Air Filtration."
2. Panel Filters:

a. Description: Flat, non-pleated factory-fabricated, self-supported, disposable air filters with holding frames.
b. Filter Unit Class: UL 900.
c. Media: Interlaced glass, synthetic or cotton fibers coated with nonflammable adhesive and antimicrobial coating.

d. Filter-Media Frame: Beverage board with perforated metal retainer, or metal grid, on outlet side.

3. Adhesive, Sustainability Projects: As recommended by air-filter manufacturer and with a VOC content of 80 g/L or less.

H. Gas Furnaces:

1. Description: Factory assembled, piped, and wired; complying with ANSI Z21.47/CSA 2.3 and NFPA 54.
2. CSA Approval: Designed and certified by and bearing label of CSA.
3. Burners: Stainless steel.

a. Rated Minimum Turndown Ratio: As scheduled.
b. Fuel: Natural gas.
c. Ignition: Electronically controlled electric spark or hot-surface igniter with flame sensor.
d. Gas Control Valve: Modulating.
e. Gas Train: Single-body, regulated, redundant, 24-V ac gas valve assembly containing pilot solenoid valve, pilot filter, pressure regulator, pilot shutoff, and manual shutoff.

4. Heat-Exchanger and Drain Pan: Stainless steel.
5. Venting, Power: Power vented, with integral, motorized centrifugal fan interlocked with gas valve with vertical extension.
6. Safety Controls:

a. Gas Manifold: Safety switches and controls complying with ANSI standards and FM Global.

I. Dampers:

1. Outdoor- and Return-Air Dampers: Low-leakage, double-skin, airfoil-blade, galvanized-
2. steel dampers with compressible jamb seals and extruded-vinyl blade edge seals in opposed or parallel-blade arrangement with zinc-plated steel operating rods rotating in sintered bronze or nylon bearings mounted in a single galvanized-steel frame, and with operating rods connected with a common linkage. Leakage rate must not exceed 4 cfm/sq. ft. (20 L/s per sq. m) at 1-inch wg (250 Pa) and 8 cfm/sq. ft. (40 L/s per sq. m) at 4-inch wg (1.0 MPa) rated in accordance with AMCA 500D. Barometric relief dampers.
3. Damper Operators:
4. Electronic Damper Operators:

a. Direct-coupled type designed for minimum 60,000 full-stroke cycles at rated torque.
b. Electronic damper position indicator to have visual scale indicating percent of travel and 2- to 10-V dc, feedback signal.
c. Operator Motors:

1) Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 230500 "Common Work Results for HVAC."
2) Size to operate with sufficient reserve power to provide smooth modulating action or two-position action.
3) Permanent Split-Capacitor or Shaded-Pole Type: Gear trains completely oil immersed and sealed. Equip spring-return motors with integral spiral-spring mechanism in housings designed for easy removal for service or adjustment of limit switches, auxiliary switches, or feedback potentiometer.

d. Nonspring-Return Motors for Dampers Larger Than 25 Sq. Ft. (2.3 sq. m): Size for running torque of 150 in. x lbf (16.9 N x m) and breakaway torque of 300 in. x lbf (33.9 N x m).
e. Spring-Return Motors for Dampers Larger Than 25 Sq. Ft. (2.3 sq. m): Size for running and breakaway torque of 150 in. x lbf (16.9 N x m).
f. Size dampers for running torque calculated as follows:

1) Parallel-Blade Damper with Edge Seals: 7 inch-lb/sq. ft. (86.8 kg-cm/sq. m) of damper.
2) Opposed-Blade Damper with Edge Seals: 5 inch-lb/sq. ft. (62 kg-cm/sq. m) of damper.
3) Parallel-Blade Damper without Edge Seals: 4 inch-lb/sq. ft (49.6 kg-cm/sq. m) of damper.
4) Opposed-Blade Damper without Edge Seals: 3 inch-lb/sq. ft. (37.2 kg-cm/sq. m) of damper.
5) Dampers with 2- to 3-Inch wg (500 to 750 Pa) of Pressure Drop or Face Velocities of 1000 to 2500 fpm (5 to 13 m/s): Increase running torque by 1.5.
6) Dampers with 3- to 4-Inch wg (750 to 1000 Pa) of Pressure Drop or Face Velocities of 2500 to 3000 fpm (13 to 15 m/s): Increase running torque by 2.0.

g. Coupling: V-bolt and V-shaped, toothed cradle.
h. Overload Protection: Electronic overload or digital rotation-sensing circuitry.
i. Fail-Safe Operation: Mechanical, spring-return mechanism with external, manual gear release on nonspring-return actuators.
j. Power Requirements (Two-Position Spring Return): 24 V dc.
k. Power Requirements (Modulating): Maximum 10 VA at 24 V ac or 8 W at 24 V dc.
l. Proportional Signal: 2 to 10 V dc or 4 to 20 mA, and 2- to 10-V dc position feedback signal.

J. Electrical Power Connections:

1. RTU to have a single connection of power to unit with unit-mounted disconnect switch accessible from outside unit and control-circuit transformer with built-in overcurrent protection.

K. Controls:

1. Furnish each rooftop unit with the manufacturer's factory-mounted, factory-wired microprocessor-based control system.
2. Factory controls shall be capable of performing all sequences of operation indicated on the Drawings and shall include all safeties, operating logic, and control functions required for the scheduled unit configuration.
3. Factory-mounted control panel shall include all controllers, relays, transformers, sensors, actuators, contactors, safety devices, and interface modules required for complete operation of the unit.
4. Provide all factory and field wiring required for proper operation of all unit-mounted and field-mounted control devices and accessories, including but not limited to:
    a. Supply fan.
    b. Compressors.
    c. Condenser fans.
    d. Heating section.
    e. Economizer dampers.
    f. Barometric relief operation.
    g. Outdoor-air, return-air, and relief-air dampers.
    h. Smoke detector interface.
    i. Dirty filter indication.
    j. Freeze protection.
    k. Low ambient cooling controls.
    l. Refrigerant safety controls.
    m. Factory A2L refrigerant leak detection and mitigation controls where applicable.
    n. Variable-speed drives or ECM motors.
    o. Wall-mounted thermostats or zone sensors.
    p. Remote sensors furnished with the unit.
5. Provide manufacturer's standard wall-mounted thermostat or communicating zone sensor compatible with the factory controller unless otherwise indicated on the Drawings.
6. Provide manufacturer's standard local operator interface integral to the unit control panel for adjustment of operating parameters, alarm indication, diagnostics, and service functions.
7. Program the factory controller in accordance with the sequences of operation indicated on the Drawings.
8. Unit controls shall include all scheduled factory-installed options and accessories, including but not limited to:
    a. Single-zone VAV control.
    b. Enthalpy economizer.
    c. Barometric relief.
    d. Modulating gas heat.
    e. Return-air smoke detector.
    f. Dirty filter indication.
    g. Low ambient cooling.
    h. Compressor staging.
    i. A2L refrigerant leak detection and mitigation controls where applicable.
    j. Alarm and diagnostic functions.
9. Unit capacities, electrical characteristics, factory-installed accessories, control functions, and options shall be as scheduled on the Drawings.

L. Roof Curbs:

1. Furnish factory-fabricated roof curbs by the rooftop unit manufacturer, designed specifically for the scheduled unit.
2. Roof curbs shall be fabricated of galvanized steel with corrosion-resistant coating, continuous welded corners, factory-installed wood nailer, gasketing, and curb insulation.
3. Curb insulation shall comply with NFPA 90A or NFPA 90B and shall be manufacturer's standard.
4. Curb height shall be as indicated on the Drawings and shall comply with applicable roofing manufacturer requirements.
5. Furnish factory-fabricated bottom discharge supply and return air plenum roof curbs where indicated on the Drawings. Plenums shall be specifically designed for the scheduled rooftop unit and duct arrangement.
6. Coordinate curb dimensions, duct openings, and unit support requirements with the rooftop unit manufacturer prior to fabrication.
7. Adapt curb dimensions to existing roof openings where indicated on the Drawings.

M. Accessories:
1. Furnish factory-installed accessories as scheduled on the Drawings.
2. Factory-installed accessories shall include, where scheduled:
   a. Low ambient cooling controls.
   b. Dirty filter indication.
   c. Return-air smoke detector.
   d. Condensate overflow switch.
   e. Phase-loss and phase-reversal protection.
   f. Coil guards.
   g. Hail guards.
   h. Outdoor-air weather hood.
   i. Service lights.
   j. GFCI convenience outlet.
   k. Electric heater for gas burner compartment.
   l. Demand controlled ventilation.
   m. Economizer.
   n. Barometric relief.
   o. Single-zone VAV controls.
   p. Enthalpy control.
   q. A2L refrigerant leak detection and mitigation controls where applicable.
3. Unit accessories, options, and factory-installed features shall be as scheduled on the Drawings.

N. MATERIALS
1. Steel:
   a. ASTM A36/A36M for carbon structural steel.
   b. ASTM A568/A568M for steel sheet.
2. Stainless Steel:
   a. Manufacturer's standard grade for casing.
   b. Manufacturer's standard type, ASTM A240/A240M for bare steel exposed to airstream or moisture.
3. Galvanized Steel: ASTM A653/A653M.
4. Aluminum: ASTM B209 (ASTM B209M).

3.4 SOURCE QUALITY CONTROL

A. AHRI Compliance:

1. Comply with AHRI 210/240 for testing and rating energy efficiencies for RTUs.
2. Comply with AHRI 340/360 for testing and rating energy efficiencies for RTUs.
3. Comply with AHRI 270 for testing and rating sound performance for RTUs.
4. Comply with AHRI 1060 for testing and rating performance for air-to-air exchanger.

B. AMCA Compliance:

1. Comply with AMCA 11 and bear the AMCA-Certified Ratings Seal for air and sound performance according to AMCA 211 and AMCA 311.
2. Damper leakage tested according to AMCA 500-D.
3. Operating Limits: Classify according to AMCA 99.

PART 4 - EXECUTION

4.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of RTUs.

B. Examine roughing-in for RTUs to verify actual locations of piping and duct connections before equipment installation.

C. Examine roofs for suitable conditions where RTUs will be installed.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

4.2 INSTALLATION OF PACKAGED, SMALL-CAPACITY, ROOFTOP AIR-CONDITIONING UNITS

A. Roof Curb: Install on roof structure or concrete base, level and secure, according to NRCA's "NRCA Roofing Manual: Membrane Roof Systems." Install RTUs on curbs and coordinate roof penetrations and flashing with roof construction specified in Section 077200 "Roof Accessories." Secure RTUs to upper curb rail, and secure curb base to roof framing or concrete base with anchor bolts. Coordinate sizes and locations of roof curbs with actual equipment provided.

1. Install normal-weight, 3000-psi (20.7-MPa), compressive strength (28-day) concrete mix inside roof curb, 4 inches (100 mm) thick. Concrete, formwork, and reinforcement are specified with concrete.
2. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."

4.3 PIPING CONNECTIONS

A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to RTU, allow space for service and maintenance.

C. Connect piping to unit mounted on vibration isolators with flexible connectors.

D. Connect condensate drain pans using NPS 1-1/4 (DN 32), ASTM B88, Type M (ASTM B88M, Type C) copper tubing. Extend to nearest equipment or roof drain. Construct deep trap at connection to drain pan and install cleanouts at changes in direction.

E. Gas Piping: Comply with applicable requirements in Section 231123 "Facility Natural-Gas Piping." Connect gas piping to burner, full size of gas train inlet, and connect with union and shutoff valve with sufficient clearance for burner removal and service.

4.4 DUCT CONNECTIONS

A. Comply with duct installation requirements specified in other HVAC Sections. Drawings indicate general arrangement of ducts. The following are specific connection requirements:

1. Install ducts to termination at top of roof curb.
2. Remove roof decking only as required for passage of ducts. Do not cut out decking under entire roof curb.
3. Connect supply ducts to RTUs with flexible duct connectors specified in Section 233300 "Air Duct Accessories."
4. Install return-air duct continuously through roof structure.

4.5 ELECTRICAL CONNECTIONS

A. Connect electrical wiring according to Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment according to Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, according to NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate is to be laminated acrylic or melamine plastic signs as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate is to be laminated acrylic or melamine plastic signs as layers of black with engraved white letters at least 1/2 inch (13 mm) high.
3. Locate nameplate where easily visible.

4.6 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring according to Section 260523 "Control-Voltage Electrical Power Cables."

4.7 CONTROLS INSTALLATION

A. Install all factory-furnished and field-mounted control devices in accordance with the manufacturer's written instructions.

B. Install wall-mounted thermostats, zone sensors, remote sensors, and other field-mounted control devices at locations indicated on the Drawings. Coordinate final mounting locations with the Architect.

C. Provide all control wiring between the rooftop unit, field-mounted control devices, and accessories required for a complete and operational control system.

D. Coordinate installation of all interlocks with equipment furnished by others, including smoke detectors, fire alarm systems, kitchen hood controls, and fire suppression systems where applicable.

E. Program the factory controller in accordance with the sequences of operation indicated on the Drawings.

F. Verify proper operation of all factory and field-mounted control devices, sensors, thermostats, safeties, dampers, actuators, compressors, heating equipment, economizer operation, and control sequences prior to startup.

G. Verify proper operation of all scheduled accessories, including but not limited to economizers, barometric relief, smoke detectors, refrigerant leak detection and mitigation controls, low ambient controls, and alarm functions.

H. Coordinate any required field adjustments with the equipment manufacturer to provide a complete and fully operational control system.

4.8 STARTUP SERVICE

A. Perform startup service.

1. Complete installation and startup checks according to manufacturer's written instructions.
2. Inspect for visible damage to unit casing.
3. Inspect for visible damage to furnace combustion chamber.
4. Inspect for visible damage to compressor, coils, and fans.
5. Inspect internal insulation.
6. Verify that labels are clearly visible.
7. Verify that clearances have been provided for servicing.
8. Verify that controls are connected and operable.

9. Verify that filters are installed.
10. Clean condenser coil and inspect for construction debris.
11. Clean furnace flue and inspect for construction debris.
12. Connect and purge gas line.
13. Remove packing from vibration isolators.
14. Inspect operation of barometric relief dampers.
15. Verify lubrication on fan and motor bearings.
16. Inspect fan-wheel rotation for movement in correct direction without vibration and binding.
17. Adjust fan belts to proper alignment and tension.
18. Start unit according to manufacturer's written instructions.

    a. Start refrigeration system.
    b. Do not operate below recommended low-ambient temperature.
    c. Complete startup sheets and attach copy with Contractor's startup report.

19. Inspect and record performance of interlocks and protective devices; verify sequences.
20. Operate unit for an initial period as recommended or required by manufacturer.
21. Perform the following operations for both minimum and maximum firing. Adjust burner for peak efficiency:

    a. Measure gas pressure on manifold.
    b. Inspect operation of power vents.
    c. Measure combustion-air temperature at inlet to combustion chamber.
    d. Measure flue-gas temperature at furnace discharge.
    e. Perform flue-gas analysis. Measure and record flue-gas carbon dioxide and oxygen concentration.
    f. Measure supply-air temperature and volume when burner is at maximum firing rate and when burner is off. Calculate useful heat to supply air.

22. Calibrate thermostats.
23. Adjust and inspect high-temperature limits.
24. Inspect outdoor-air dampers for proper stroke and interlock with return-air dampers.
25. Start refrigeration system and measure and record the following when ambient is a minimum of 15 deg F (8 deg C) above return-air temperature:

    a. Coil leaving-air, dry- and wet-bulb temperatures.
    b. Coil entering-air, dry- and wet-bulb temperatures.
    c. Outdoor-air, dry-bulb temperature.
    d. Outdoor-air-coil, discharge-air, dry-bulb temperature.

26. Inspect controls for correct sequencing of heating, mixing dampers, refrigeration, and normal and emergency shutdown.
27. Measure and record the following minimum and maximum airflows. Plot fan volumes on fan curve.

    a. Supply-air volume.
    b. Return-air volume.
    c. Relief-air volume.
    d. Outdoor-air intake volume.

28. Simulate maximum cooling demand and inspect the following:

    a. Compressor refrigerant suction and hot-gas pressures.
    b. Short circuiting of air through condenser coil or from condenser fans to outdoor-air intake.

29. Verify operation of remote panel including pilot-light operation and failure modes. Inspect the following:

    a. High-temperature limit on gas-fired heat exchanger.
    b. Low-temperature safety operation.
    c. Filter high-pressure differential alarm.
    d. Economizer to minimum outdoor-air changeover.
    e. Relief-air fan operation.
    f. Smoke and firestat alarms.

30. After startup and performance testing and prior to Substantial Completion, replace existing filters with new filters.

4.9 ADJUSTING

A. Adjust damper linkages for proper damper operation.

B. Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC" for air-handling system testing, adjusting, and balancing.

C. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions.

4.10 CLEANING

A. After completing system installation and testing, adjusting, and balancing RTUs and air-distribution systems, clean RTUs internally to remove foreign material and construction dirt and dust. Clean fan wheels, cabinets, dampers, coils, and filter housings, and install new, clean filters.

4.11 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform tests and inspections.

D. Tests and Inspections:

1. After installing RTUs and after electrical circuitry has been energized, test units for compliance with requirements.
2. Inspect for and remove shipping bolts, blocks, and tie-down straps.
3. Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

E. RTU will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

4.12 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain RTUs.

END OF SECTION 237416.11

SECTION 237433 – DEDICATED OUTDOOR AIR UNITS/MAKE UP AIR UNITS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Dedicated outdoor-air units.

1.2 DEFINITIONS:

A. ISCOP: Integrated Seasonal Coefficient of Performance.

B. ISMRE: Integrated Seasonal Moisture Removal Efficiency.

C. MRC: Moisture Removal Capacity.

1.3 ACTION SUBMITTALS

A. Product Data:

1. For each type of product.

a. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
b. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
c. Include unit dimensions and weight.
d. Include cabinet material, metal thickness, finishes, insulation, and accessories.
e. Fans:

1) Certified fan-performance curves with system operating conditions indicated.
2) Certified fan-sound power ratings.
3) Fan construction and accessories.
4) Motor ratings, electrical characteristics, and motor accessories.

f. Include certified coil-performance ratings with system operating conditions indicated.
g. Include filters with performance characteristics.
h. Include heat exchangers with performance characteristics.
i. Include dampers, including housings, linkages, and operators.

B. Shop Drawings: For each dedicated outdoor-air unit.

1. Include plans, elevations, sections, and mounting details.
2. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

1.4 INFORMATIONAL SUBMITTALS

A. Submit certification that specified equipment will withstand wind forces identified in "Performance Requirements" Article and in Section 230548 "Vibration and Seismic Controls for HVAC."

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculations.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of wind force and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

B. Source quality-control reports.

C. Startup service reports.

D. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For dedicated outdoor-air units to include in emergency, operation, and maintenance manuals.

1.6 WARRANTY

A. Warranty: Manufacturer agrees to replace components of dedicated outdoor-air units that fail in materials or workmanship within specified warranty period.

1. Warranty Period for Dedicated Outdoor-Air-Handling Units: Two years from date of Substantial Completion.
2. Warranty Period for Compressors: Five years from date of Substantial Completion.
3. Warranty Period for Heat Exchangers: Five years from date of Substantial Completion.
4. Warranty Period for Air to Air Heat Exchangers: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by an "NRTL" (nationally recognized testing laboratory), and marked for intended location and application.

B. NFPA Compliance: Comply with NFPA 90A for design, fabrication, and installation of units and components.

C. ASHRAE 62.1 Compliance: Applicable requirements in ASHRAE 62.1, Section 5 - "Systems and Equipment" and Section 7 - "Construction and Startup."

D. ASHRAE 15 and ASHRAE 34 Compliance: For refrigeration system safety.

E. ASHRAE/IES 90.1 Compliance: Applicable requirements in ASHRAE/IES 90.1, Section 6 - "Heating, Ventilating, and Air-Conditioning."

F. ASHRAE 84 Compliance: Comply with capacity ratings for fixed plate energy-recovery equipment.

G. UL Compliance:

1. Coils: Comply with requirements in UL 1995.

H. Seismic Performance: Units are to withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7. As indicated in drawings.

1. The term "withstand" means "the unit will remain in place without separation of any parts when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."
2. Component Importance Factor: 1.5.

I. Wind-Restraint Performance:

1. As indicated in drawings.

2.2 DEDICATED OUTDOOR-AIR UNITS

A. Limitations: Obtain dedicated outdoor-air units from single manufacturer.

B. Unit Casing:

1. General Fabrication Requirements for Casings: Formed and reinforced double-wall insulated panels, fabricated to allow removal for access to internal parts and components, with joints between sections sealed.

2. Configuration: Horizontal unit with horizontal discharge for roof-mounting installation.

C. Fans, Drives, And Motors:

1. Fan and Drive Assemblies: Statically and dynamically balanced and designed for continuous operation at maximum-rated fan speed and motor horsepower.
2. Supply-Air Fans and Relief-Air Fans: Plenum or Centrifugal; galvanized or painted steel; mounted on solid-steel shaft.

    a. Shafts: With field-adjustable alignment.

        1) Turned, ground, and polished hot-rolled steel with keyway.

    b. Shaft Bearings:

        1) Heavy-duty, self-aligning, pillow-block type with an L-50 rated life of minimum 100,000 hours in accordance with ABMA 9.

    c. Housings, Plenum Fans: Steel frame and panel; fabricated without fan scroll and volute housing. Provide inlet screens for Type SWSI fans.

3. Drive, Direct: Factory-mounted direct drive.

4. Condenser-Coil Fan: Propeller-type condenser fans with EC or VFD controlled motors, mounted on shaft of permanently lubricated multispeed motors.
5. Motors:
    a. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.
    b. Enclosure Type: Manufacturer’s standard, suitable for outdoor service.
    c. Efficiency: Invertor duty.
    d. Controllers, Electrical Devices, and Wiring: Comply with requirements for electrical devices and connections specified in electrical Sections.
    e. Mount unit-mounted disconnect switches on exterior of unit.

D. Coils:

1. General Requirements for Coils:

    a. Comply with AHRI 410.
    b. Fabricate coils section to allow removal and replacement of coil for maintenance and to allow in-place access for service and maintenance of coil(s).
    c. Coils are not to act as structural component of unit.

2. Supply-Air Refrigerant Coils:

    a. Tubes: Copper.
    b. Fins: Aluminum.
    c. Fin and Tube Joints: Mechanical bond.
    d. Headers: Seamless-copper headers with brazed connections.

e. Frames: Galvanized steel.
f. Ratings: Designed, tested, and rated in accordance with ASHRAE 33 and AHRI 410.

1) Working Pressure: Minimum 300 psig.

E. Refrigeration Circuit Components:

1. Compressors: Hermetic scroll compressors, single-stage, tandem, digital, variable-speed as scheduled, mounted on integral vibration isolators; with internal overcurrent and high-temperature protection, internal pressure relief, and crankcase heater.
2. Refrigerant: R-410A or R-454B.
    1) Units utilizing A2L refrigerants shall comply with all applicable requirements of UL 60335-2-40 and applicable mechanical codes regarding refrigerant leak detection and mitigation.

F. Air Filtration:

1. Panel Filters:

a. Description: Pleated factory-fabricated, self-supported disposable air filters with holding frames.
b. Filter Unit Class: UL 900.
c. Media: Interlaced glass, synthetic, or cotton fibers coated with nonflammable adhesive and antimicrobial coating.
d. Filter-Media Frame: see filter specifications.

G. Indirect-Fired Gas Furnace Heating:

1. Description: Factory assembled, piped, and wired; and complying with ANSI Z21.47 and with NFPA 54.
2. CSA Approval: Designed and certified by and bearing label of CSA.
3. Burners:

a. Heat-Exchanger Material: Stainless steel.
b. Fuel: Natural gas.
c. Ignition: Electronically controlled electric spark with flame sensor.
d. Gas Control Valve: Electronic modulating.
e. Gas Train: Factory-assembled indirect-fired gas furnace complying with ANSI Z21.47.

H. Electrical Power Connections:

1. Factory-installed and -wired switches, motor controllers, transformers, and other necessary electrical devices are to provide a single-point field power connection to unit .
2. Enclosure: NEMA 250, Type 4, mounted in unit with hinged access door in unit cabinet having a lock and key or padlock and key.
3. Wiring: Numbered and color-coded to match wiring diagram.
4. Wiring Location: Install factory wiring outside an enclosure in a raceway.

5. Power Interface: Field power interface to be NEMA KS 1, heavy-duty, nonfused disconnect switch.
6. Factory Wiring: Branch power circuit to each motor and to controls with one of the following disconnecting means:

    a. NEMA KS 1, heavy-duty, fusible switch with rejection-type fuse clips rated for fuses. Select and size fuses to provide Type 2 protection in accordance with IEC 60947-4-1.
    b. NEMA KS 1, heavy-duty, nonfusible switch.
    c. UL 489, motor-circuit protector (circuit breaker) with field-adjustable, short-circuit trip coordinated with motor locked-rotor amperes.

7. Factory-Mounted, Overcurrent-Protection Service: For each motor.
8. Controls: Furnish factory-mounted controls complying with the requirements of this Section. Unit shall operate in accordance with the sequences of operation shown on the Drawings using the manufacturer's standard controller and programming.

    a. Service Lights: vaporproof luminaire with individual switched junction box located adjacent to each access door and panel.

        1) Locations: Each section accessed with door or panel.

    b. Convenience Outlets: One 20 A duplex GFCI receptacle per location with junction box located on outside casing wall.

        1) Locations: Fan section.

9. Control Relays: Auxiliary and adjustable time-delay relays.

I. Controls:

1. See controls sequences and points list on drawings.

J. Roof Curbs:

1. Height of 14 inches.
2. Wind and Seismic Restraints: Metal brackets compatible with the curb and casing, painted to match unit, used to anchor unit to the curb, and designed for loads at Project site. Comply with requirements in Section 230548 "Vibration and Seismic Controls for HVAC" for wind-load requirements.

K. Intake And Relief Openings:

1. Materials: Match material and finish of casing exterior.
2. Bird Screen: Comply with requirements in ASHRAE 62.1.

2.3 MATERIALS

A. Steel:

1. ASTM A36/A36M for carbon structural steel.
2. ASTM A568/A568M for steel sheet.

B. Stainless Steel:

1. Manufacturer's standard grade for casing.
2. Manufacturer's standard type, ASTM A240/A240M for bare steel exposed to airstream or moisture.

C. Galvanized Steel: ASTM A653/A653M.

D. Aluminum: ASTM B209.

E. Comply with Section 230546 "Coatings for HVAC" for corrosion-resistant coating.

F. Corrosion-Resistant Coating: Factory-applied corrosion-resistant coating.

1. Standards:

a. ASTM B117 for salt spray.
b. ASTM D2794 for minimum impact resistance of 100 in-lb.
c. ASTM D3359 for cross-hatch adhesion of 5B.

2. Application: Spray.
3. Thickness: 1 mil.
4. Gloss: Minimum gloss of 50 gloss units on a single angle 60-degree meter.

2.4 SOURCE QUALITY CONTROL

A. Manufacturer to certify that performance ratings are in accordance with AHRI 920 if AHRI 920 certification program is not in place. Provide AHRI 920 certification if AHRI 920 certification program is in place.

B. AHRI 260 or AMCA 311 Sound Performance Rating Certification: Test, rate, and label unit fan sound ratings in accordance with AHRI 260 or AMCA 311.

C. Fan Aerodynamic Performance Rating: Test and rate fan performance for airflow, pressure, power, air density, rotation speed, and efficiency.

1. Test and rate fan performance in accordance with AMCA 210.

D. Fan Energy Index (FEI): Test in accordance with AMCA 210 and rate in accordance with AMCA 99, AMCA 207, and AMCA 208.

E. Fan Operating Limits: Classify fans in accordance with AMCA 99, Section 14.

F. Damper Leakage and Air Performance:

1. Damper Rating: Test and rate dampers for leakage and air performance in accordance with AMCA 510.

G. Water Coils: Factory tested to 300 psig in accordance with AHRI 410 and ASHRAE 33.

H. Refrigerant Coils: Factory tested to minimum 300 psig internal pressure and to minimum 300 psig internal pressure while under water, in accordance with AHRI 410 and ASHRAE 33.

I. Factory Controls
1. Furnish each unit with the manufacturer's factory-mounted, factory-wired microprocessor-based control system capable of providing all sequences of operation indicated on the Drawings.
2. Factory-mounted control panel shall include all controllers, relays, transformers, sensors, safeties, and interface devices required for complete operation of the unit.
3. Provide all factory and field wiring required for proper operation of all unit-mounted components and accessories, including but not limited to:
   a. Supply fan(s)
   b. Exhaust or relief fan(s)
   c. Compressors
   d. Gas furnace
   e. Cooling and heating controls
   f. Economizer (where provided)
   g. Outdoor-air, return-air, and exhaust-air dampers
   h. Smoke detector interface
   i. Freeze protection
   j. Dirty filter indication
   k. Safety interlocks
   l. Variable-frequency drives or ECM motors
   m. Remote sensors and thermostats.
   n. A2L refrigerant leak detection and mitigation controls where applicable.
4. Furnish and install all required field-mounted temperature sensors, room thermostats, duct sensors, discharge-air sensors, and control devices required for operation.
5. Provide manufacturer's standard operator interface integral to the unit control panel with digital display and keypad for local adjustment of operating parameters and diagnostics.
6. Unit shall automatically restart following power interruption in accordance with the manufacturer's standard sequence.
7. Coordinate all factory programming with the sequences of operation indicated on the Drawings.

J. Kitchen Makeup Air Unit Controls
1. Furnish a complete factory-mounted, factory-wired control package.
2. Provide manufacturer's standard controller programmed to perform the sequences of operation indicated on the Drawings.
3. Provide wall-mounted space thermostat for occupied temperature control.
4. Provide discharge-air temperature sensor.
5. Interlock operation with the kitchen exhaust hood controls and fire suppression system as indicated on the Drawings.

6. Supply fan shall operate whenever the associated kitchen exhaust fan is energized.
7. Upon activation of the kitchen hood fire suppression system, automatically shut down the makeup air unit in accordance with NFPA 96 and the sequence of operation.
8. Provide terminals for remote start/stop and status indication as required for hood controls.
9. Provide all field control wiring between the unit, wall thermostat, hood control panel, fire suppression microswitches, and associated control devices required for a complete operating system.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for piping, ducts, and electrical systems to verify actual locations of connections before equipment installation.

C. Examine roof curbs and equipment supports for suitable conditions where units will be installed.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF DEDICATED OUTDOOR-AIR UNITS

A. Unit Support: Install unit level on structural curbs. Coordinate roof penetrations and flashing with roof construction. Secure units to structural support with anchor bolts. Coordinate sizes and locations of curbs with actual equipment provided.

1. Comply with requirements for vibration isolation and seismic-control devices specified in Section 230548 "Vibration and Seismic Controls for HVAC."
2. Comply with requirements for vibration isolation devices specified in Section 230548.13 "Vibration Controls for HVAC."

B. Do not operate fan system until filters (temporary or permanent) are in place. Replace temporary filters used during construction and testing with new, clean filters.

C. Install filter-gauge, static-pressure taps upstream and downstream of filters. Mount filter gauges on outside of filter housing or filter plenum in accessible position. Provide filter gauges on filter banks, installed with separate static-pressure taps upstream and downstream of filters.

D. Connect duct to air-handling units with flexible connections. Comply with requirements in Section 233300 "Air Duct Accessories."

E. Install wall- and duct-mounted sensors furnished by manufacturer for field installation. Install control wiring and make final connections to control devices and unit control panel.

F. Comply with requirements for gas-fired furnace installation in NFPA 54.

G. Install separate devices furnished by manufacturer and not factory installed.

H. Install new filters at completion of equipment installation and before testing, adjusting, and balancing.

3.3 PIPING CONNECTIONS

A. Piping installation requirements are specified in other Sections. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Where installing piping adjacent to units, allow space for service and maintenance.

C. Connect piping to units mounted on vibration isolators with flexible connectors.

D. Refrigerant Piping: Comply with applicable requirements in Section 232300 "Refrigerant Piping." Install shutoff valve and union or flange at each supply and return connection.

E. Gas Piping: Comply with requirements in Section 231123 "Facility Natural-Gas Piping." Provide AGA-approved flexible connectors.

1. Connect gas piping to furnace, full size of gas train inlet, and connect with union, pressure regulator, and shutoff valve with sufficient clearance for burner removal and service.
2. Install AGA-approved flexible connectors.

F. Hydronic Piping Connections:

1. Install shutoff valve and union or flange on each supply connection, and install balancing valve and union or flange on each return connection.

G. Duct Connections:

1. Comply with requirements in Section 233113 "Metal Ducts."
2. Drawings indicate the general arrangement of ducts.
3. Connect ducts to units with flexible duct connectors. Comply with requirements for flexible duct connectors in Section 233300 "Air Duct Accessories."

3.4 ELECTRICAL CONNECTIONS

A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."

C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.

D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.

1. Nameplate is to be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
2. Nameplate is to be laminated acrylic or melamine plastic signs with a black background and engraved white letters at least 1/2 inch high.

3.5 CONTROL CONNECTIONS

A. Install control and electrical power wiring to field-mounted control devices.

B. Connect control wiring in accordance with Section 260523 "Control-Voltage Electrical Power Cables."

C. Install all factory-furnished and field-mounted control devices in accordance with the manufacturer's written instructions.

D. Install wall-mounted thermostats, sensors, remote displays, and other control devices at locations indicated on the Drawings. Coordinate final mounting locations with the Architect.

E. Provide all control wiring between the unit, field-mounted control devices, and accessories required for a complete and operational system. Wiring shall be installed in conduit where exposed or where required by the National Electrical Code.

F. Coordinate installation of all interlocks with equipment furnished by others, including kitchen hood control panels, fire suppression systems, smoke detectors, and fire alarm systems.

G. Verify proper operation of all safeties, interlocks, sensors, thermostats, dampers, and actuators prior to startup.

H. Program the factory controller in accordance with the sequences of operation indicated on the Drawings.

I. Demonstrate proper operation of all control sequences during startup.

J. Kitchen Make Up Air Unit Controls
1. Coordinate all control wiring and interlocks with the kitchen hood manufacturer and fire suppression contractor. Provide all control wiring between the make-up air unit controller, wall thermostat, hood control panel, and all required field-mounted devices for a complete operating system. Verify operation of fan interlocks, heating and cooling enable, fire suppression shutdown, and all safeties during startup.

3.6 STARTUP SERVICE

A. Perform startup service.

1. Complete installation and startup checks in accordance with manufacturer's written instructions.
2. Inspect units for visible damage to furnace combustion chamber.
3. Perform the following operations for both minimum and maximum firing, and adjust burner for peak efficiency:

    a. Measure gas pressure at manifold.
    b. Measure combustion-air temperature at inlet to combustion chamber.
    c. Measure flue-gas temperature at furnace discharge.
    d. Perform flue-gas analysis. Measure and record flue-gas carbon dioxide and oxygen concentration.
    e. Measure supply-air temperature and volume when burner is at maximum firing rate and when burner is off. Calculate useful heat to supply air.

4. Verify operation of remote panel, including pilot-light operation and failure modes. Inspect the following:

    a. High-limit heat exchanger.
    b. Alarms.

5. Inspect units for visible damage to refrigerant compressor, condenser and evaporator coils, and fans.
6. Start refrigeration system when outdoor-air temperature is within normal operating limits. and measure and record the following:

    a. Cooling coil leaving-air, dry- and wet-bulb temperatures.
    b. Cooling coil entering-air, dry- and wet-bulb temperatures.
    c. Condenser coil entering-air dry-bulb temperature.
    d. Condenser coil leaving-air dry-bulb temperature.

7. Simulate maximum cooling demand and inspect the following:

    a. Compressor refrigerant suction and hot-gas pressures.
    b. Short-circuiting of air through outside coil or from outside coil to outdoor-air intake.

8. Inspect casing insulation for integrity, moisture content, and adhesion.
9. Verify that clearances have been provided for servicing.
10. Verify that controls are connected and operable.
11. Verify that filters are installed.
12. Clean coils and inspect for construction debris.
13. Clean furnace flue and inspect for construction debris.
14. Inspect operation of power vents.
15. Purge gas line.
16. Inspect and adjust vibration isolators and seismic restraints.

17. Verify bearing lubrication.
18. Clean fans and inspect fan-wheel rotation for movement in correct direction without vibration and binding.
19. Adjust fan belts to proper alignment and tension.
20. Start unit.
21. Inspect and record performance of interlocks and protective devices, including response to smoke detectors by fan controls and fire alarm.
22. Operate unit for run-in period.
23. Calibrate controls.
24. Adjust and inspect high-temperature limits.
25. Inspect outdoor-air dampers for proper stroke and interlock with return-air damper.
26. Verify operational sequence of controls.
27. Measure and record the following airflows. Plot fan volumes on fan curve.

    a. Supply-air volume.
    b. Relief-air flow.
    c. Outdoor-air flow.

B. After startup, change filters, verify bearing lubrication, and adjust belt tension.

C. Remove and replace components that do not properly operate, and repeat startup procedures as specified above.

D. Prepare written report of the results of startup services.

3.7 ADJUSTING

A. Adjust initial temperature and humidity set points.

B. Set field-adjustable switches and circuit-breaker trip ranges as indicated.

C. Occupancy Adjustments: When requested within four full seasons from date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.8 CLEANING

A. After completing system installation; testing, adjusting, and balancing dedicated outdoor-air unit and air-distribution systems; and completing startup service, clean air-handling units internally to remove foreign material and construction dirt and dust. Clean fan wheels, casings, dampers, coils, and filter housings, and install new, clean filters.

3.9 FIELD QUALITY CONTROL

A. Engage a qualified testing agency to perform tests and inspections.

B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

C. Perform the following tests and inspections:

1. Leak Test: After installation, fill water and steam coils with water, and test coils and connections for leaks.
2. Charge refrigerant coils with refrigerant and test for leaks.
3. Fan Operational Test: After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation.

3.10 DEMONSTRATION

A. Train Owner's maintenance personnel to adjust, operate, and maintain units.

END OF SECTION 237433

SECTION 26 0500 - COMMON WORK RESULTS FOR ELECTRICAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Electrical equipment coordination and installation.
2. Sleeves for raceways and cables.
3. Sleeve seals.
4. Grout.
5. Common electrical installation requirements.

1.3 DEFINITIONS

A. EPDM: Ethylene-propylene-diene terpolymer rubber.

B. NBR: Acrylonitrile-butadiene rubber.

1.4 COORDINATION

A. Coordinate arrangement, mounting, and support of electrical equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.
4. Raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electrical items that are behind finished surfaces or otherwise concealed. Access doors and panels are specified in Division 08 Section "Access Doors and Frames."

D. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 Section "Penetration Firestopping".

PART 2 - PRODUCTS

2.1 SLEEVES FOR RACEWAYS AND CABLES

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.

B. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.

C. Sleeves for Rectangular Openings: Galvanized sheet steel.

1. Minimum Metal Thickness:

a. For sleeve cross-section rectangle perimeter, less than 50 inches) and no side more than 16 inches), thickness shall be 0.052 inch.
b. For sleeve cross-section rectangle perimeter equal to, or more than, 50 inches and 1 or more sides equal to, or more than, 16 inches thickness shall be 0.138 inch.

2.2 SLEEVE SEALS

A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and raceway or cable.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Advance Products & Systems, Inc.
b. Calpico, Inc.
c. Metraflex Co.
d. Pipeline Seal and Insulator, Inc.
e. Thunderline Link-Seal, Model C (Basis of Design Product).

2. Sealing Elements: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
3. Pressure Plates: Reinforced nylon polymer. Include two for each sealing element.
4. Connecting Bolts and Nuts: Carbon steel with corrosion-resistant coating of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.3 GROUT

A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

PART 3 - EXECUTION

3.1 COMMON REQUIREMENTS FOR ELECTRICAL INSTALLATION

A. Comply with NECA 1.

B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.

C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.

D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electrical equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.

E. Right of Way: Give to piping systems installed at a required slope.

3.2 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

A. Electrical penetrations occur when raceways, cables, wireways, cable trays, or busways penetrate concrete slabs, concrete or masonry walls, or fire-rated floor and wall assemblies.

B. Concrete Slabs and Walls: Install sleeves for penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of slabs and walls.

C. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.

D. Fire-Rated Assemblies: Install sleeves for penetrations of fire-rated floor and wall assemblies unless openings compatible with firestop system used are fabricated during construction of floor or wall.

E. Cut sleeves to length for mounting flush with both surfaces of walls.

F. Extend sleeves installed in floors **2** inches above finished floor level.

G. Size pipe sleeves to provide 1/4-inch annular clear space between sleeve and raceway or cable, unless indicated otherwise.

H. Seal space outside of sleeves with grout for penetrations of concrete and masonry

1. Promptly pack grout solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect grout while curing.

I. Interior Penetrations of Non-Fire-Rated Walls and Floors: Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Division 07 Section "Joint Sealants.".

J. Fire-Rated-Assembly Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at raceway and cable penetrations. Install sleeves and seal raceway and cable penetration sleeves with firestop materials. Comply with requirements in Division 07 Section "Penetration Firestopping."

K. Roof-Penetration Sleeves: Seal penetration of individual raceways and cables with flexible boot-type flashing units applied in coordination with roofing work. Penetrations of existing roofing systems shall comply with methods and materials approved by the roofing system manufacturer.

L. Aboveground, Exterior-Wall Penetrations: Seal penetrations using steel pipe sleeves and mechanical sleeve seals. Select sleeve size to allow for 1-inch annular clear space between pipe and sleeve for installing mechanical sleeve seals.

M. Underground, Exterior-Wall Penetrations: Install cast-iron pipe sleeves. Size sleeves to allow for 1-inch annular clear space between raceway or cable and sleeve for installing mechanical sleeve seals.

3.3 SLEEVE-SEAL INSTALLATION

A. Install to seal exterior wall penetrations.

B. Use type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.4 FIRESTOPPING

A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electrical installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section "Penetration Firestopping."

END OF SECTION 260500

SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:

1. Building wires and cables rated 600 V and less.
2. Connectors, splices, and terminations rated 600 V and less.
3. Sleeves and sleeve seals for cables.

1.3 DEFINITIONS

A. EPDM: Ethylene-propylene-diene terpolymer rubber.

B. NBR: Acrylonitrile-butadiene rubber.

1.4 QUALITY ASSURANCE

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

B. Comply with NFPA 70.

1.5 COORDINATION

A. Set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Alcan Products Corporation; Alcan Cable Division.
2. American Insulated Wire Corp.; a Leviton Company.
3. General Cable Corporation.
4. Senator Wire & Cable Company.
5. Southwire Company.

B. Copper Conductors: Comply with NEMA WC 70.

C. Conductor Insulation: Comply with NEMA WC 70 for Types THHN-THWN or XHHW.

D. Multiconductor Cable: Comply with NEMA WC 70 for metal-clad cable, Type MC with ground wire and type HCF (Healthcare Facility) MC with ground wire for Hospital patient care areas.

2.2 CONNECTORS AND SPLICES

A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. AFC Cable Systems, Inc.
2. Hubbell Power Systems, Inc.
3. O-Z/Gedney; EGS Electrical Group LLC.
4. 3M; Electrical Products Division.
5. Tyco Electronics Corp.

B. Description: Factory-fabricated connectors and splices of size, ampacity rating, material, type, and class for application and service indicated.

2.3 SLEEVES FOR CABLES

A. See specification Section 260500.

2.4 SLEEVE SEALS

A. See Specification Section 260500.

PART 3 - EXECUTION

3.1 CONDUCTOR MATERIAL APPLICATIONS

A. Feeders: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

B. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.2 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

A. Service Entrance: Type THHN-THWN, single conductors in raceway.

B. Exposed Feeders: Type THHN-THWN, single conductors in raceway.

C. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspaces: Type THHN-THWN, single conductors in raceway.

D. Feeders Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-THWN, single conductors in raceway.

E. Exposed Branch Circuits, Including in Crawlspaces: Type THHN-THWN, single conductors in raceway.

F. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-THWN, single conductors in raceway; or Metal-clad cable, Type MC. Type MC cable shall be used for non-emergency applications only and shall be HCF (HealthCare Facility) rated when installed in Hospital patient care areas per NEC Article 517.13. Type MC cable shall be allowed from the device, light fixture, equipment, etc. served to a j-box above an accessible ceiling. Home runs from the j-box to the panelboard and branch circuits between j-boxes shall be single conductors in raceway.

G. Branch Circuits Concealed in Concrete, below Slabs-on-Grade, and Underground: Type THHN-THWN, single conductors in raceway.

3.3 INSTALLATION OF CONDUCTORS AND CABLES

A. Conceal cables in finished walls, ceilings, and floors, unless otherwise indicated.

B. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.

C. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.

D. Install exposed cables parallel and perpendicular to surfaces of exposed structural members and follow surface contours where possible.

E. Support cables according to Division 26 Section "Hangers and Supports for Electrical Systems."

F. Identify and color-code conductors and cables according to Division 26 Section "Identification for Electrical Systems."

3.4 CONNECTIONS

A. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

B. Make splices and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.

1. Use oxide inhibitor in each splice and tap conductor for aluminum conductors.

C. Wiring at Outlets: Install conductor at each outlet, with at least 6 inches of slack.

3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

A. See Specification Section 260500.

3.6 SLEEVE-SEAL INSTALLATION

A. See Specification Section 260500.

3.7 FIRESTOPPING

A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Division 07 Section "Penetration Firestopping."

3.8 FIELD QUALITY CONTROL

A. Perform tests and inspections and prepare test reports.

B. Tests and Inspections:

1. After installing conductors and cables and before electrical circuitry has been energized, test service entrance and feeder conductors, and conductors feeding the following critical equipment and services for compliance with requirements.

a. Emergency system feeders.
b. HVAC equipment feeders.

2. Perform each visual and mechanical inspection and electrical test stated in ANSI/NETA Acceptance Testing Specification. Certify compliance with test parameters.

3. Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each splice in cables and conductors No. 3 AWG and larger. Remove box and equipment covers so splices are accessible to portable scanner.

a. Instrument: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
b. Record of Infrared Scanning: Prepare a certified report that identifies splices checked and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

C. Test Reports: Prepare a written report to record the following:

1. Test procedures used.
2. Test results that comply with requirements.
3. Test results that do not comply with requirements and corrective action taken to achieve compliance with requirements.

D. Remove and replace malfunctioning units and retest as specified above.

END OF SECTION 260519

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 0526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes: Grounding systems and equipment.

PART 2 - PRODUCTS

2.1 CONDUCTORS

A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by applicable Code or authorities having jurisdiction.

B. Bare Copper Conductors:

1. Solid Conductors: ASTM B 3.
2. Stranded Conductors: ASTM B 8.
3. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch in diameter.
4. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor.
5. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches wide and 1/16 inch thick.

C. Grounding Bus: Predrilled rectangular bars of annealed copper, 1/4 by 4 inches in cross section, with 9/32-inch holes spaced 1-1/8 inches apart. Stand-off insulators for mounting shall comply with UL 891 for use in switchboards, 600 V. Lexan or PVC, impulse tested at 5000 V. Determine bus length in field or as indicated on the drawings.

2.2 CONNECTORS

A. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

B. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, pressure type with at least two bolts.

1. Pipe Connectors: Clamp type, sized for pipe.

C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

D. Bus-bar Connectors: Mechanical type, cast silicon bronze, solderless compression-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

2.3 GROUNDING ELECTRODES

A. Ground Rods: Copper; 3/4 inch by 10 feet.

PART 3 - EXECUTION

3.1 APPLICATIONS

A. Conductors: Install solid conductor for No. 10 AWG and smaller, and stranded conductors for No. 8 AWG and larger unless otherwise indicated.

B. Underground Grounding Conductors: Install bare tinned-copper conductor, No. 2/0 AWG minimum.

1. Bury at least 24 inches below grade.

C. Isolated Grounding Conductors: Green-colored insulation with continuous yellow stripe. On feeders with isolated ground, identify grounding conductor where visible to normal inspection, with alternating bands of green and yellow tape, with at least three bands of green and two bands of yellow.

D. Grounding Bus: Install in telephone/data equipment rooms, in rooms housing service equipment, and elsewhere as indicated.

1. Install bus on insulated spacers 2 inches minimum from wall, 6 inches above finished floor unless otherwise indicated.

E. Conductor Terminations and Connections:

1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
2. Underground Connections: Welded connection.
3. Connections to Ground Rods: Welded connection.
4. Connections to Structural Steel: Welded connection.

3.2 EQUIPMENT GROUNDING

A. Install insulated equipment grounding conductors with all feeders and branch circuits.

B. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:

1. Feeders and branch circuits.
2. Lighting circuits.
3. Receptacle circuits.
4. Single-phase motor and appliance branch circuits.
5. Three-phase motor and appliance branch circuits.
6. Flexible raceway runs.
7. Metal-clad cable runs.
8. Busway Supply Circuits: Install insulated equipment grounding conductor from grounding bus in the switchgear, switchboard, or distribution panel to equipment grounding bar terminal on busway.
9. Computer and Rack-Mounted Electronic Equipment Circuits: Install insulated equipment grounding conductor in branch-circuit runs from equipment-area power panels and power-distribution units.

C. Air-Duct Equipment Circuits: Install insulated equipment grounding conductor to duct-mounted electrical devices operating at 120 V and more, including air cleaners, heaters, dampers, humidifiers, and other duct electrical equipment. Bond conductor to each unit and to air duct and connected metallic piping.

D. Water Heater, Heat-Tracing, and Antifrost Heating Cables: Install a separate insulated equipment grounding conductor to each electric water heater and heat-tracing cable. Bond conductor to heater units, piping, connected equipment, and components.

E. Signal and Communication Equipment: In addition to grounding and bonding required by NFPA 70, provide a separate grounding system complying with requirements in TIA/ATIS J-STD-607-A.

1. For telephone, alarm, voice and data, and other communication equipment, provide No. 4 AWG minimum insulated grounding conductor in raceway from grounding electrode system to each service location, terminal cabinet, wiring closet, and central equipment location.
2. Service and Central Equipment Locations and Wiring Closets: Terminate grounding conductor on a 1/4-by-4-by-12-inch grounding bus.
3. Terminal Cabinets: Terminate grounding conductor on cabinet grounding terminal.

F. Metal Poles Supporting Outdoor Lighting Fixtures: Install grounding electrode and a separate insulated equipment grounding conductor in addition to grounding conductor installed with branch-circuit conductors.

3.3 INSTALLATION

A. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.

B. Ground Rods: Drive rods until tops are 2 inches below finished floor or final grade unless otherwise indicated.

1. Interconnect ground rods with grounding electrode conductor below grade and as otherwise indicated. Make connections without exposing steel or damaging coating if any.

2. For grounding electrode system, install at least three rods spaced at least one-rod length from each other and located at least the same distance from other grounding electrodes, and connect to the service grounding electrode conductor.

C. Bonding Straps and Jumpers: Install in locations accessible for inspection and maintenance except where routed through short lengths of conduit.

1. Bonding to Structure: Bond straps directly to basic structure, taking care not to penetrate any adjacent parts.
2. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.
3. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.

D. Grounding and Bonding for Piping:

1. Metal Water Service Pipe: Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
2. Water Meter Piping: Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with a bolted connector.
3. Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.

E. Bonding Interior Metal Ducts: Bond metal air ducts to equipment grounding conductors of associated fans, blowers, electric heaters, and air cleaners. Install bonding jumper to bond across flexible duct connections to achieve continuity.

F. Grounding for Steel Building Structure: Install a driven ground rod at base of each corner column and at intermediate exterior columns at distances not more than 60 feet apart.

3.4 FIELD QUALITY CONTROL

A. Perform the following tests and inspections.

1. After installing grounding system, but before permanent electrical circuits have been energized, test for compliance with requirements.

2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal, and at individual ground rods. Make tests at ground rods before any conductors are connected.

    a. Measure ground resistance at least for two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
    b. Perform tests by fall-of-potential method according to IEEE 81.

B. Grounding system will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

D. Report measured ground resistances that exceed the following values:

1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
2. Power and Lighting Equipment or System with Capacity of 500 to 1000 kVA: 5 ohms.
3. Power and Lighting Equipment or System with Capacity More Than 1000 kVA: 3 ohms.
4. Power Distribution Units or Panelboards Serving Electronic Equipment: 1 ohm.
5. Pad-Mounted Equipment: 5 ohms.

E. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Engineer promptly and include recommendations to reduce ground resistance.

END OF SECTION 26 0526

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 0529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:

1. Hangers and supports for electrical equipment and systems.
2. Construction requirements for concrete bases.

B. Related Sections include the following:

1. Division 26 Section "Vibration And Seismic Controls For Electrical Systems" for products and installation requirements necessary for compliance with seismic criteria.

1.3 DEFINITIONS

A. EMT: Electrical metallic tubing.

B. RMC: Rigid metal conduit.

1.4 PERFORMANCE REQUIREMENTS

A. Design supports for multiple raceways capable of supporting combined weight of supported systems and its contents.

B. Design equipment supports capable of supporting combined operating weight of supported equipment and connected systems and components.

C. Rated Strength: Adequate in tension, shear, and pullout force to resist maximum loads calculated or imposed for this Project, with a minimum structural safety factor of five times the applied force.

1.5 SUBMITTALS

A. Product Data: For the following:

1. Steel slotted support systems.

1.6 QUALITY ASSURANCE

A. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

B. Comply with NFPA 70.

1.7 COORDINATION

A. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.

B. Coordinate installation of roof curbs, equipment supports, and roof penetrations. These items are specified in Division 07 Section "Roof Accessories."

C. Coordinate with other trades for piping and duct runs.

PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

    a. Allied Tube & Conduit.
    b. Cooper B-Line, Inc.; a division of Cooper Industries.
    c. ERICO International Corporation.
    d. GS Metals Corp.
    e. Thomas & Betts Corporation.
    f. Unistrut; Atkore
    g. Wesanco, Inc.

2. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
3. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-4.
4. Channel Dimensions: Selected for applicable load criteria.

B. Raceway and Cable Supports: As described in NECA 1 and NECA 101.

C. Conduit and Cable Support Devices: Steel and malleable-iron hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.

D. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for non-armored electrical conductors or cables in riser conduits. Plugs shall have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body shall be malleable iron.

E. Structural Steel for Fabricated Supports and Restraints: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.

F. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:

1. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete, steel, or wood, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.

    a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

        1) Hilti Inc.
        2) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
        3) MKT Fastening, LLC.
        4) Simpson Strong-Tie Co., Inc.; Masterset Fastening Systems Unit.

2. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel, for use in hardened portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.

    a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

        1) Cooper B-Line, Inc.; a division of Cooper Industries.
        2) Empire Tool and Manufacturing Co., Inc.
        3) Hilti Inc.
        4) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
        5) MKT Fastening, LLC.

3. Concrete Inserts: Steel or malleable-iron, slotted support system units similar to MSS Type 18; complying with MFMA-4 or MSS SP-58.
4. Clamps for Attachment to Steel Structural Elements: MSS SP-58, type suitable for attached structural element.
5. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.
6. Toggle Bolts: All-steel springhead type.
7. Hanger Rods: Threaded steel.

2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

B. Materials: Comply with requirements in Division 05 Section "Metal Fabrications" for steel shapes and plates.

PART 3 - EXECUTION

3.1 APPLICATION

A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.

B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, and RMC as required by NFPA 70. Minimum rod size shall be 1/4 inch in diameter.

C. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.

1. Secure raceways and cables to these supports with single-bolt conduit clamps.

D. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch and smaller raceways serving branch circuits and communication systems above suspended ceilings and for fastening raceways to trapeze supports.

3.2 SUPPORT INSTALLATION

A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.

B. Raceway Support Methods: In addition to methods described in NECA 1, EMT and RMC may be supported by openings through structure members, as permitted in NFPA 70.

C. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination shall be weight of supported components plus 200 lb.

D. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:

1. To Wood: Fasten with lag screws or through bolts.

2. To New Concrete: Bolt to concrete inserts.
3. To Masonry: Approved toggle-type bolts on hollow masonry units and expansion anchor fasteners on solid masonry units.
4. To Steel: Beam clamps (MSS Type 19, 21, 23, 25, or 27) complying with MSS SP-69.
5. To Light Steel: Sheet metal screws.
6. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that meet seismic-restraint strength and anchorage requirements.

E. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

3.3 INSTALLATION OF FABRICATED METAL SUPPORTS

A. Comply with installation requirements in Division 05 Section "Metal Fabrications" for site-fabricated metal supports.

B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor electrical materials and equipment.

C. Field Welding: Comply with AWS D1.1/D1.1M.

3.4 CONCRETE BASES

A. Construct concrete bases of dimensions indicated but not less than 4 inches (100 mm) larger in both directions than supported unit, and so anchors will be a minimum of 10 bolt diameters from edge of the base.

B. Use **3000-psi**, 28-day compressive-strength concrete. Concrete materials, reinforcement, and placement requirements are specified in Division 03 Section "Cast-in-Place Concrete".

C. Anchor equipment to concrete base.

1. Place and secure anchorage devices. Use supported equipment manufacturer's setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
2. Install anchor bolts to elevations required for proper attachment to supported equipment.
3. Install anchor bolts per anchor-bolt manufacturer's written instructions.

3.5 PAINTING

A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.

1. Apply paint by brush or spray to provide minimum dry film thickness of 2.0 mils.

B. Touchup: Comply with requirements in Division 09 for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.

C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

END OF SECTION 26 0529

SECTION 26 0533 - RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes raceways, fittings, boxes, enclosures, and cabinets for electrical wiring.

B. Related Sections include the following:

1. Division 26 Section for exterior ductbanks, manholes, and underground utility construction.

1.3 DEFINITIONS

A. EMT: Electrical metallic tubing.

B. FMC: Flexible metal conduit.

C. LFMC: Liquidtight flexible metal conduit.

D. LFNC: Liquidtight flexible nonmetallic conduit.

E. NBR: Acrylonitrile-butadiene rubber.

F. RNC: Rigid nonmetallic conduit.

G. RMC: Rigid Metal Conduit

1.4 SUBMITTALS

A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

B. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.

1. Custom enclosures and cabinets.

2. For handholes and boxes for underground wiring, including the following:

    a. Duct entry provisions, including locations and duct sizes.
    b. Frame and cover design.
    c. Grounding details.
    d. Dimensioned locations of cable rack inserts, and pulling-in and lifting irons.

C. Manufacturer Seismic Qualification Certification: Submit certification that enclosures and cabinets and their mounting provisions, including those for internal components, will withstand seismic forces defined in Division 26 Section "Vibration and Seismic Controls for Electrical Systems." Include the following:

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.

    a. The term "withstand" means "the cabinet or enclosure will remain in place without separation of any parts when subjected to the seismic forces specified and the unit will retain its enclosure characteristics, including its interior accessibility, after the seismic event."

2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

1.5 QUALITY ASSURANCE

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

B. Comply with NFPA 70.

PART 2 - PRODUCTS

2.1 METAL CONDUIT AND TUBING

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AFC Cable Systems, Inc.
2. Alflex Inc.
3. Allied Tube & Conduit; a Tyco International Ltd. Co.
4. Anamet Electrical, Inc.; Anaconda Metal Hose.
5. Electri-Flex Co.
6. Manhattan/CDT/Cole-Flex.

7. Maverick Tube Corporation.
8. O-Z Gedney; a unit of General Signal.
9. Wheatland Tube Company.

B. Rigid Steel Conduit: ANSI C80.1.

C. Aluminum Rigid Conduit: ANSI C80.5.

D. EMT: ANSI C80.3.

E. FMC: Zinc-coated steel.

F. LFMC: Liquidtight flexible steel conduit with PVC jacket.

G. Fittings for Conduit (Including all Types and Flexible and Liquidtight), EMT, and Cable: NEMA FB 1; listed for type and size raceway with which used, and for application and environment in which installed.

1. Fittings for EMT: Steel, set-screw type.

H. Joint Compound for Rigid Steel Conduit: Listed for use in cable connector assemblies and compounded for use to lubricate and protect threaded raceway joints from corrosion and enhance their conductivity.

2.2 NONMETALLIC CONDUIT AND TUBING

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AFC Cable Systems, Inc.
2. Anamet Electrical, Inc.; Anaconda Metal Hose.
3. Arnco Corporation.
4. CANTEX Inc.
5. CertainTeed Corp.; Pipe & Plastics Group.
6. Condux International, Inc.
7. ElecSYS, Inc.
8. Electri-Flex Co.
9. Lamson & Sessions; Carlon Electrical Products.
10. Manhattan/CDT/Cole-Flex.
11. RACO; a Hubbell Company.
12. Thomas & Betts Corporation.

B. ENT: NEMA TC 13.

C. RNC: NEMA TC 2, Type EPC-40-PVC, unless otherwise indicated.

D. LFNC: UL 1660.

E. Fittings for ENT and RNC: NEMA TC 3; match to conduit or tubing type and material.

F. Fittings for LFNC: UL 514B.

2.3 OPTICAL FIBER/COMMUNICATIONS CABLE RACEWAY AND FITTINGS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Arnco Corporation.
2. Endot Industries Inc.
3. IPEX Inc.
4. Lamson & Sessions; Carlon Electrical Products.

B. Description: Comply with UL 2024; flexible type, approved for plenum, riser, or general-use installation as dictated by field conditions and applicable codes.

2.4 METAL WIREWAYS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cooper B-Line, Inc.
2. Hoffman.
3. Square D; Schneider Electric.

B. Description: Sheet metal sized and shaped as indicated, NEMA 250, Type 1, unless otherwise indicated.

C. Fittings and Accessories: Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for complete system.

D. Wireway Covers: Hinged type.

E. Finish: Manufacturer's standard enamel finish.

2.5 SURFACE RACEWAYS

A. Surface Metal Raceways: Galvanized steel with snap-on covers. Manufacturer's standard enamel finish in color selected by Architect.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Thomas & Betts Corporation.
b. Walker Systems, Inc.; Wiremold Company (The).

c. Wiremold Company (The); Electrical Sales Division.
d. Hubbell Wiring Device-Kellems

2.6 BOXES, ENCLOSURES, AND CABINETS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Cooper Crouse-Hinds; Div. of Cooper Industries, Inc.
2. EGS/Appleton Electric.
3. Erickson Electrical Equipment Company.
4. Hoffman.
5. Hubbell Incorporated; Killark Electric Manufacturing Co. Division.
6. RACO; a Hubbell Company.
7. Thomas & Betts Corporation.

B. Sheet Metal Outlet and Device Boxes: NEMA OS 1.

C. Cast-Metal Outlet and Device Boxes: NEMA FB 1, aluminum, Type FD, with gasketed cover.

D. Nonmetallic Outlet and Device Boxes: NEMA OS 2.

E. Metal Floor Boxes: Sheet metal, fully adjustable, rectangular.

F. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.

G. Cast-Metal Access, Pull, and Junction Boxes: NEMA FB 1, cast aluminum with gasketed cover.

H. Hinged-Cover Enclosures: NEMA 250, Type 1, with continuous-hinge cover with flush latch, unless otherwise indicated.

1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
2. Nonmetallic Enclosures: Plastic.

I. Cabinets:

1. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
2. Hinged door in front cover with flush latch and concealed hinge.
3. Key latch to match panelboards.
4. Metal barriers to separate wiring of different systems and voltage.
5. Accessory feet where required for freestanding equipment.

2.7 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

A. Description: Comply with SCTE 77.

1. Color of Frame and Cover: Gray.
2. Configuration: Units shall be designed for flush burial and have open bottom, unless otherwise indicated.
3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure.
4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
5. Cover Legend: Molded lettering, as indicated on the drawings for each service.

B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel or fiberglass or a combination of the two.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Strongwell Quazite or a comparable product by one of the following:

a. Armorcast Products Company.
b. Carson Industries LLC.
c. CDR Systems Corporation.
d. NewBasis.

2.8 SLEEVES FOR RACEWAYS

A. See Specification Section 260500.

2.9 SLEEVE SEALS

A. See Specification Section 260500.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

A. Outdoors: Apply raceway products as specified below, unless otherwise indicated:

1. Exposed Conduit: Rigid aluminum conduit.
2. Concealed Conduit, Aboveground: EMT.
3. Underground Conduit: RNC, Type EPC-80-PVC, direct buried.
4. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): LFMC.
5. Boxes and Enclosures, Aboveground: NEMA 250, Type 3R.
6. Application of Handholes and Boxes for Underground Wiring:

a. Handholes and Pull Boxes in Driveway, Parking Lot, and Off-Roadway Locations, Subject to Occasional, Nondeliberate Loading by Heavy Vehicles: Polymer concrete, SCTE 77, Tier 15 structural load rating.

b. Handholes and Pull Boxes in Sidewalk and Similar Applications with a Safety Factor for Nondeliberate Loading by Vehicles: Polymer-concrete units, SCTE 77, Tier 8 structural load rating.

B. Comply with the following indoor applications, unless otherwise indicated:

1. Exposed, Not Subject to Physical Damage: EMT.
2. Exposed, Not Subject to Severe Physical Damage: EMT.
3. Exposed and Subject to Severe Physical Damage: Rigid steel conduit. Includes raceways in the following locations:

   a. Loading dock.
   b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.

4. Concealed in Ceilings and Interior Walls and Partitions: EMT.
5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
6. Damp or Wet Locations: Rigid steel conduit.
7. Raceways for Optical Fiber or Communications Cable in Spaces Used for Environmental Air: Plenum-type, optical fiber/communications cable raceway
8. Raceways for Optical Fiber or Communications Cable Risers in Vertical Shafts**:** Riser-type, optical fiber/communications cable raceway.
9. Raceways for Concealed GeneralPurpose Distribution of Optical Fiber or Communications Cable: General-use, optical fiber/communications cable raceway.
10. Boxes and Enclosures: NEMA 250, Type 1, except use NEMA 250, Type 4, nonmetallic in damp or wet locations.

C. Minimum Raceway Size: **3/4-inch** trade size.

D. Raceway Fittings: Compatible with raceways and suitable for use and location.

1. Rigid Steel Conduit: Use threaded rigid steel conduit fittings, unless otherwise indicated.

E. Install nonferrous conduit or tubing for circuits operating above 60 Hz. Where aluminum raceways are installed for such circuits and pass through concrete, install in nonmetallic sleeve.

F. Do not install aluminum conduits in contact with concrete.

3.2 INSTALLATION

A. Comply with NECA 1 for installation requirements applicable to products specified in Part 2 except where requirements on Drawings or in this Article are stricter.

B. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.

C. Complete raceway installation before starting conductor installation.

D. Support raceways as specified in Division 26 Section "Hangers and Supports for Electrical Systems."

E. Arrange stub-ups so curved portions of bends are not visible above the finished slab.

F. Install no more than the equivalent of three 90-degree bends in any conduit run except for communications conduits, for which fewer bends are allowed.

G. Conceal conduit and EMT within finished walls, ceilings, and floors, unless otherwise indicated.

H. Raceways Embedded in Slabs:

1. Arrange raceways to cross building expansion joints at right angles with expansion fittings.

2. Change from ENT to rigid steel conduit before rising above the floor.

I. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.

J. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors, including conductors smaller than No. 4 AWG.

K. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb tensile strength. Leave at least 12 inches of slack at each end of pull wire.

L. Raceways for Optical Fiber and Communications Cable: Install raceways, metallic and nonmetallic, rigid and flexible, as follows:

1. 3/4-Inch Trade Size and Smaller: Install raceways in maximum lengths of 50 feet.
2. 1-Inch Trade Size and Larger: Install raceways in maximum lengths of 75 feet.
3. Install with a maximum of two 90-degree bends or equivalent for each length of raceway unless Drawings show stricter requirements. Separate lengths with pull or junction boxes or terminations at distribution frames or cabinets where necessary to comply with these requirements.

M. Install raceway sealing fittings at suitable, approved, and accessible locations and fill them with listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings at the following points:

1. Where conduits pass from warm to cold locations, such as boundaries of refrigerated spaces.
2. Where otherwise required by NFPA 70.

N. Flexible Conduit Connections: Use maximum of 72 inches of flexible conduit for recessed and semi-recessed lighting fixtures, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.

1. Use LFMC in damp or wet locations subject to severe physical damage.
2. Use LFMC in damp or wet locations not subject to severe physical damage.

O. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block and install box flush with surface of wall.

P. Set metal floor boxes level and flush with finished floor surface.

3.3 INSTALLATION OF UNDERGROUND CONDUIT

A. Direct-Buried Conduit:

1. Excavate trench bottom to provide firm and uniform support for conduit. Prepare trench bottom as specified in Division 31 Section "Earth Moving" for pipe less than 6 inches in nominal diameter.
2. Install backfill as specified in Division 31 Section "Earth Moving."
3. After installing conduit, backfill and compact. Start at tie-in point, and work toward end of conduit run, leaving conduit at end of run free to move with expansion and contraction as temperature changes during this process. Firmly hand tamp backfill around conduit to provide maximum supporting strength. After placing controlled backfill to within 12 inches of finished grade, make final conduit connection at end of run and complete backfilling with normal compaction as specified in Division 31 Section "Earth Moving."

4. Install manufactured rigid steel conduit elbows for stub-ups at poles and equipment and at building entrances through the floor.

a. Couple steel conduits to ducts with adapters designed for this purpose, and encase coupling with 3 inches of concrete.
b. For stub-ups at equipment mounted on outdoor concrete bases, extend steel conduit horizontally a minimum of 60 inches from edge of equipment pad or foundation. Install insulated grounding bushings on terminations at equipment.

3.4 INSTALLATION OF UNDERGROUND HANDHOLES AND BOXES

A. Install handholes and boxes level and plumb and with orientation and depth coordinated with connecting conduits to minimize bends and deflections required for proper entrances.

B. Unless otherwise indicated, support units on a level bed of crushed stone or gravel, graded from 1/2-inch sieve to No. 4 sieve and compacted to same density as adjacent undisturbed earth.

C. Elevation: In paved areas, set so cover surface will be flush with finished grade. Set covers of other enclosures 1 inch above finished grade.

D. Install handholes and boxes with bottom below the frost line, 30” below grade.

3.5 SLEEVE INSTALLATION FOR ELECTRICAL PENETRATIONS

A. See Specification Section 260500.

3.6 SLEEVE-SEAL INSTALLATION

A. See Specification Section 260500.

3.7 FIRESTOPPING

A. Apply firestopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section "Penetration Firestopping."

3.8 PROTECTION

A. Provide final protection and maintain conditions that ensure coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.

1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
2. Repair damage to PVC or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 26 0533

SECTION 26 0548 - VIBRATION AND SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:

1. Isolation pads.
2. Spring isolators.
3. Restrained spring isolators.
4. Channel support systems.
5. Restraint cables.
6. Hanger rod stiffeners.
7. Anchorage bushings and washers.

B. Related Sections include the following:

1. Division 26 Section "Hangers And Supports For Electrical Systems" for commonly used electrical supports and installation requirements.

1.3 DEFINITIONS

A. The IBC: International Building Code.

B. ICC-ES: ICC-Evaluation Service.

1.4 SUBMITTALS

A. Product Data: For the following:

1. Include rated load, rated deflection, and overload capacity for each vibration isolation device.
2. Illustrate and indicate style, material, strength, fastening provision, and finish for each type and size of seismic-restraint component used.

a. Tabulate types and sizes of seismic restraints, complete with report numbers and rated strength in tension and shear as evaluated by an agency acceptable to authorities having jurisdiction.

b. Annotate to indicate application of each product submitted and compliance with requirements.

3. Restrained-Isolation Devices: Include ratings for horizontal, vertical, and combined loads.

B. Delegated-Design Submittal: For seismic-restraint details indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Design Calculations: Calculate static and dynamic loading due to equipment weight and operation, seismic forces required to select vibration isolators and seismic restraints.

a. Coordinate design calculations with wind-load calculations required for equipment mounted outdoors. Comply with requirements in other Division 26 Sections for equipment mounted outdoors.

2. Indicate materials and dimensions and identify hardware, including attachment and anchorage devices.
3. Field-fabricated supports.
4. Seismic-Restraint Details:

a. Design Analysis: To support selection and arrangement of seismic restraints. Include calculations of combined tensile and shear loads.
b. Details: Indicate fabrication and arrangement. Detail attachments of restraints to the restrained items and to the structure. Show attachment locations, methods, and spacings. Identify components, list their strengths, and indicate directions and values of forces transmitted to the structure during seismic events
c. Preapproval and Evaluation Documentation: By an agency acceptable to authorities having jurisdiction, showing maximum ratings of restraint items and the basis for approval (tests or calculations).

C. Coordination Drawings: Show coordination of seismic bracing for electrical components with other systems and equipment in the vicinity, including other supports and seismic restraints.

D. Welding certificates.

E. Qualification Data: For professional engineer and testing agency.

F. Field quality-control test reports.

1.5 QUALITY ASSURANCE

A. Testing Agency Qualifications: An independent agency, with the experience and capability to conduct the testing indicated, that is a nationally recognized testing laboratory (NRTL) as defined by OSHA in 29 CFR 1910.7, and that is acceptable to authorities having jurisdiction.

B. Comply with seismic-restraint requirements in the IBC unless requirements in this Section are more stringent.

C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."

D. Seismic-restraint devices shall have horizontal and vertical load testing and analysis and shall bear anchorage preapproval by ICC-ES or preapproval by another agency acceptable to authorities having jurisdiction, showing maximum seismic-restraint ratings. Ratings based on independent testing are preferred to ratings based on calculations. If preapproved ratings are not available, submittals based on independent testing are preferred. Calculations (including combining shear and tensile loads) to support seismic-restraint designs must be signed and sealed by a qualified professional engineer.

E. Comply with NFPA 70.

PART 2 - PRODUCTS

2.1 VIBRATION ISOLATORS

A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

C. Basis-of-Design Product: Subject to compliance with requirements, provide the product indicated on Drawings or a comparable product by one of the following:

1. Ace Mountings Co., Inc.
2. Amber/Booth Company, Inc.
3. California Dynamics Corporation.
4. Isolation Technology, Inc.
5. Kinetics Noise Control.
6. Mason Industries.
7. Vibration Eliminator Co., Inc.
8. Vibration Isolation.
9. Vibration Mountings & Controls, Inc.

D. Pads: Arrange in single or multiple layers of sufficient stiffness for uniform loading over pad area, molded with a nonslip pattern and galvanized-steel baseplates, and factory cut to sizes that match requirements of supported equipment.

1. Resilient Material: Oil- and water-resistant **neoprene.**

E. Spring Isolators: Freestanding, laterally stable, open-spring isolators.

1. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
2. Minimum Additional Travel: 50 percent of the required deflection at rated load.
3. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
4. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.
5. Baseplates: Factory drilled for bolting to structure and bonded to 1/4-inch-thick, rubber isolator pad attached to baseplate underside. Baseplates shall limit floor load to 500 psig.
6. Top Plate and Adjustment Bolt: Threaded top plate with adjustment bolt and cap screw to fasten and level equipment.

F. Restrained Spring Isolators: Freestanding, steel, open-spring isolators with seismic or limit-stop restraint.

1. Housing: Steel with resilient vertical-limit stops to prevent spring extension due to weight being removed; factory-drilled baseplate bonded to 1/4-inch-thick, neoprene or rubber isolator pad attached to baseplate underside; and adjustable equipment mounting and leveling bolt that acts as blocking during installation.
2. Restraint: Seismic or limit-stop as required for equipment and authorities having jurisdiction.
3. Outside Spring Diameter: Not less than 80 percent of the compressed height of the spring at rated load.
4. Minimum Additional Travel: 50 percent of the required deflection at rated load.
5. Lateral Stiffness: More than 80 percent of rated vertical stiffness.
6. Overload Capacity: Support 200 percent of rated load, fully compressed, without deformation or failure.

2.2 SEISMIC-RESTRAINT DEVICES

A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

C. Basis-of-Design Product: Subject to compliance with requirements, provide the product indicated on Drawings or a comparable product by one of the following:

1. Amber/Booth Company, Inc.
2. California Dynamics Corporation.
3. Cooper B-Line, Inc.; a division of Cooper Industries.
4. Hilti Inc.
5. Loos & Co.; Seismic Earthquake Division.
6. Mason Industries.
7. TOLCO Incorporated; a brand of NIBCO INC.
8. Unistrut; Tyco International, Ltd.

D. General Requirements for Restraint Components: Rated strengths, features, and application requirements shall be as defined in reports by an agency acceptable to authorities having jurisdiction.

1. Structural Safety Factor: Allowable strength in tension, shear, and pullout force of components shall be at least four times the maximum seismic forces to which they will be subjected.

E. Channel Support System: MFMA-3, shop- or field-fabricated support assembly made of slotted steel channels with accessories for attachment to braced component at one end and to building structure at the other end and other matching components and with corrosion-resistant coating; and rated in tension, compression, and torsion forces.

F. Restraint Cables: ASTM A 603 galvanized steel cables with end connections made of steel assemblies with thimbles, brackets, swivels, and bolts designed for restraining cable service; and with a minimum of two clamping bolts for cable engagement.

G. Hanger Rod Stiffener: Reinforcing steel angle clamped to hanger rod. Do not weld stiffeners to rods.

H. Bushings for Floor-Mounted Equipment Anchor: Neoprene bushings designed for rigid equipment mountings and matched to type and size of anchors and studs.

I. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for rigid equipment mountings and matched to type and size of attachment devices.

J. Resilient Isolation Washers and Bushings: One-piece, molded, oil- and water-resistant neoprene, with a flat washer face.

K. Mechanical Anchor: Drilled-in and stud-wedge or female-wedge type in zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchors with strength required for anchor and as tested according to ASTM E 488. Minimum length of eight times diameter.

L. Adhesive Anchor: Drilled-in and capsule anchor system containing polyvinyl or urethane methacrylate-based resin and accelerator, or injected polymer or hybrid mortar adhesive. Provide anchor bolts and hardware with zinc-coated steel for interior applications and stainless steel for exterior applications. Select anchor bolts with strength required for anchor and as tested according to ASTM E 488.

2.3 FACTORY FINISHES

A. Finish: Manufacturer's standard prime coat finish ready for field painting.

B. Finish: Manufacturer's standard paint applied to factory-assembled and -tested equipment before shipping.

1. Powder coating on springs and housings.
2. All hardware shall be galvanized. Hot-dip galvanize metal components for exterior use.
3. Baked enamel or powder coat for metal components on isolators for interior use.
4. Color-code or otherwise mark vibration isolation and seismic-control devices to indicate capacity range.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and equipment to receive seismic-control devices for compliance with requirements for installation tolerances and other conditions affecting performance.

B. Examine roughing-in of reinforcement and cast-in-place anchors to verify actual locations before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLICATIONS

A. Multiple Raceways or Cables: Secure raceways and cables to trapeze members with clamps approved for application by an agency acceptable to authorities having jurisdiction.

B. Hanger Rod Stiffeners: Install hanger rod stiffeners where indicated or scheduled on Drawings to receive them and where required to prevent buckling of hanger rods due to seismic forces.

C. Strength of Support and Seismic-Restraint Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static and seismic loads within specified loading limits.

3.3 SEISMIC-RESTRAINT DEVICE INSTALLATION

A. Equipment and Hanger Restraints:

1. Install restrained isolators on electrical equipment.
2. Install resilient bolt-isolation washers on equipment anchor bolts where clearance between anchor and adjacent surface exceeds 0.125 inch.
3. Install seismic-restraint devices using methods approved by an agency acceptable to authorities having jurisdiction providing required submittals for component.

B. Install bushing assemblies for mounting bolts for wall-mounted equipment, arranged to provide resilient media where equipment or equipment-mounting channels are attached to wall.

C. Attachment to Structure: If specific attachment is not indicated, anchor bracing to structure at flanges of beams, at upper truss chords of bar joists, or at concrete members.

D. Drilled-in Anchors:

1. Identify position of reinforcing steel and other embedded items prior to drilling holes for anchors. Do not damage existing reinforcing or embedded items during coring or drilling. Notify the structural engineer if reinforcing steel or other embedded items are encountered during drilling. Locate and avoid prestressed tendons, electrical and telecommunications conduit, and gas lines.
2. Do not drill holes in concrete or masonry until concrete, mortar, or grout has achieved full design strength.
3. Wedge Anchors: Protect threads from damage during anchor installation. Heavy-duty sleeve anchors shall be installed with sleeve fully engaged in the structural element to which anchor is to be fastened.
4. Adhesive Anchors: Clean holes to remove loose material and drilling dust prior to installation of adhesive. Place adhesive in holes proceeding from the bottom of the hole and progressing toward the surface in such a manner as to avoid introduction of air pockets in the adhesive.
5. Set anchors to manufacturer's recommended torque, using a torque wrench.
6. Install zinc-coated steel anchors for interior and stainless-steel anchors for exterior applications.

3.4 ACCOMMODATION OF DIFFERENTIAL SEISMIC MOTION

A. Install flexible connections in runs of raceways, cables, wireways, cable trays, and busways where they cross seismic joints, where adjacent sections or branches are supported by different structural elements, and where they terminate with connection to equipment that is anchored to a different structural element from the one supporting them as they approach equipment.

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections and prepare test reports.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Provide evidence of recent calibration of test equipment by a testing agency acceptable to authorities having jurisdiction.
2. Schedule test with Owner, through Architect, before connecting anchorage device to restrained component (unless post connection testing has been approved), and with at least seven days' advance notice.
3. Obtain Architect's approval before transmitting test loads to structure. Provide temporary load-spreading members.
4. Test at least four of each type and size of installed anchors and fasteners selected by Architect.
5. Test to 90 percent of rated proof load of device.
6. Measure isolator restraint clearance.

7. Measure isolator deflection.
8. Verify snubber minimum clearances.
9. If a device fails test, modify all installations of same type and retest until satisfactory results are achieved.

D. Remove and replace malfunctioning units and retest as specified above.

E. Prepare test and inspection reports.

3.6 ADJUSTING

A. Adjust isolators after isolated equipment is at operating weight.

B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

C. Adjust active height of spring isolators.

D. Adjust restraints to permit free movement of equipment within normal mode of operation.

END OF SECTION 26 0548

SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Identification for raceways.
2. Identification of power and control cables.
3. Identification for conductors.
4. Underground-line warning tape.
5. Warning labels and signs.
6. Instruction signs.
7. Equipment identification labels.
8. Miscellaneous identification products.

1.3 QUALITY ASSURANCE

A. Comply with ANSI A13.1.

B. Comply with NFPA 70.

C. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.

D. Comply with ANSI Z535.4 for safety signs and labels.

E. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, shall comply with UL 969.

1.4 COORDINATION

A. Coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual; and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.

B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.

C. Coordinate installation of identifying devices with location of access panels and doors.

D. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 POWER RACEWAY IDENTIFICATION MATERIALS

A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.

B. Colors for Raceways Carrying Circuits at 600 V or Less:

1. Black letters on an orange field.
2. Legend: Indicate voltage and system or service type.

C. Self-Adhesive Vinyl Labels for Raceways Carrying Circuits at 600 V or Less: Preprinted, flexible label laminated with a clear, weather-, UV and chemical-resistant coating and matching wraparound adhesive tape for securing ends of legend label.

2.2 METAL-CLAD CABLE IDENTIFICATION MATERIALS

A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway and cable size.

B. Colors for Raceways Carrying Circuits at 600 V and Less:

1. Black letters on an orange field.
2. Legend: Indicate voltage and system or service type.

C. Self-Adhesive Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound adhesive tape for securing ends of legend label.

2.3 POWER AND CONTROL CABLE IDENTIFICATION MATERIALS

A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway and cable size.

B. Self-Adhesive Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound adhesive tape for securing ends of legend label.

2.4 CONDUCTOR IDENTIFICATION MATERIALS

A. Color-Coding Conductor Tape: Colored, self-adhesive vinyl tape not less than 3 mils thick by 3/4 to 2 inches wide.

2.5 FLOOR MARKING TAPE

A. 2-inch-wide, 5-mil pressure-sensitive vinyl tape, with black and white stripes and clear vinyl overlay.

2.6 UNDERGROUND-LINE WARNING TAPE

A. Detectable Tape:

1. Recommended by manufacturer for the method of installation and suitable to identify and locate underground electrical and communications utility lines.
2. Printing on tape shall be permanent and shall not be damaged by burial operations.
3. Tape material and ink shall be chemically inert, and not subject to degrading when exposed to acids, alkalis, and other destructive substances commonly found in soils.
4. Tape shall have a metallic core that is detectable by a metal detector. Verify the tape size required based on the width and depth of the underground lines.

B. Color and Printing:

1. Comply with ANSI Z535.1 through ANSI Z535.5.
2. Inscriptions for Red-Colored Tapes: ELECTRIC LINE, HIGH VOLTAGE.
3. Inscriptions for Orange-Colored Tapes: TELEPHONE CABLE, CATV CABLE, COMMUNICATIONS CABLE, OPTICAL FIBER CABLE.

2.7 WARNING LABELS AND SIGNS

A. Comply with NFPA 70 and 29 CFR 1910.145.

B. Self-Adhesive Warning Labels: Factory-printed, multicolor, pressure-sensitive adhesive labels, configured for display on front cover, door, or other access to equipment unless otherwise indicated.

C. Warning label and sign shall include, but are not limited to, the following legends:

1. Multiple Power Source Warning: "DANGER - ELECTRICAL SHOCK HAZARD - EQUIPMENT HAS MULTIPLE POWER SOURCES."

2. Workspace Clearance Warning: "WARNING - OSHA REGULATION - AREA IN FRONT OF ELECTRICAL EQUIPMENT MUST BE KEPT CLEAR"

2.8 INSTRUCTION SIGNS

A. Engraved, laminated acrylic or melamine plastic, minimum 1/16 inch thick for signs up to 20 sq. inches and 1/8 inch thick for larger sizes.

1. Engraved legend with black letters on white face.
2. Punched or drilled for mechanical fasteners.

2.9 EQUIPMENT IDENTIFICATION LABELS

A. Adhesive Film Label: Machine printed, in black, by thermal transfer or equivalent process. Minimum letter height shall be 3/8 inch.

2.10 CABLE TIES

A. General-Purpose Cable Ties: Fungus inert, self extinguishing, one piece, self locking, Type 6/6 nylon.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 deg F, According to ASTM D 638: 12,000 psi.
3. Temperature Range: Minus 40 to plus 185 deg F.
4. Color: Black except where used for color-coding.

B. UV-Stabilized Cable Ties: Fungus inert, designed for continuous exposure to exterior sunlight, self extinguishing, one piece, self locking, Type 6/6 nylon.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 deg F, According to ASTM D 638: 12,000 psi.
3. Temperature Range: Minus 40 to plus 185 deg F.
4. Color: Black.

C. Plenum-Rated Cable Ties: Self extinguishing, UV stabilized, one piece, self locking.

1. Minimum Width: 3/16 inch.
2. Tensile Strength at 73 deg F, According to ASTM D 638: 7000 psi.
3. UL 94 Flame Rating: 94V-0.
4. Temperature Range: Minus 50 to plus 284 deg F.
5. Color: Black.

2.11 MISCELLANEOUS IDENTIFICATION PRODUCTS

A. Paint: Comply with requirements in Division 09 painting Sections for paint materials and application requirements. Select paint system applicable for surface material and location (exterior or interior).

B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Verify identity of each item before installing identification products.

B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.

C. Apply identification devices to surfaces that require finish after completing finish work.

D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.

E. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.

F. System Identification Color-Coding Bands for Raceways and Cables: Each color-coding band shall completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.

G. Aluminum Wraparound Marker Labels and Metal Tags: Secure tight to surface of conductor or cable at a location with high visibility and accessibility.

H. Cable Ties: For attaching tags. Use general-purpose type, except as listed below:

1. Outdoors: UV-stabilized nylon.
2. In Spaces Handling Environmental Air: Plenum rated.

I. Underground-Line Warning Tape: During backfilling of trenches install continuous underground-line warning tape directly above line at 6 to 8 inches below finished grade. Use multiple tapes where width of multiple lines installed in a common trench exceeds 16 inches overall.

3.2 IDENTIFICATION SCHEDULE

A. Accessible Raceways, Armored and Metal-Clad Cables, More Than 600 V: Self-adhesive vinyl labels. Install labels at 30-foot maximum intervals.

B. Accessible Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive vinyl labels with the wiring system legend and system voltage. System legends shall be as follows:

1. Emergency Power.
2. Power.
3. UPS.

C. Power-Circuit Conductor Identification, 600 V or Less: For conductors in pull and junction boxes, and handholes, use color-coding conductor tape to identify the phase.

1. Color-Coding for Phase and Voltage Level Identification, 600 V or Less: Use colors listed below for service, feeder, and branch-circuit conductors.

a. Color shall be factory applied.
b. Colors for 208/120-V Circuits:

1) Phase A: Black.
2) Phase B: Red.
3) Phase C: Blue.
4) Neutral: White.
5) Ground: Green.

c. Colors for 480/277-V Circuits:

1) Phase A: Brown.
2) Phase B: Orange.
3) Phase C: Yellow.
4) Neutral: Gray.
5) Ground: Green.

d. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.

D. Install instructional sign including the color-code for grounded and ungrounded conductors using adhesive-film-type labels.

E. Conductors to Be Extended in the Future: Attach marker tape to conductors and list source.

F. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.

1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual.

G. Locations of Underground Lines: Identify with underground-line warning tape for power, lighting, communication, and control wiring and optical fiber cable.

1. Install underground-line warning tape for both direct-buried cables and cables in raceway.

H. Workspace Indication: Install floor marking tape to show working clearances in the direction of access to live parts. Workspace shall be as required by NFPA 70 and 29 CFR 1926.403 unless otherwise indicated. Do not install at flush-mounted panelboards and similar equipment in finished spaces.

I. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Self-adhesive warning labels.

1. Comply with 29 CFR 1910.145.
2. Identify system voltage with black letters on an orange background.
3. Apply to exterior of door, cover, or other access.
4. For equipment with multiple power or control sources, apply to door or cover of equipment including, but not limited to, the following:

a. Power transfer switches.
b. Controls with external control power connections.

J. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and the Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.

1. Labeling Instructions:

a. Indoor Equipment: Self-adhesive, engraved, laminated acrylic or melamine label. Unless otherwise indicated, provide a single line of text with 1/2-inch-high letters on 1-1/2-inch-high label; where two lines of text are required, use labels 2 inches high.
b. Outdoor Equipment: Engraved, laminated acrylic or melamine label.
c. Elevated Components: Increase sizes of labels and letters to those appropriate for viewing from the floor.
d. Unless provided with self-adhesive means of attachment, fasten labels with appropriate mechanical fasteners that do not change the NEMA or NRTL rating of the enclosure.

2. Equipment to Be Labeled:

a. Panelboards: Typewritten directory of circuits in the location provided by panelboard manufacturer. Panelboard identification shall be self-adhesive, engraved, laminated acrylic or melamine label.
b. Enclosures and electrical cabinets.
c. Access doors and panels for concealed electrical items.
d. Switchboards.
e. Transformers: Label that includes tag designation shown on Drawings for the transformer, feeder, and panelboards or equipment supplied by the secondary.
f. Emergency system boxes and enclosures.
g. Motor-control centers.
h. Enclosed switches.
i. Enclosed circuit breakers.
j. Enclosed controllers.
k. Variable-speed controllers.
l. Push-button stations.

m. Power transfer equipment.
n. Contactors.
o. Remote-controlled switches, dimmer modules, and control devices.
p. Power-generating units.
q. Monitoring and control equipment.
r. UPS equipment.

END OF SECTION 26 0553

SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following lighting control devices:

1. Time switches.
2. Outdoor and indoor photoelectric switches.
3. Indoor occupancy sensors.

B. Related Sections include the following:

1. Division 26 Section "Wiring Devices" for wall-box dimmers, wall-switch occupancy sensors, and manual light switches.

1.3 DEFINITIONS

A. LED: Light-emitting diode.

B. PIR: Passive infrared.

1.4 SUBMITTALS

A. Product Data: For each type of product indicated.

B. Shop Drawings: Show installation details for occupancy and light-level sensors.

1. Interconnection diagrams showing field-installed wiring.

C. Field quality-control test reports.

D. Operation and Maintenance Data: For each type of product to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

1.6 COORDINATION

A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression system, and partition assemblies.

PART 2 - PRODUCTS

2.1 TIME SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Intermatic, Inc., ET70000 Series
2. Paragon Electric Co.; Invensys Climate Controls.
3. TORK.

2.2 OUTDOOR PHOTOELECTRIC SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Intermatic, Inc., K4100 Series
2. Paragon Electric Co.; Invensys Climate Controls.
3. TORK.

B. Description: Solid state, with SPST dry contacts rated for 1800-VA tungsten or 1000-VA ballast, to operate connected relay, contactor coils, or microprocessor input; complying with UL 773A.

1. Light-Level Monitoring Range: 1.5 to 10 fc, with an adjustment for turn-on and turn-off levels within that range.
2. Time Delay: 15-second minimum, to prevent false operation.
3. Surge Protection: Metal-oxide varistor, complying with IEEE C62.41.1, IEEE C62.41.2, and IEEE 62.45 for Category A1 locations.
4. Mounting: Stem mounting, with base-and-stem mounting or stem-and-swivel mounting accessories as required to direct sensor to the north sky exposure.

2.3 INDOOR OCCUPANCY SENSORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Hubbell Lighting.
2. Leviton Mfg. Company Inc.
3. Lithonia Lighting; Acuity Lighting Group, Inc.
4. Novitas, Inc.
5. RAB Lighting, Inc.
6. Sensor Switch, Inc.
7. TORK.
8. Watt Stopper (The).

B. General Description: Wall- or ceiling-mounting, solid-state units with a separate relay unit.

1. Ceiling Mounted Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
2. Wall Mounted Operation: Unless otherwise indicated, manual on and automatic off when unoccupied; with a time delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
3. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A. Sensor shall be powered from the relay unit.
4. Relay Unit: Dry contacts rated for 20-A ballast load at 120- and 277-V ac, for 13-A tungsten at 120-V ac, and for 1 hp at 120-V ac. Power supply to sensor shall be 24-V dc, 150-mA, Class 2 power source as defined by NFPA 70.
5. Mounting:

    a. Sensor: Suitable for mounting in any position on a standard outlet box.
    b. Relay: Externally mounted through a 1/2-inch knockout in a standard electrical enclosure.
    c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

6. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
7. Bypass Switch: Override the on function in case of sensor failure.
8. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc; keep lighting off when selected lighting level is present.

C. Dual-Technology Type: Ceiling mounting; detect occupancy by using a combination of PIR and ultrasonic detection methods in area of coverage. Technology or combination of technologies that controls on-off functions shall be selectable in the field by operating controls on unit.

1. Sensitivity Adjustment: Separate for each sensing technology.
2. Detector Sensitivity: Detect occurrences of 6-inch-minimum movement of any portion of a human body that presents a target of not less than 36 sq. in., and detect a person of

average size and weight moving not less than 12 inches in either a horizontal or a vertical manner at an approximate speed of 12 inches/s.

3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. when mounted on a 96-inch-high ceiling.

PART 3 - EXECUTION

3.1 SENSOR INSTALLATION

A. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

3.2 WIRING INSTALLATION

A. Wiring Method: Comply with Division 26 Section "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size shall be 3/4 inch.

B. Wiring within Enclosures: Comply with NECA 1. Separate power-limited and nonpower-limited conductors according to conductor manufacturer's written instructions.

C. Size conductors according to lighting control device manufacturer's written instructions, unless otherwise indicated.

D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.

3.3 IDENTIFICATION

A. Identify components and power and control wiring according to Division 26 Section "Identification for Electrical Systems."

1. Identify controlled circuits in lighting contactors.

B. Label time switches and contactors with a unique designation.

3.4 FIELD QUALITY CONTROL

A. Perform the following field tests and inspections and prepare test reports:

1. After installing time switches and sensors, and after electrical circuitry has been energized, adjust and test for compliance with requirements.
2. Operational Test: Verify operation of each lighting control device, and adjust time delays.

B. Lighting control devices that fail tests and inspections are defective work and shall be replaced to comply with the manufacturers specifications.

3.5 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain lighting control devices. Refer to Division 01 Section "Demonstration and Training."

END OF SECTION 26 0923

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 262416 - PANELBOARDS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Distribution panelboards.
2. Lighting and appliance branch-circuit panelboards.

1.3 DEFINITIONS

A. SVR: Suppressed voltage rating.

B. TVSS: Transient voltage surge suppressor.

1.4 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Panelboards shall withstand the effects of earthquake motions determined according to SEI/ASCE 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

1.5 SUBMITTALS

A. Product Data: For each type of panelboard, switching and overcurrent protective device, transient voltage suppression device, accessory, and component indicated. Include dimensions and manufacturers' technical data on features, performance, electrical characteristics, ratings, and finishes.

B. Shop Drawings: For each panelboard and related equipment.

1. Include dimensioned plans, elevations, sections, and details. Show tabulations of installed devices, equipment features, and ratings.
2. Detail enclosure types and details for types other than NEMA 250, Type 1.

3. Detail bus configuration, current, and voltage ratings.
4. Short-circuit current rating of panelboards and overcurrent protective devices.
5. Include evidence of NRTL listing for series rating of installed devices.
6. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices and auxiliary components.
7. Include wiring diagrams for power, signal, and control wiring.
8. Include time-current coordination curves for each type and rating of overcurrent protective device included in panelboards. Submit on translucent log-log graft paper; include selectable ranges for each type of overcurrent protective device.

C. Qualification Data: For qualified testing agency.

D. Seismic Qualification Certificates: Submit certification that panelboards, overcurrent protective devices, accessories, and components will withstand seismic forces defined in Division 26 Section "Vibration and Seismic Controls for Electrical Systems." Include the following:

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

E. Field Quality-Control Reports:

1. Test procedures used.
2. Test results that comply with requirements.
3. Results of failed tests and corrective action taken to achieve test results that comply with requirements.

F. Operation and Maintenance Data: For panelboards and components to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:

1. Manufacturer's written instructions for testing and adjusting overcurrent protective devices.
2. Time-current curves, including selectable ranges for each type of overcurrent protective device that allows adjustments.

1.6 QUALITY ASSURANCE

A. Source Limitations: Obtain panelboards, overcurrent protective devices, components, and accessories from single source from single manufacturer.

B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for panelboards including clearances between panelboards and adjacent surfaces and other items. Comply with indicated maximum dimensions.

C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

D. Comply with NEMA PB 1.

E. Comply with NFPA 70.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Remove loose packing and flammable materials from inside panelboards.

B. Handle and prepare panelboards for installation according to NECA 407 and NEMA PB 1.

1.8 PROJECT CONDITIONS

A. Environmental Limitations:

1. Do not deliver or install panelboards until spaces are enclosed and weathertight, wet work in spaces is complete and dry, work above panelboards is complete, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.
2. Rate equipment for continuous operation under the following conditions unless otherwise indicated:

    a. Ambient Temperature: Not exceeding **23** deg F to plus 104 deg F.
    b. Altitude: Not exceeding 6600 feet.

B. Service Conditions: NEMA PB 1, usual service conditions, as follows:

1. Ambient temperatures within limits specified.
2. Altitude not exceeding 6600 feet.

C. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:

1. Notify Construction Manager and Owner no fewer than seven days in advance of proposed interruption of electric service.
2. Do not proceed with interruption of electric service without Construction Manager's and Owner's written permission.
3. Comply with NFPA 70E.

1.9 COORDINATION

A. Coordinate layout and installation of panelboards and components with other construction that penetrates walls or is supported by them, including electrical and other types of equipment,

raceways, piping, encumbrances to workspace clearance requirements, and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

B. Coordinate sizes and locations of concrete bases with actual equipment provided. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.

1.10 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace transient voltage suppression devices that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Manufacturers standard warranty period from date of Substantial Completion.

1.11 EXTRA MATERIALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Keys: Two spares for each type of panelboard cabinet lock.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PANELBOARDS

A. Fabricate and test panelboards according to IEEE 344 to withstand seismic forces defined in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."

B. Enclosures: Flush and surface-mounted cabinets.

1. Rated for environmental conditions at installed location.

a. Indoor Dry and Clean Locations: NEMA 250, Type 1.
b. Outdoor Locations: NEMA 250, Type 3R.
c. Other Wet or Damp Indoor Locations: NEMA 250, Type 4.
d. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: NEMA 250, Type 12.

2. Front: Secured to box with concealed trim clamps. For surface-mounted fronts, match box dimensions; for flush-mounted fronts, overlap box.
3. Hinged Door: Standard hinged door within front trim cover.

4. Gutter Extension and Barrier: Same gage and finish as panelboard enclosure; integral with enclosure body. Arrange to isolate individual panel sections.
5. Finishes:

    a. Panels and Trim: Steel, factory finished immediately after cleaning and pretreating with manufacturer's standard two-coat, baked-on finish consisting of prime coat and thermosetting topcoat.
    b. Back Boxes: Galvanized steel.
    c. Fungus Proofing: Permanent fungicidal treatment for overcurrent protective devices and other components.

6. Directory Card: Inside panelboard door, mounted in metal frame with transparent protective cover.

C. Incoming Mains Location: Field verify location for each panelboard.

D. Phase, Neutral, and Ground Buses:

1. Material: Hard-drawn copper, 98 percent conductivity.

2. Equipment Ground Bus: Adequate for feeder and branch-circuit equipment grounding conductors; bonded to box.

E. Conductor Connectors: Suitable for use with conductor material and sizes.

1. Material: Hard-drawn copper, 98 percent conductivity.
2. Main and Neutral Lugs: Mechanical type.
3. Ground Lugs and Bus-Configured Terminators: Mechanical type.
4. Feed-Through Lugs: Mechanical type, suitable for use with conductor material. Locate at opposite end of bus from incoming lugs or main device.
5. Subfeed (Double) Lugs: Mechanical type suitable for use with conductor material. Locate at same end of bus as incoming lugs or main device.

F. Future Devices: Mounting brackets, bus connections, filler plates, and necessary appurtenances required for future installation of devices.

G. Panelboard Short-Circuit Current Rating: Fully rated to interrupt symmetrical short-circuit current available at terminals.

2.2 DISTRIBUTION PANELBOARDS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

B. Basis-of-Design Product: Subject to compliance with requirements, provide Square D or comparable product by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.

2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.

C. Panelboards: NEMA PB 1, power and feeder distribution type.

D. Doors: Secured with vault-type latch with tumbler lock; keyed alike.

1. For doors more than 36 inches high, provide two latches, keyed alike.

E. Mains: Circuit breaker or Main Lug Only as indicated on the drawings.

F. Branch Overcurrent Protective Devices for Circuit-Breakers: Bolt-on circuit breakers.

2.3 LIGHTING AND APPLIANCE BRANCH-CIRCUIT PANELBOARDS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

B. Basis-of-Design Product: Subject to compliance with requirements, provide Square D, Schneider Electric or comparable product by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.

C. Panelboards: NEMA PB 1, lighting and appliance branch-circuit type.

D. Mains: Circuit breaker or Main Lug Only as indicated on the drawings.

E. Branch Overcurrent Protective Devices: Bolt-on circuit breakers, replaceable without disturbing adjacent units.

F. Doors: Concealed hinges; secured with flush latch with tumbler lock; keyed alike.

2.4 DISCONNECTING AND OVERCURRENT PROTECTIVE DEVICES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

B. Basis-of-Design Product: Subject to compliance with requirements, provide Square D, Schneider Electric or comparable product by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.

C. Molded-Case Circuit Breaker (MCCB): Comply with UL 489, with interrupting capacity to meet available fault currents.

1. Thermal-Magnetic Circuit Breakers: Inverse time-current element for low-level overloads, and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
2. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller; let-through ratings less than NEMA FU 1, RK-5.
3. GFCI Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6-mA trip).
4. Molded-Case Circuit-Breaker (MCCB) Features and Accessories:

    a. Standard frame sizes, trip ratings, and number of poles.

    b. Lugs: Mechanical style, suitable for number, size, trip ratings, and conductor materials.
    c. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge (HID) lighting circuits.
    d. Multipole units enclosed in a single housing or factory assembled to operate as a single unit.
    e. Handle Padlocking Device: Fixed attachment, for locking circuit-breaker handle in on or off position.
    f. Handle Clamp: Loose attachment, for holding circuit-breaker handle in on position.

2.5 PANELBOARD SUPPRESSORS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

B. Basis-of-Design Product: Subject to compliance with requirements, provide Square D, Schneider Electric or comparable product by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.

C. Surge Protection Device: IEEE C62.41-compliant, integrally mounted, plug-in, solid-state, parallel-connected, modular (with field-replaceable modules) type, with sinewave tracking suppression and filtering modules, UL 1449, second edition, short-circuit current rating matching or exceeding the panelboard short-circuit rating, and with the following features and accessories:

1. Accessories:

    a. Fuses rated at 200-kA interrupting capacity.
    b. Fabrication using bolted compression lugs for internal wiring.
    c. Integral disconnect switch.
    d. Redundant suppression circuits.
    e. Redundant replaceable modules.
    f. Arrangement with wire connections to phase buses, neutral bus, and ground bus.

g. LED indicator lights for power and protection status.
h. Audible alarm, with silencing switch, to indicate when protection has failed.
i. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of system operation. Contacts shall reverse position on failure of any surge diversion module or on opening of any current-limiting device. Coordinate with building power monitoring and control system.
j. Four-digit, transient-event counter set to totalize transient surges.

2. Peak Single-Impulse Surge Current Rating: 160 kA per mode/320 kA per phase.
3. Withstand Capabilities: 12,000 IEEE C62.41, Category C3 (10 kA), 8-by-20-mic.sec. surges with less than 5 percent change in clamping voltage.
4. Protection modes and UL 1449 SVR for grounded wye circuits with 480Y/277 and 208Y/120-V, three-phase, four-wire circuits shall be as follows:

   a. Line to Neutral: 800 V for 480Y/277 and 400 V for 208Y/120.
   b. Line to Ground: 800 V for 480Y/277 and 400 V for 208Y/120.
   c. Neutral to Ground: 800 V for 480Y/277 and 400 V for 208Y/120.

5. Protection modes and UL 1449 SVR for 240-, 480-, or 600-V, three-phase, three-wire, delta circuits shall be as follows:

   a. Line to Line: 2000 V for 480 V and 1000 V for 240 V.
   b. Line to Ground: 1500 V for 480 V and 800 V for 240 V.

2.6 ACCESSORY COMPONENTS AND FEATURES

A. Accessory Set: Include tools and miscellaneous items required for overcurrent protective device test, inspection, maintenance, and operation.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Receive, inspect, handle, and store panelboards according to NECA 407 and NEMA PB 1.1.

B. Examine panelboards before installation. Reject panelboards that are damaged or rusted or have been subjected to water saturation.

C. Examine elements and surfaces to receive panelboards for compliance with installation tolerances and other conditions affecting performance of the Work.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install panelboards and accessories according to NECA 407 and NEMA PB 1.1.

B. Equipment Mounting: Install panelboards on concrete bases, 4-inch nominal thickness. Comply with requirements for concrete base specified in Division 03 Section "Cast-in-Place Concrete."

1. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around full perimeter of base.
2. For panelboards, install epoxy-coated anchor bolts that extend through concrete base and anchor into structural concrete floor.
3. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
4. Install anchor bolts to elevations required for proper attachment to panelboards.
5. Attach panelboard to the vertical finished or structural surface behind the panelboard.
6. All penetrations through the existing hollow core floor slab shall be entirely located in the hollow core portion of the slab. Scan the floor slab to locate the hollow cores prior to penetration.

C. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from panelboards.

D. Comply with mounting and anchoring requirements specified in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."

E. Mount top of trim 90 inches above finished floor unless otherwise indicated.

F. Mount panelboard cabinet plumb and rigid without distortion of box. Mount recessed panelboards with fronts uniformly flush with wall finish and mating with back box.

G. Install overcurrent protective devices and controllers not already factory installed.

1. Set field-adjustable, circuit-breaker trip ranges.

H. Install filler plates in unused spaces.

I. Stub four 1-inch empty conduits from panelboard into accessible ceiling space or space designated to be ceiling space in the future.

J. Arrange conductors in gutters into groups and bundle and wrap with wire ties after completing load balancing.

K. Comply with NECA 1.

3.3 IDENTIFICATION

A. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs complying with Division 26 Section "Identification for Electrical Systems."

B. Create a directory to indicate installed circuit loads after balancing panelboard loads; incorporate Owner's final room designations. Obtain approval before installing. Use a computer or typewriter to create directory; handwritten directories are not acceptable.

C. Panelboard Nameplates: Label each panelboard with a nameplate complying with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."

D. Device Nameplates: Label each branch circuit device in distribution panelboards with a nameplate complying with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."

3.4 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Acceptance Testing Preparation:

1. Test insulation resistance for each panelboard bus, component, connecting supply, feeder, and control circuit.
2. Test continuity of each circuit.

C. Tests and Inspections:

1. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
3. Perform the following infrared scan tests and inspections and prepare reports:

    a. Initial Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each panelboard. Remove front panels so joints and connections are accessible to portable scanner.
    b. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each panelboard 11 months after date of Substantial Completion.
    c. Instruments and Equipment:

        1) Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.

D. Panelboards will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports, including a certified report that identifies panelboards included and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

3.5 ADJUSTING

A. Adjust moving parts and operable component to function smoothly, and lubricate as recommended by manufacturer.

B. Set field-adjustable circuit-breaker trip ranges as specified in Division 26 Section "Overcurrent Protective Device Coordination Study."

END OF SECTION 26 2416

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Straight-blade convenience, and tamper-resistant receptacles.
2. GFCI receptacles.
3. Toggle switches.
4. Wall switch sensor light switches with dual technology sensors.
5. Wall plates.
6. Prefabricated multioutlet assemblies.

1.3 DEFINITIONS

A. Abbreviations of Manufacturers' Names:

1. Cooper: Cooper Wiring Devices; Division of Cooper Industries, Inc.
2. Hubbell: Hubbell Incorporated: Wiring Devices-Kellems.
3. Leviton: Leviton Mfg. Company, Inc.
4. Pass & Seymour: Pass& Seymour/Legrand.

B. BAS: Building automation system.

C. EMI: Electromagnetic interference.

D. GFCI: Ground-fault circuit interrupter.

E. Pigtail: Short lead used to connect a device to a branch-circuit conductor.

F. RFI: Radio-frequency interference.

G. SPD: Surge protective device.

H. UTP: Unshielded twisted pair.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: List of legends and description of materials and process used for marking wall plates.

C. Samples: One for each type of device and wall plate specified, in each color specified.

1.5 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For wiring devices to include in all manufacturers' packing-label warnings and instruction manuals that include labeling conditions.

PART 2 - PRODUCTS

2.1 GENERAL WIRING-DEVICE REQUIREMENTS

A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with NFPA 70.

C. Devices for Owner-Furnished Equipment:

1. Receptacles: Match plug configurations.

2. Cord and Plug Sets: Match equipment requirements.

D. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.

E. Provide devices with right angle pigtailed snap connect terminals.

2.2 STRAIGHT-BLADE RECEPTACLES

A. Tamper-Resistant Convenience Receptacles: 125 V, 20 A; comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, and FS W-C-596.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Eaton (Arrow Hart).
b. Hubbell Incorporated; Wiring Device-Kellems.
c. Leviton Manufacturing Co., Inc.
d. Pass & Seymour/Legrand (Pass & Seymour).

2. Description: Labeled and complying with NFPA 70, "Health Care Facilities" Article, "Pediatric Locations" Section.
3. Provide device with right angle pigtailed snap connect terminal.

2.3 GFCI RECEPTACLES

A. General Description:

1. 125 V, 20 A, straight blade, feed through type.
2. Comply with NEMA WD 1, NEMA WD 6 Configuration 5-20R, UL 498, UL 943 Class A, and FS W-C-596.
3. Include indicator light that shows when the GFCI has malfunctioned and no longer provides proper GFCI protection.
4. Provide device with right angle pigtailed snap connect terminal.

B. Duplex GFCI Convenience Receptacles:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Eaton (Arrow Hart).
b. Hubbell Incorporated; Wiring Device-Kellems.
c. Leviton Manufacturing Co., Inc.
d. Pass & Seymour/Legrand (Pass & Seymour).

C. Tamper-Resistant, Duplex GFCI Convenience Receptacles:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Hubbell Incorporated; Wiring Device-Kellems.
b. Pass & Seymour/Legrand (Pass & Seymour).

2.4 CORD AND PLUG SETS

A. Description:

1. Match voltage and current ratings and number of conductors to requirements of equipment being connected.
2. Cord: Rubber-insulated, stranded-copper conductors, with Type SOW-A jacket; with green-insulated grounding conductor and ampacity of at least 130 percent of the equipment rating.

3. Plug: Nylon body and integral cable-clamping jaws. Match cord and receptacle type for connection.

2.5 TOGGLE SWITCHES

A. Comply with NEMA WD 1, UL 20, and FS W-S-896.

B. Switches, 120/277 V, 20 A:

1. Single Pole:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) Eaton (Arrow Hart).
2) Hubbell Incorporated; Wiring Device-Kellems.
3) Leviton Manufacturing Co., Inc.
4) Pass & Seymour/Legrand (Pass & Seymour).

2. Two Pole:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) Eaton (Arrow Hart).
2) Hubbell Incorporated; Wiring Device-Kellems.
3) Leviton Manufacturing Co., Inc.
4) Pass & Seymour/Legrand (Pass & Seymour).

3. Three Way:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) Eaton (Arrow Hart).
2) Hubbell Incorporated; Wiring Device-Kellems.
3) Leviton Manufacturing Co., Inc.
4) Pass & Seymour/Legrand (Pass & Seymour).

4. Four Way:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1) Eaton (Arrow Hart).
2) Hubbell Incorporated; Wiring Device-Kellems.
3) Leviton Manufacturing Co., Inc.
4) Pass & Seymour/Legrand (Pass & Seymour).

C. Pilot-Light Switches: 120/277 V, 20 A.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Eaton (Arrow Hart).
b. Hubbell Incorporated; Wiring Device-Kellems.
c. Leviton Manufacturing Co., Inc.
d. Pass & Seymour/Legrand (Pass & Seymour).

2. Description: Single pole, with LED-lighted handle, illuminated when switch is off.

2.6 WALL SWITCH SENSOR LIGHT SWITCH, DUAL TECHNOLOGY

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Eaton (Arrow Hart).
2. Hubbell Incorporated; Wiring Device-Kellems.
3. Leviton Manufacturing Co., Inc.
4. Pass & Seymour/Legrand (Pass & Seymour).
5. Watt Stopper.
6. Sensor Switch, Acuity Brands.

B. Description: Switchbox-mounted, combination lighting-control sensor and conventional switch lighting-control unit using dual technology.

1. Connections: Provisions for connection to BAS.
2. Connections: Hard wired.
3. Connections: Wireless.
4. Rated 960 W at 120-V ac for tungsten lighting, 10 A at 120-V ac or 10 A at 277-V ac for fluorescent or LED lighting, and 1/4 hp at 120-V ac.
5. Adjustable time delay of up to 30 minutes.
6. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc.
7. Comply with NEMA WD 1, UL 20, and FS W-S-896.

2.7 OCCUPANCY SENSORS

A. Wall-Switch Sensors (Single Relay):

1. Products: Subject to compliance with requirements, provide one of the following:

a. Hubbell; AD1277*1 (* denotes device color).
b. Leviton; OSSMT-MA.
c. Watt Stopper (The); DSW-100.

2. Description: Dual technology, with both passive-infrared- and ultrasonic-type sensing, 120/277 V, adjustable time delay up to 30 minutes, 110-degree field of view, and a minimum coverage area of 1000 sq. ft.

B. Wall-Switch Sensors (Dual Relay):

1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
2. Products: Subject to compliance with requirements, provide one of the following:

a. Hubbell; AD1277*2 (* denotes device color).
b. Leviton; OSSMD-MA.
c. Watt Stopper (The); DW-200.

3. Description: Dual technology, with both passive-infrared- and ultrasonic-type sensing, 120/277 V, adjustable time delay up to 30 minutes, 110-degree field of view, with a minimum coverage area of 1000 sq. ft.

C. Ceiling Occupancy Sensors:

1. Products: Subject to compliance with requirements, provide one of the following:

a. Leviton; OSC20-MAW.
b. Hubbell; LVDT2000R.
c. Watt Stopper (The); DT-355.

Description: Dual technology, with both passive-infrared- and ultrasonic-type sensing, 120/277 V, adjustable time delay up to 30 minutes, 360-degree field of view, with minimum coverage of 1000 sq. ft. Minimum switch rating: 1200-VA fluorescent.

2.8 WALL PLATES

A. Single and combination types to match corresponding wiring devices.

1. Plate-Securing Screws: Metal with head color to match plate finish.
2. Material for Finished Spaces: Smooth, high-impact thermoplastic.
3. Material for Unfinished Spaces: Smooth, high-impact thermoplastic.
4. Material for Damp Locations: Cast aluminum with spring-loaded lift cover, and listed and labeled for use in "wet locations."

B. Wet-Location, Weatherproof “While-in-Use” Cover Plates: NEMA 250, complying with type 3R weather-resistant, die-cast aluminum with lockable cover.

C. Patient accessible areas for Behavioral Health spaces:

1. Plate-Securing Screws: Metal with tamper resistant head and center pin reject. Color to match plate finish.
2. Material for Behavioral Health: Smooth, nylon with reinforcement ribs**.**

3. Wall plates shall be provided that insure the grounding integrity of the entire installation.

2.9 PREFABRICATED MULTIOUTLET ASSEMBLIES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Hubbell Incorporated; Wiring Device-Kellems.
2. Wiremold / Legrand.

B. Description:

1. Two-piece surface metal raceway, with factory-wired multioutlet harness.
2. Components shall be products from single manufacturer designed for use as a complete, matching assembly of raceways and receptacles.

C. Raceway Material: Metal, with manufacturer's standard finish.

D. Multioutlet Harness:

1. Receptacles: 15-A, 125-V, NEMA WD 6 Configuration 5-15R receptacles complying with NEMA WD 1, UL 498, and FS W-C-596.
2. Receptacle Spacing: as shown on the drawings
3. Wiring: No. 12 AWG solid, Type THHN copper.
4. Factory finish color shall be as selected by the architect.

2.10 FINISHES

A. Device Color:

1. Wiring Devices Connected to Normal Power System: As selected by Architect, unless otherwise indicated or required by NFPA 70 or device listing.

2. Wiring Devices Connected to Emergency Power System: Red.

B. Wall Plate Color: Match device color.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.

B. Coordination with Other Trades:

1. Protect installed devices and their boxes. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of boxes.

2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
4. Install wiring devices after all wall preparation, including painting, is complete.

C. Conductors:

1. Do not strip insulation from conductors until right before they are spliced or terminated on devices.
2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
3. The length of free conductors at outlets for devices shall meet provisions of NFPA 70, Article 300, without pigtails.
4. Existing Conductors:

    a. Cut back and pigtail, or replace all damaged conductors.
    b. Straighten conductors that remain and remove corrosion and foreign matter.
    c. Pigtailing existing conductors is permitted, provided the outlet box is large enough.

D. Device Installation:

1. Replace devices that have been in temporary use during construction and that were installed before building finishing operations were complete.
2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
4. Connect devices to branch circuits using pigtails that are not less than 6 inches in length.
5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, two-thirds to three-fourths of the way around terminal screw.
6. Use a torque screwdriver when a torque is recommended or required by manufacturer.
7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
8. Tighten unused terminal screws on the device.
9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.

E. Receptacle Orientation:

1. Install ground pin of vertically mounted receptacles up, and on horizontally mounted receptacles to the right.

2. Install hospital-grade receptacles in patient-care areas with the ground pin or neutral blade at the top.

F. Device Plates: Do not use oversized or extra-deep plates. Repair wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening. Provide tamper resistant device plates in all patient areas of Behavioral Health Department.

G. Dimmers:

1. Install dimmers within terms of their listing.
2. Verify that dimmers used for fan-speed control are listed for that application.
3. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' device listing conditions in the written instructions.

H. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.

I. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

3.2 GFCI RECEPTACLES

A. Install non-feed-through-type GFCI receptacles where protection of downstream receptacles is not required.

B. Provide GFCI, Tamper Resistant receptacles in all patient accessible areas of Behavioral Health Department.

3.3 IDENTIFICATION

A. Comply with Section 260553 "Identification for Electrical Systems."

B. Identify each receptacle with panelboard identification and circuit number. Use hot, stamped, or engraved machine printing with blac**k** filled lettering on face of plate, and durable wire markers or tags inside outlet boxes.

3.4 FIELD QUALITY CONTROL

A. Test Instruments: Use instruments that comply with UL 1436.

B. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.

C. Perform the following tests and inspections:

1. Prepare reports that comply with recommendations in NFPA 99.
2. Test Instruments: Use instruments that comply with UL 1436.

3. Test Instrument for Convenience Receptacles: Digital wiring analyzer with digital readout or illuminated digital-display indicators of measurement.

D. Tests for Convenience Receptacles:

1. Line Voltage: Acceptable range is 105 to 132 V.
2. Percent Voltage Drop under 15-A Load: A value of 6 percent or higher is unacceptable.
3. Ground Impedance: Values of up to 2 ohms are acceptable.
4. GFCI Trip: Test for tripping values specified in UL 1436 and UL 943.
5. Using the test plug, verify that the device and its outlet box are securely mounted.
6. Tests shall be diagnostic, indicating damaged conductors, high resistance at the circuit breaker, poor connections, inadequate fault current path, defective devices, or similar problems. Correct circuit conditions, remove malfunctioning units and replace with new ones, and retest as specified above.

E. Test straight-blade hospital-grade convenience outlets for the retention force of the grounding blade according to NFPA 99. Retention force shall be not less than 4 oz..

F. Wiring device will be considered defective if it does not pass tests and inspections.

G. Prepare test and inspection reports and submit to owner.

END OF SECTION 262726

SECTION 262816 - ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Fusible switches.
2. Nonfusible switches.
3. Molded-case circuit breakers (MCCBs).
4. Enclosures.

1.3 DEFINITIONS

A. NC: Normally closed.

B. NO: Normally open.

C. SPDT: Single pole, double throw.

1.4 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Enclosed switches and circuit breakers shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

1.5 SUBMITTALS

A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.

1. Enclosure types and details for types other than NEMA 250, Type 1.

2. Current and voltage ratings.
3. Short-circuit current ratings (interrupting and withstand, as appropriate).
4. Include evidence of NRTL listing for series rating of installed devices.
5. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.

B. Shop Drawings: For enclosed switches and circuit breakers. Include plans, elevations, sections, details, and attachments to other work.

1. Wiring Diagrams: For power, signal, and control wiring.

C. Operation and Maintenance Data: For enclosed switches and circuit breakers to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:

1. Manufacturer's written instructions for testing and adjusting enclosed switches and circuit breakers.

1.6 QUALITY ASSURANCE

A. Source Limitations: Obtain enclosed switches and circuit breakers, overcurrent protective devices, components, and accessories, within same product category, from single source from single manufacturer.

B. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.

C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

D. Comply with NFPA 70.

1.7 PROJECT CONDITIONS

A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:

1. Ambient Temperature: Not less than minus 22 deg F (minus 30 deg C) and not exceeding 104 deg F (40 deg C).
2. Altitude: Not exceeding 6600 feet (2010 m).

B. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:

1. Notify Construction Manager and Owner no fewer than seven days in advance of proposed interruption of electric service.

2. Indicate method of providing temporary electric service.
3. Do not proceed with interruption of electric service without Construction Manager's and Owner's written permission.
4. Comply with NFPA 70E.

1.8 COORDINATION

A. Coordinate layout and installation of switches, circuit breakers, and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

PART 2 - PRODUCTS

2.1 FUSIBLE SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.
4. Square D; a brand of Schneider Electric.

B. Type HD, Heavy Duty, Single Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle (open and closed positions) with capability to accept three padlocks, and interlocked with cover in closed position.

C. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
3. Class R Fuse Kit: Provides rejection of other fuse types when Class R fuses are specified.
4. Lugs: Mechanical type, suitable for number, size, and conductor material.
5. Service-Rated Switches: Labeled for use as service equipment.

2.2 NONFUSIBLE SWITCHES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.

3. Siemens Energy & Automation, Inc.
4. Square D; a brand of Schneider Electric.

B. Type HD, Heavy Duty, Single Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle (open and closed positions) with capability to accept three padlocks, and interlocked with cover in closed position.

C. Accessories:

1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
3. Lugs: Mechanical type, suitable for number, size, and conductor material.

2.3 MOLDED-CASE CIRCUIT BREAKERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
3. Siemens Energy & Automation, Inc.
4. Square D; a brand of Schneider Electric.

B. General Requirements: Comply with UL 489, NEMA AB 1, and NEMA AB 3, with interrupting capacity to comply with available fault currents.

C. Thermal-Magnetic Circuit Breakers: Inverse time-current element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.

D. Ground-Fault, Circuit-Interrupter (GFCI) Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6-mA trip).

E. Ground-Fault, Equipment-Protection (GFEP) Circuit Breakers: With Class B ground-fault protection (30-mA trip).

F. Features and Accessories:

1. Standard frame sizes, trip ratings, and number of poles.

2. Lugs: Mechanical type, suitable for number, size, trip ratings, and conductor material.
3. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge lighting circuits.

2.4 ENCLOSURES

A. Enclosed Switches and Circuit Breakers: NEMA AB 1, NEMA KS 1, NEMA 250, and UL 50, to comply with environmental conditions at installed location.

1. Indoor, Dry and Clean Locations: NEMA 250, Type 1.
2. Outdoor Locations: NEMA 250, Type 3R.
3. Kitchen and Wash-Down Areas: NEMA 250, Type 4X, stainless steel.
4. Other Wet or Damp, Indoor Locations: NEMA 250, Type 4.
5. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: NEMA 250, Type 12.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.

B. Comply with mounting and anchoring requirements specified in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."

C. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.

D. Install fuses in fusible devices.

E. Comply with NECA 1.

3.3 IDENTIFICATION

A. Comply with requirements in Division 26 Section "Identification for Electrical Systems."

1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
2. Label each enclosure with engraved metal or laminated-plastic nameplate.

3.4 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Acceptance Testing Preparation:

1. Test insulation resistance for each enclosed switch and circuit breaker, component, connecting supply, feeder, and control circuit.
2. Test continuity of each circuit.

C. Tests and Inspections:

1. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
3. Perform the following infrared scan tests and inspections and prepare reports:

    a. Initial Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each enclosed switch and circuit breaker. Remove front panels so joints and connections are accessible to portable scanner.
    b. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each enclosed switch and circuit breaker 11 months after date of Substantial Completion.
    c. Instruments and Equipment: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.

4. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.

D. Enclosed switches and circuit breakers will be considered defective if they do not pass tests and inspections.

E. Prepare test and inspection reports, including a certified report that identifies enclosed switches and circuit breakers and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

3.5 ADJUSTING

A. Adjust moving parts and operable components to function smoothly, and lubricate as recommended by manufacturer.

END OF SECTION 262816

SECTION 262913 - ENCLOSED CONTROLLERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes the following enclosed controllers rated 600 V and less:

1. Full-voltage manual.
2. Full-voltage magnetic.

B. Related Section:

1. Division 26 Section "Variable-Frequency Motor Controllers" for general-purpose, ac, adjustable-frequency, pulse-width-modulated controllers for use on variable torque loads in ranges up to 200 hp.

1.3 DEFINITIONS

A. CPT: Control power transformer.

B. MCCB: Molded-case circuit breaker.

C. MCP: Motor circuit protector.

D. N.C.: Normally closed.

E. N.O.: Normally open.

F. OCPD: Overcurrent protective device.

G. SCR: Silicon-controlled rectifier.

1.4 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Enclosed controllers shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. The term "withstand" means "the unit will remain in place without separation of any parts from the device when subjected to the seismic forces specified and the unit will be fully operational after the seismic event."

1.5 SUBMITTALS

A. Product Data: For each type of enclosed controller. Include manufacturer's technical data on features, performance, electrical characteristics, ratings, and enclosure types and finishes.

B. Shop Drawings: For each enclosed controller. Include dimensioned plans, elevations, sections, details, and required clearances and service spaces around controller enclosures.

1. Show tabulations of the following:

a. Each installed unit's type and details.
b. Factory-installed devices.
c. Nameplate legends.
d. Short-circuit current rating of integrated unit.
e. Listed and labeled for integrated short-circuit current (withstand) rating of OCPDs in combination controllers by an NRTL acceptable to authorities having jurisdiction.
f. Features, characteristics, ratings, and factory settings of individual OCPDs in combination controllers.

2. Wiring Diagrams: For power, signal, and control wiring.

C. Qualification Data: For qualified testing agency.

D. Seismic Qualification Certificates: For enclosed controllers, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

E. Field quality-control reports.

F. Operation and Maintenance Data: For enclosed controllers to include in emergency, operation, and maintenance manuals. In addition to items specified in Division 01 Section "Operation and Maintenance Data," include the following:

1. Routine maintenance requirements for enclosed controllers and installed components.

G. Load-Current and Overload-Relay Heater List: Compile after motors have been installed and arrange to demonstrate that selection of heaters suits actual motor nameplate full-load currents.

1.6 QUALITY ASSURANCE

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with NFPA 70.

C. IEEE Compliance: Fabricate and test enclosed controllers according to IEEE 344 to withstand seismic forces defined in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store enclosed controllers indoors in clean, dry space with uniform temperature to prevent condensation. Protect enclosed controllers from exposure to dirt, fumes, water, corrosive substances, and physical damage.

B. If stored in areas subject to weather, cover enclosed controllers to protect them from weather, dirt, dust, corrosive substances, and physical damage. Remove loose packing and flammable materials from inside controllers; install temporary electric heating, with at least 250 W per controller.

1.8 PROJECT CONDITIONS

A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:

1. Ambient Temperature: Not less than minus 22 deg F (minus 30 deg C) and not exceeding 104 deg F (40 deg C).
2. Altitude: Not exceeding 6600 feet (2010 m).

B. Interruption of Existing Electrical Systems: Do not interrupt electrical systems in facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary electrical service according to requirements indicated:

1. Notify Construction Manager and Owner no fewer than seven days in advance of proposed interruption of electrical systems.
2. Indicate method of providing temporary utilities.
3. Do not proceed with interruption of electrical systems without Construction Manager's and Owner's written permission.
4. Comply with NFPA 70E.

1.9 COORDINATION

A. Coordinate layout and installation of enclosed controllers with other construction including conduit, piping, equipment, and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

B. Coordinate sizes and locations of concrete bases with actual equipment provided. Cast anchor-bolt inserts into bases. Concrete, reinforcement, and formwork requirements are specified in Division 03.

C. Coordinate installation of roof curbs, equipment supports, and roof penetrations.

1.10 EXTRA MATERIALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Fuses for Fused Switches: Equal to 10 percent of quantity installed for each size and type, but no fewer than three of each size and type.
2. Control Power Fuses: Equal to 10 percent of quantity installed for each size and type, but no fewer than two of each size and type.

PART 2 - PRODUCTS

2.1 FULL-VOLTAGE CONTROLLERS

A. General Requirements for Full-Voltage Controllers: Comply with NEMA ICS 2, general purpose, Class A.

B. Fractional Horsepower Manual Controllers: "Quick-make, quick-break" toggle action; marked to show whether unit is off, on, or tripped.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
b. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
c. Siemens Energy & Automation, Inc.
d. Square D; a brand of Schneider Electric.
e. Allen Bradley

2. Configuration: Nonreversing.

3. Overload Relays: Inverse-time-current characteristics; NEMA ICS 2, Class 20 tripping characteristics; heaters matched to nameplate full-load current of actual protected motor; external reset push button; melting alloy type.

4. Surface mounting.
5. Red pilot light.

C. Magnetic Controllers: Full voltage, across the line, electrically held.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
   b. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
   c. Siemens Energy & Automation, Inc.
   d. Square D; a brand of Schneider Electric.
   e. Allen Bradley

2. Configuration: Nonreversing.
3. Contactor Coils: Pressure-encapsulated type.

   a. Operating Voltage: Depending on contactor NEMA size and line-voltage rating, manufacturer's standard matching control power or line voltage.

4. Power Contacts: Totally enclosed, double-break, silver-cadmium oxide; assembled to allow inspection and replacement without disturbing line or load wiring.
5. Control Circuits: 24-V ac; obtained from integral CPT, with primary and secondary fuses, with CPT of sufficient capacity to operate integral devices and remotely located pilot, indicating, and control devices.

   a. CPT Spare Capacity: 50 VA.

6. Melting Alloy Overload Relays:

   a. Inverse-time-current characteristic.
   b. Class 20 tripping characteristic.
   c. Heaters in each phase matched to nameplate full-load current of actual protected motor and with appropriate adjustment for duty cycle.

7. N.C., isolated overload alarm contact.
8. External overload reset push button.
9. Selector Switch: Hand-Off-Auto (HOA).
10. Pilot Light: Red
11. Auxiliary Contacts: One normally open and one normally closed.

D. Combination Magnetic Controller: Factory-assembled combination of magnetic controller, OCPD, and disconnecting means.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

   a. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
   b. General Electric Company; GE Consumer & Industrial - Electrical Distribution.

c. Siemens Energy & Automation, Inc.
d. Square D; a brand of Schneider Electric.

2. Fusible Disconnecting Means:

a. NEMA KS 1, heavy-duty, horsepower-rated, fusible switch with clips or bolt pads to accommodate Class R fuses.
b. Lockable Handle: Accepts three padlocks and interlocks with cover in closed position.
c. Auxiliary Contacts: N.O./N.C., arranged to activate before switch blades open.

3. Nonfusible Disconnecting Means:

a. NEMA KS 1, heavy-duty, horsepower-rated, nonfusible switch.
b. Lockable Handle: Accepts three padlocks and interlocks with cover in closed position.
c. Auxiliary Contacts: N.O./N.C., arranged to activate before switch blades open.

4. MCP Disconnecting Means:

a. UL 489, NEMA AB 1, and NEMA AB 3, with interrupting capacity to comply with available fault currents, instantaneous-only circuit breaker with front-mounted, field-adjustable, short-circuit trip coordinated with motor locked-rotor amperes.
b. Lockable Handle: Accepts three padlocks and interlocks with cover in closed position.
c. Auxiliary contacts "a" and "b" arranged to activate with MCP handle.
d. N.C. alarm contact that operates only when MCP has tripped.
e. Current-limiting module to increase controller short-circuit current (withstand) rating to 100 kA.

2.2 ENCLOSURES

A. Enclosed Controllers: NEMA ICS 6, to comply with environmental conditions at installed location.

1. Dry and Clean Indoor Locations: Type 1.
2. Outdoor Locations: Type 3R.
3. Kitchen and Wash-Down Areas: Type 4X, stainless steel.
4. Other Wet or Damp Indoor Locations: Type 4.
5. Indoor Locations Subject to Dust, Falling Dirt, and Dripping Noncorrosive Liquids: Type 12.

2.3 ACCESSORIES

A. General Requirements for Control Circuit and Pilot Devices: NEMA ICS 5; factory installed in controller enclosure cover unless otherwise indicated.

1. Push Buttons, Pilot Lights, and Selector Switches: Heavy-duty type.

    a. Push Buttons: Shrouded types; maintained as indicated.
    b. Pilot Lights: LED types; colors as indicated; push to test.
    c. Selector Switches: Rotary type, Hand-Off-Auto.

B. One N.C. and one N.O. auxiliary contact(s).

C. Control Relays: Auxiliary and adjustable solid-state time-delay relays.

D. Spare control wiring terminal blocks, quantity as indicated; wired.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and surfaces to receive enclosed controllers, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

B. Examine enclosed controllers before installation. Reject enclosed controllers that are wet, moisture damaged, or mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Wall-Mounted Controllers: Install enclosed controllers on walls with tops at uniform height unless otherwise indicated, and by bolting units to wall or mounting on lightweight structural-steel channels bolted to wall. For controllers not at walls, provide freestanding racks complying with Division 26 Section "Hangers and Supports for Electrical Systems."

B. Seismic Bracing: Comply with requirements specified in Division 26 Section "Vibration and Seismic Controls for Electrical Systems."

C. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.

D. Install fuses in each fusible-switch enclosed controller.

E. Install fuses in control circuits if not factory installed. Comply with requirements in Division 26 Section "Fuses."

F. Install heaters in thermal overload relays. Select heaters based on actual nameplate full-load amperes after motors have been installed.

G. Install, connect, and fuse thermal-protector monitoring relays furnished with motor-driven equipment.

H. Comply with NECA 1.

3.3 IDENTIFICATION

A. Identify enclosed controllers, components, and control wiring. Comply with requirements for identification specified in Division 26 Section "Identification for Electrical Systems."

1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
2. Label each enclosure with engraved nameplate.
3. Label each enclosure-mounted control and pilot device.

3.4 CONTROL WIRING INSTALLATION

A. Install wiring between enclosed controllers and remote devices.

B. Bundle, train, and support wiring in enclosures.

C. Connect selector switches and other automatic-control selection devices where applicable.

3.5 FIELD QUALITY CONTROL

A. Acceptance Testing Preparation:

1. Test insulation resistance for each enclosed controller, component, connecting supply, feeder, and control circuit.
2. Test continuity of each circuit.

B. Tests and Inspections:

1. Inspect controllers, wiring, components, connections, and equipment installation. Test and adjust controllers, components, and equipment.
2. Test insulation resistance for each enclosed-controller element, component, connecting motor supply, feeder, and control circuits.
3. Test continuity of each circuit.
4. Verify that voltages at controller locations are within plus or minus 10 percent of motor nameplate rated voltages. If outside this range for any motor, notify Engineer before starting the motor(s).
5. Test each motor for proper phase rotation.
6. Perform each electrical test and visual and mechanical inspection stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
7. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
8. Perform the following infrared (thermographic) scan tests and inspections and prepare reports:

a. Initial Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each multi-pole enclosed controller. Remove front panels so joints and connections are accessible to portable scanner.
b. Instruments and Equipment: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.

9. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.

C. Enclosed controllers will be considered defective if they do not pass tests and inspections.

D. Prepare test and inspection reports including a certified report that identifies enclosed controllers and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.

3.6 ADJUSTING

A. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and overload-relay pickup and trip ranges.

B. Set field-adjustable circuit-breaker trip ranges as specified in Division 26 Section "Overcurrent Protective Device Coordination Study."

3.7 PROTECTION

A. Temporary Heating: Apply temporary heat to maintain temperature according to manufacturer's written instructions until enclosed controllers are ready to be energized and placed into service.

B. Replace controllers whose interiors have been exposed to water or other liquids prior to Substantial Completion.

END OF SECTION 262913

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 265119 - LED INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Interior solid-state luminaires that use LED technology.
2. Lighting fixture supports.
3. Refer to light fixture schedule on design drawings.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Arrange in order of luminaire designation.
2. Include data on features, accessories, and finishes.
3. Include physical description and dimensions of luminaires.
4. Include emergency lighting units, including batteries and chargers.
5. Include life, output (lumens, CCT, and CRI), and energy efficiency data.
6. Photometric data and adjustment factors based on laboratory tests, complying with IESNA Lighting Measurements Testing and Calculation Guides, of each lighting fixture type. The adjustment factors shall be for lamps and accessories identical to those indicated for the lighting fixture as applied in this Project. IES LM-79 and IES LM-80.

    a. Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
    b. Testing Agency Certified Data: For indicated luminaires, photometric data certified by a qualified independent testing agency. Photometric data for remaining luminaires shall be certified by manufacturer.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For luminaires and lighting systems to include in operation and maintenance manuals.

1. Provide a list of all lamp types used on Project; use ANSI and manufacturers' codes.

1.5 QUALITY ASSURANCE

A. Luminaire Photometric Data Testing Laboratory Qualifications: Luminaire manufacturer's laboratory that is accredited under the NVLAP for Energy Efficient Lighting Products.

B. Provide luminaires from a single manufacturer for each luminaire type.

C. Each luminaire type shall be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect finishes of exposed surfaces by applying a strippable, temporary protective covering before shipping.

1.7 WARRANTY

A. Warranty: Manufacturer and Installer agree to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.

B. Warranty Period: Five year(s) from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. As specified in drawings or approved equal.

B. Seismic Performance: Luminaires and lamps shall be labeled vibration and shock resistant.

1. The term "withstand" means "the luminaire will remain in place without separation of any parts when subjected to the seismic forces.

2.2 LUMINAIRE REQUIREMENTS

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. NRTL Compliance: Luminaires for hazardous locations shall be listed and labeled for indicated class and division of hazard by an NRTL.

C. CRI minimum 80. CCT as specified in the light fixture schedule.

D. Rated lamp life of 50,000 hours.

E. Internal driver.

F. Nominal Operating Voltage: 120 Vac or multivolt.

1. Lens Thickness: At least 0.125 inch (3.175 mm) minimum unless otherwise indicated.

2.3 MATERIALS

A. Metal Parts:

1. Free of burrs and sharp corners and edges.
2. Sheet metal components shall be steel unless otherwise indicated.
3. Form and support to prevent warping and sagging.

B. Doors, Frames, and Other Internal Access: Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

C. Diffusers and Globes:

1. Prismatic acrylic clear, UV-stabilized acrylic
2. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
3. Lens Thickness: At least 0.125 inch (3.175 mm) minimum unless otherwise indicated.

D. Housings:

1. Extruded-aluminum housing and heat sink.

2.4 METAL FINISHES

A. Variations in finishes are unacceptable in the same piece. Variations in finishes of adjoining components are acceptable if they are within the range of approved Samples and if they can be and are assembled or installed to minimize contrast.

2.5 LUMINAIRE FIXTURE SUPPORT COMPONENTS

A. Channel and angle iron supports and nonmetallic channel and angle supports.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for luminaire to verify actual locations of luminaire and electrical connections before fixture installation. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Comply with NECA 1.

B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.

C. Supports:

1. Sized and rated for luminaire weight.
2. Able to maintain luminaire position after cleaning and re-lamping.
3. Provide support for luminaire without causing deflection of ceiling or wall.
4. Luminaire mounting devices shall be capable of supporting a horizontal force of 100 percent of luminaire weight and vertical force of 400 percent of luminaire weight.

3.3 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.

END OF SECTION 265119

EXHIBIT A

VERSICO TOTAL ROOFING SYSTEM WARRANTY

VSW-1
Rev 3-18

Versico, a division of Carlisle Construction Materials Incorporated (Versico), warrants to the Building Owner **(Owner)** of the building described below, that subject to the terms, conditions, and limitations stated in this warranty, Versico will repair any leak in the Versico Total Roofing System **(Versico Total Roofing System)** installed by a Versico Authorized Roofing Contractor for a period of **20** years commencing with the date of Versico's acceptance of the Versico Total Roofing System installation. However, in no event shall Versico's obligations extend beyond **20.5** years subsequent to the date of substantial completion of the Versico Total Roofing System. See below for exact date of warranty expiration.

The Versico Total Roofing System is defined as the following Versico brand Materials: Membrane, Flashings, Adhesives and Sealants, Insulation, Cover Boards, Fasteners, Fastener Plates, Fastening Bars, Insulation Adhesives, and any other Versico brand products utilized in this installation.

TERMS, CONDITIONS, LIMITATIONS

1. Owner shall provide Versico with written notice via letter, fax or email within thirty (30) days of the discovery of any leak in the Versico Total Roofing System. Owner should send written notice of a leak to Versico's Warranty Services Department at the address set forth at the bottom of this warranty. By so notifying Versico, the Owner authorizes Versico or its designee to investigate the cause of the leak. Should the investigation reveal the cause of the leak to be outside the scope of this Warranty, investigation and repair costs for this service shall be paid by the Owner.

2. If, upon inspection, Versico determines that the leak is caused by defects in the Versico Total Roofing System's materials, or workmanship of the Versico Authorized Roofing Contractor in installing the same, Owner's remedies and Versico's liability shall be limited to Versico's repair of the leak.

3. This Warranty shall not be applicable if, upon Versico's inspection, Versico determines that any of the following has occurred:

(a) The Versico Total Roofing System is damaged by natural disasters, including, but not limited to, lightning, fire, insect infestations, earthquake, tornado, hail, hurricanes, and winds of (3 second) peak gust speeds of fifty-five mph or higher measured at 10 meters above ground, or

(b) Loss of integrity of the building envelope and, or structure including, but not limited to partial or complete loss of roof decking, wall siding, windows, doors or other envelope components or from roof damage by wind-blown objects, or:

(c) The Versico Total Roofing System is damaged by any intentional or negligent acts, accidents, misuse, abuse, vandalism, civil disobedience, or the like.

(d) Deterioration or failure of building components, including, but not limited to, the roof substrate, walls, mortar, HVAC units, non-Versico brand metal work, etc., occurs and causes a leak, or otherwise damages the Versico Total Roofing System; or

(e) Acids, oils, harmful chemicals and the like come in contact with the Versico Total Roofing System and cause a leak, or otherwise damage the Versico Total Roofing System.

(f) The Versico Total Roofing System encounters leaks or is otherwise damaged by condensation resulting from any condition within the building that may generate moisture.

4. This Warranty shall be null and void if any of the following shall occur:

(a) If, after installation of the Versico Total Roofing System by a Versico Authorized Roofing Contractor, there are any alterations or repairs made on or through the roof or objects such as, but not limited to, structures, fixtures, solar panels, wind turbines, roof gardens or utilities are placed upon or attached to the roof without first obtaining written authorization from Versico; or

(b) Failure by the Owner to use reasonable care in maintaining the roof, said maintenance to include, but not be limited to, those items listed on Versico's Care & Maintenance Information sheet which accompanies this Warranty.

5. Only Versico brand insulation products are covered by this warranty. Versico specifically disclaims liability, under any theory of law, for damages sustained by or caused by non-Versico brand insulation products.

6. During the term of this Warranty, Versico shall have free access to the roof during regular business hours.

7. Versico shall have no obligation under this Warranty while any bills for installation, supplies, services, and warranty charges have not been paid in full to the Versico Authorized Roofing Contractor, Versico, or material suppliers.

8. Versico's failure at any time to enforce any of the terms or conditions stated herein shall not be construed to be a waiver of such provision.

9. Versico shall not be responsible for the cleanliness or discoloration of the Versico Total Roofing System caused by environmental conditions including, but not limited to, dirt, pollutants, or biological agents.

10. Versico shall have no liability under any theory of law for any claims, repairs, restoration, or other damages including, but not limited to, consequential or incidental damages relating, directly or indirectly, to the presence of any irritants, contaminants, vapors, fumes, molds, fungi, bacteria, spores, mycotoxins, or the like in the building or in the air, land, or water serving the building.

11. This warranty shall be transferable upon a change in ownership of the building when the owner has completed certain procedures including a transfer fee and an inspection of the Roofing System by a Versico representative.

VERSICO DOES NOT WARRANT PRODUCTS UTILIZED IN THIS INSTALLATION WHICH IT HAS NOT FURNISHED; AND SPECIFICALLY DISCLAIMS LIABILITY, UNDER ANY THEORY OF LAW, ARISING OUT OF THE INSTALLATION AND PERFORMANCE OF, OR DAMAGES SUSTAINED BY OR CAUSED BY, PRODUCTS NOT FURNISHED BY VERSICO OR THE PRIOR EXISTING ROOFING MATERIAL OVER WHICH THE VERSICO ROOFING SYSTEM HAS BEEN INSTALLED

THE REMEDIES STATED HEREIN ARE THE SOLE AND EXCLUSIVE REMEDIES FOR FAILURE OF THE VERSICO TOTAL ROOFING SYSTEM OR ITS COMPONENTS. THERE ARE NO WARRANTIES EITHER EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY, WHICH EXTEND BEYOND THE FACE HEREOF. VERSICO SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS OR DAMAGE TO THE BUILDING OR ITS CONTENTS UNDER ANY THEORY OF LAW.

OWNER: ST LOUIS COUNTY CATHOLIC CHURCH REAL ESTATE
BUILDING : ST BERNADETTE SCHOOL
74 KEARNEY ST, SAINT LOUIS, MO

ROOFER: BADE ROOFING CO, INC
3806 LEMAY FERRY ROAD, SAINT LOUIS, MO 63125

DATE INSTALLATION COMPLETED : 11/05/2019
DATE OF ACCEPTANCE BY VERSICO : 11/06/2019 (ER Warranty)
WARRANTY EXPIRATION DATE : 11/05/2039

WARRANTY NUMBER: 1277552

VERSICO ROOFING SYSTEMS
P.O. Box 1289 Carlisle, PA 17013
(800) 992-7663 (717) 960-4035 FAX

BY _____

SCI ENGINEERING, INC.
EARTH • SCIENCE • SOLUTIONS
GEOTECHNICAL
ENVIRONMENTAL
NATURAL RESOURCES
CULTURAL RESOURCES
CONSTRUCTION SERVICES

February 5, 2026

Mike Sundermeyer
CASCO
12 Sunnen Drive, Suite 100
St. Louis, Missouri 63143

RE: Asbestos and Lead-Based Paint Survey Activities
Missouri National Guard Readiness Center-Jefferson Barracks
74 Kearney Street
St. Louis, Missouri 63125
SCI No. 2025-2261.25

Dear Mike Sundermeyer:

INTRODUCTION

SCI Engineering, Inc. (SCI) is pleased to submit this report of the asbestos and lead-based paint (LBP) survey activities performed at the above-referenced site on January 21, 2026. SCI understands that the building on-site will be renovated for use as a Missouri National Guard Readiness Center.

The survey was conducted by Ethan Boyer, Missouri-Licensed Asbestos Inspector and Missouri-Licensed Lead Inspector. Copies of Ethan's licenses are enclosed.

The purpose of the asbestos survey was to satisfy the requirements for the asbestos National Emission Standard for Hazardous Air Pollutants (NESHAP) for renovation. It is also intended to be used for Occupational Safety and Health Administration (OSHA) compliance. The purpose of the lead-based paint survey was to determine the presence of lead-based paint/coating which could be impacted during the renovation activities.

BUILDING INFORMATION

The on-site structure is an approximate 15,800-square-foot, single-story former school building which was constructed in 1965. The exterior of the structure was brick with aluminum windows and a membrane roof. The structure utilized a boiler for heat and window AC units. No attic insulation was noted.

LIMITATIONS

SCI's asbestos survey entailed visually assessing accessible areas only. If any other suspect asbestos materials are discovered during demolition or renovation, please contact SCI, and we will make arrangements for assessment of these materials. Areas behind walls, under subfloors and above fixed ceilings are considered non-accessible.

During the course of performing the survey of the structure, SCI was able to access all locations within the structure. However, it is noted that the boiler was in operation. As such no samples were taken from the boiler. If future renovations are to take place involving the boiler, please contact SCI, and we will make arrangements for assessment of these materials, or the boiler can be assumed to contain asbestos and should be disposed of according to applicable regulations.

Additionally, it was SCI's understanding that the attached gymnasium and the roof of the building would not be renovated. Therefore, SCI's survey did not include the gymnasium or the roof.

SCOPE OF SERVICES

Asbestos Survey Activities

Seventy-eight samples were collected from the on-site structure. Of these 78 samples, 62 were analyzed by Polarized Light Microscopy (PLM) using a positive stop procedure. Of the 62 samples analyzed, 14 were found to contain asbestos. Analytical test results and chain-of-custody documentation are enclosed as Appendix A. The results of the analysis of all samples are summarized in Table 1. Maps depicting the locations of the ACMs are contained as Appendix B.

Table 1 – Summary of Analytical Test Results

Sample Number	Material Location	Material Description	Approx. Quantity	Result	Category
74-1A	Throughout Classrooms	4" Black Covebase	--	None Detected in Covebase or Mastic	--
74-1B				None Detected in Covebase or Mastic	
74-1C				None Detected in Covebase or Mastic	
74-2A	Rooms 101, 103, 105, 107, 108, 109, 111, 113, Office, and Hallways	9' by 9' Tan Floor Tile with Brown Streaks (With Black Mastic, On Concrete)	9,000 sf	5-10% Chrysotile Detected in Floor Tile and Mastic	NCI
74-2B				Not Analyzed Due to Positive Stop	
74-2C				Not Analyzed Due to Positive Stop	
74-3A	Throughout	2' by 4' White Pinhole Wormtrack Ceiling Tile	--	None Detected	--
74-3B				None Detected	
74-3C				None Detected	
74-4A	Throughout	Roof Deck Insulation (Above Metal Roof Deck, Under Fixed Roof)	15,800 sf	None Detected	--
74-4B				None Detected	
74-4C				None Detected	
74-5A	All Interior Windows	Window Glaze (200 per Room)	2,400 lf	None Detected	--
74-5B				None Detected	
74-5C				None Detected	
74-6A	All Interior Windows	Window Caulk (On Sides of Window)	150 lf	5-10% Chrysotile Detected	NCII
74-6B				Not Analyzed Due to Positive Stop	
74-6C				Not Analyzed Due to Positive Stop	

sf – square feet
lf – linear feet
NCI – Non-Friable Category I Material
NCII – Non-Friable Category II Material

Table 1 – Summary of Analytical Test Results (continued)

Sample Number	Material Location	Material Description	Approx. Quantity	Result	Category
74-7A	All Classrooms	Chalkboard Mastic Pucks (Behind Chalkboard, On CMU)	650 sf	5-10& Chrysotile Detected	NCII
74-7B				Not Analyzed Due to Positive Stop	
74-7C				Not Analyzed Due to Positive Stop	
74-8A	Rooms 102 and 104	9" by9" Beige and Green Feather Floor Tile (With Black Mastic, On Concrete)	1,500 sf	5-10% Chrysotile Detected in Floor Tile and Mastic	NCI
74-8B				Not Analyzed Due to Positive Stop	
74-8C				Not Analyzed Due to Positive Stop	
74-9A	Various Patch Points in Hallway	12" by 12" Grey Feathered Floor Tile (With Black Mastic, On Concrete)	--	None Detected in Floor Tile, Yellow Mastic, or Black Mastic	--
74-9B				None Detected in Floor Tile, Yellow Mastic, or Black Mastic	
74-9C				None Detected in Floor Tile, Yellow Mastic, or Black Mastic	
74-10A	Classroom Coat Walls	Drywall (No Tape or Mud Present)	--	None Detected	--
74-10B				None Detected	
74-10C				None Detected	
74-11A	Various Patch Points in Classrooms and Hallways	9" by 9" Brown with White Feather, Black with White Feather, and Yellow Mottled Floor Tiles (With Black Mastic, On Concrete, With 2ABC)	500 sf	5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile or Tan Mastic	NCI
74-11B				5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile or Tan Mastic	
74-11C				5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile or Tan Mastic	
74-12A	Throughout	Tan Pipe Wrap (On Fiberglass)	--	None Detected	--
74-12B				None Detected	
74-12C				None Detected	
74-13A	Throughout	Mudded Fittings (On Fiberglass)	460 Elbows	None Detected	--
74-13B				None Detected	
74-13C				None Detected	
74-14A	Throughout	White Pipe Wrap (On Fiberglass)	--	None Detected	--
74-14B				None Detected	
74-14C				None Detected	
74-15A	Room 107	9" by 9" Red Feathered Floor Tile (With Black Mastic, On Concrete, With 2ABC)	15 sf	5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile	NCI
74-15B				5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile	
74-15C				5-10% Chrysotile Detected in Black Mastic; None Detected in Floor Tile	

sf – square feet
NCI – Non-Friable Category I Material
NCII – Non-Friable Category II Material

Table 1 – Summary of Analytical Test Results (continued)

Sample Number	Material Location	Material Description	Approx. Quantity	Result	Category
74-16A	Room 110	9" by 9" Green and White Feathered Floor Tile (With Brown Mastic, On Concrete)	1,450 sf	5-10% Chrysotile Detected in Floor Tile; None Detected in Mastic	NCI
74-16B				Not Analyzed Due to Positive Stop	
74-16C				Not Analyzed Due to Positive Stop	
74-17A	Storage Rooms Attached to Room 110	9" by 9" Green Floor Tile with White and Dark Green Streaks (With Brown Mastic, On Concrete)	315 sf	5-10% Chrysotile Detected in Floor Tile; None Detected in Mastic	NCI
74-17B				Not Analyzed Due to Positive Stop	
74-17C				Not Analyzed Due to Positive Stop	
74-18A	Bathrooms, Janitors Closet	1' by 1' White Ceramic Floor Tile (With Mortar and Grout)	--	None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	--
74-18B				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-18C				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-19A	Women's Bath	1' by 1' Pink Ceramic Floor Tile (With Mortar and Grout)	--	None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	--
74-19B				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-19C				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-20A	Men's Bath	1' by 1' Brown Ceramic Floor Tile (With Mortar and Grout)	--	None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	--
74-20B				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-20C				None Detected in Floor Tile, Tan Mastic, Grout, or Mortar	
74-21A	Exterior	Door Caulk	130 lf	None Detected	--
74-21B				None Detected	
74-21C				None Detected	
74-22A	Exterior (Sides of Windows)	White Window Caulk (Older), Under 23ABC)	250 lf	5-10% Chrysotile Detected	NCII
74-22B				Not Analyzed Due to Positive Stop	
74-22C				Not Analyzed Due to Positive Stop	
74-23A	Exterior (Sides and Bottoms of Windows)	Grey Window Caulk (Newer, on 22ABC and Brick)	550 lf	5-10% Chrysotile Detected	NCII
74-23B				Not Analyzed Due to Positive Stop	
74-23C				Not Analyzed Due to Positive Stop	

sf – square feet
lf – linear feet
NCI – Non-Friable Category I Material
NCII – Non-Friable Category II Material

Table 1 – Summary of Analytical Test Results (continued)

Sample Number	Material Location	Material Description	Approx. Quantity	Result	Category
74-24A	Exterior Expansion Joints	Grey Expansion Joint Caulk	250 lf	None Detected	--
74-24B				None Detected	
74-24C				None Detected	
74-25A	Exterior Windows	White Window Glaze	4,000 lf	None Detected	--
74-25B				None Detected	
74-25C				None Detected	
74-26A	Exterior AC Units	White Caulking	125 lf	None Detected	--
74-26B				None Detected	
74-26C				None Detected	

Demolition/Renovation

According to the St. Louis County Department of Public Health (SLCDOPH), any friable or potentially friable ACM in excess of 16 linear feet or 10 square feet is classified as a regulated ACM (RACM) and must be removed prior to demolition or renovation which would significantly damage the material.

The tan with brown streaks floor tile and mastic (sample 2a), beige and green feather floor tile and mastic (sample 8a), green and white feather floor tile (sample 16a), and green with white and dark green streaks floor tile (sample 17a) are Category I non-friable materials and would not normally require removal. However, should renovation activities impact these materials, they should be removed by a licensed abatement contractor.

The mastic pucks behind the chalkboards (sample 7a), the interior window caulk (sample 6a), white exterior window caulk (sample 23a), and grey exterior window caulk (sample 23a) are Category II non-friable materials and according to the rule outlined above, are not, by definition, RACM. However, should renovation activities impact these materials, they should be removed by a licensed abatement contractor.

The black floor tile mastic (samples 11abc and 15abc) is a Category I non-friable material and would not normally require removal. However, should renovation activities impact this material, it should be removed by a licensed abatement contractor. Furthermore, should the floor tiles be removed, the floor tile/floor tile mastic should also be removed by a licensed abatement contractor. Alternatively, new flooring systems can be laid on top of the existing floor tile/floor tile mastic.

Although no asbestos-containing thermal system insulation (TSI) was observed in this structure, it is possible that asbestos-containing TSI is present in the wall cavities and floor cavities of the building where piping is present due to the construction date of the building. If any suspect pipe insulation is encountered during renovation, please contact SCI for analysis of the materials.

The Occupational Safety & Health Administration also has regulations (29 CFR Parts 1910 et al, Occupational Exposure to Asbestos, August 10, 1994) regarding removal of asbestos-containing materials which must be followed.

Reporting

Attached as Appendix C is the SLCDOPH *Asbestos NESHAP Notification of Demolition and Renovation* form, which has been filled out to the extent possible by SCI. The remaining information must be completed by you.

This report, as well as the completed SLCDOPH *Asbestos NESHAP Notification of Demolition and Renovation* form, must be submitted to the Kathrina Donnegan, SLCDOPH, 111 S Meramec, Clayton, Missouri, 63105.

It should be noted, following submittal of the SLCDOPH *Asbestos NESHAP Notification of Demolition and Renovation* form, there is a 10-day waiting period before demolition, renovation, or abatement activities can begin.

If this report is to be used for bidding purposes for asbestos abatement, SCI recommends the contractor visit the site to verify all conditions and quantities.

Lead-Based Paint Survey

SCI performed an LBP survey to determine whether LBP systems are prevalent within the former school building. The survey was conducted by Ethan Boyer, Missouri Licensed Lead Inspector. This survey was performed using a SciAps X-550 x-ray florescence meter (XRF, Serial Number 00441) that can quickly and nondestructively determine the quantity of lead present in paint coatings on various interior and exterior components of the structures.

The United States Department of Housing and Urban Development and the Missouri Department of Natural Resources (MDNR) indicates that LBP is any paint, varnish, stain, or other applied coating that has one milligram per square centimeter (mg/cm^2) or 5,000 micrograms per gram (ug/g) by dry weight (0.5 percent by mass) or more of lead. Based upon a review of the XRF results, several of the paint systems analyzed had a lead content greater than 1.0 mg/cm^3. A summary of these LPB systems is included in Table 2 below. A complete summary of the lead testing results is included as Appendix D of this report. Photographic documentation of the LBP systems is included as Appendix E. A figure showing LBP sample shot locations is included as Appendix F.

Table 2 – Lead-Based Paint XRF Results
(Results Reported in Parts Per Million)

Sample Number	Sample Date	Sample Location	Sample Description
21	1/21/26	Basement	Blue Metal Handrail
22	1/21/26	Basement	Blue Metal Riser
26	1/21/26	Basement – Side A	Blue Wood Baseboard
31	1/21/26	Kitchen	Black Metal Support Beam
63	1/21/26	Exterior – Side D	White Wood Fascia
70	1/21/26	Exterior – Side C	Gray Metal Handrail
71	1/21/26	Exterior – Side C	Silver Metal Fence
72	1/21/26	Exterior – Side D	Black Wood Fascia

As can be seen in Table 2, above, several paint coatings were identified as being LBP coatings. Based on the sample results above, the following components are homogenous and should be considered LBP:

- Basement: Blue metal handrails, blue metal risers, blue metal baseboards,
- Throughout: Black metal support beams,
- Exterior: White wood fascia, grey metal handrails, silver metal fences, black wood fascia.

During renovation of these areas, care should be taken not to sand, grind or abrade surfaces coated with LBPs. Any disturbance of these painted surfaces must be performed by workers that are renovation, repair and paint program (RRP) trained. If the painted building components are to remain and be refinished, then stripping the paint should be performed by a licensed abatement contractor. If the components are to be removed, then they can be removed by RRP-trained workers with appropriate safety training and disposed as construction waste. There are no special disposal considerations in Missouri for disposal of demolition rubble from this structure as long as it is disposed in a licensed solid waste landfill.

The quantities provided in this report are estimates based on the observations made at the time of survey activities and were limited to the area of the structure which was available at the time of the survey. These estimates should not be relied on for bidding purposes and SCI recommends that the contractor verify all quantities.

SCI appreciates the opportunity to be of service to you on this project. Please contact us if you have any questions or comments regarding the information provided.

Respectfully,

SCI ENGINEERING, INC.

Ethan D. Boyer
Missouri State Certified Asbestos Inspector
Certificate Number 7011061625MOIR22389
Missouri State Certified Lead Inspector
License Number 220926-300006365

Jessica B. Keeven, CHMM
Environmental Services Manager

EDB/JBK/bmw

Enclosures

Appendix A - Asbestos Analytical Test Results and Chain of Custody
Appendix B – ACM Locations
Appendix C - Asbestos NESHAP Notification of Demolition and Renovation
Appendix D – XRF Results
Appendix E – Positive Lead Photos
Appendix F – LBP Sample Locations
Appendix G – Asbestos and Lead Inspector Certificates

Appendix A

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545896	1a	None Detected		Binders, Vinyl, Aggregate
		None Detected in Mastic		Binders
545897	1b	None Detected		Binders, Vinyl, Aggregate
		None Detected in Mastic		Binders
545898	1c	None Detected		Binders, Vinyl, Aggregate
		None Detected in Mastic		Binders
545899	2a	5-10% Chrysotile	Antigorite	Binders, Vinyl, Aggregate
		5-10% Chrysotile in Mastic		Black Tar Binders
545900	3a	None Detected	Cellulose, Glass Wool	Binders, Polyfoam, Paint
545901	3b	None Detected	Cellulose, Glass Wool	Binders, Polyfoam, Paint
545902	3c	None Detected	Cellulose, Glass Wool	Binders, Polyfoam, Paint

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc. Date Received: 01-23-26
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St., Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545903	4a	None Detected		Binders, Polyfoam, Mica
545904	4b	None Detected		Binders, Polyfoam, Mica
545905	4c	None Detected		Binders, Polyfoam, Mica
545906	5a	None Detected		Binders, Vinyl
545907	5b	None Detected		Binders, Vinyl
545908	5c	None Detected		Binders, Vinyl
545909	6a	5-10% Chrysotile		Binders, Vinyl, Paint
545910	7a	5-10% Chrysotile in Brown Mastic Pucks		Binders
545911	8a	5-10% Chrysotile	Antigorite	Binders, Vinyl, Aggregate
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545912	9a	None Detected		Binders, Vinyl, Aggregate
		None Detected in Yellow Mastic		Binders
		None Detected in Black Mastic		Black Tar Binders

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545913	9b	None Detected		Binders, Vinyl, Aggregate
		None Detected in Yellow Mastic		Binders
		None Detected in Black Mastic		Black Tar Binders
545914	9c	None Detected		Binders, Vinyl, Aggregate
		None Detected in Yellow Mastic		Binders
		None Detected in Black Mastic		Black Tar Binders
545915	10a	None Detected	Cellulose	Binders, Polyfoam, Paint
545916	10b	None Detected	Cellulose	Binders, Polyfoam, Paint
545917	10c	None Detected	Cellulose	Binders, Polyfoam, Paint
545918	11a	None Detected		Binders, Vinyl, Aggregate
		None Detected in Tan Mastic		Binders
		5-10% Chrysotile in Black Mastic		Black Tar Binders

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545919	11b	5-10% Chrysotile		Binders, Vinyl, Aggregate
		None Detected in Tan Mastic		Binders
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545920	11c	None Detected		Binders, Vinyl, Aggregate
		None Detected in Tan Mastic		Binders
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545921	12a	None Detected	Cellulose	Black Tar Binders, Binders, Aluminum
545922	12b	None Detected	Cellulose	Black Tar Binders, Binders, Aluminum
545923	12c	None Detected	Cellulose	Black Tar Binders, Binders, Aluminum
545924	13a	None Detected	Glass Wool	Binders, Polyfoam
545925	13b	None Detected	Cellulose, Glass Wool	Binders, Polyfoam

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc. Date Received: 01-23-26
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St., Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545926	13c	None Detected	Glass Wool, Synthetic Fibers	Binders, Polyfoam
545927	14a	None Detected	Synthetic Fibers	Binders, Paint
545928	14b	None Detected	Synthetic Fibers	Binders, Paint
545929	14c	None Detected	Synthetic Fibers	Binders, Paint
545930	15a	None Detected		Binders, Vinyl, Aggregate
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545931	15b	None Detected		Binders, Vinyl, Aggregate
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545932	15c	None Detected		Binders, Vinyl, Aggregate
		5-10% Chrysotile in Black Mastic		Black Tar Binders
545933	16a	5-10% Chrysotile	Antigorite	Binders, Vinyl, Aggregate
		None Detected in Mastic		Binders

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc. Date Received: 01-23-26
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St., Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545934	17a	5-10% Chrysotile	Antigorite	Binders, Vinyl, Aggregate
		None Detected in Mastic		Binders
545935	18a	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545936	18b	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545937	18c	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545938	19a	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545939	19b	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545940	19c	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc. Date Received: 01-23-26
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St., Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545941	20a	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545942	20b	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545943	20c	None Detected		Binders, Aggregate
		None Detected in Tan Mastic		Binders
		None Detected in Grout		Binders, Aggregate
		None Detected in Mortar		Binders, Aggregate
545944	21a	None Detected		Binders, Vinyl
545945	21b	None Detected		Binders, Vinyl
545946	21c	None Detected		Binders, Vinyl

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545947	22a	5-10% Chrysotile		Binders, Paint
545948	23a	5-10% Chrysotile		Binders, Vinyl
545949	24a	None Detected		Binders, Vinyl
545950	24b	None Detected		Binders, Vinyl
545951	24c	None Detected		Binders, Vinyl
545952	25a	None Detected		Binders, Paint
545953	25b	None Detected		Binders, Paint
545954	25c	None Detected		Binders, Paint

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

PRECISION ANALYSIS, INC.

BULK SAMPLE ANALYSIS

Client: SCI Engineering, Inc.
Project Number: 2025-2261.25
Project Name: JB Readiness Center - 74 Kearney St.,

Date Received: 01-23-26
Date Reported: 01-30-26

Technique: Polarized Light Microscopy with Dispersion Staining
In accordance with EPA/600/R-93/116 Test Method

Lab No.	Sample No.	Asbestos Detected & Percentage *	Fibrous Material	Non-Fibrous Material
545955	26a	None Detected		Binders, Vinyl, Paint
545956	26b	None Detected		Binders, Vinyl, Paint
545957	26c	None Detected		Binders, Vinyl, Paint

* The upper detection limit is 100 percent.
The lower detection limit is less than 1 percent.

Nicole Hogan

Nikki Hogan
Laboratory Co-Director

AIHA Bulk Asbestos Proficiency Analytical Testing Program ID # 101228
In Association with RTI Center for Measurements and Quality Assurance

PLM is not recommended for analysis of vinyl floor tile. Vinyl floor tile often contains milled asbestos with fiber lengths of 1 micrometer or less. Because these fibers are not detected by PLM, PLM analysis may yield a false negative result. We recommend qualitative analysis of vinyl floor tile by Transmission Electron Microscopy (TEM).

Precision Analysis assumes no responsibility for financial or health consequences for action or lack of action taken by our clients or their agents as a result of these analytical reports. Since Precision Analysis was not involved in the collection of these samples, we cannot attest to the proper collection of said samples and therefore are neither responsible nor liable for the accuracy, validity or completeness of the sample collection.

952 ANGLUM ROAD HAZELWOOD, MISSOURI 63042 TEL/FAX (314) 838-5052

BULK ASBESTOS CHAIN OF CUSTODY

130 Point West Boulevard
St. Charles, Missouri 63301
636-949-8200 Fax 636-949-8269
www.sciengineering.com

Company :	SCI Engineering, Inc.	**Please Provide Results Via:**	☐ Fax ■ Email ☐ Mail
Street:	130 Point West Boulevard	**To:** Ethan Boyer	
City/State/Zip:	St. Charles, Missouri 63301	**Telephone #:**	**Fax #:** 636-949-8269
Project Name:	JB Readiness Center	**Email:**	ebover@sciengineering.com
Project Number:	2025-2261.25		

Turnaround Time (TAT) Options - Please Check One

☐ 3 Hour	☐ 6 Hour	☐ 24 Hour	☐ 48 Hour	☐ 72 Hour	☐ 96 Hour	■ Other 5 Day

PLM Bulk Analysis	*TEM Bulk Analysis*
■ PLM-EPA 600	☐ TEM EPA NOB - EPA 600/R-93/116 Section 2.5.5.1
☐ PLM-EPA 600 NOB	☐ Chatfield Protocol (semi-quantitative)
☐ PLM-Point Count	

■ Check Box for Stop Positive

Comments: 74 Kearney Street/ Survey only encompassed renovation areas (No roof, no gym, no lobby or kitchen ceramics). Boiler in Use- Packing assumed hot

Samplers Name: Ethan Boyer	**Samplers Signature:**		**Date Sampled:** 1-21-25
Building Use/Description/Features: Former School Building/ Single Story		**Age:** 1965	**Size:** 15,800 SF
Windows: Aluminum	**Siding:** Brick	**Roof:** N/A	**Attic:** None	**HVAC:** Window AC/ Boiler Heat

Sample #	Material Location	Material Description	Approx. Quantity	Condition	Comments
74-1ABC	Throughout Classrooms	Black 4" CB	--	Good	
74-2ABC	Rooms : 101, 103, 105, 107, 108, 109, 111, 113, office and Hallways	9x9 Tan w Brown Streaks FT	9000 SF	Good	W black mastic/ On Conc
74-3ABC	Throughout	2x4 White Pinhole Wormtrack CT	--	Good	
74-4ABC	Throughout	Roof Deck Insulation	15,800 SF	Good	Above Metal Roof deck, Under Fixed Roof
74-5ABC	All Interior Windows	Window Glaze	2,400 LF	Good	200 Per Room
74-6ABC	All Interior Windows	Window Caulk	150 LF	Good	On Sides of Window
74-7ABC	All Classrooms	Chaulkboard Mastic Pucks	650 SF	Good	Behind Chaulkboard/ On CMU
74-8ABC	Rooms: 102, 104	9x9 Beige w Green Feather FT	1,500 SF	Good	W Black Mastic/ On Conc
74-9ABC	Various Patch Points in Hallway	12x12 Grey Feathered FT	--	Good	W Black Mastic/ On Conc

Relinquished:	**Date:** 1/22/25 RECEIVED	**Time:** 1610	
Received: Nicole Hogan	**Date:** JAN 23 REC'D	**Time:**	

BY:

See Back

Project Name/Number 2025-2261.25


Sample #	Material Location	Material Description	Approx. Quantity	Condition	Comments
74-10ABC	Classrooms Coat Walls	Drywall	--	Good	No Tape or Mud Present
74-11ABC	Various Patch Points in Class Rooms and Hallways	9x9 Brown w White Feather/ Black W White Feather/ Yellow Mottled FT	--	Good	W Black Mastic/ On Conc/ With 2ABC
74-12ABC	Throughout	Tan Pipe Wrap	--	Good	On Fiberglass
74-13ABC	Throughout	Mudded Fittings	460 Elbows	Good	On Fiberglass
74-14ABC	Throughout	White Pipe Wrap	--	Good	On Fiberglass
74-15ABC	Room 107	9x9 Red Feathered FT	15 SF	Good	W Black Mastic/ On Conc/ With 2ABC
74-16ABC	Rooms 110	9x9 Green and White Feathered FT	1450 SF	Good	W Black Mastic/ On Conc
74-17ABC	Storage Room Attached to 110	9x9 Green w White and Dk Green Streaks FT	315 SF	Good	W Black Mastic/ On Conc
74-18ABC	Bathrooms, Janitors Closet	1x1 White Ceramic FT	--	Good	W Morter and Grout
74-19ABC	Womens Bath	1x1 Pink Ceramic FT	--	Good	W Morter and Grout
74-20ABC	Mens Bath	1x1 Brown Ceramic FT	--	Good	W Morter and Grout
74-21ABC	Exterior	Door Caulk	130 LF	Good	
74-22ABC	Exterior (Sides of Windows)	White Window Caulk (Older)	250 LF	Good	Under 23ABC
74-23ABC	Exterior (Sides and Bottoms of Windows)	Grey Window Caulk (Newer)	550 LF	Good	On 22ABC and Brick
74-24ABC	Exterior Expansion Joints	Grey Expansion Joint Caulk	250 LF	Good	
74-25ABC	Exterior Windows	White Window Glaze	4,000 LF	Good	
74-26ABC	Exterior AC Units	White Caulking	125 LF	Good	

RECEIVED
JAN 23 REC'D
BY: Nicole Hogan

Appendix B

LBP, FASICA

ACM

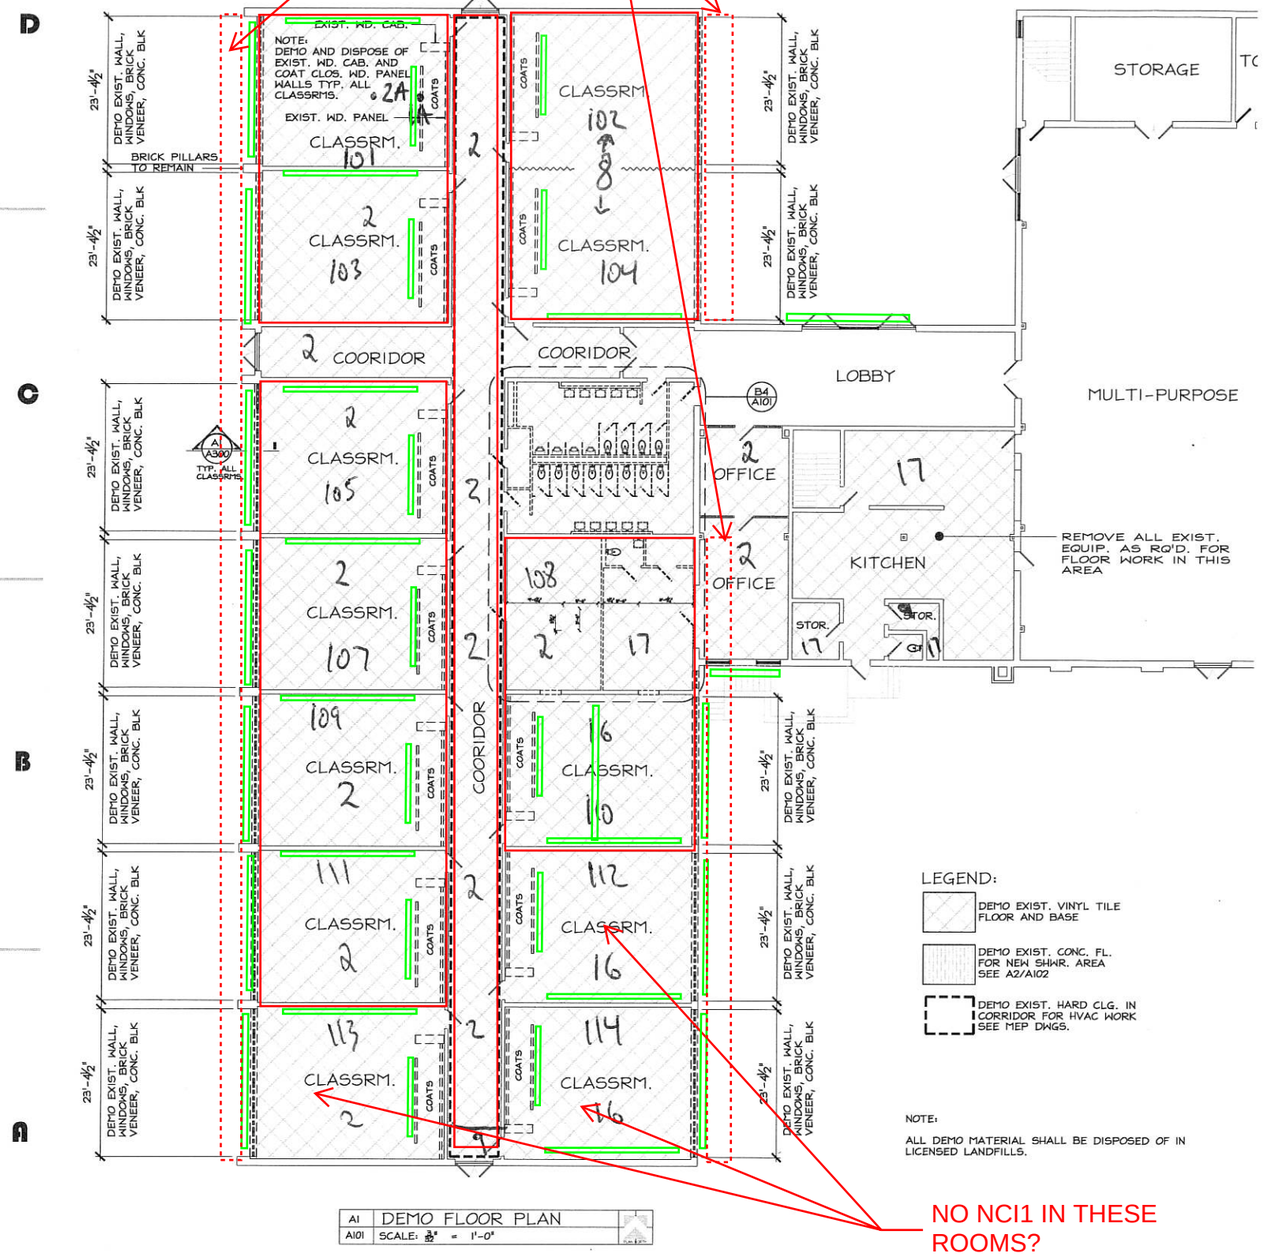

LEGEND:


- DEMO EXIST. VINYL TILE FLOOR AND BASE
- DEMO EXIST. CONC. FL. FOR NEW SHWR. AREA SEE A2/A102
- DEMO EXIST. HARD CLG. IN CORRIDOR FOR HVAC WORK SEE MEP DWGS.

NOTE:

ALL DEMO MATERIAL SHALL BE DISPOSED OF IN LICENSED LANDFILLS.

A1	DEMO FLOOR PLAN
A101	SCALE: 3/32" = 1'-0"

NO NCI1 IN THESE ROOMS?

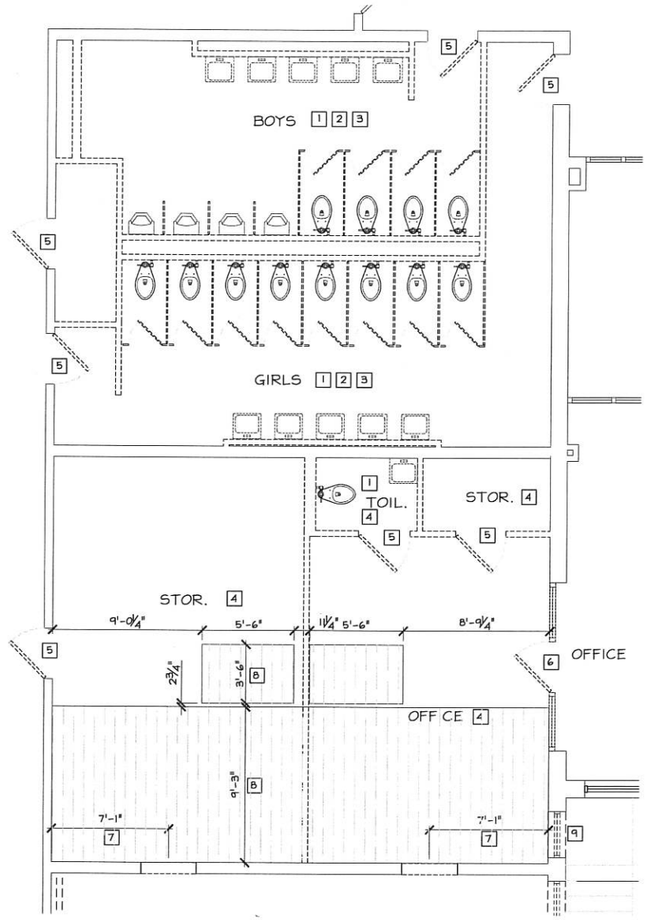

B4	ENLARGED DEMO FLOOR PLAN
A101	SCALE: ¼" = 1'-0"

ENLARGED DEMO PLAN NOTES:

1. EXIST. BOYS AND GIRLS RESTRMS. AND OFFICE RESTRM - DEMO ALL EXIST. PLUMB. FIXTURES INCLUDING WASTE AND SUPPLY LINES. DEMO PORTIONS OF EXIST. CONC. FL. AND PLASTER CLG. AS NECESSARY FOR REMOVAL OF EXIST. LINES. SEE MEP DWGS.
2. DEMO ALL EXIST. TOILET PARTITIONS IN BOYS AND GIRLS TOIL.
3. DEMO EXIST. CONC. BLOCK WALLS INSIDE OF BOYS AND GIRLS RESTRMS. AS INDICATED BY DASHED LINES.
4. DEMO EXIST. CONC. BLOCK WALLS, BETWEEN STOR. RM., OFFICE, OFFICE RESTRM. AND OFFICE STORAGE RM.
5. DEMO EXIST. DOOR AND FRAME.
6. DEMO WOOD WINDOW WALL, DOOR AND FRAME BETWEEN OFFICES.
7. CUT OUT AND REMOVE PORTION OF EXIST. CONC. BLOCK WALL TO ACCOMMODATE A A HOLLOW METAL DOOR AND FRAME 3'-0"x6'-8". SEE PROPOSED FLOOR PLAN A1/A102.
8. REMOVE PORTION OF EXISTS. CONC. FLOOR FOR NEW SHOWER AREA. SEE PROPOSED FLOOR PLAN A1/A102 AND MEP DWGS.
9. REMOVE EXIST. WINDOW.

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

PRELIMINARY NOT FOR CONSTRUCTION

DATE: XXXXXXXX
KEITH A. LESKO
ARCHITECT A-6176

OFFICE OF THE
ADJUTANT GENERAL

MISSOURI NATIONAL GU
FACILITIES DIVISION

OFFICE OF ADMINISTRA
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUC

OFFICE OF THE
ADJUTANT GENERAL

MISSOURI NATIONAL GUA
FACILITIES DIVISION

BUILDING REPAIRS AND RENOVATIONS

JEFFERSON BARRACKS
READINESS CNTR.
JEFFERSON BARRACKS
ST. LOUIS COUNTY, MISSOUR

PROJECT # XXXXX
ASSET # XXXX
SITE # XXXX

REVISION:
DATE:
REVISION:
DATE:
REVISION:
DATE:

ISSUE DATE: 03/27/2023

CAD DWG FILE:
DRAWN BY: KAL
CHECKED BY: KAL
DESIGNED BY: KAL

SHEET TITLE:

SHEET NUMBER:

SHEET OF
DATE 00/00/0000

Appendix C

Saint Louis COUNTY PUBLIC HEALTH

ST. LOUIS COUNTY
DEPARTMENT OF PUBLIC HEALTH
AIR POLLUTION CONTROL PROGRAM

ASBESTOS NESHAP NOTIFICATION OF DEMOLITION AND RENOVATION

Important: A NESHAP Notification of Demolition should be submitted for each structure being demolished, subject to 40 CFR Subpart 61 M with a $100.00 application fee. Payment by mail may be in the form of a check or money order made payable to St. Louis County Department of Public Health. The fee is not applicable to renovation projects.

OPERATOR PROJECT NO.	POSTMARK	DATE RECEIVED	NOTIFICATION NUMBER

I. TYPE OF NOTIFICATION

☐ O – ORIGINAL ☐ C – CANCELLED ☐ R -- REVISION, WRITE REVISION NUMBER

II. FACILITY INFORMATION (IDENTIFY OWNER, REMOVAL CONTRACTOR, AND OTHER OPERATOR)

OWNER NAME		ADDRESS		
CITY		COUNTY	STATE	ZIP CODE
CONTACT			TELEPHONE NUMBER	

ASBESTOS REMOVAL CONTRACTOR		ADDRESS		
CITY			STATE	ZIP CODE
CONTACT	TELEPHONE NUMBER		TITLE	

DEMOLITION CONTRACTOR		ADDRESS		
CITY			STATE	ZIP CODE
CONTACT	TELEPHONE NUMBER		TITLE	

III. TYPE OF OPERATION

☐ D - DEMO ☐ O – ORDERED DEMO ☒ R – RENOVATION ☐ E – EMERGENCY RENOVATION

IV. IS ASBESTOS PRESENT	LIST TYPE OF ASBESTOS MATERIAL(S) TO BE REMOVED
☒ YES ☐ NO	

V. FACILITY DESCRIPTION (INCLUDE BUILDING NAME, NUMBER AND FLOOR OR ROOM NUMBER)

BUILDING NAME			
ADDRESS 74 Kearney Street			
CITY St. Louis	COUNTY St. Louis	STATE MO	ZIP CODE 63125
SITE LOCATION			
BUILDING SIZE 15,800	NUMBER OF FLOORS	AGE IN YEARS 61	
PRESENT USE	PRIOR USE		

VI. PROCEDURE, INCLUDING ANALYTICAL METHOD, IF APPROPRIATE, USED TO DETECT THE PRESENCE OF ASBESTOS MATERIAL. INCLUDE A COPY OF THE ASBESTOS INSPECTION.

VII. APPROXIMATE AMOUNT OF ASBESTOS, INCLUDING: 1. REGULATED ACM (RACM) 2. CATEGORY I ACM 3. CATEGORY II ACM	RACM TO BE REMOVED	NONFRIABLE ASBESTOS MATERIAL TO BE REMOVED		NONFRIABLE ASBESTOS MATERIAL NOT TO BE REMOVED	
		CAT I	CAT II	CAT I	CAT II
PIPES (LINEAR FEET)			950		
SURFACE AREA (SQUARE FEET)		12,780	650		

VOL. RACM OFF FACILITY COMPONENT (CUBIC FEET)					

VIII. SCHEDULED DATES DEMO/RENOVATION (MM/DD/YY)

START: COMPLETE:

IX. SCHEDULED DATES ASBESTOS REMOVAL (MM/DD/YY) START: COMPLETE:	WEEKDAYS WORK HOURS	WEEKEND WORK HOURS

X. DESCRIPTION OF PLANNED DEMOLITION OR RENOVATION WORK, AND METHOD(S) TO BE USED

XI. DESCRIPTION OF WORK PRACTICES AND ENGINEERING CONTROLS TO BE USED TO PREVENT EMISSIONS OF ASBESTOS AT THE DEMOLITION AND RENOVATION SITE.

XII. WASTE TRANSPORTER

ADDRESS		
CITY	STATE	ZIP CODE
CONTACT PERSON	TELEPHONE NUMBER	

XIII. WASTE DISPOSAL SITE

NAME		
LOCATION		
CITY	STATE	ZIP CODE
TELEPHONE NUMBER		

XIV. IF DEMOLITION ORDERED BY A GOVERNMENT AGENCY, PLEASE IDENTIFY THE AGENCY BELOW

NAME	TITLE
AUTHORITY	
DATE OF ORDER (MM/DD/YY) INCLUDE A COPY OF THE ORDER.	DATE ORDERED TO BEGIN (MM/DD/YY)

XV. FOR EMERGENCY RENOVATIONS

A. DATE AND HOUR OF EMERGENCY (MM/DD/YY)

B. DESCRIPTION OF THE SUDDEN, UNEXPECTED EVENT

C. EXPLANATION OF HOW THE EVENT CAUSED UNSAFE CONDITIONS OR WOULD CAUSE EQUIPMENT DAMAGE OR AN UNREASONABLE FINANCIAL BURDEN

XVI. DESCRIPTION OF PROCEDURES TO BE FOLLOWED IN THE EVENT THAT UNEXPECTED ASBESTOS IS FOUND OR PREVIOUSLY NONFRIABLE ASBESTOS MATERIAL BECOMES CRUMBLED, PULVERIZED, OR REDUCED TO POWDER.

XVII. I certify that an individual trained in the provisions of this regulation (40 CFR Part 61, Subpart M) will be on-site during the demolition or renovation and evidence that the required training has been accomplished by this person will be available for inspection during normal business hours (required 1 year after promulgation).

SIGNATURE OF OWNER/OPERATOR	DATE

XVIII. I Certify that the above information is correct.

SIGNATURE OF OWNER/OPERATOR	DATE

Appendix D

XRF Results
MONG Jefferson Barracks
74 Kearney Street
St. Louis, Missouri
SCI No. 2025-2261.25

Reading No	Substrate	Component	Room	Side	Color	Paint Result	Pb
14	Metal	Boiler	Basement	-	Gray	Negative	0.18
15	Metal	Pipe	Basement	B	White	Negative	0.01
16	Metal	Door	Basement	C	Gray	Negative	0
17	Metal	Door Frame	Basement	C	Black	Negative	0.01
18	Concrete	Wall	Basement	D	White	Negative	0
19	Metal	Door	Basement	C	Gray	Negative	0
20	Metal	Door Frame	Basement	C	Black	Negative	0.02
21	Metal	Handrail	Basement	-	Blue	Positive	5.05
22	Metal	Riser	Basement	-	Blue	Positive	3.57
23	CMU	Wall	Basement	D	White	Negative	0
24	Concrete	Wall	Basement	D	White	Negative	0.01
25	Ceramic	Wall	Basement	D	Brown	Negative	0
26	Wood	Baseboard	Basement	A	Blue	Positive	2.66
27	Metal	Door	Kitchen	C	White	Negative	0
28	Wood	Door Frame	Kitchen	C	Black	Negative	0
29	Ceramic	Floor	Kitchen	-	White	Negative	0
30	Metal	Roof Joist	Kitchen	-	Black	Negative	0
31	Metal	Support Beam	Kitchen	-	Black	Positive	3.47
32	Ceramic	Wall	Lobby	A	Brown	Negative	0.01
33	CMU	Wall	Lobby	A	White	Negative	0
34	CMU	Wall	Lobby	A	Green	Negative	0
35	CMU	Wall	Lobby	A	Purple	Negative	0
36	CMU	Wall	Lobby	A	Red	Negative	0
37	Ceramic	Floor	Lobby	-	Brown	Negative	0
38	Fiberglass	Pipe	Lobby	C	White	Negative	0.12
39	Ceramic	Window Sill	Office	C	White	Negative	0.08
40	Metal	Radiator	Office	C	White	Negative	0.21
41	CMU	Wall	Boys' Restroom	D	Beige	Negative	0.29
42	CMU	Wall	Boys' Restroom	D	Blue	Negative	0
43	Metal	Stall	Boys' Restroom	-	Beige	Negative	0
44	Ceramic	Floor	Boys' Restroom	-	White	Negative	0.01
45	CMU	Wall	101	B	Light Blue	Negative	0
46	Drywall	Wall	101	B	Light Blue	Negative	0
47	Metal	Roof Joist	101	-	Black	Negative	0
48	Drywall	Wall	104	D	White	Negative	0.01
49	CMU	Wall	103	B	Tan	Negative	0
50	CMU	Wall	112	A	Light Green	Negative	0
51	CMU	Wall	111	C	Lime Green	Negative	0
52	Drywall	Wall	111	B	Lime Green	Negative	0.01
53	CMU	Wall	110	C	Orange	Negative	0
54	Ceramic	Wall	Hall	D	Brown	Negative	0.01
55	CMU	Wall	Hall	D	White	Negative	0
56	CMU	Wall	Hall	D	Green	Negative	0


XRF Results
MONG Jefferson Barracks
74 Kearney Street
St. Louis, Missouri
SCI No. 2025-2261.25

Reading No	Substrate	Component	Room	Side	Color	Paint Result	Pb
57	CMU	Wall	Hall	D	Purple	Negative	0
58	CMU	Wall	Hall	D	Red	Negative	0
59	Metal	Door Frame	Hall	D	Black	Negative	0.01
60	CMU	Wall	Girls' Restroom	B	Pink	Negative	0
61	Metal	Stall	Girls' Restroom	-	Pink	Negative	0
62	Ceramic	Floor	Girls' Restroom	-	Pink	Negative	0.01
63	Wood	Fascia	Exterior	D	White	Positive	1.06
64	Wood	Window	Exterior	D	Silver	Negative	0
65	Wood	Window	Exterior	D	Green	Negative	0
66	Metal	Door	Exterior	C	Brown	Negative	0
67	Metal	Door Frame	Exterior	C	Brown	Negative	0.02
68	Wood	Wall	Exterior	C	Brown	Negative	0
69	Concrete	Wall	Exterior	C	Brown	Negative	0
70	Metal	Handrail	Exterior	C	Gray	Positive	1.2
71	Metal	Fence	Exterior	C	Silver	Positive	2.42
72	Wood	Fascia	Exterior	D	Black	Positive	1.82
73	Transite	Soffit	Exterior	D	Black	Negative	0.49

Appendix E



Sample 21 – Blue Metal Handrail

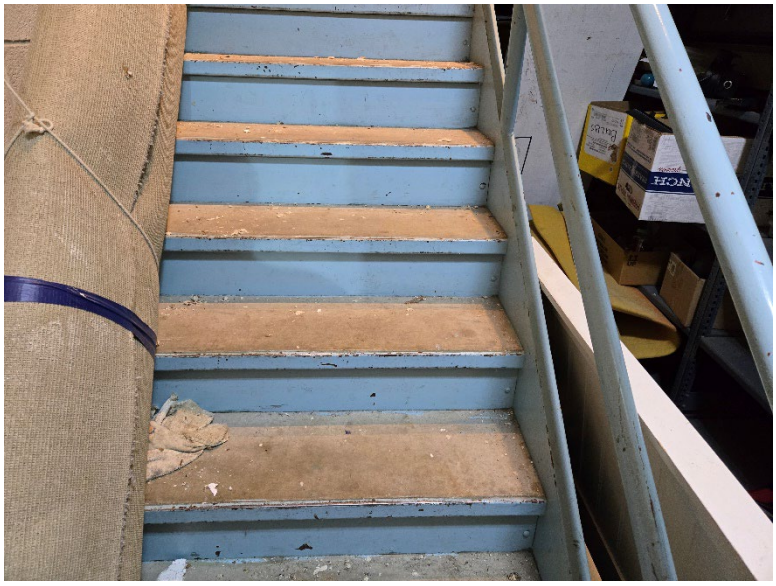

Sample 22 – Blue Metal Riser




Sample 26 – Blue Wood Baseboard



Sample 31 – Black Metal Support Beam



Sample 63 – White Wood Fascia

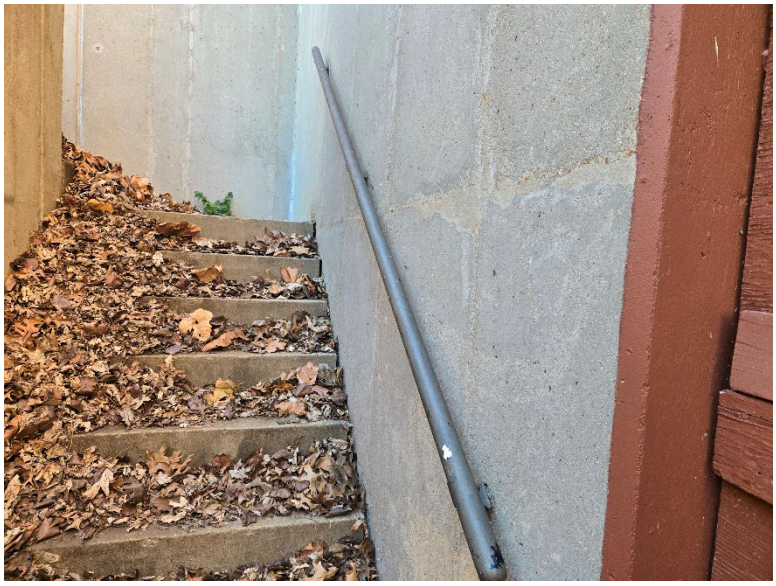

Sample 70 – Grey Metal Handrail




Sample 71 – Silver Metal Fence



Sample 72 – Black Wood Fascia

Appendix F

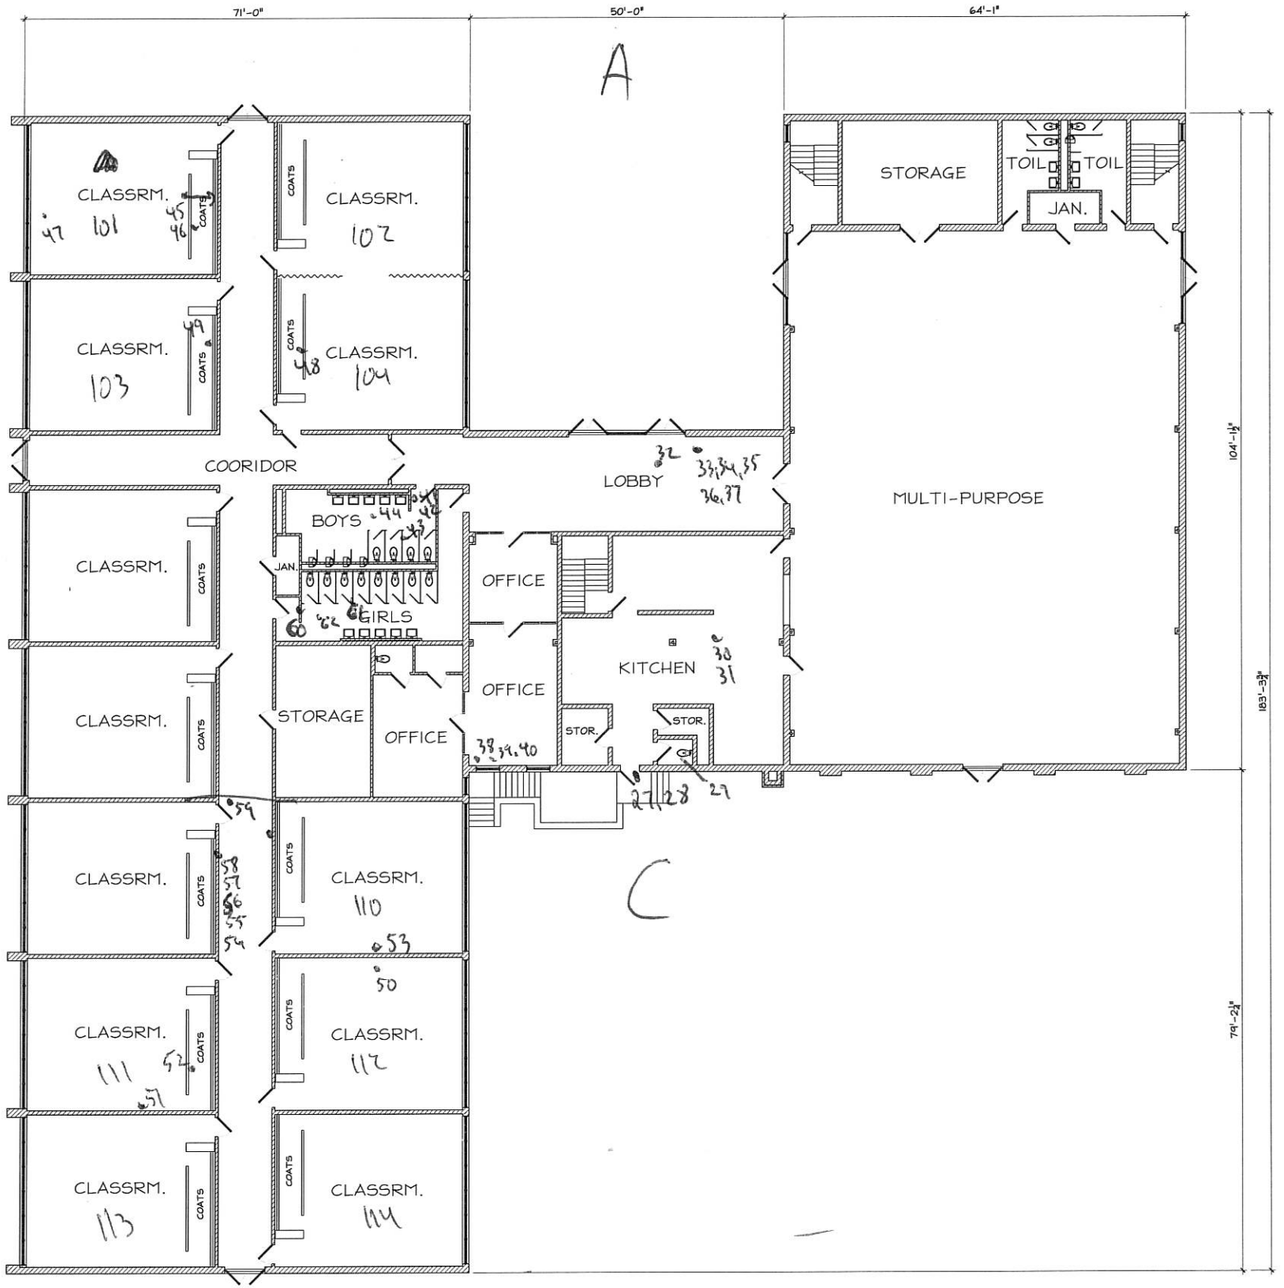

A1 EXIST. FLOOR PLAN
A100 SCALE: 3/8" = 1'-0"

SCOPE OF WORK:

1. REMOVE ALL EXIST. VINYL TILE AND WALL BASE AS SHOWN ON PLAN A1/A101.
2. INSTALL NEW EPOXY FLOORING AS SHOWN ON PLAN A1/A102.
3. DEMO ALL COAT CLOSETS IN CLASS ROOMS AS SHOWN ON PLAN 1/A101.
4. DEMO. EXIST. WINDOWS AND WALLS AS SHOWN ON PLAN A1/A101.
5. CONSTRUCT NEW WALLS AND INSTALL NEW WINDOWS AS SPECIFIED AND AS SHOWN ON PLAN A1/A102.
6. DEMO. EXIST. RESTROOMS AS SHOWN ON PLAN A1/A101.
7. CONSTRUCT NEW RESTROOMS AND SHOWER AREA AS SHOWN ON A1/A102.
8. RENOVATE HVAC SYSTEM AS SHOWN ON THE MECHANICAL DRAWINGS.

GENRAL NOTES:

1. GENERAL CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, I.E., FOR ALL DEMO WORK AND LAYOUT OF NEW WORK.
2. ALL DEMO MATERIALS SHALL BE REMOVED FROM SITE AND DISPOSED OF LICENSED LANDFILLS. DEMOLISHED MATERIALS SHALL BE DISPOSED OF AS REQUIRED BY LAW.

STATE OF MISSOURI
MIKE KEHOE,
GOVERNOR

PRELIMINARY NOT FOR CONSTRUCTION

DATE: XX/XX/XXXX
KEITH A. LESKO
ARCHITECT A-6176

OFFICE OF THE
ADJUTANT GENERAL

MISSOURI NATIONAL GU
FACILITIES DIVISION

OFFICE OF ADMINISTRA
DIVISION OF FACILITIES
MANAGEMENT,
DESIGN AND CONSTRUC

OFFICE OF THE
ADJUTANT GENERAL

MISSOURI NATIONAL GUA
FACILITIES DIVISION

BUILDING REPAIRS AND RENOVATIONS

JEFFERSON BARRACKS
READINESS CNTR.
JEFFERSON BARRACKS
ST. LOUIS COUNTY, MISSOUR

PROJECT # XXXXX
ASSET # XXXX
SITE # XXXX

REVISION:
DATE:
REVISION:
DATE:
REVISION:
DATE:
ISSUE DATE: 03/27/2023

CAD DWG FILE:
DRAWN BY: KAL
CHECKED BY: KAL
DESIGNED BY: KAL

SHEET TITLE:

SHEET NUMBER:

SHEET OF
DATE 00/00/0000

Appendix G

CERTIFICATION NUMBER:

7011061625MOIR22389

THIS CERTIFIES

Ethan D Boyer

HAS COMPLETED THE CERTIFICATION REQUIREMENTS FOR

Inspector



APPROVED: **07/08/2025**

TRAINING DATE: **06/16/2025**

EXPIRES: **07/08/2026**

Director of Air Pollution Control Program

The holder of this card is certified to conduct the specified occupation in conjunction with an asbestos abatement project under the certification requirements, in RSMo, 10 CSR 10-6.250.

It is unlawful for any person to use this card other than the individual to whom it is issued or in any manner inconsistent with the law.

Violations of Missouri State Rule 10 CSR 10-6.080, "Emission Standards for Hazardous Air Pollutants," which adopts by reference 40 CFR, Part 61, Subpart M, the National Emission Standards for Asbestos," are subject to fines of not more than $10,000 per day per violation. This Missouri State Certification is subject to review and the director may deny, suspend or revoke this certification per RSMo, chapter 643.230.

If found, please return to:

MISSOURI
DEPARTMENT OF
NATURAL RESOURCES

Air Pollution Control Program
P.O. Box 176
Jefferson City, MO 65102
Phone: (573)751-4817 Fax:(573)751-2706
www.dnr.mo.gov/env/apcp

STATE OF MISSOURI
DEPARTMENT OF HEALTH AND SENIOR SERVICES

LEAD ABATEMENT OCCUPATION LICENSE

Issued to:

Ethan Boyer

The person, firm or corporation whose name appears on this certificate has fulfilled the requirements for licensure as set forth in the Missouri Revised Statutes 701.300-701.338, as long as not suspended or revoked, and is hereby authorized to engage in the activity listed below.

Lead Inspector
Category of License

Issuance Date:	**11/12/2024**
Expiration Date:	**11/12/2026**
License Number:	**220926-300006365**

Paula F. Nickelson
Director
Department of Health and Senior Services

Lead Licensing Program, PO Box 570, Jefferson City, MO 65102